




SPECIFICATION SHEET

FineAdjust Applicator

63865-3300

REVISION B

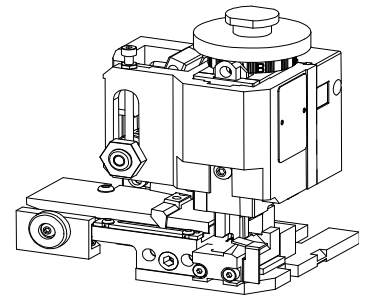


SCOPE

Terminal Series No		Wire Size Awg (mm ²)		Insulation Diameter mm (in)		Strip Length mm (in)	
33000-1002	Male (tin)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
33011-0004	Male (gold)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
31296-0004	Male (long)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)

. Wire Specs: Wires to be thin wall thickness per Ford's specification M1L135-A1 and M1L123-A

DEFINITION OF TERMS

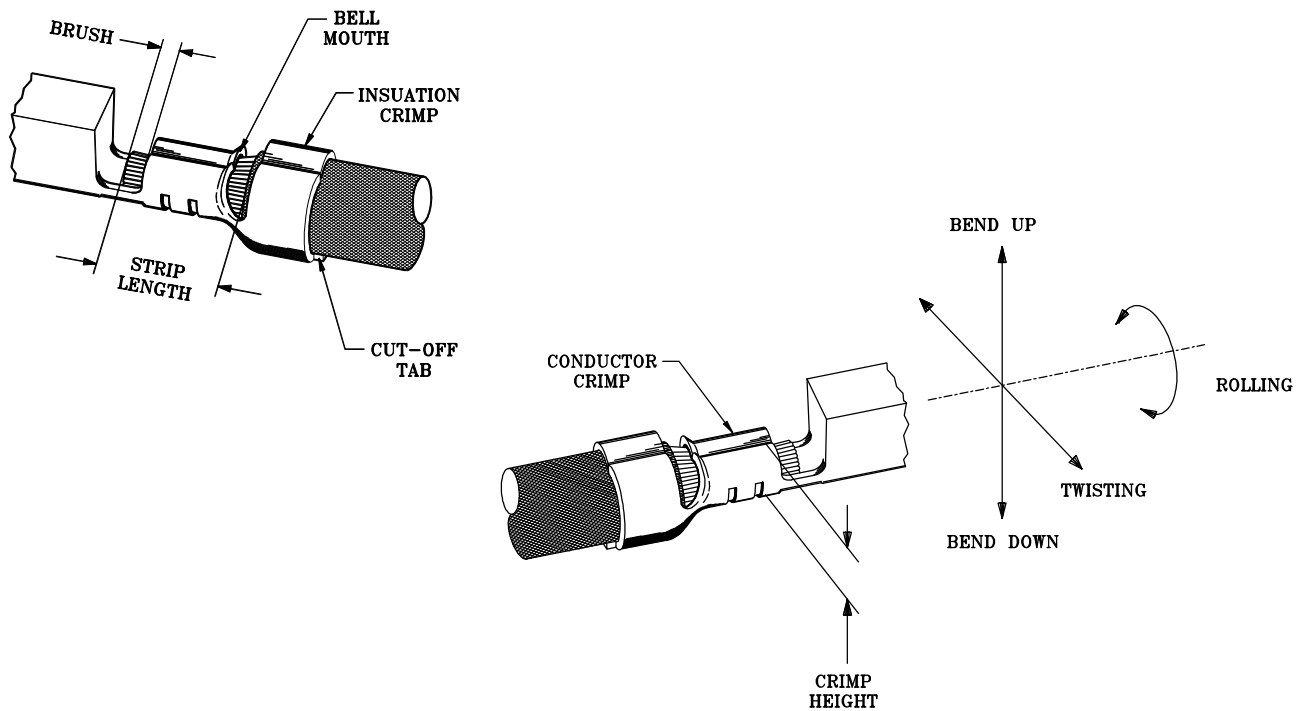

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope




SPECIFICATION SHEET

FineAdjust Applicator

63865-3300

REVISION B

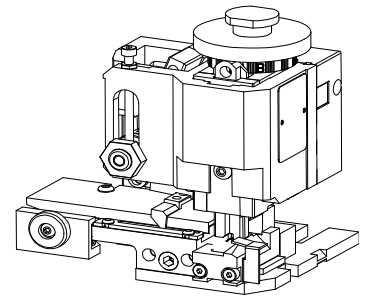


SCOPE

Terminal Series No		Wire Size Awg (mm ²)		Insulation Diameter mm (in)		Strip Length mm (in)	
33000-1002	Male (tin)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
33011-0004	Male (gold)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
31296-0004	Male (long)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)

. Wire Specs: Wires to be thin wall thickness per Ford's specification M1L135-A1 and M1L123-A

DEFINITION OF TERMS

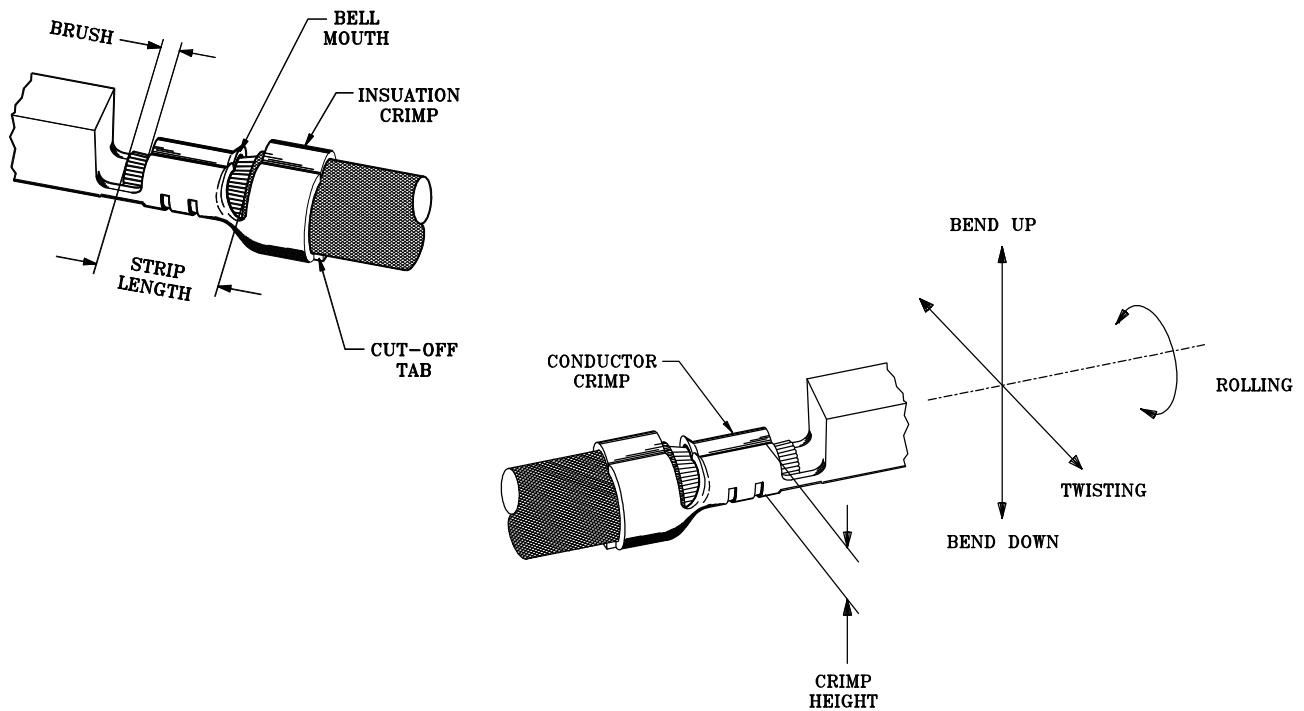

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope




SPECIFICATION SHEET

FineAdjust Applicator

63865-3300

REVISION B

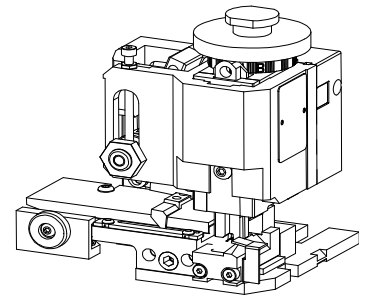


SCOPE

Terminal Series No		Wire Size Awg (mm ²)		Insulation Diameter mm (in)		Strip Length mm (in)	
33000-1002	Male (tin)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
33011-0004	Male (gold)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
31296-0004	Male (long)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)

. Wire Specs: Wires to be thin wall thickness per Ford's specification M1L135-A1 and M1L123-A

DEFINITION OF TERMS

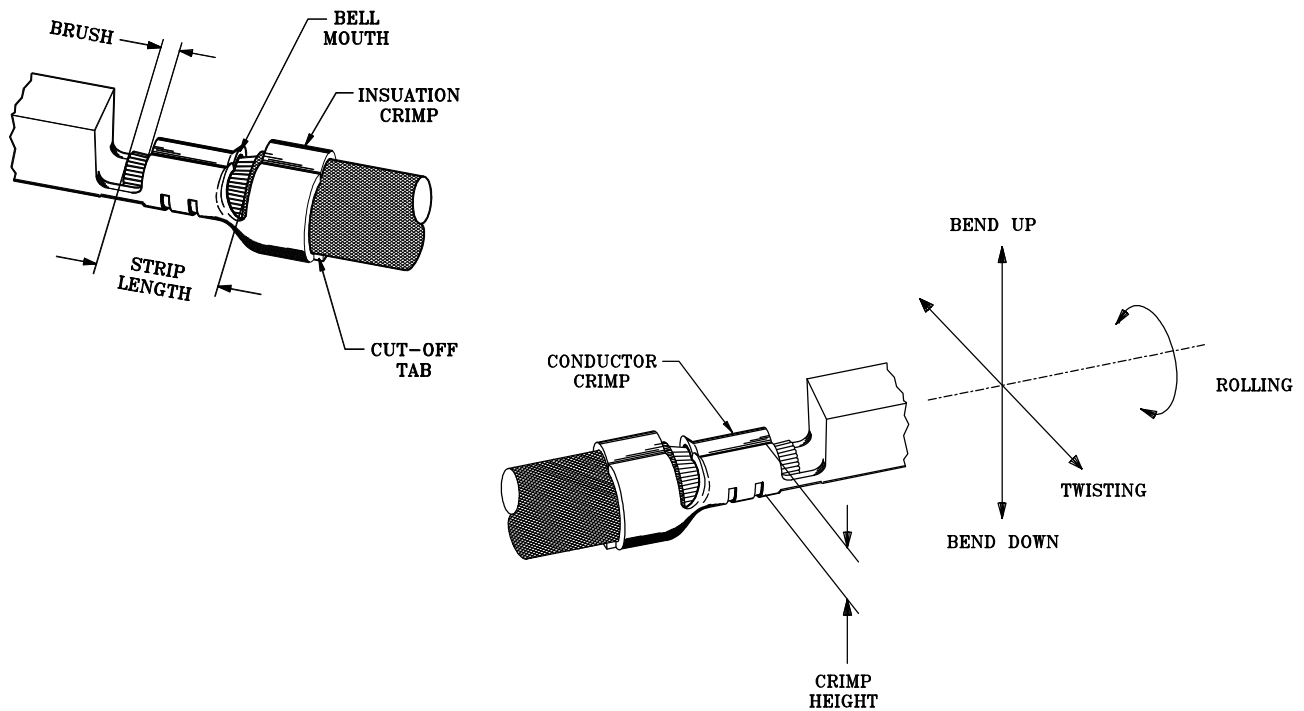

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope




SPECIFICATION SHEET

FineAdjust Applicator

63865-3300

REVISION B

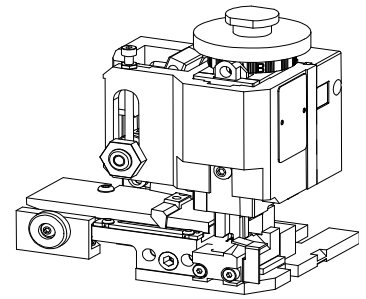


SCOPE

Terminal Series No		Wire Size Awg (mm ²)		Insulation Diameter mm (in)		Strip Length mm (in)	
33000-1002	Male (tin)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
33011-0004	Male (gold)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
31296-0004	Male (long)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)

. Wire Specs: Wires to be thin wall thickness per Ford's specification M1L135-A1 and M1L123-A

DEFINITION OF TERMS

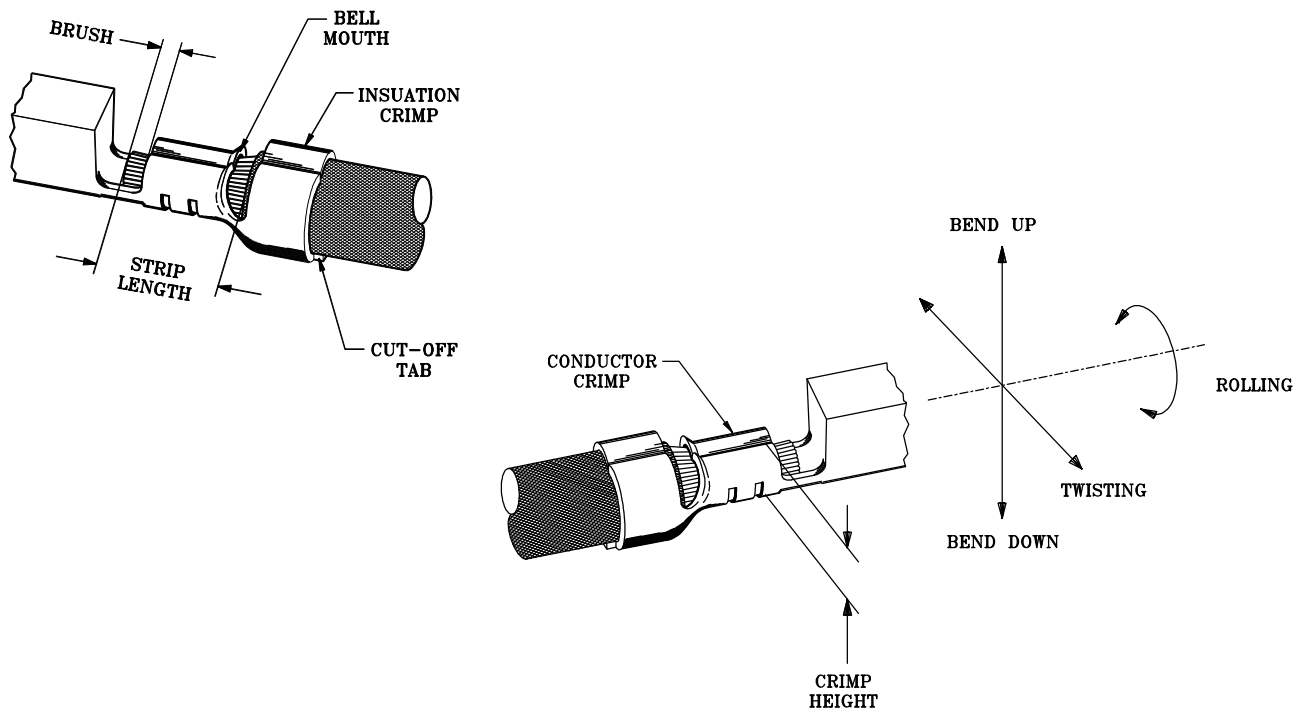

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope




SPECIFICATION SHEET

FineAdjust Applicator

63865-3300

REVISION B

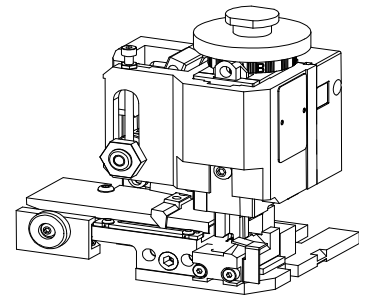


SCOPE

Terminal Series No		Wire Size Awg (mm ²)		Insulation Diameter mm (in)		Strip Length mm (in)	
33000-1002	Male (tin)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
33011-0004	Male (gold)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)
31296-0004	Male (long)	20	(0.58)	1.70-1.85	(.067-.073)	4.70-5.60	(.185-.220)

. Wire Specs: Wires to be thin wall thickness per Ford's specification M1L135-A1 and M1L123-A

DEFINITION OF TERMS

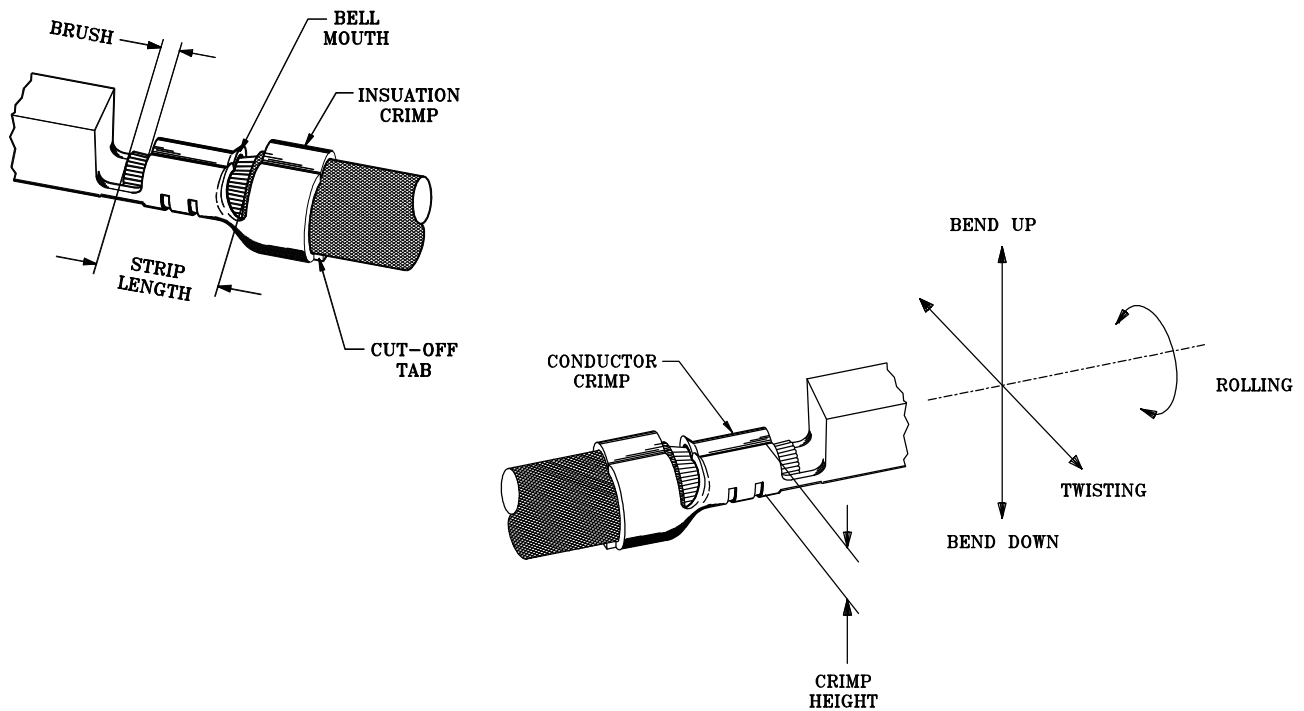

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope

SPECIFICATIONS

Terminal Series No.	Bellmouth mm (in)	Cut-Off Tab Max. mm (in)	Conductor Brush mm (in)
---------------------	----------------------	-----------------------------	----------------------------

33000-1002	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
33011-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
31296-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)

Terminal Series No.	Bend Up Degree	Bend Down Degree	Twist Degree	Roll	Punch Width mm Conductor Insulation
---------------------	-------------------	---------------------	-----------------	------	--

33000-1002	3	3	3	5	2.10 2.05
33011-0004	3	3	3	5	2.10 2.05
31296-0004	3	3	3	5	2.10 2.05

The above specifications are guidelines to an optimum crimp.

CONDITIONS

After crimping, the crimp profiles should measure the following.

Terminal Series	Wire Size Awg (mm ²)	Conductor Crimp Height mm (in)	Conductor Crimp Width mm (in)	Pull Force Min N (lbs)
-----------------	-------------------------------------	-----------------------------------	----------------------------------	---------------------------

33000-1002	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
33011-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
31296-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)

Terminal Series	Wire Size Awg (mm ²)	Insulation Crimp Height mm (in)	Insulation Crimp Width mm (in)
-----------------	-------------------------------------	------------------------------------	-----------------------------------

33000-1002	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
33011-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
31296-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)

Pull Force measured with no influence from the insulation crimp

SPECIFICATIONS

Terminal Series No.	Bellmouth mm (in)	Cut-Off Tab Max. mm (in)	Conductor Brush mm (in)
---------------------	----------------------	-----------------------------	----------------------------

33000-1002	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
33011-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
31296-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)

Terminal Series No.	Bend Up Degree	Bend Down Degree	Twist Degree	Roll	Punch Width mm Conductor Insulation
---------------------	-------------------	---------------------	-----------------	------	--

33000-1002	3	3	3	5	2.10 2.05
33011-0004	3	3	3	5	2.10 2.05
31296-0004	3	3	3	5	2.10 2.05

The above specifications are guidelines to an optimum crimp.

CONDITIONS

After crimping, the crimp profiles should measure the following.

Terminal Series	Wire Size Awg (mm ²)	Conductor Crimp Height mm (in)	Conductor Crimp Width mm (in)	Pull Force Min N (lbs)
-----------------	-------------------------------------	-----------------------------------	----------------------------------	---------------------------

33000-1002	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
33011-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
31296-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)

Terminal Series	Wire Size Awg (mm ²)	Insulation Crimp Height mm (in)	Insulation Crimp Width mm (in)
-----------------	-------------------------------------	------------------------------------	-----------------------------------

33000-1002	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
33011-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
31296-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)

Pull Force measured with no influence from the insulation crimp

SPECIFICATIONS

Terminal Series No.	Bellmouth mm (in)	Cut-Off Tab Max. mm (in)	Conductor Brush mm (in)
---------------------	----------------------	-----------------------------	----------------------------

33000-1002	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
33011-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
31296-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)

Terminal Series No.	Bend Up Degree	Bend Down Degree	Twist Degree	Roll	Punch Width mm Conductor Insulation
---------------------	-------------------	---------------------	-----------------	------	--

33000-1002	3	3	3	5	2.10 2.05
33011-0004	3	3	3	5	2.10 2.05
31296-0004	3	3	3	5	2.10 2.05

The above specifications are guidelines to an optimum crimp.

CONDITIONS

After crimping, the crimp profiles should measure the following.

Terminal Series	Wire Size Awg (mm ²)	Conductor Crimp Height mm (in)	Conductor Crimp Width mm (in)	Pull Force Min N (lbs)
-----------------	-------------------------------------	-----------------------------------	----------------------------------	---------------------------

33000-1002	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
33011-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
31296-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)

Terminal Series	Wire Size Awg (mm ²)	Insulation Crimp Height mm (in)	Insulation Crimp Width mm (in)
-----------------	-------------------------------------	------------------------------------	-----------------------------------

33000-1002	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
33011-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
31296-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)

Pull Force measured with no influence from the insulation crimp

SPECIFICATIONS

Terminal Series No.	Bellmouth mm (in)	Cut-Off Tab Max. mm (in)	Conductor Brush mm (in)
---------------------	----------------------	-----------------------------	----------------------------

33000-1002	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
33011-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
31296-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)

Terminal Series No.	Bend Up Degree	Bend Down Degree	Twist Degree	Roll	Punch Width mm Conductor Insulation
---------------------	-------------------	---------------------	-----------------	------	--

33000-1002	3	3	3	5	2.10 2.05
33011-0004	3	3	3	5	2.10 2.05
31296-0004	3	3	3	5	2.10 2.05

The above specifications are guidelines to an optimum crimp.

CONDITIONS

After crimping, the crimp profiles should measure the following.

Terminal Series	Wire Size Awg (mm ²)	Conductor Crimp Height mm (in)	Conductor Crimp Width mm (in)	Pull Force Min N (lbs)
-----------------	-------------------------------------	-----------------------------------	----------------------------------	---------------------------

33000-1002	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
33011-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
31296-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)

Terminal Series	Wire Size Awg (mm ²)	Insulation Crimp Height mm (in)	Insulation Crimp Width mm (in)
-----------------	-------------------------------------	------------------------------------	-----------------------------------

33000-1002	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
33011-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
31296-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)

Pull Force measured with no influence from the insulation crimp

SPECIFICATIONS

Terminal Series No.	Bellmouth mm (in)	Cut-Off Tab Max. mm (in)	Conductor Brush mm (in)
---------------------	----------------------	-----------------------------	----------------------------

33000-1002	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
33011-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)
31296-0004	0.25-1.25 (.010-.049)	0.50 (.020)	0.15-0.65 (.006-.026)

Terminal Series No.	Bend Up Degree	Bend Down Degree	Twist Degree	Roll	Punch Width mm Conductor Insulation
---------------------	-------------------	---------------------	-----------------	------	--

33000-1002	3	3	3	5	2.10 2.05
33011-0004	3	3	3	5	2.10 2.05
31296-0004	3	3	3	5	2.10 2.05

The above specifications are guidelines to an optimum crimp.

CONDITIONS

After crimping, the crimp profiles should measure the following.

Terminal Series	Wire Size Awg (mm ²)	Conductor Crimp Height mm (in)	Conductor Crimp Width mm (in)	Pull Force Min N (lbs)
-----------------	-------------------------------------	-----------------------------------	----------------------------------	---------------------------

33000-1002	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
33011-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)
31296-0004	20 (0.58)	1.10-1.20 (.043-.047)	2.05-2.25 (.081-.089)	75.0 (17.00)

Terminal Series	Wire Size Awg (mm ²)	Insulation Crimp Height mm (in)	Insulation Crimp Width mm (in)
-----------------	-------------------------------------	------------------------------------	-----------------------------------

33000-1002	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
33011-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)
31296-0004	20 (0.58)	1.80-2.00 (.071-.079)	2.00-2.20 (.079-.087)

Pull Force measured with no influence from the insulation crimp

PARTS LIST

Item Number	Order Number	Eng Number	Description	Qty	Kit Part
1	634570009	634570009	Conductor Punch	1	Y
2	634550012	634550012	Conductor Anvil	1	Y
3	634540013	634540013	Insulation Punch	1	Y
4	634560012	634560012	Insulation Anvil	1	Y
5	634610001	634610001	Cut-Off Plunger	1	Y
6	634430036	634430036	Front Plunger Retainer	1	Y
7	637000539	637000539	Cut-Off Plunger Spring	1	
8	634433160	634433160	Front Plunger Striker	1	
9	634430021	634430021	Lower Tooling Key	1	
10	634436013	634436013	Rear Cover	1	
11	11-18-4094	60709A111	Front Cover	1	
12	634432506	634432506	Anvil Mount	1	
13	11-18-4080	60707-5	Wire Stop	1	*
14	634430009	634430009	Scrap Chute	1	
15	638013100	638013100	Wide Track FineAdjust	1	
49	634590001	634590001	Wide Terminal Track	1	
70	638653370	638653370	Tool Kit (All "Y" Items)	0	

* For Terminal 31296-0004 : Use 11-18-4080 (60707-5) Revision "E"

NOTES

1. We recommend an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power.
3. Slugs , Terminals, Dirt and Oil should be kept clear of work area.
4. This Applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.
5. ** CAUTION** To prevent injury never operate this Applicator without the guarding supplied with the press or wire processing machine in place. Reference the press or wire processing manufacturer's instruction manual.
6. Wear safety glasses at all times.

PARTS LIST

Item Number	Order Number	Eng Number	Description	Qty	Kit Part
1	634570009	634570009	Conductor Punch	1	Y
2	634550012	634550012	Conductor Anvil	1	Y
3	634540013	634540013	Insulation Punch	1	Y
4	634560012	634560012	Insulation Anvil	1	Y
5	634610001	634610001	Cut-Off Plunger	1	Y
6	634430036	634430036	Front Plunger Retainer	1	Y
7	637000539	637000539	Cut-Off Plunger Spring	1	
8	634433160	634433160	Front Plunger Striker	1	
9	634430021	634430021	Lower Tooling Key	1	
10	634436013	634436013	Rear Cover	1	
11	11-18-4094	60709A111	Front Cover	1	
12	634432506	634432506	Anvil Mount	1	
13	11-18-4080	60707-5	Wire Stop	1	*
14	634430009	634430009	Scrap Chute	1	
15	638013100	638013100	Wide Track FineAdjust	1	
49	634590001	634590001	Wide Terminal Track	1	
70	638653370	638653370	Tool Kit (All "Y" Items)	0	

* For Terminal 31296-0004 : Use 11-18-4080 (60707-5) Revision "E"

NOTES

1. We recommend an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power.
3. Slugs , Terminals, Dirt and Oil should be kept clear of work area.
4. This Applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.
5. ** CAUTION** To prevent injury never operate this Applicator without the guarding supplied with the press or wire processing machine in place. Reference the press or wire processing manufacturer's instruction manual.
6. Wear safety glasses at all times.

PARTS LIST

Item Number	Order Number	Eng Number	Description	Qty	Kit Part
1	634570009	634570009	Conductor Punch	1	Y
2	634550012	634550012	Conductor Anvil	1	Y
3	634540013	634540013	Insulation Punch	1	Y
4	634560012	634560012	Insulation Anvil	1	Y
5	634610001	634610001	Cut-Off Plunger	1	Y
6	634430036	634430036	Front Plunger Retainer	1	Y
7	637000539	637000539	Cut-Off Plunger Spring	1	
8	634433160	634433160	Front Plunger Striker	1	
9	634430021	634430021	Lower Tooling Key	1	
10	634436013	634436013	Rear Cover	1	
11	11-18-4094	60709A111	Front Cover	1	
12	634432506	634432506	Anvil Mount	1	
13	11-18-4080	60707-5	Wire Stop	1	*
14	634430009	634430009	Scrap Chute	1	
15	638013100	638013100	Wide Track FineAdjust	1	
49	634590001	634590001	Wide Terminal Track	1	
70	638653370	638653370	Tool Kit (All "Y" Items)	0	

* For Terminal 31296-0004 : Use 11-18-4080 (60707-5) Revision "E"

NOTES

1. We recommend an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power.
3. Slugs , Terminals, Dirt and Oil should be kept clear of work area.
4. This Applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.
5. ** CAUTION** To prevent injury never operate this Applicator without the guarding supplied with the press or wire processing machine in place. Reference the press or wire processing manufacturer's instruction manual.
6. Wear safety glasses at all times.

PARTS LIST

Item Number	Order Number	Eng Number	Description	Qty	Kit Part
1	634570009	634570009	Conductor Punch	1	Y
2	634550012	634550012	Conductor Anvil	1	Y
3	634540013	634540013	Insulation Punch	1	Y
4	634560012	634560012	Insulation Anvil	1	Y
5	634610001	634610001	Cut-Off Plunger	1	Y
6	634430036	634430036	Front Plunger Retainer	1	Y
7	637000539	637000539	Cut-Off Plunger Spring	1	
8	634433160	634433160	Front Plunger Striker	1	
9	634430021	634430021	Lower Tooling Key	1	
10	634436013	634436013	Rear Cover	1	
11	11-18-4094	60709A111	Front Cover	1	
12	634432506	634432506	Anvil Mount	1	
13	11-18-4080	60707-5	Wire Stop	1	*
14	634430009	634430009	Scrap Chute	1	
15	638013100	638013100	Wide Track FineAdjust	1	
49	634590001	634590001	Wide Terminal Track	1	
70	638653370	638653370	Tool Kit (All "Y" Items)	0	

* For Terminal 31296-0004 : Use 11-18-4080 (60707-5) Revision "E"

NOTES

1. We recommend an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power.
3. Slugs , Terminals, Dirt and Oil should be kept clear of work area.
4. This Applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.
5. ** CAUTION** To prevent injury never operate this Applicator without the guarding supplied with the press or wire processing machine in place. Reference the press or wire processing manufacturer's instruction manual.
6. Wear safety glasses at all times.

PARTS LIST

Item Number	Order Number	Eng Number	Description	Qty	Kit Part
1	634570009	634570009	Conductor Punch	1	Y
2	634550012	634550012	Conductor Anvil	1	Y
3	634540013	634540013	Insulation Punch	1	Y
4	634560012	634560012	Insulation Anvil	1	Y
5	634610001	634610001	Cut-Off Plunger	1	Y
6	634430036	634430036	Front Plunger Retainer	1	Y
7	637000539	637000539	Cut-Off Plunger Spring	1	
8	634433160	634433160	Front Plunger Striker	1	
9	634430021	634430021	Lower Tooling Key	1	
10	634436013	634436013	Rear Cover	1	
11	11-18-4094	60709A111	Front Cover	1	
12	634432506	634432506	Anvil Mount	1	
13	11-18-4080	60707-5	Wire Stop	1	*
14	634430009	634430009	Scrap Chute	1	
15	638013100	638013100	Wide Track FineAdjust	1	
49	634590001	634590001	Wide Terminal Track	1	
70	638653370	638653370	Tool Kit (All "Y" Items)	0	


* For Terminal 31296-0004 : Use 11-18-4080 (60707-5) Revision "E"

NOTES

1. We recommend an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power.
3. Slugs , Terminals, Dirt and Oil should be kept clear of work area.
4. This Applicator should only be used in a press with a shut height of 135.8 mm (5.346"). Tooling damage could result at a lower setting.
5. ** CAUTION** To prevent injury never operate this Applicator without the guarding supplied with the press or wire processing machine in place. Reference the press or wire processing manufacturer's instruction manual.
6. Wear safety glasses at all times.


ASSEMBLY DRAWING

The drawing below is a generic drawing representation. Some detail may not be shown.
The FineAdjust applicator assembly and parts list can be found in the FineAdjust manual.

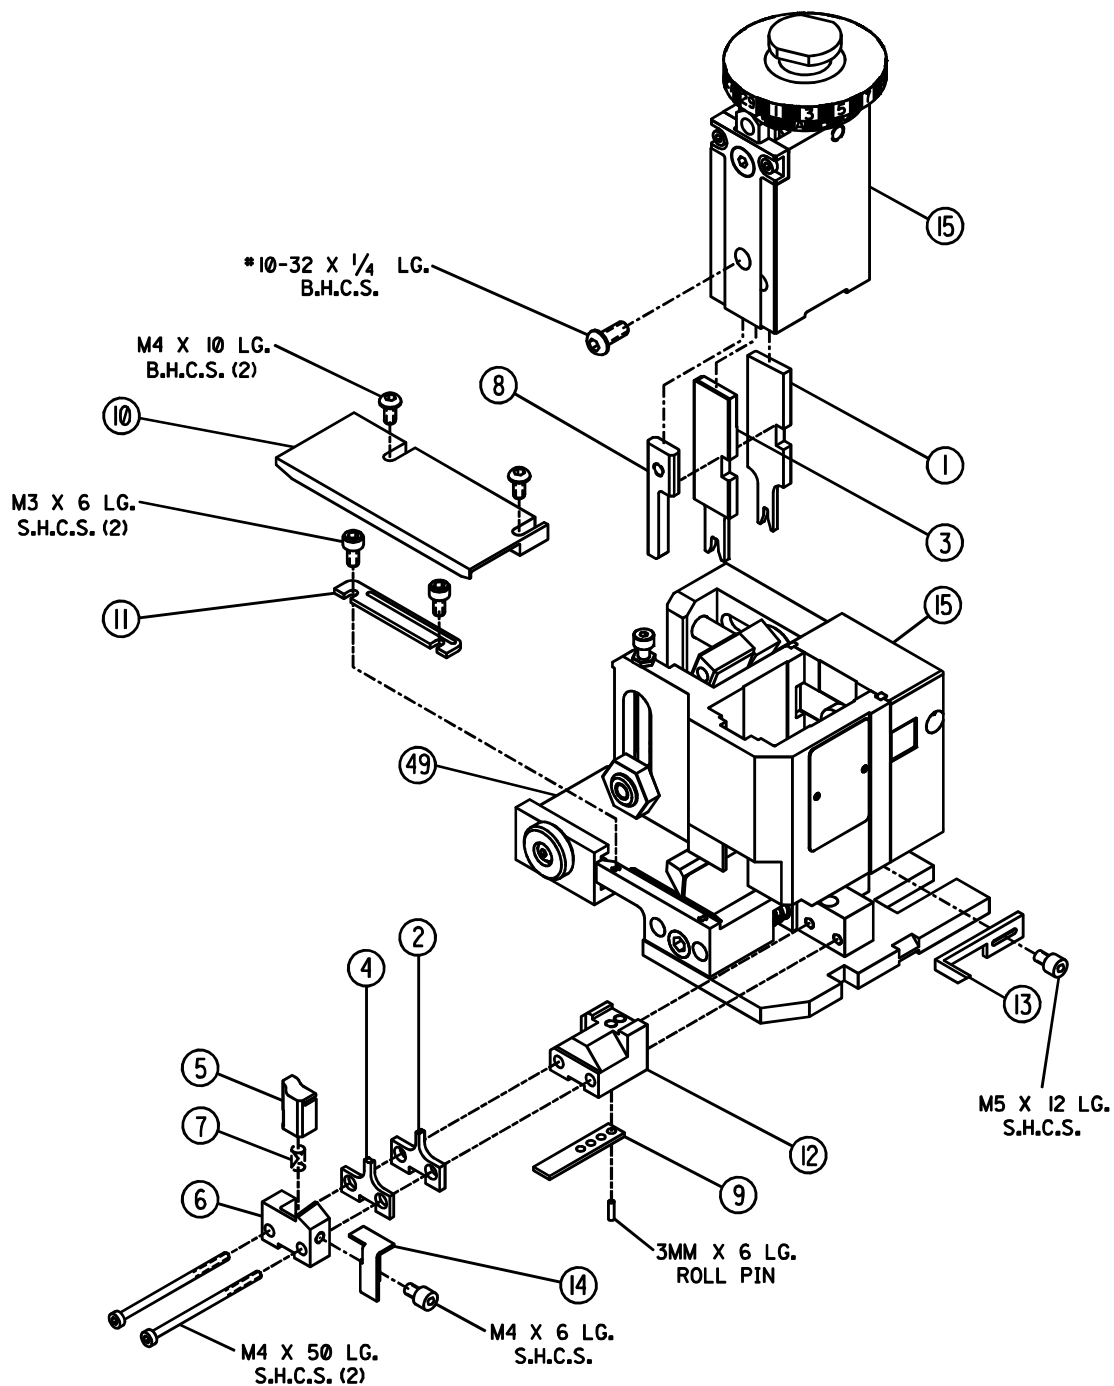


ASSEMBLY DRAWING

The drawing below is a generic drawing representation. Some detail may not be shown.
The FineAdjust applicator assembly and parts list can be found in the FineAdjust manual.

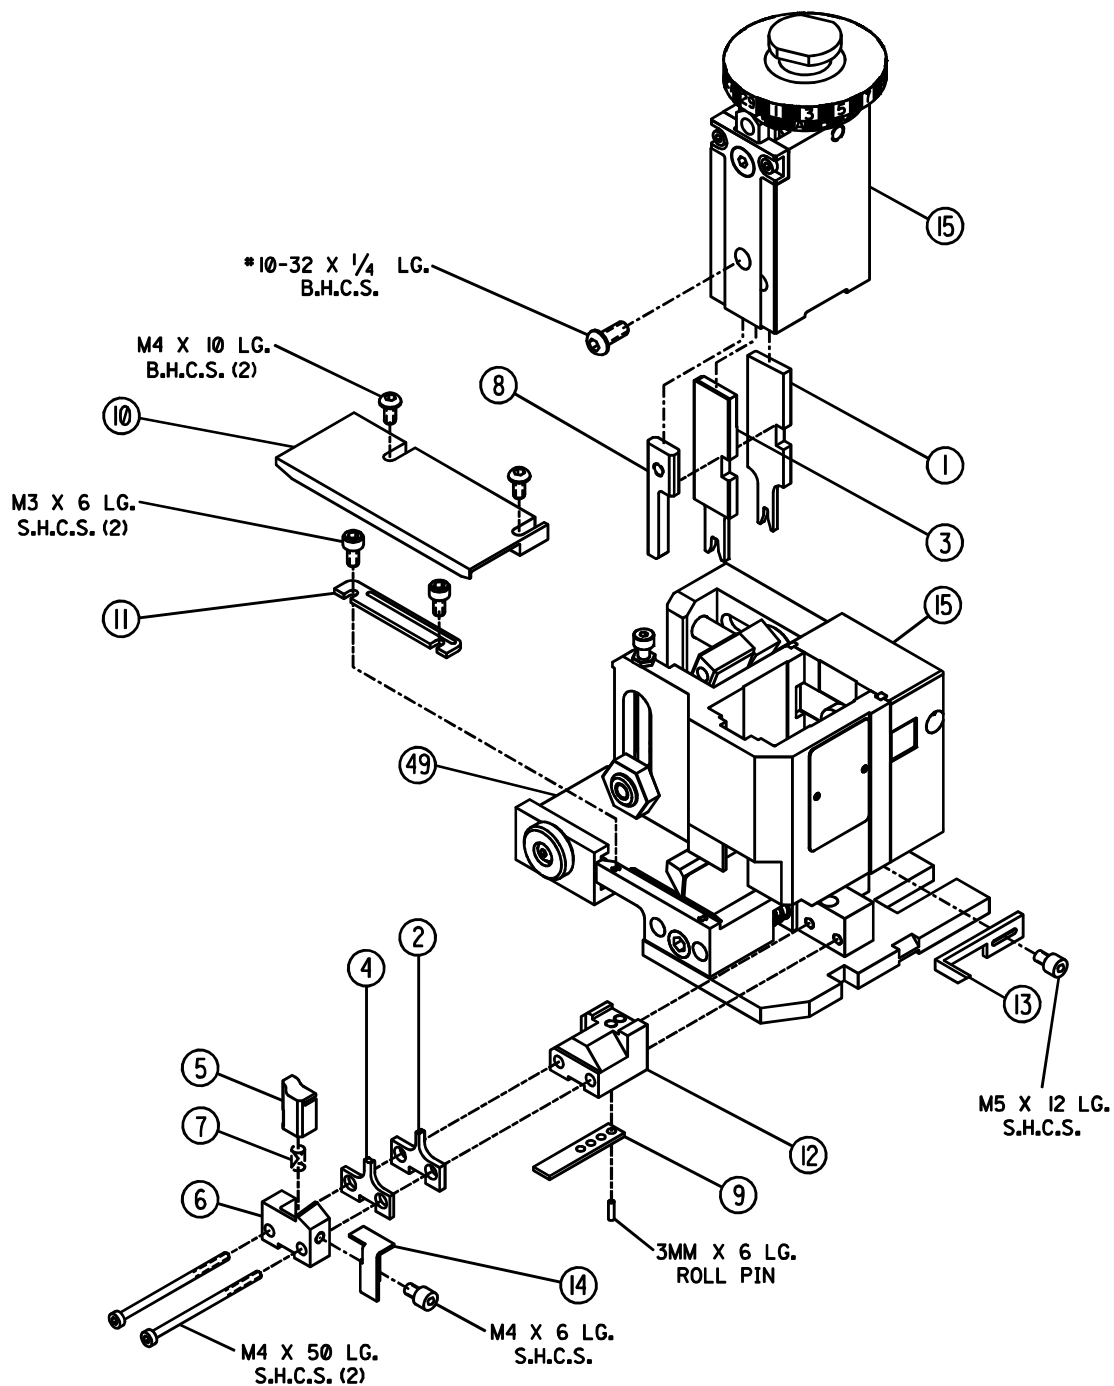


ASSEMBLY DRAWING

The drawing below is a generic drawing representation. Some detail may not be shown.
The FineAdjust applicator assembly and parts list can be found in the FineAdjust manual.

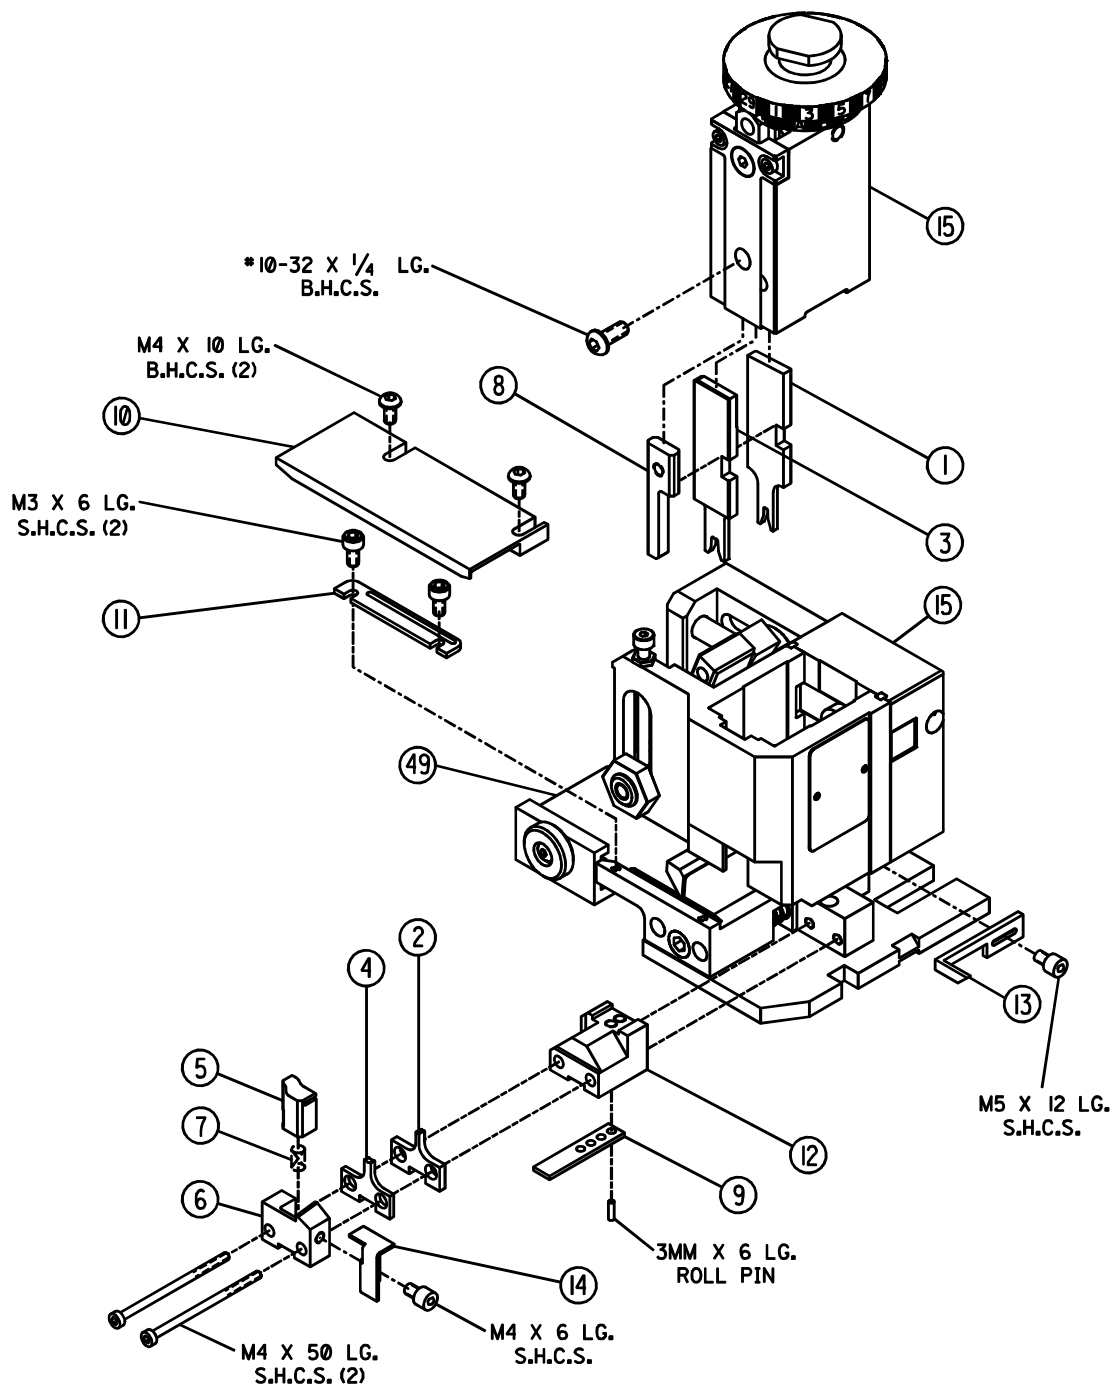


ASSEMBLY DRAWING

The drawing below is a generic drawing representation. Some detail may not be shown.
The FineAdjust applicator assembly and parts list can be found in the FineAdjust manual.

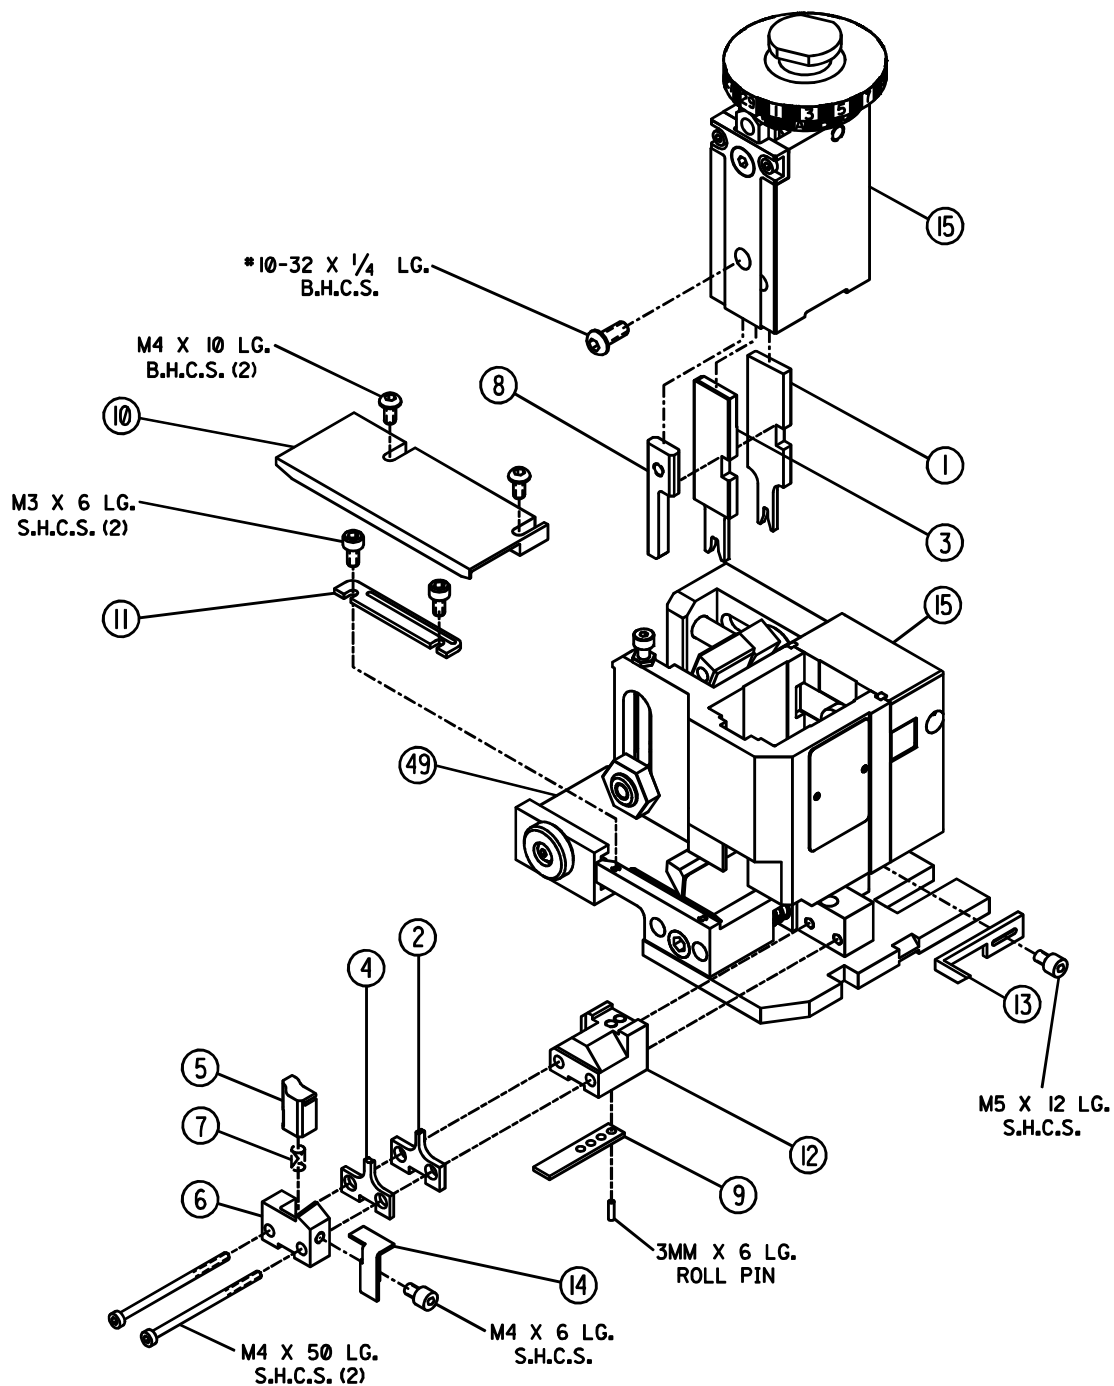

ASSEMBLY DRAWING

The drawing below is a generic drawing representation. Some detail may not be shown.
The FineAdjust applicator assembly and parts list can be found in the FineAdjust manual.

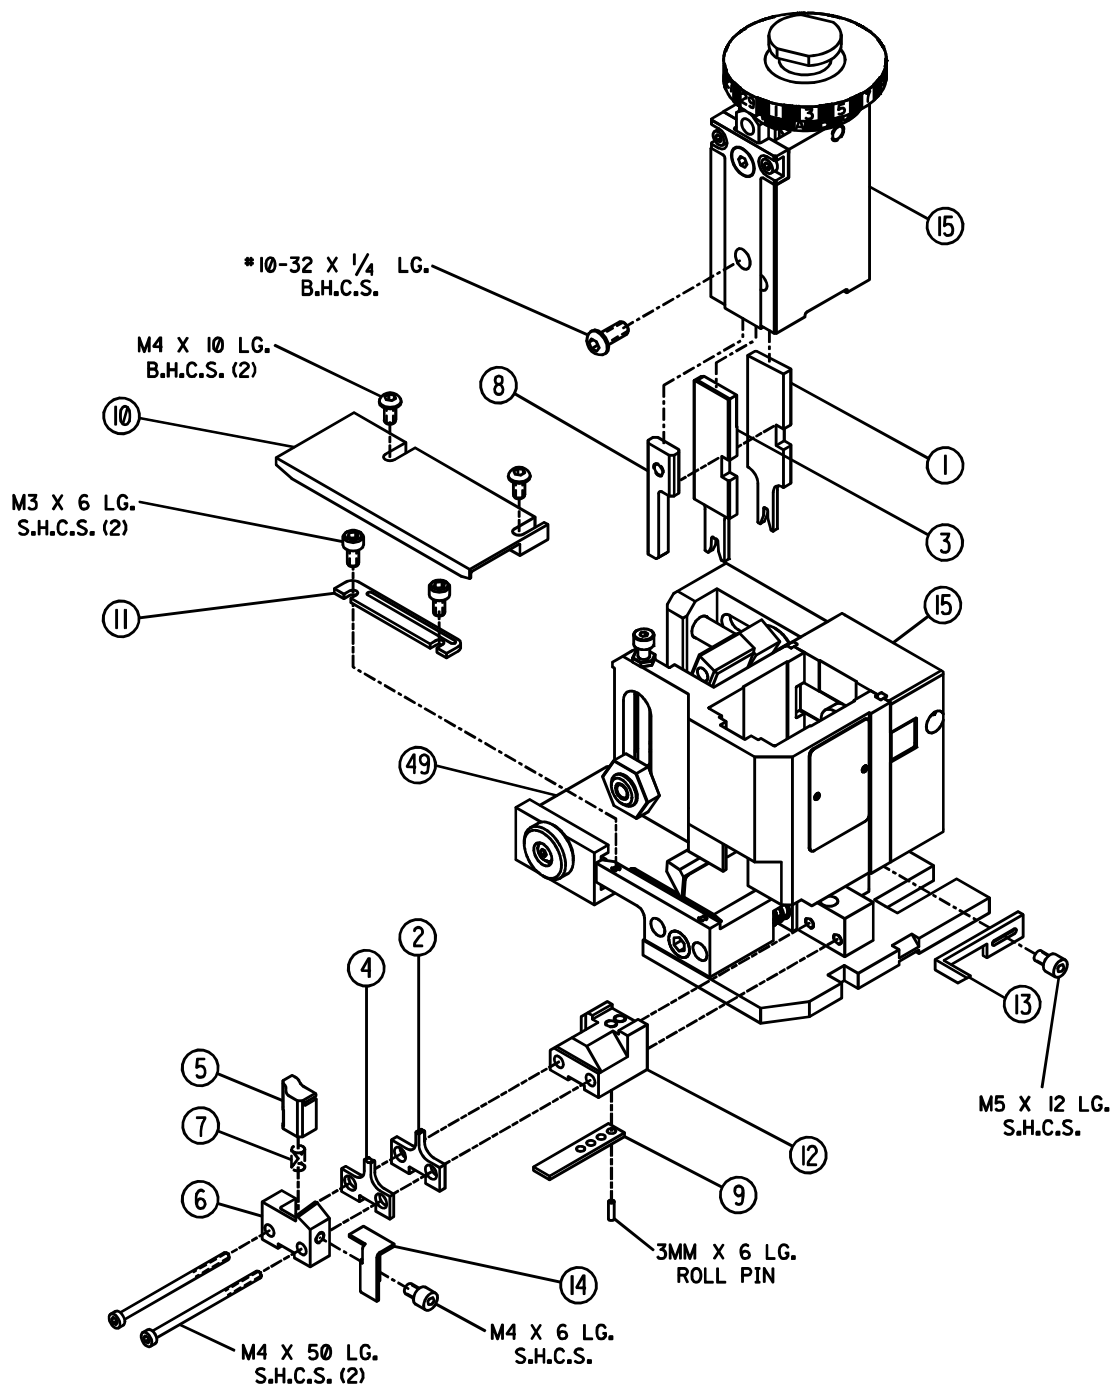

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9