

## 2x2 Antenna SWITCH GaAs MMIC

### ■GENERAL DESCRIPTION

NJG1544HC3 is a 2x2 antenna switch IC designed for the IEEE 802.11b or 802.11g (2.4GHz band) wireless LAN application.

This device includes logic decoder function, and can be operated by 2 bits signal to control Tx/Rx and ANT1/ANT2 switching.

This switch features high isolation and low loss.

The ultra small & ultra thin USB10-C3 package is adopted.

### ■PACKAGE OUTLINE




NJG1544HC3

### ■FEATURES

- Single low voltage control +2.5~+5.5V
- Low insertion loss 0.35dB typ. @TX-ANT2, f=2.5GHz, P<sub>IN</sub>=20dBm  
0.50dB typ. @RX-ANT1, RX-ANT2, f=2.5GHz, P<sub>IN</sub>=10dBm
- High isolation 23dB typ. @f=2.5GHz, P<sub>IN</sub>=20dBm
- Handling power (TX port) 28dBm max. @f=2.5GHz, V<sub>DD</sub>=2.7V
- Low current consumption 120uA typ. @f=2.5GHz
- Ultra small & ultra thin package USB10-C3 (Package size: 1.5x2.0x0.75mm)

### ■PIN CONFIGURATION

USB10-C3 Type  
(TOP VIEW)

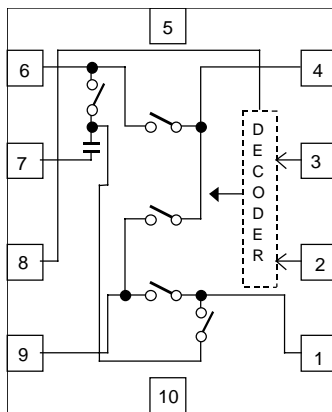

- 1 ANT1
- 2 CTL1
- 3 CTL2
- 4 ANT2
- 5 GND
- 6 TX
- 7 GND
- 8 VDD
- 9 RX
- 10 GND

### ■TRUTH TABLE

"H"=VCTL(H) "L"=VCTL(L)

"X"="H" or "L" (Don't care)

PASS	CONTROL SIGNAL	
	CTL1	CTL2
RX-ANT2	L	L
RX-ANT1	L	H
TX-ANT2	H	X

# NJG1544HC3

## ■ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNITS
Input Power	$P_{in}$	TX, ANT2 Terminal, $V_{DD}=2.7V$ , $V_{CTL}=0/2.7V$	30	dBm
		RX, ANT1 Terminal, $V_{DD}=2.7V$ , $V_{CTL}=0/2.7V$	25	dBm
Supply Voltage	$V_{DD}$	$V_{DD}$ Terminal	7.5	V
Control Voltage	$V_{CTL}$	CTL1, CTL2 Terminal	7.5	V
Power Dissipation	$P_D$	At on PCB board	135	mW
Operating Temp.	$T_{opr}$		-40~+85	°C
Storage Temp.	$T_{stg}$		-55~+125	°C

## ■ELECTRICAL CHARACTERISTICS

General conditions:  $V_{DD}=2.7V$ ,  $V_{CTL}=0/2.7V$ ,  $Z_S=Z_I=50\Omega$ ,  $T_a=25^\circ C$

Tested on PCB circuit as shown below.

Insertion loss of each connectors, striplines, and capacitors are excluded.

PARAMETERS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply voltage	VDD		2.5	2.7	5.5	V
Operating current	IDD	f=2.5GHz	-	120	150	uA
Control voltage (LOW)	$V_{CTL(L)}$		0	-	0.8	V
Control voltage (HIGH)	$V_{CTL(H)}$		2.0	-	VDD	V
Control current	$I_{CTL}$	f=2.5GHz	-	30	40	uA
Insertion loss 1	LOSS1	TX-ANT2, f=2.5GHz, $P_{IN}=20dBm$	-	0.35	0.65	dB
Insertion loss 2	LOSS2	RX-ANT1, RX-ANT2, f=2.5GHz, $P_{IN}=10dBm$	-	0.5	0.8	dB
Isolation 1	ISL1	TX-ANT2, f=2.5GHz, $P_{in}=20dBm$	20	23	-	dB
Isolation 2	ISL2	RX-ANT1, RX-ANT2, f=2.5GHz, $P_{in}=10dBm$	20	23	-	dB
Pin at 1dB compression point	$P_{-1dB}$	TX-ANT2, f=2.5GHz	26	28	-	dBm
VSWR	VSWR	f=0.1~2.5GHz, ON State	-	1.1	1.3	
Switching time	$T_{SW}$	f=0.1~2.5GHz	-	200	300	ns

## ■ TERMINAL INFORMATION

No.	SYMBOL	DESCRIPTION
1	ANT1	RF receiving port. An external capacitor of around 56pF is required to block DC voltage ( $V_{DD}$ ).
2	CTL1	Control voltage input terminal. This terminal is set to High-Level (+2V~ $V_{DD}$ ) or Low-Level (0~+0.8V).
3	CTL2	Control voltage input terminal. This terminal is set to High-Level (+2V~ $V_{DD}$ ) or Low-Level (0~+0.8V).
4	ANT2	RF transmitting/receiving port. An external capacitor of 56pF is required to block DC voltage ( $V_{DD}$ ).
5	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
6	TX	RF transmitting port. An external capacitor of around 56pF is required to block DC voltage ( $V_{DD}$ ).
7	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
8	VDD	Positive voltage supply terminal. The positive voltage (+2.5~+5.5V) have to be supplied. Please connect a bypass capacitor with GND terminal for excellent RF performance.
9	RX	RF receiving port. An external capacitor of around 56pF is required to block DC voltage ( $V_{DD}$ ).
10	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.


# NJG1544HC3

## ■ ELECTRICAL CHARACTERISTICS

(f=0.1~3.0GHz, with Application circuit, Losses of external circuit are excluded)


**RX-ANT2 Insertion Loss vs. Frequency**

(RX-ANT2 ON, VDD=2.7V, Pin=0dBm)

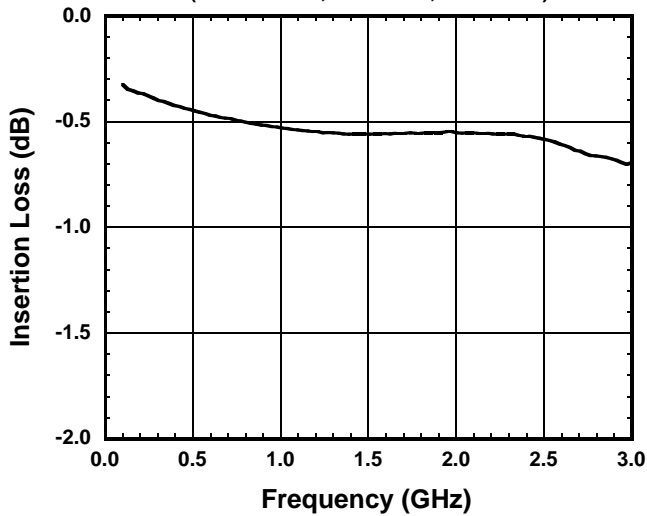


**RX-ANT2 Isolation vs. Frequency**

(TX-ANT2 ON, VDD=2.7V, Pin=0dBm)

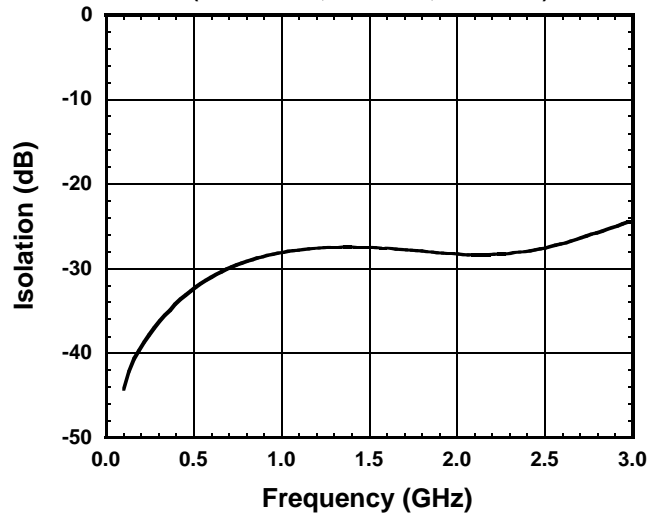


**RX-ANT1 Insertion Loss vs. Frequency**

(RX-ANT1 ON, VDD=2.7V, Pin=0dBm)

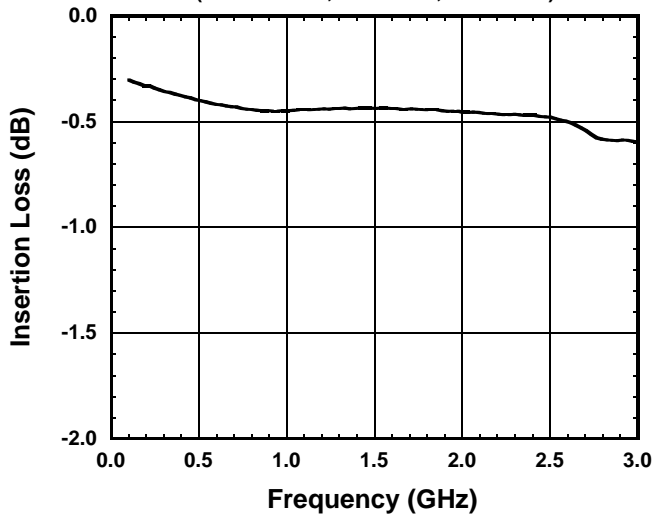


**RX-ANT1 Isolation vs. Frequency**

(RX-ANT2 ON, VDD=2.7V, Pin=0dBm)

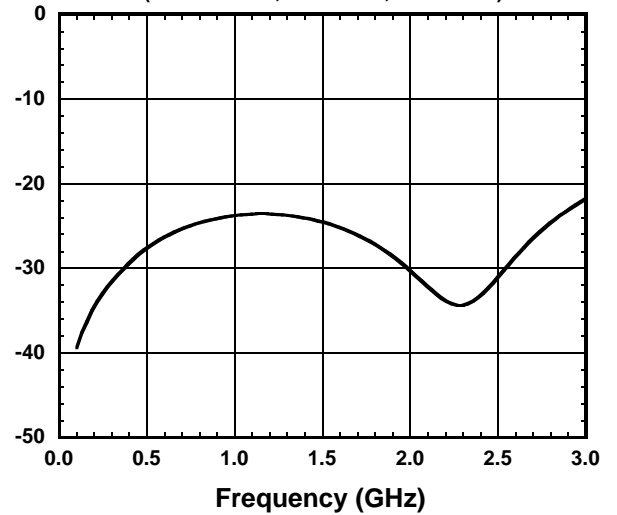


**TX-ANT2 Insertion Loss vs. Frequency**

(TX-ANT2 ON, VDD=2.7V, Pin=0dBm)

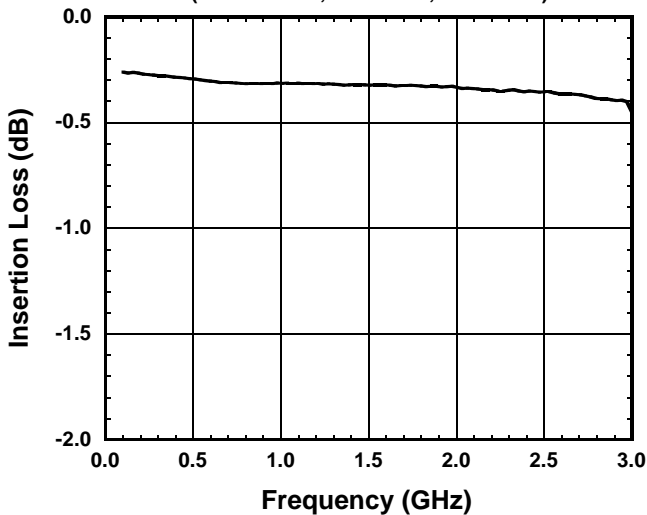

**TX-ANT2 Isolation vs. frequency**

(RX-ANT2 ON, VDD=2.7V, Pin=0dBm)

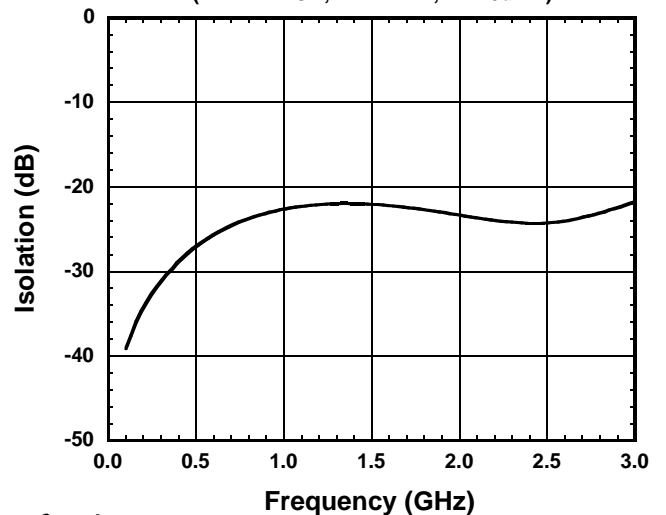


## ELECTRICAL CHARACTERISTICS

(f=0.1~3.0GHz, with Application circuit, Losses of external circuit are excluded)


### RX-ANT2 VSWR vs. Frequency

(RX-ANT2 ON, ANT2 port, VDD=2.7V)

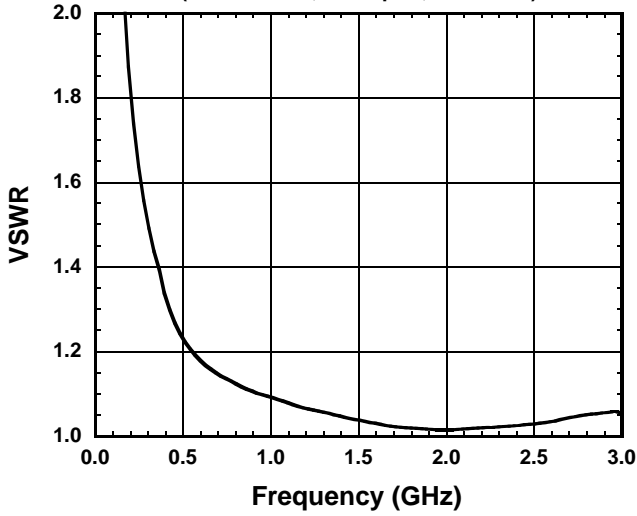


### Switching Speed

(RX-ANT2 ON, VDD=2.7V)

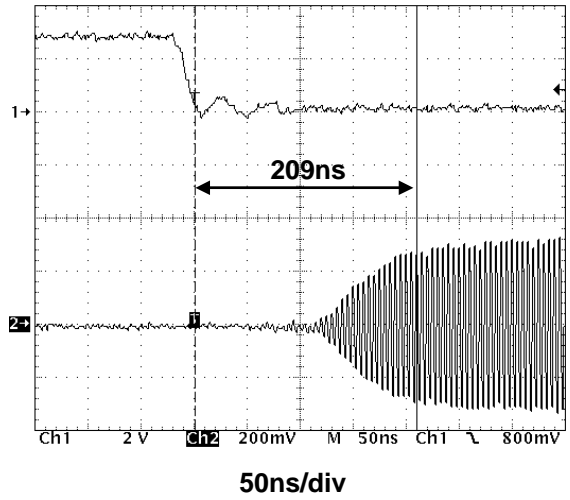


### RX-ANT1 VSWR vs. Frequency

(RX-ANT1 ON, ANT1 port, VDD=2.7V)

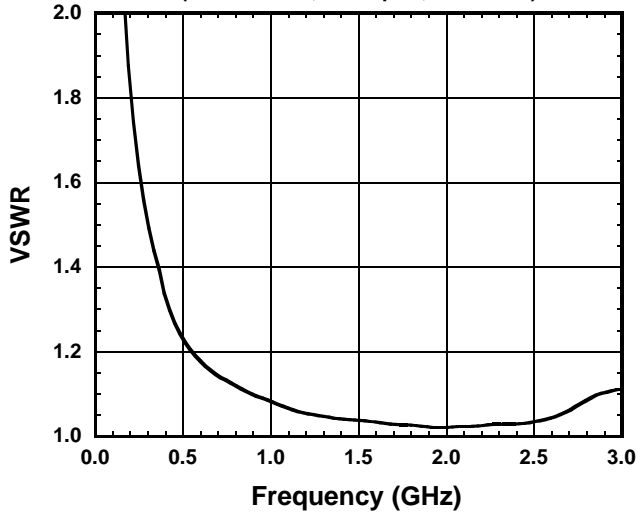


### Switching Speed

(RX-ANT1 ON, VDD=2.7V)

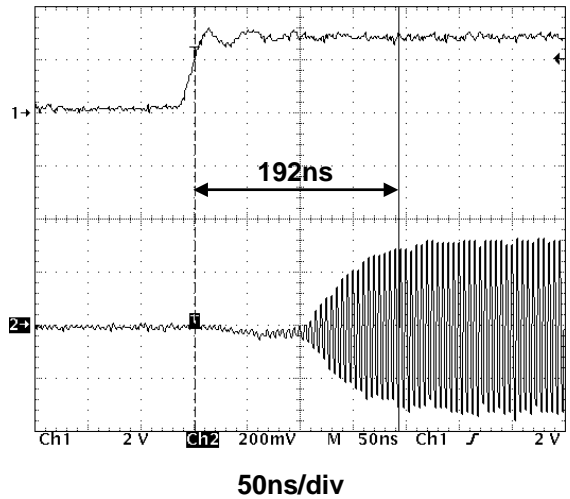


### TX-ANT2 VSWR vs. Frequency

(TX-ANT2 ON, TX port, VDD=2.7V)

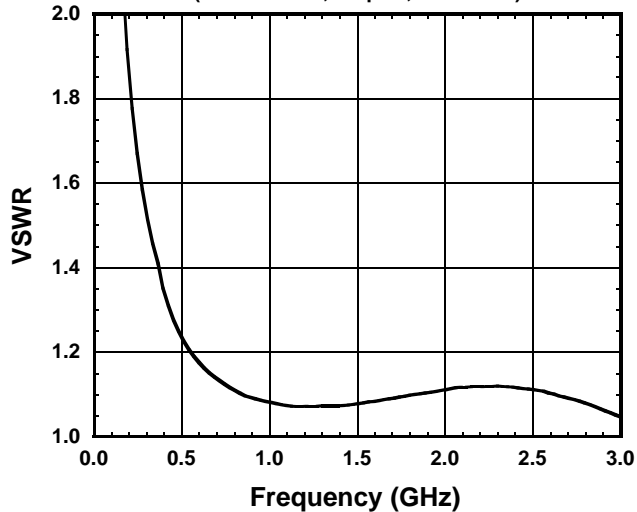

### Switching Speed

(TX-ANT2 ON, VDD=2.7V)

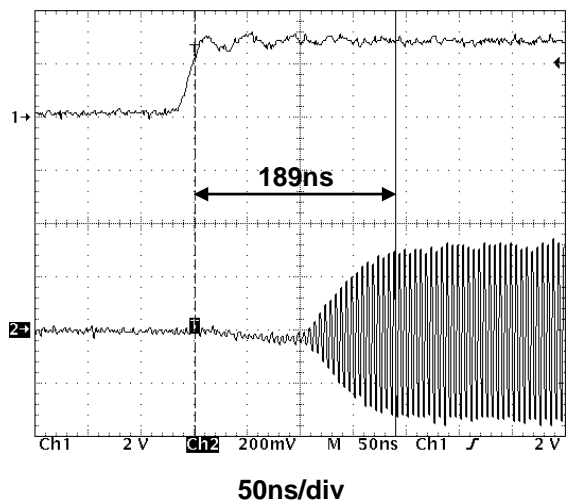


# NJG1544HC3

## ELECTRICAL CHARACTERISTICS

(f=0.1~3.0GHz, with Application circuit, Losses of external circuit are excluded)


**Output Power, IDD vs. Input Power**

(TX-ANT2 ON, fin=2.5GHz)

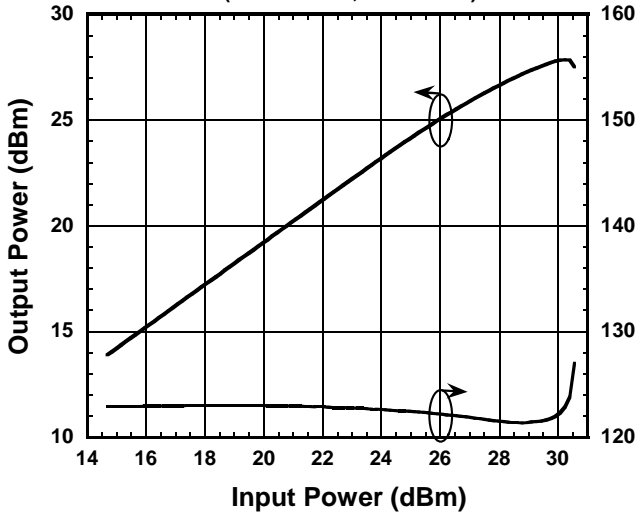


**RX-ANT2 Isolation vs. Frequency**

(TX-ANT2 ON, VDD=2.7V, Pin=0dBm)

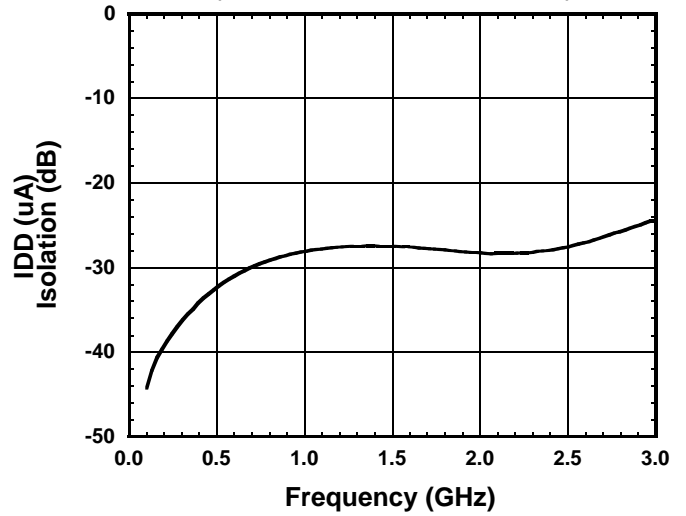


**Output Power, IDD vs. Input Power**

(TX-ANT2 ON, fin=960MHz)

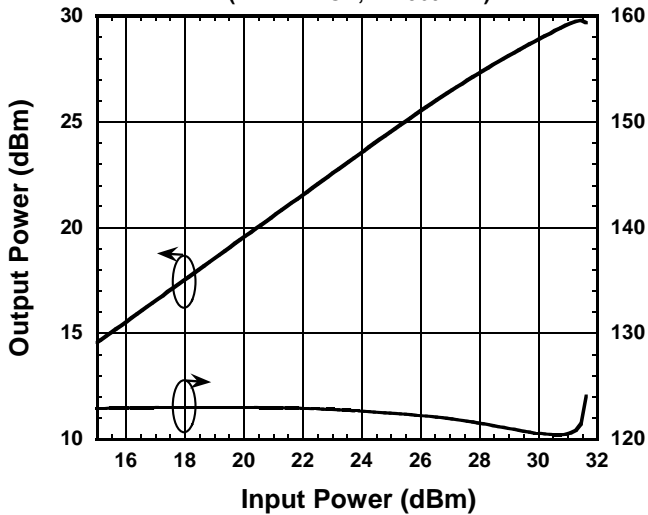


**Insertion Loss vs. Input Power**

(TX-ANT2 ON, fin=960MHz)

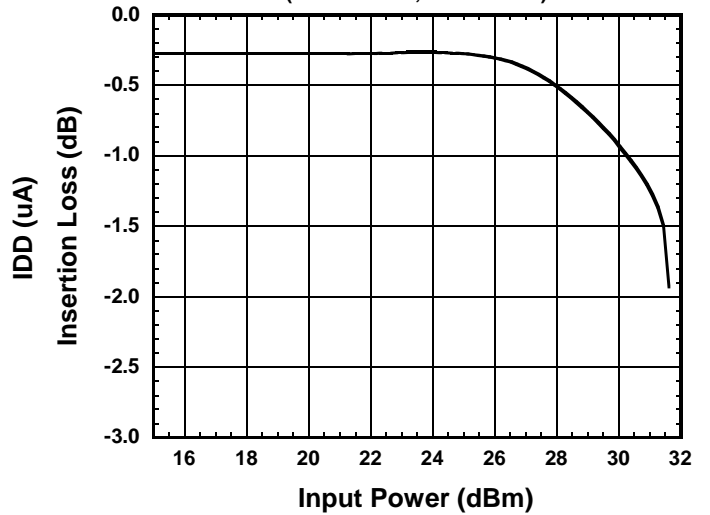


**Output Power, IDD vs. Input Power**

(TX-ANT2 ON, fin=2.5GHz)

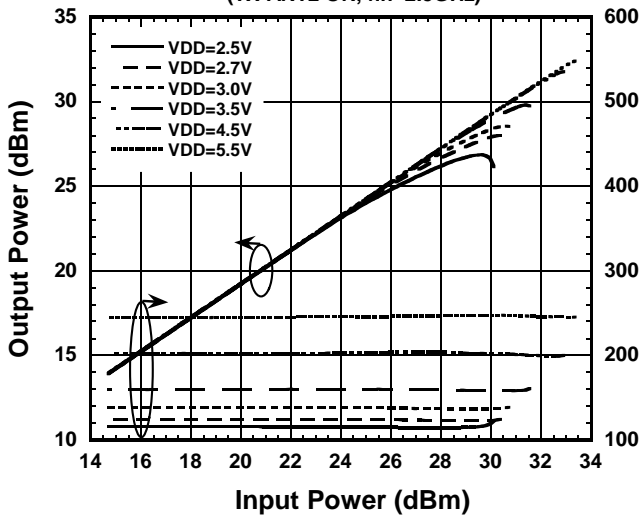


**Insertion Loss vs. Input Power**

(TX-ANT2 ON, fin=2.5GHz)

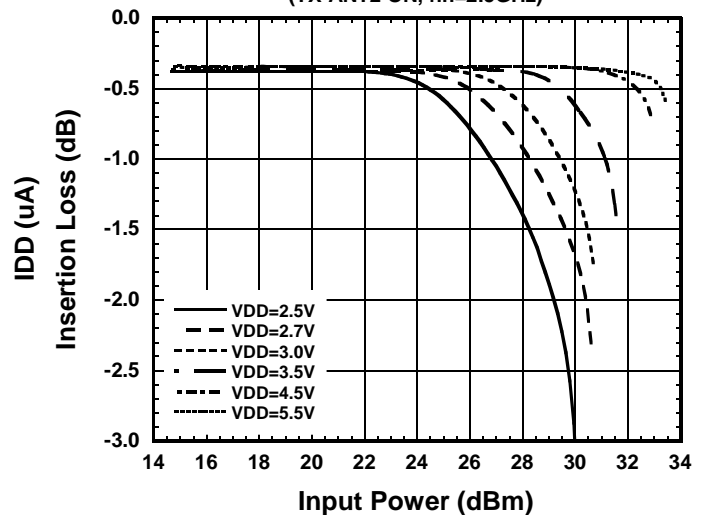


## APPLICATION CIRCUIT

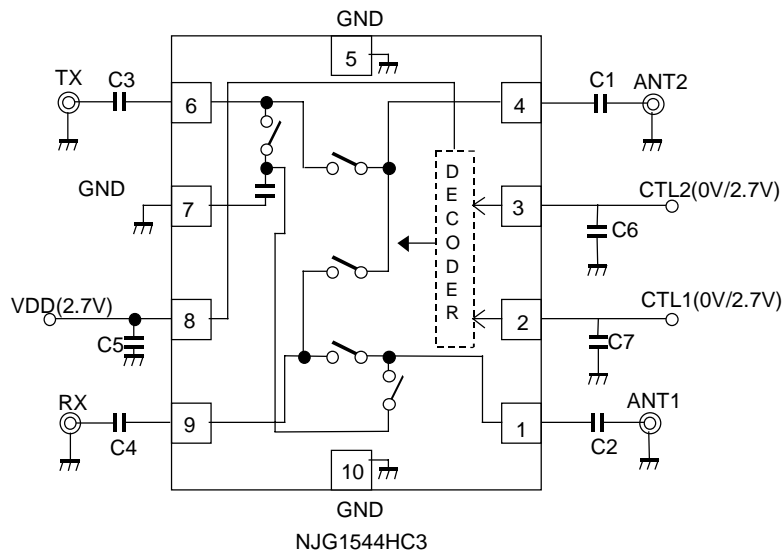

### Parts List

Parts number	List 1	Notes
C1~C4	56pF	GRM36 MURATA
C5~C7	10pF	GRM36 MURATA

## RECOMMENDED PCB DESIGN

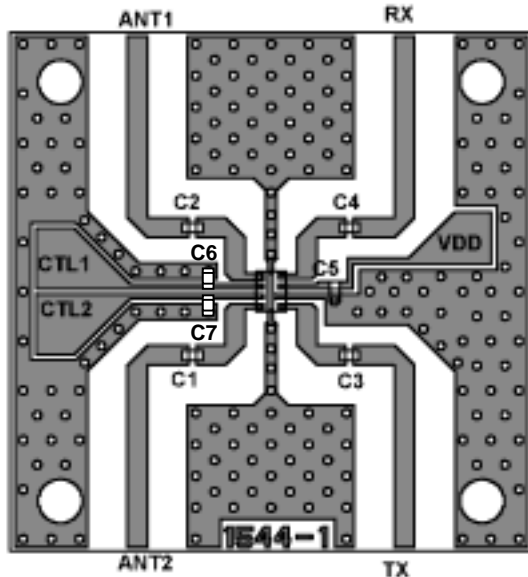


PCB SIZE=26x26 mm  
 PCB:FR4 t=0.5mm  
 CAPACITOR: size 1005  
 Microstrip Line Width=1.0mm  
 ( $Z_0=50\text{ohm}$ )

## PRECAUTIONS

- [1] The DC blocking capacitors have to be placed at RF terminal of Tx, Rx, ANT1 and ANT2.  
Please choose appropriate capacitance values to the application frequency.
- [2] To reduce stipline influence on RF characteristics, please locate bypass capacitors (C5) close to VDD terminals.
- [3] For good isolation, the GND terminal (7th pin) must be placed possibly close to ground plane of substrate, and through holes for GND should be placed near by the pin connection.

# NJG1544HC3

## PACKAGE OUTLINE (USB10-C3)

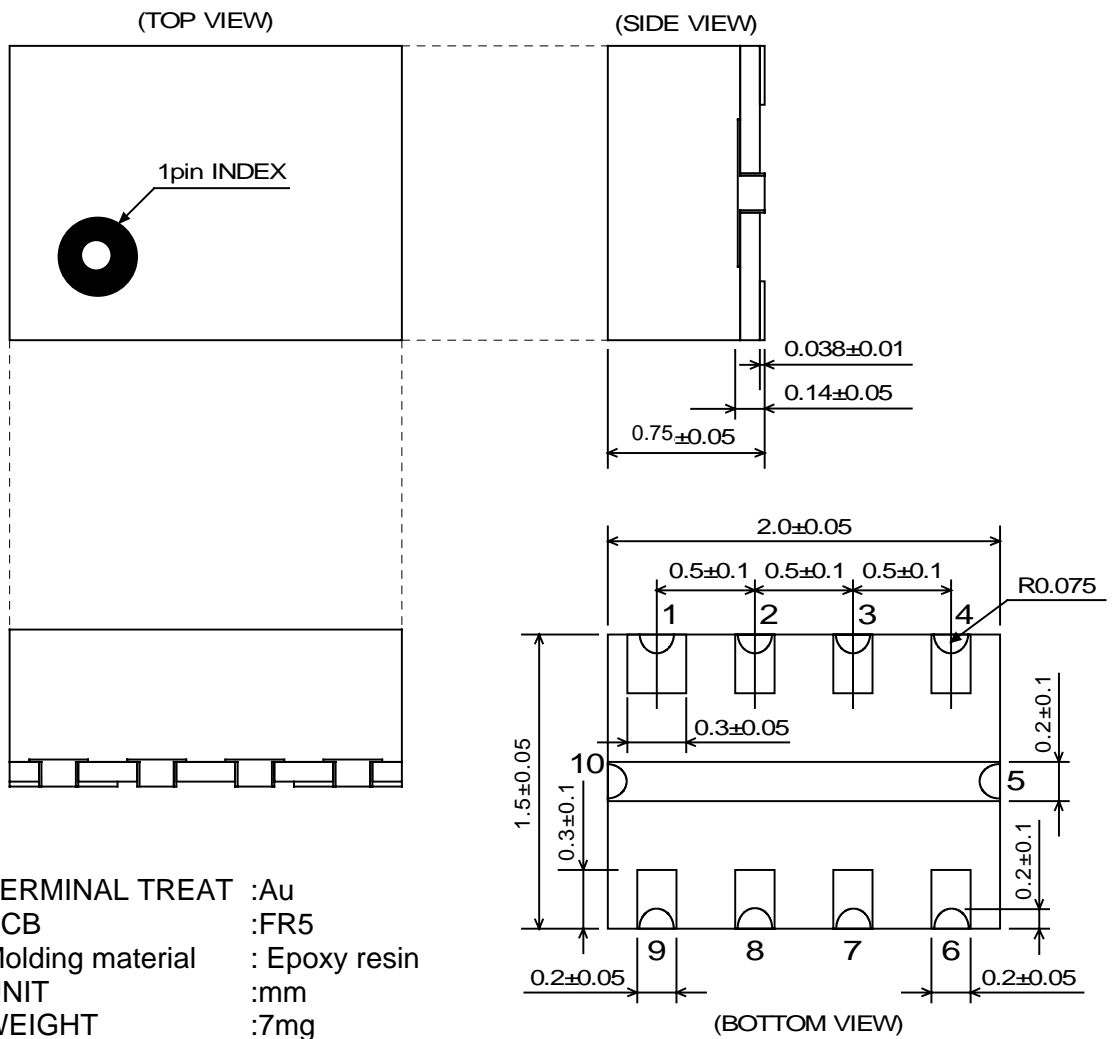

### Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee

as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9