



Quality Products. Service Excellence.

## Tube Output (10 - 280 Watts) Easy Wire Secondary 1608A-1650A Series

Push-Pull - HI-FI




**Classic**

**RoHS**

### Features

- NEW & improved version of our **1608-1650 Series** multiple secondary output transformers (re-designed secondaries for easy hook-up of secondary loads).
- Designed for push-pull tube output circuits.
- Units are designed to provide ample "headroom" at bass frequencies (note the weight of each transformer).
- All models have a secondary tapped for 4, 8 or 16 ohm outputs.
- Enclosed (shielded), 4 slot, above chassis Type "X" mounting.
- Manufactured with plastic coil forms for coil support and insulation.
- Frequency response 30 Hz. to 30 Khz. at full rated power (+/- 1 db max. - ref. 1 Khz) minimum.
- Insulated flexible leads 8" min.
- All units (except the **1650G**) include 40% screen taps for Ultra-Linear operation (if desired).
- Typical applications - Push-Pull: triode, Ultra-Linear pentode, pentode and tetrode connected audio output. The **1650G** does NOT have primary screen taps and will not support "Ultra-Linear" applications.

### Gallery

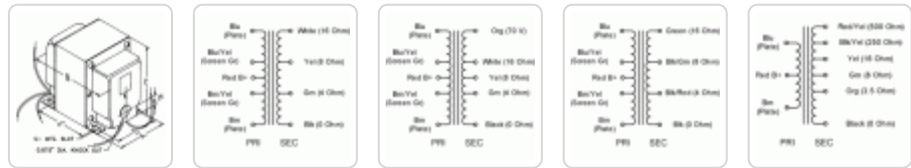

| Part No. | Audio Watts (RMS) | Primary Impedance (Ohms) | Maximum DC Per Side | Secondary Impedance (Ohms) | Dimensions |      |      |      |             |             |      | Weight (lbs.) |
|----------|-------------------|--------------------------|---------------------|----------------------------|------------|------|------|------|-------------|-------------|------|---------------|
|          |                   |                          |                     |                            | A          | B    | C    | D    | E +/- 1/16" | G Slot      |      |               |
| 1608A    | 10                | 8,000 ct                 | 100 ma.             | 4-8-16                     | 2.50       | 2.75 | 3.06 | 2.00 | 1.69        | 0.20 x 0.38 | 2.5  |               |
| 1609A    | 10                | 10,000 ct                | 100 ma.             | 4-8-16                     | 2.50       | 2.75 | 3.06 | 2.00 | 1.69        | 0.20 x 0.38 | 2.5  |               |
| 1615A    | 15                | 5,000 ct                 | 100 ma.             | 4-8-16                     | 2.50       | 3.25 | 3.06 | 2.00 | 2.19        | 0.20 x 0.38 | 3.25 |               |
| 1616     | 15                | 7,600 ct                 | 100 ma.             | 16                         | 2.50       | 3.50 | 3.06 | 2.00 | 2.50        | 0.20 x 0.38 | 3.5  |               |
| 1650E    | 15                | 8,000 ct                 | 100 ma.             | 4-8-16                     | 2.50       | 3.25 | 3.06 | 2.00 | 2.50        | 0.20 x 0.38 | 3.5  |               |
| 1620A    | 20                | 6,600 ct                 | 158 ma.             | 4-8-16                     | 2.50       | 3.50 | 3.06 | 2.00 | 2.44        | 0.20 x 0.38 | 3.5  |               |
| 1650FA   | 25                | 7,600 ct                 | 128 ma.             | 4-8-16                     | 2.50       | 3.50 | 3.06 | 2.00 | 2.44        | 0.20 x 0.38 | 4    |               |
| 1645A    | 30                | 5,000 ct                 | 128 ma.             | 4-8-16-70V                 | 2.50       | 3.75 | 3.06 | 2.00 | 2.69        | 0.20 x 0.38 | 4.5  |               |
| 1650G    | 35                | 6,600 ct                 | 200 ma.             | 3.5/8/16/250/500           | 3.13       | 3.75 | 3.81 | 2.50 | 2.25        | 0.20 x 0.38 | 5    |               |
| 1650HA   | 40                | 6,600 ct                 | 200 ma.             | 4-8-16                     | 3.13       | 4.00 | 3.81 | 2.50 | 2.69        | 0.20 x 0.38 | 6.5  |               |
| 1650KA   | 50                | 3,400 ct                 | 318 ma.             | 4-8-16                     | 3.13       | 4.00 | 3.81 | 2.50 | 2.69        | 0.20 x 0.38 | 7    |               |
| 1650NA   | 60                | 4,300 ct                 | 318 ma.             | 4-8-16                     | 3.13       | 4.25 | 3.81 | 2.50 | 2.94        | 0.20 x 0.38 | 8    |               |
| 1650PA   | 60                | 6,600 ct                 | 200 ma.             | 4-8-16                     | 3.13       | 4.25 | 3.81 | 2.50 | 2.94        | 0.20 x 0.38 | 8    |               |
| 1650RA   | 100               | 5,000 ct                 | 318 ma.             | 4-8-16                     | 3.75       | 4.25 | 4.56 | 3.00 | 3.06        | 0.20 x 0.38 | 12   |               |
| 1650TA   | 120               | 1,900 ct                 | 403 ma.             | 4-8-16                     | 3.75       | 4.50 | 4.56 | 3.00 | 3.31        | 0.20 x 0.38 | 14   |               |
| 1650WA   | 280               | 1,900 ct                 | 806 ma.             | 4-8-16                     | 4.38       | 7.50 | 5.25 | 3.50 | 5.88        | 0.20 x 0.38 | 28   |               |

## Suggested Tube Types

| Part No. | Audio<br>Watts<br>(R.M.S.) | Primary<br>Impedance<br>(Ohms) | Operation                     | Suggested Tube Types                       |
|----------|----------------------------|--------------------------------|-------------------------------|--|
| 1608A    | 10                         | 8,000 ct                       | Push-Pull (2 Tubes)           | 6AQ5, 6V6, 6BQ5, EL84, SV83                |
| 1609A    | 10                         | 10,000 ct                      | Push-Pull (2 Tubes)           | 6AQ5, 6V6, 6BQ5, EL84, SV83                |
| 1615A    | 15                         | 5,000 ct                       | Push-Pull (2 Tubes)           | 2A3, 6A3, 6AQ5, 6B4G, 6L6, 6V6             |
| 1650E    | 15                         | 8,000 ct                       | Push-Pull (2 Tubes)           | 6AQ5, 6V6, 6BQ5, EL84, SV83                |
| 1620A    | 20                         | 6,600 ct                       | Push-Pull (2 Tubes)           | 6AQ5, 6L6, 6V6                             |
| 1650FA   | 25                         | 7,600 ct                       | Push-Pull (2 Tubes)           | 6L6GC, 6V6, 807, 5881, EL34                |
| 1645A    | 30                         | 5,000 ct                       | Push-Pull (2 Tubes)           | 6L6GC, 6V6, 807, 5881, EL34                |
| 1650G    | 35                         | 6,600 ct                       | Push-Pull (2 Tubes)           | 6L6GC, 807, 5881, EL34                     |
| 1650HA   | 40                         | 6,600 ct                       | Push-Pull (2 Tubes)           | 6L6GC, 807, 5881, EL34                     |
| 1650KA   | 50                         | 3,400 ct                       | Push-Pull Par. (4 Tubes)      | 6L6GC, 807, 5881, EL34, 6146B, 6550B       |
| 1650NA   | 60                         | 4,300 ct                       | Push-Pull Par. (2 or 4 Tubes) | 6L6GC, 807, 5881, EL34, 6146B, 6550B, KT88 |
| 1650PA   | 60                         | 6,600 ct                       | Push-Pull (2 Tubes)           | 6L6GC, 807, 5881, EL34, 6146B, 6550B, KT88 |
| 1650RA   | 100                        | 5,000 ct                       | Push-Pull Par. (2 or 4 Tubes) | 807, 5881, EL34, 6146B, 6550B, KT88        |
| 1650TA   | 120                        | 1,900 ct                       | Push-Pull Par. (4 or 6 Tubes) | 6L6GC, 5881, EL34, 6550B, KT88             |
| 1650WA   | 280                        | 1,900 ct                       | Push-Pull Par. (6 or 8 Tubes) | 6L6GC, 5881, EL34, 6550B, KT88             |

**Notes:** The above examples of possible combinations are to help you narrow down the choices of transformers for your favorite tube types. How you operate the tubes (push-pull, push-pull parallel, ultra-linear, class, B+, bias, operating points, etc.) will change optimum plate to plate load impedance. Only a few of the most popular tubes are shown. As more tubes become available we will add them to the list. A tube manual or tube manufacturer's technical data sheets should be consulted first, before making a decision on a proper output transformer.

*Data subject to change without notice*

© 2020. Hammond Manufacturing Ltd. All rights reserved.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9