

Typical unit


#### **FEATURES**

- 670 KHz operation
- 6.0-13.8 Vdc input voltage range
- Programmable output voltage from 0.591-5.0 VDC
- High power conversion efficiency at 94%
- Outstanding thermal derating performance
- Over temperature and over current protection
- On/Off control
- SIP, 1.45 x 0.44 x 0.61 inches (36.8 x 11.2 x 15.5 mm)
- Certified to UL/EN/IEC 60950-1 safety standards, 2nd edition (pending)
- RoHS-6 hazardous substance compliance
- Power Good

#### **PRODUCT OVERVIEW**

The OKR-T/20-W12-C is a miniature SIP non-isolated Point-of-Load (PoL) DC/DC power converter measuring only  $1.45 \times 0.44 \times 0.61$  inches ( $36.8 \times 11.2 \times 15.5$  mm). The wide input range is  $6.0 \times 13.8$  Volts DC. Based on  $670 \times 10^{-2}$  KHz synchronous buck topology, the high power conversion efficient Point of Load (PoL) module features programmable output voltage and On/Off control, under voltage lock out (UVLO), overcurrent and over temperature protections. These units meet all standard UL/EN/ IEC  $60950-1 \times 10^{-2}$  safety certifications (pending) and RoHS-6 hazardous substance compliance.

Figure 1. Connection Diagram

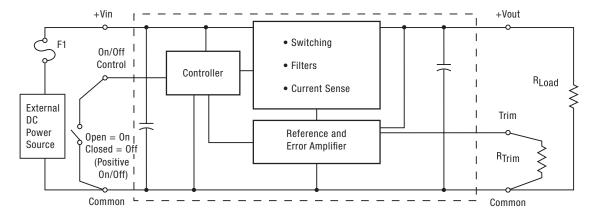










PERFORMANCE SPECIFICATIONS SUMMARY AND ORDERING GUIDE														
	Output					Input					Package			
			Іоит		R/N (mVp-p)	Regulation	on (Max.)			lın,	lın,	Efficiency		
Root Mo	odel	Vout (Volts)	(Amps max)	Power (Watts)	Max.	Line	Load	Vin Nom. (Volts)	Range (Volts)	no load (mA)	full load (Amps)	Min.	Тур.	Dimensions: inches (mm) L x W x H
0KR-T/20-	-W12-C	0.591-5	20	100	25	±0.3%	±0.5%	12	6.0-13.8	100	8.9	92%	94%	1.45 x 0.44 x 0.61 (36.8 x 11.2 x 15.5)

- ① Dimensions are in inches (mm).
- ② Ripple and Noise is shown at Vout=1.8V. See specs for details.
- ③ All specifications are at nominal line voltage, Vout= 5V and full load, +25 deg.C.

unless otherwise noted. Output capacitors are 3 22 $\mu$ F and 2 47 $\mu$ F ceramic. Input cap is 22  $\mu$ F. See detailed specifications. I/O caps are necessary for our test equipment and may not be needed for your application.

④ Vin must be 2V or higher than Vout for 3.3 to 5V outputs.

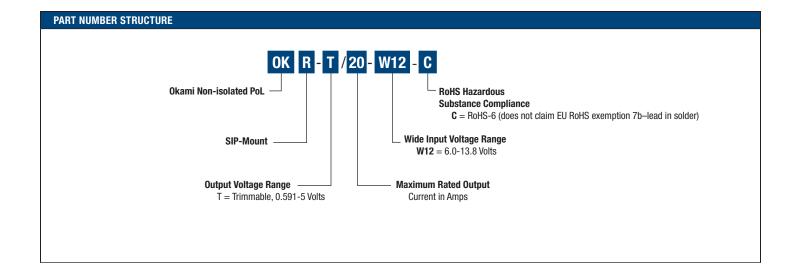





#### **FUNCTIONAL SPECIFICATIONS**

ABSOLUTE MAXIMUM RATINGS	Conditions	Minimum	Typical/Nominal	Maximum	Units
Input Voltage, Continuous	Full power operation	6.0	12	13.8	Vdc
Output Power				102	W
Output Ourset	Current-limited, no damage,	0		00	Δ.
Output Current	short-circuit protected	0		20	Α
On/Off Control	·			Vin	Vdc
Power Good Pin				7	Vdc
Storage Temperature Range	Vin = Zero (no power)	-40		125	°C
Absolute maximums are stress ratings. Exposu	ure of devices to greater than any of these condi	tions may adversely aff	ect long-term reliability.	Proper operation under	conditions other
	al Specifications Table is not implied or recomme				
INPUT					
Operating voltage range		6.0	12	13.8	Vdc
Recommended External Fuse	Fast blow			40	А
Turn On/Start-up threshold	Rising input voltage	5.2	5.4	5.6	Vdc
Undervoltage Shutdown	<u> </u>	4.2	4.4	4.6	Vdc
Internal Filter Type	C-Type				
Input current	21		'		
Full Load Conditions	Vin = nominal (5Vset)		8.8		Α
Low Line	Vin @ min, 5Vset		15		А
Inrush Transient	,		1		A <sup>2</sup> -Sec.
Short Circuit Input Current			NA NA		mA
No Load Input Current	Vout = 5V		100		mA
Shut-Down Mode Input Current			NA NA		mA
	Measured at input with specified filter				
Reflected (back) ripple current	Cin = $100\mu$ F, Cbus = $1000\mu$ F, Lbus = $1\mu$ H		10		mA, pk-pk
GENERAL and SAFETY					
Efficiency	12Vin, 5Vout, 20A	92	94.2		%
	Certified to UL-60950-1, CSA-C22.2	-			
Safety	No.60950-1, IEC/60950-1, 2nd edition		Yes		
	(pending)				
	Per Telcordia SR332, issue 1 class 3, ground		0.704.700		
Calculated MTBF	fixed, Tambient = $+25^{\circ}$ C		8,724,722		Hours
Calculated MTBF	Per Mil-HDBK-217N2 Method		10,772,399		Hours
DYNAMIC CHARACTERISTICS			10,112,000		1100.00
Fixed Switching Frequency			670		KHz
Startup Time			4	10	mS
	(lout 50% - 75% nom, within 2% of Vout set,			7-	0
Dynamic Load Response	di/dt = 1A/µSec)			75	μSec
Dynamic Load Peak Deviation	·			150	mV
FEATURES and OPTIONS					
Remote On/Off Control					
Positive Logic, ON state	Pin pulled high	1.2		5	V
Control Current, ON state	_	0.04		1.3	mA
Positive Logic, OFF state	Pin open or pulled low	0		0.7	V
Control Current, OFF state	open collector/drain	0		6	μΑ
Remote Sense					mV
Power Good Option					
PGOOD, Open Drain Configuration, Sinking	:				
Vout window for PGOOD: Upper limit		+8.3	+12.5	+16.2	%
Vout window for PGOOD: Lower limit		-15	-12.5	-9.2	%
OUTPUT					
Total Output Power					
Voltage		0	100	102	W
Nominal Output Voltage Range		0	100	102	W
	See trim formula	0.591	100	102 5	Vdc
	See trim formula At 50% load		100 ±1.5		Vdc
Setting Accuracy					
				5	Vdc % of Vnom.
Setting Accuracy Output Voltage Overshoot-Startup Current	At 50% load			5	Vdc % of Vnom. % Vo set
Setting Accuracy Output Voltage Overshoot-Startup		0.591		5	Vdc % of Vnom.

#### **FUNCTIONAL SPECIFICATIONS (CONT.)**

OUTPUT (CONT.)	Conditions	Minimum	Typical/Nominal	Maximum	Units
Short Circuit					
Short Circuit Current	Hiccup technique, autorecovery within ±1% of Vout		1		A
Short Circuit Duration (remove short for recovery)	Output shorted to ground, no damage				
Regulation					
Total Regulation Band		-3		3	% Vo set
Line Regulation	Vin = min to max, output @ nominal load			±0.3	%
Load Regulation	Min load to max load			±0.5	%
Ripple and Noise	1.8Vo, 12Vin		15	25	mV pk-pk
Temperature Coefficient			0.02		% of Vnom./°C
Maximum Capacitive Loading	Low ESR; > 1 mohm		1000		μF
	ESR > 15 mohm		5000		μF
MECHANICAL					
Outline Dimensions	LxWxH		1.45 x 0.44 x 0.61		Inches
			36.8 x 11.2 x 15.5		mm
Weight			0.29		Ounces
			8.2		Grams
ENVIRONMENTAL					
Operating Ambient Temperature Range	full power, all output voltages, see derating curves	0		70	°C
Storage Temperature	Vin = Zero (no power)	-40		125	°C
RoHS rating			RoHS-6		

#### **Trim Connections**


#### **Output Voltage Adustment**

The output voltage may be adjusted over a limited range by connecting an external trim resistor (Rtrim) between the Trim pin and Ground. The Rtrim resistor must be a 1/10 Watt precision metal film type,  $\pm 0.5\%$  accuracy or better with low temperature coefficient,  $\pm 100$  ppm/oC. or better. Mount the resistor close to the converter with very short leads or use a surface mount trim resistor.

In the tables below, the calculated resistance is given. Do not exceed the specified limits of the output voltage or the converter's maximum power rating when applying these resistors. Also, avoid high noise at the Trim input. However, to prevent instability, you should never connect any capacitors to Trim.


#### OKR-T/20-W12-C


Output Voltage	Calculated Rtrim (Ω)
5 V.	268
3.3 V.	436
2.5 V.	619
1.8 V.	978
1.5 V.	1300
1.2 V.	1940
1.0 V.	2890
0.591 V.	∞ (open)




#### Resistor Trim Equation, OKR-T/20-W12-C models:

RTRIM 
$$(k\Omega) = \frac{1.182}{(Vout - 0.591)}$$

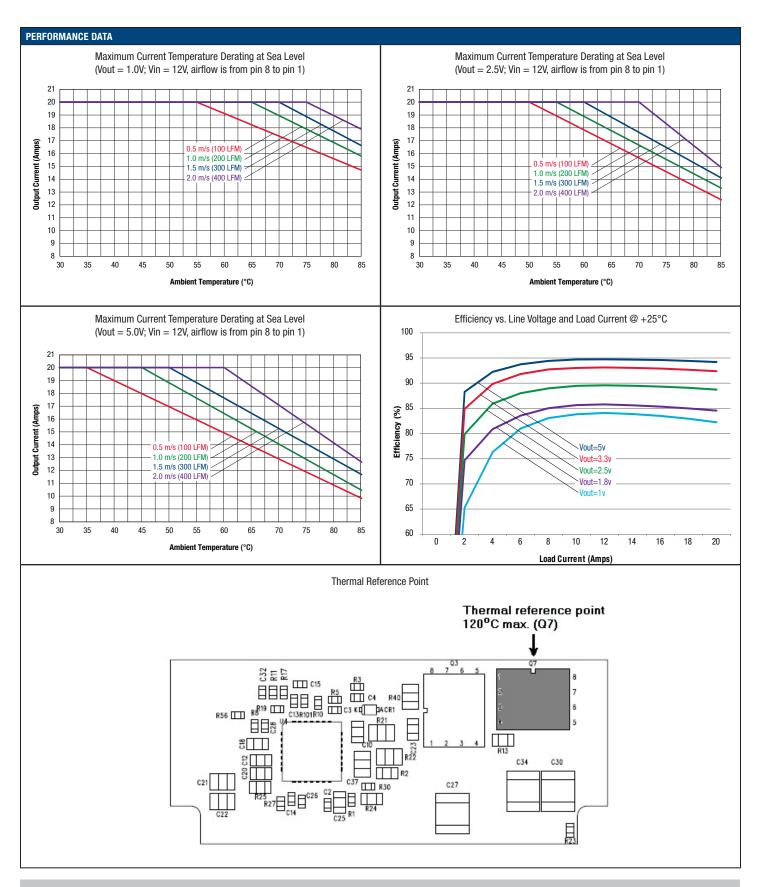

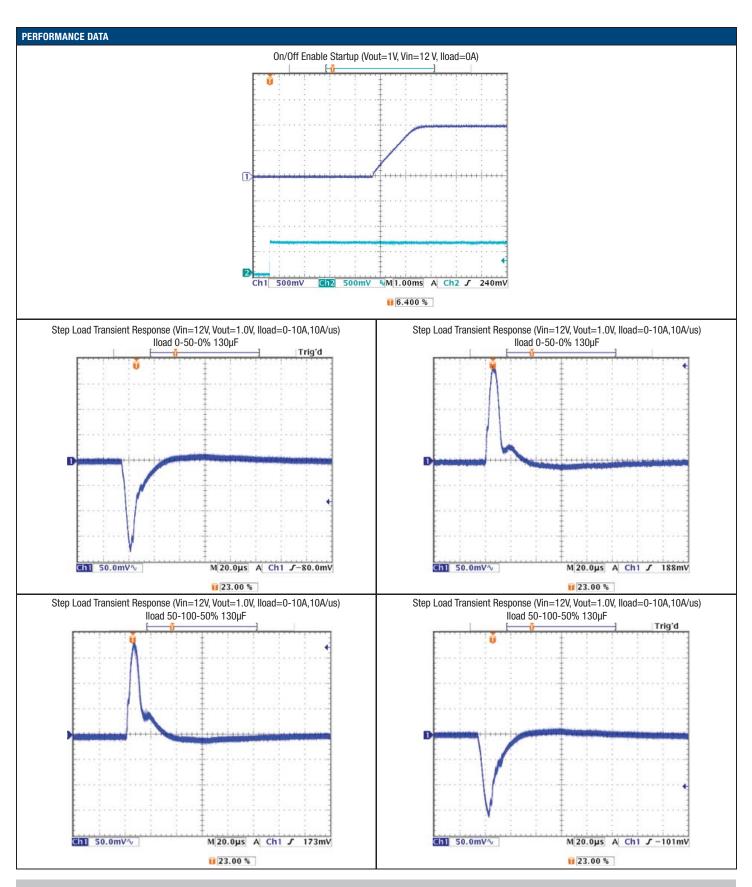



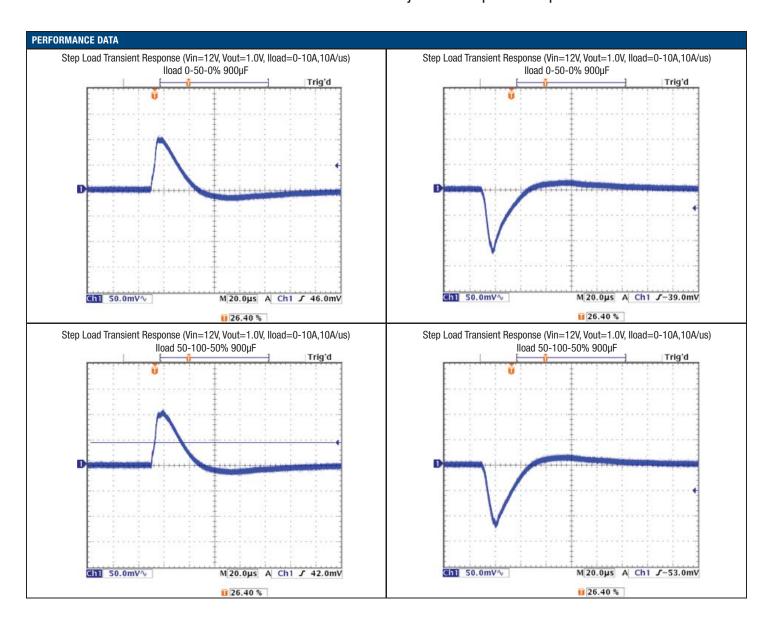

#### **TECHNICAL NOTES**

#### **Input Fusing**

Certain applications and/or safety agencies may require fuses at the inputs of power conversion components. Fuses should also be used when there is the possibility of sustained input voltage reversal which is not current-limited. For greatest safely, we recommend a fast blow fuse installed in the ungrounded input supply line.

The installer must observe all relevant safety standards and regulations. For safety agency approvals, install the converter in compliance with the end-user safety standard, i.e. IEC/EN/UL 60950-1.

#### Input Under-Voltage Shutdown and Start-Up Threshold

Under normal start-up conditions, converters will not begin to regulate properly until the ramping-up input voltage exceeds and remains at the Start-Up Threshold Voltage (see Specifications). Once operating, converters will not turn off until the input voltage drops below the Under-Voltage Shutdown Limit. Subsequent restart will not occur until the input voltage rises again above the Start-Up Threshold. This built-in hysteresis prevents any unstable on/off operation at a single input voltage.

Users should be aware however of input sources near the Under-Voltage Shutdown whose voltage decays as input current is consumed (such as capacitor inputs), the converter shuts off and then restarts as the external capacitor recharges. Such situations could oscillate. To prevent this, make sure the operating input voltage is well above the UV Shutdown voltage AT ALL TIMES.

#### **Start-Up Time**

Assuming that the output current is set at the rated maximum, the Vin to Vout Start-Up Time (see Specifications) is the time interval between the point when the ramping input voltage crosses the Start-Up Threshold and the fully loaded regulated output voltage enters and remains within its specified accuracy band. Actual measured times will vary with input source impedance, external input capacitance, input voltage slew rate and final value of the input voltage as it appears at the converter.

These converters include a soft start circuit to moderate the duty cycle of its PWM controller at power up, thereby limiting the input inrush current.

The On/Off Remote Control interval from On command to Vout regulated assumes that the converter already has its input voltage stabilized above the Start-Up Threshold before the On command. The interval is measured from the On command until the output enters and remains within its specified accuracy band. The specification assumes that the output is fully loaded at maximum rated current. Similar conditions apply to the On to Vout regulated specification such as external load capacitance and soft start circuitry.

#### **Recommended Input Filtering**

The user must assure that the input source has low AC impedance to provide dynamic stability and that the input supply has little or no inductive content, including long distributed wiring to a remote power supply. The converter will operate with no additional external capacitance if these conditions are met.

For best performance, we recommend installing a low-ESR capacitor immediately adjacent to the converter's input terminals. The capacitor should be a ceramic type such as the Murata GRM32 series or a polymer type. Initial

suggested capacitor values are 10 to 22  $\mu$ F, rated at twice the expected maximum input voltage. Make sure that the input terminals do not go below the undervoltage shutdown voltage at all times. More input bulk capacitance may be added in parallel (either electrolytic or tantalum) if needed.

#### **Recommended Output Filtering**

The minimum external output capacitance required for proper operation is 3  $22\mu F$  and  $247\mu F$  ceramic type. The maximum external output capacitance is  $1500\mu F$ . Operating outside of these minimum and maximum limits may affect the performance of the unit.

#### **Input Ripple Current and Output Noise**

All models in this converter series are tested and specified for input reflected ripple current and output noise using designated external input/output components, circuits and layout as shown in the figures below. In the figure below, the Cbus and Lbus components simulate a typical DC voltage bus. Please note that the values of Cin, Lbus and Cbus will vary according to the specific converter model.

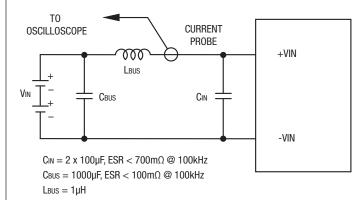


Figure 3. Measuring Input Ripple Current

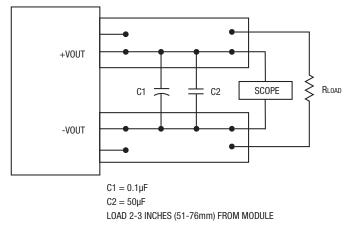


Figure 4. Measuring Output Ripple and Noise (PARD)

#### **Minimum Output Loading Requirements**

All models regulate within specification and are stable under no load to full load conditions. Operation under no load might however slightly increase output ripple and noise.

#### **Thermal Shutdown**

To prevent many over temperature problems and damage, these converters include thermal shutdown circuitry. If environmental conditions cause the temperature of the DC/DC's to rise above the Operating Temperature Range up to the shutdown temperature, an on-board electronic temperature sensor will power down the unit. When the temperature decreases below the turn-on threshold, the converter will automatically restart. There is a small amount of hysteresis to prevent rapid on/off cycling. The temperature sensor is typically located adjacent to the switching controller, approximately in the center of the unit. See the Performance and Functional Specifications.

CAUTION: If you operate too close to the thermal limits, the converter may shut down suddenly without warning. Be sure to thoroughly test your application to avoid unplanned thermal shutdown.

#### **Temperature Derating Curves**

The graphs in this data sheet illustrate typical operation under a variety of conditions. The Derating curves show the maximum continuous ambient air temperature and decreasing maximum output current which is acceptable under increasing forced airflow measured in Linear Feet per Minute ("LFM"). Note that these are AVERAGE measurements. The converter will accept brief increases in current or reduced airflow as long as the average is not exceeded.

Note that the temperatures are of the ambient airflow, not the converter itself which is obviously running at higher temperature than the outside air. Also note that very low flow rates (below about 25 LFM) are similar to "natural convection," that is, not using fan-forced airflow.

Murata Power Solutions makes Characterization measurements in a closed cycle wind tunnel with calibrated airflow. We use both thermocouples and an infrared camera system to observe thermal performance.

**CAUTION:** If you routinely or accidentally exceed these Derating guidelines, the converter may have an unplanned Over Temperature shut down. Also, these graphs are all collected at slightly above Sea Level altitude. Be sure to reduce the derating for higher density altitude.

#### **Output Current Limiting**

Current limiting inception is defined as the point at which full power falls below the rated tolerance. See the Performance/Functional Specifications. Note particularly that the output current may briefly rise above its rated value in normal operation as long as the average output power is not exceeded. This enhances reliability and continued operation of your application. If the output current is too high, the converter will enter the short circuit condition.

#### **Output Short Circuit Condition**

When a converter is in current-limit mode, the output voltage will drop as the output current demand increases. If the output voltage drops too low (approximately 98% of nominal output voltage for most models), the magnetically coupled voltage used to develop primary side voltages will also drop, thereby shutting down the PWM controller. Following a time-out period, the PWM will restart, causing the output voltage to begin ramping up to its appropriate value. If the short-circuit condition persists, another shutdown cycle will initiate. This rapid on/off cycling is called "hiccup mode". The hiccup cycling reduces the average output current, thereby preventing excessive internal temperatures and/or component damage. A short circuit can be tolerated indefinitely.

The "hiccup" system differs from older latching short circuit systems because you do not have to power down the converter to make it restart. The system will automatically restore operation as soon as the short circuit condition is removed.


#### External Enable On/Off Control (see figure 5)

The forced On/Off enable option uses positive logic for the external control. The converter may be powered ON by applying a positive voltage (logic HI) between the On/Off pin and the negative power input (-Vin). This positive voltage is referred to –Vin and must be in the range of at least +2.0V and not to exceed the power supply input voltage (+Vin). The current drain is 12 mA max. when turned on.

If the On/Off pin is left open, an internal 100 Kilohm pulldown resistor will turn the converter OFF. The OFF condition may also be commanded by grounding the pin or from an external logic LO voltage not to exceed +0.4 Volts. All voltages are referred to the -Vin negative power input.


If you wish to control the On/Off circuit by external logic rather than a switch, carefully compare your logic threshold voltages with that of the On/Off input.

The circuit below indicates the equivalent input. Please avoid false signals from ground bounce errors on the On/Off control.

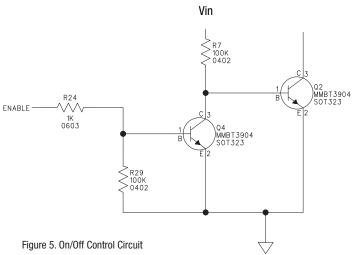


**END VIEW** 

#### **MECHANICAL SPECIFICATIONS**



#### **FRONT VIEW**

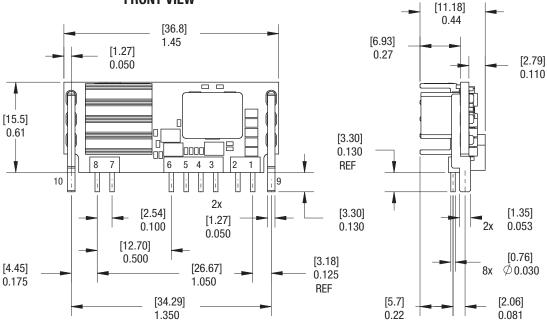

MATERIAL:

 $\phi$  0.030 Header Pins: Copper alloy Support Pins: Tin Plated Brass

FINISH: (ALL HEADER PINS) 200µ" MIN MATTE TIN OVER NICKEL (40µ" MIN)

INPUT/OUTPUT CONNECTIONS OKR-T/20-W12-C							
Pin	Function						
J1-1	+Vout						
J1-2	Output Trim						
J1-3	PGND						
J1-4	PGood						
J1-5	Enable						


 $+V_{\text{IN}}$ 

(+) Remote Sense

(-) Remote Sense

Mechanical Support Mechanical Support Dimensions are in inches (mm shown for ref. only).

ISOMETRIC VIEW



Tolerances (unless otherwise specified):  $.XX \pm 0.02$  (0.5)  $.XXX \pm 0.010$  (0.25) Angles +  $2^{\circ}$ 

Components are shown for reference only.

J1-6


J1-7

J1-8 J1-9


J1-10

**MECHANICAL SPECIFICATIONS** 

# RECOMMENDED FOOTPRINT (VIEW FROM TOP)

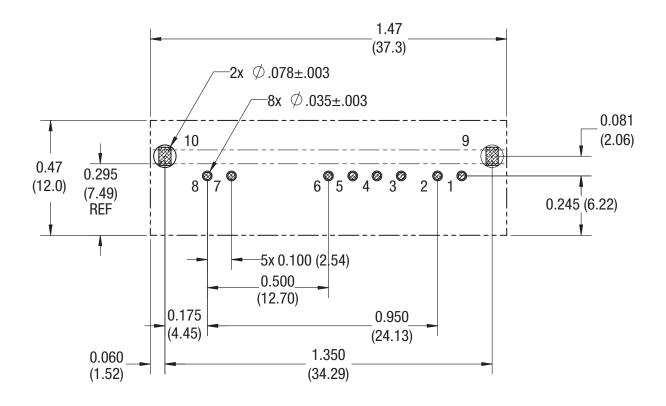


Dimensions are in inches (mm shown for ref. only).



Tolerances (unless otherwise specified):  $XX \pm 0.02$  (0.5)  $XXX \pm 0.010$  (0.25) Angles  $\pm 2^{\circ}$ 

Components are shown for reference only.

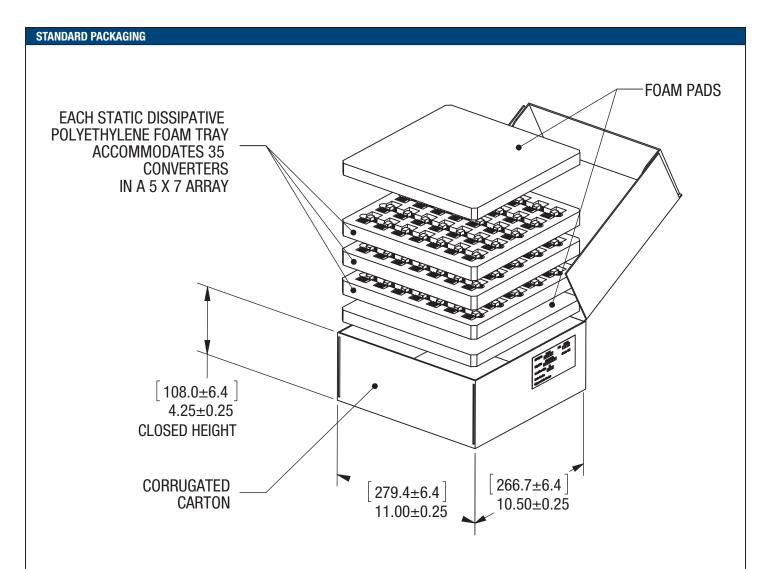


# STANDARD PACKAGING

35 UNITS PER TRAY 3 TRAYS PER CARTON

MPQ=105 UNITS

Dimensions are in inches (mm shown for ref. only).



Tolerances (unless otherwise specified):  $XX \pm 0.02$  (0.5)  $XXX \pm 0.010$  (0.25) Angles  $\pm$  2°

Components are shown for reference only.





#### **Soldering Guidelines**

Murata Power Solutions recommends the specifications below when installing these converters. These specifications vary depending on the solder type. Exceeding these specifications may cause damage to the product. Your production environment may differ; therefore please thoroughly review these guidelines with your process engineers.

Wave Solder Operations for through-hole mounted products (THMT)							
For Sn/Ag/Cu based solders:		For Sn/Pb based solders:					
Maximum Preheat Temperature	115° C.	Maximum Preheat Temperature	105° C.				
Maximum Pot Temperature	270° C.	Maximum Pot Temperature	250° C.				
Maximum Solder Dwell Time	7 seconds	Maximum Solder Dwell Time	6 seconds				



This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:

Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2015 Murata Power Solutions, for

## **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9