

## LM5020 100V Current Mode PWM Controller

Check for Samples: [LM5020](#)


### FEATURES

- Internal Start-up Bias Regulator
- Error Amplifier
- Precision Voltage Reference
- Programmable Softstart
- 1A Peak Gate Driver
- Maximum Duty Cycle Limiting (80% for LM5020-1 or 50% for LM5020-2)
- Programmable Line Under Voltage Lockout (UVLO) with Adjustable Hysteresis
- Cycle-by-Cycle Over-Current Protection
- Slope Compensation (LM5020-1)
- Programmable Oscillator Frequency with Synchronization Capability
- Current Sense Leading Edge Blanking
- Thermal Shutdown Protection

### APPLICATIONS

- Telecommunication Power Converters
- Industrial Power Converters
- +42V Automotive Systems

### Typical Application Circuit

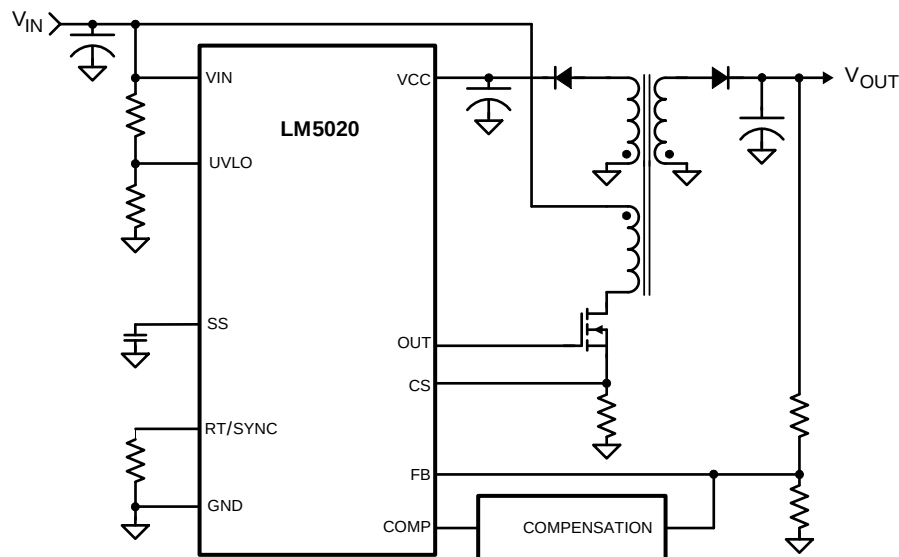

**Figure 1. Non-Isolated Flyback Converter**




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2004–2006, Texas Instruments Incorporated

## Connection Diagram



**Figure 2. 10-Lead VSSOP, WSON**

### PIN DESCRIPTIONS

| Pin | Name      | Description                                                                                 | Application Information                                                                                                                                                                                                                                                                                                                       |
|-----|-----------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | VIN       | Source Input Voltage                                                                        | Input to the start-up regulator. Input range is 13V to 100V.                                                                                                                                                                                                                                                                                  |
| 2   | FB        | Feedback Signal                                                                             | Inverting input of the internal error amplifier. The non-inverting input is internally connected to a 1.25V reference.                                                                                                                                                                                                                        |
| 3   | COMP      | The output of the error amplifier and input to the Pulse Width Modulator                    | COMP pull-up is provided by an internal 5K resistor which may be used to bias an opto-coupler transistor.                                                                                                                                                                                                                                     |
| 4   | VCC       | Output of the internal high voltage series pass regulator. Regulated output voltage is 7.7V | If an auxiliary winding raises the voltage on this pin above the regulation set point, the internal series pass regulator will shut down, reducing the internal power dissipation.                                                                                                                                                            |
| 5   | OUT       | Output of the PWM controller                                                                | Gate driver output with a 1A peak current capability.                                                                                                                                                                                                                                                                                         |
| 6   | GND       | Ground return                                                                               |                                                                                                                                                                                                                                                                                                                                               |
| 7   | UVLO      | Line Under-Voltage Shutdown                                                                 | An external resistor divider from the power converter source voltage sets the shutdown levels. The threshold at this pin is 1.25V. Hysteresis is set by a switched internal 20μA current source.                                                                                                                                              |
| 8   | CS        | Current Sense input                                                                         | Current sense input for current mode control and over-current protection. Current limiting is accomplished using a dedicated current sense comparator. If the CS pin voltage exceeds 0.5V the OUT pin switches low for cycle-by-cycle current limiting. CS is held low for 50ns after OUT switches high to blank leading edge current spikes. |
| 9   | RT / SYNC | Oscillator timing resistor pin and synchronization input                                    | An external resistor connected from RT to GND sets the oscillator frequency. This pin also accepts synchronization pulses from an external clock.                                                                                                                                                                                             |
| 10  | SS        | Softstart Input                                                                             | An external capacitor and an internal 10μA current source set the soft-start ramp rate.                                                                                                                                                                                                                                                       |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## Absolute Maximum Ratings<sup>(1)(2)</sup>

|                           |                    |
|---------------------------|--------------------|
| VIN to GND                | -0.3V to 100V      |
| VCC to GND                | -0.3V to 16V       |
| RT to GND                 | -0.3V to 5.5V      |
| All other pins to GND     | -0.3V to 7V        |
| Power Dissipation         | Internally Limited |
| ESD Rating <sup>(3)</sup> | Human Body Model   |
| Storage Temperature       | -65°C to +150°C    |
| Junction Temperature      | 150°C              |

- (1) Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions under which operation of the device is intended to be functional. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) The human body model is a 100 pF capacitor discharged through a 1.5kΩ resistor.

## Operating Ratings

|                                 |                 |
|---------------------------------|-----------------|
| VIN Voltage                     | 13V to 90V      |
| External Voltage applied to VCC | 8V to 15V       |
| Operating Junction Temperature  | -40°C to +125°C |

## Electrical Characteristics

Specifications in standard type face are for T<sub>J</sub> = +25°C and those in **boldface type** apply over the full operating junction temperature range. Unless otherwise specified: VIN = 48V, VCC = 10V, and RT = 31.6kΩ.<sup>(1)</sup>

| Symbol                   | Parameter                                       | Conditions                                                      | Min                              | Typ                        | Max          | Units |
|--------------------------|-------------------------------------------------|-----------------------------------------------------------------|----------------------------------|----------------------------|--------------|-------|
| <b>Startup Regulator</b> |                                                 |                                                                 |                                  |                            |              |       |
| V <sub>CCReg</sub>       | V <sub>CC</sub> Regulation                      | V <sub>CC</sub> = Open                                          | <b>7.4</b>                       | 7.7                        | <b>8.0</b>   | V     |
|                          | V <sub>CC</sub> Current Limit                   | See <sup>(2)</sup>                                              | <b>15</b>                        | 22                         |              | mA    |
| I-V <sub>IN</sub>        | Startup Regulator Leakage                       | V <sub>IN</sub> = 100V                                          |                                  | 150                        | <b>500</b>   | μA    |
| I <sub>IN</sub>          | Shutdown Current                                | V <sub>UVLO</sub> = 0V, V <sub>CC</sub> = open                  |                                  | 250                        | <b>350</b>   | μA    |
| <b>VCC Supply</b>        |                                                 |                                                                 |                                  |                            |              |       |
|                          | V <sub>CC</sub> UVLO (Rising)                   |                                                                 | <b>V<sub>CCReg</sub> - 300mV</b> | V <sub>CCReg</sub> - 100mV |              | V     |
|                          | V <sub>CC</sub> UVLO (Falling)                  |                                                                 | <b>5.3</b>                       | 6.0                        | <b>6.7</b>   | V     |
| I <sub>CC</sub>          | Supply Current                                  | Cload = 0                                                       |                                  | 2                          | <b>3</b>     | mA    |
| <b>Error Amplifier</b>   |                                                 |                                                                 |                                  |                            |              |       |
| GBW                      | Gain Bandwidth                                  |                                                                 |                                  | 4                          |              | MHz   |
|                          | DC Gain                                         |                                                                 |                                  | 75                         |              | dB    |
|                          | Reference Voltage                               | FB = COMP                                                       | <b>1.225</b>                     | 1.25                       | <b>1.275</b> | V     |
|                          | COMP Sink Capability                            | FB = 1.5V COMP = 1V                                             | <b>5</b>                         | 17                         |              | mA    |
| <b>UVLO Pin</b>          |                                                 |                                                                 |                                  |                            |              |       |
|                          | Shutdown Threshold                              |                                                                 | <b>1.225</b>                     | 1.25                       | <b>1.275</b> | V     |
|                          | Undervoltage Shutdown Hysteresis Current Source |                                                                 | <b>16</b>                        | 20                         | <b>24</b>    | μA    |
| <b>Current Limit</b>     |                                                 |                                                                 |                                  |                            |              |       |
|                          | ILIM Delay to Output                            | CS step from 0 to 0.6V<br>Time to onset of OUT Transition (90%) |                                  | 30                         |              | ns    |
|                          | Cycle by Cycle CS Threshold Voltage             |                                                                 | <b>0.45</b>                      | 0.5                        | <b>0.55</b>  | V     |
|                          | Leading Edge Blanking Time                      |                                                                 |                                  | 50                         |              | ns    |

- (1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are specified through correlation using Statistical Quality Control (SQC) methods. The limits are used to calculate National's Average Outgoing Quality Level (AOQL).
- (2) Device thermal limitations may limit usable range.

## Electrical Characteristics (continued)

Specifications in standard type face are for  $T_J = +25^\circ\text{C}$  and those in **boldface type** apply over the full operating junction temperature range. Unless otherwise specified:  $V_{IN} = 48\text{V}$ ,  $V_{CC} = 10\text{V}$ , and  $R_T = 31.6\text{k}\Omega$ .<sup>(1)</sup>

| Symbol                    | Parameter                                      | Conditions                                                                         | Min         | Typ  | Max         | Units            |
|---------------------------|------------------------------------------------|------------------------------------------------------------------------------------|-------------|------|-------------|------------------|
|                           | CS Sink Impedance (clocked)                    |                                                                                    |             | 35   | <b>55</b>   | $\Omega$         |
| <b>Soft Start</b>         |                                                |                                                                                    |             |      |             |                  |
|                           | Softstart Current Source                       |                                                                                    | <b>7</b>    | 10   | <b>13</b>   | $\mu\text{A}$    |
|                           | Softstart to COMP Offset                       |                                                                                    | <b>0.35</b> | 0.55 | <b>0.75</b> | V                |
| <b>Oscillator</b>         |                                                |                                                                                    |             |      |             |                  |
|                           | Frequency1 ( $R_T = 31.6\text{k}$ )            | See <sup>(3)</sup>                                                                 | <b>175</b>  | 200  | <b>225</b>  | kHz              |
|                           | Frequency2 ( $R_T = 9.76\text{k}$ )            | See <sup>(3)</sup>                                                                 | <b>560</b>  | 630  | <b>700</b>  | kHz              |
|                           | Sync threshold                                 |                                                                                    | <b>2.4</b>  | 3.2  | <b>3.8</b>  | V                |
| <b>PWM Comparator</b>     |                                                |                                                                                    |             |      |             |                  |
|                           | Delay to Output                                | COMP set to 2V,<br>CS stepped 0 to 0.4V,<br>Time to onset of OUT<br>transition low |             | 25   |             | ns               |
|                           | Min Duty Cycle                                 | COMP=0V                                                                            |             |      | 0           | %                |
|                           | Max Duty Cycle (-1 Device)                     |                                                                                    | <b>75</b>   | 80   | <b>85</b>   | %                |
|                           | Max Duty Cycle (-2 Device)                     |                                                                                    |             | 50   |             | %                |
|                           | COMP to PWM Comparator Gain                    |                                                                                    |             | 0.33 |             |                  |
|                           | COMP Open Circuit Voltage                      |                                                                                    | <b>4.3</b>  | 5.2  | <b>6.1</b>  | V                |
|                           | COMP Short Circuit Current                     | COMP=0V                                                                            | <b>0.6</b>  | 1.1  | <b>1.5</b>  | mA               |
| <b>Slope Compensation</b> |                                                |                                                                                    |             |      |             |                  |
|                           | Slope Comp Amplitude<br>(LM5020-1 Device Only) | Delta increase at PWM<br>Comparator to CS                                          | <b>80</b>   | 105  | <b>130</b>  | mV               |
| <b>Output Section</b>     |                                                |                                                                                    |             |      |             |                  |
|                           | Output High Saturation                         | $I_{OUT} = 50\text{mA}$ , $V_{CC} - V_{OUT}$                                       |             | 0.25 | <b>0.75</b> | V                |
|                           | Output Low Saturation                          | $I_{OUT} = 100\text{mA}$ , $V_{OUT}$                                               |             | 0.25 | <b>0.75</b> | V                |
|                           | Rise Time                                      | $C_{load} = 1\text{nF}$                                                            |             | 18   |             | ns               |
|                           | Fall Time                                      | $C_{load} = 1\text{nF}$                                                            |             | 15   |             | ns               |
| <b>Thermal Shutdown</b>   |                                                |                                                                                    |             |      |             |                  |
| Tsd                       | Thermal Shutdown Temp.                         |                                                                                    |             | 165  |             | $^\circ\text{C}$ |
|                           | Thermal Shutdown Hysteresis                    |                                                                                    |             | 25   |             | $^\circ\text{C}$ |

(3) Specification applies to the oscillator frequency. The operational frequency of the LM5020-2 devices is divided by two.

## Typical Performance Characteristics

Unless otherwise specified:  $T_J = 25^\circ\text{C}$ .

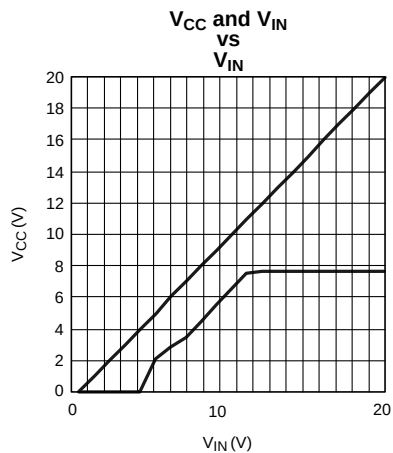


Figure 3.

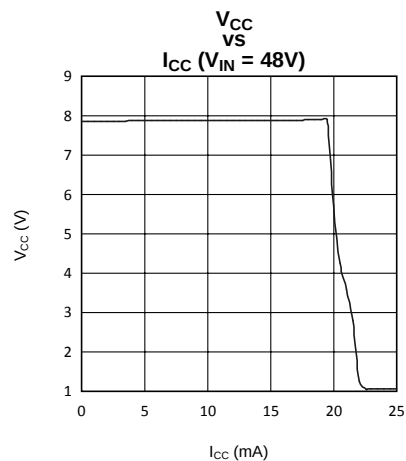


Figure 4.

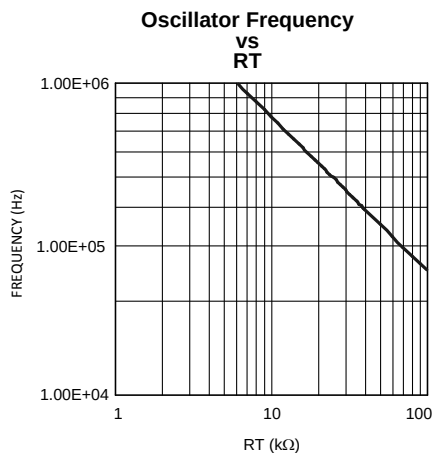


Figure 5.

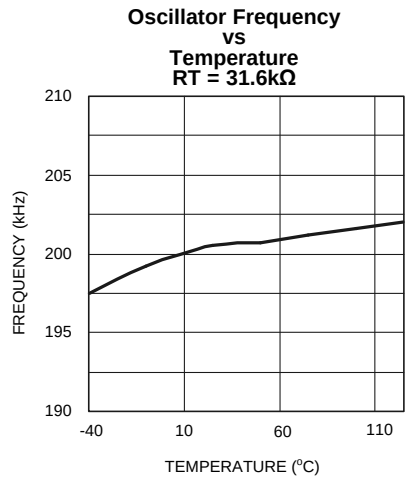


Figure 6.

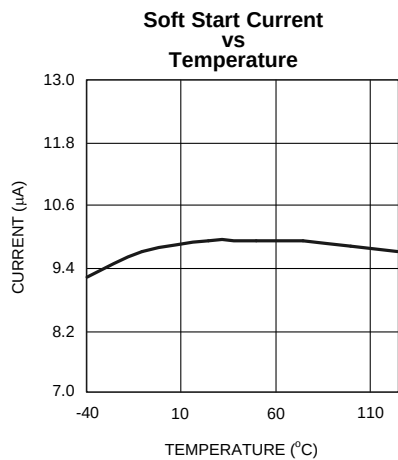


Figure 7.


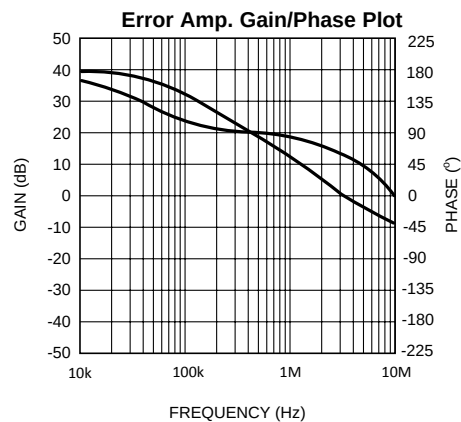


Figure 8.

## Block Diagram

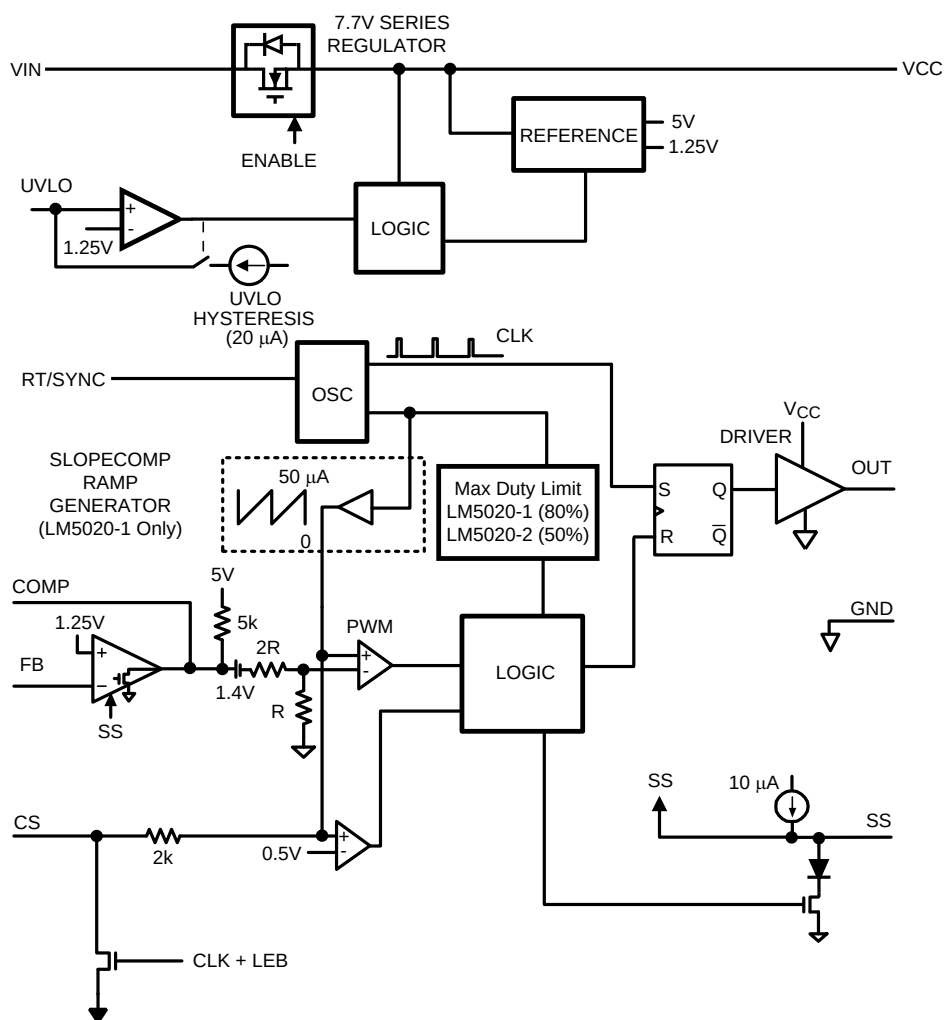

## DETAILED OPERATING DESCRIPTION

The LM5020 High Voltage PWM controller contains all of the features needed to implement single ended primary power converter topologies. The LM5020 includes a high-voltage startup regulator that operates over a wide input range to 100V. The PWM controller is designed for high speed capability including an oscillator frequency range to 1MHz and total propagation delays less than 100ns. Additional features include an error amplifier, precision reference, line under-voltage lockout, cycle-by-cycle current limit, slope compensation, softstart, oscillator sync capability and thermal shutdown. The functional block diagram of the LM5020 is shown in Figure 1. The LM5020 is designed for current-mode control power converters, which require a single drive output, such as Flyback and Forward topologies. The LM5020 provides all of the advantages of current-mode control including line feed-forward, cycle-by-cycle current limiting and simplified loop compensation.

### High Voltage Start-Up Regulator

The LM5020 contains an internal high voltage startup regulator, that allows the input pin (Vin) to be connected directly to line voltages as high as 100V. The regulator output is internally current limited to 15mA. When power is applied, the regulator is enabled and sources current into an external capacitor connected to the V<sub>CC</sub> pin. The recommended capacitance range for the V<sub>CC</sub> regulator is 0.1μF to 100μF. When the voltage on the V<sub>CC</sub> pin reaches the regulation level of 7.7V, the controller output is enabled. The controller will remain enabled until V<sub>CC</sub> falls below 6V.

In typical applications, a transformer auxiliary winding is connected through a diode to the V<sub>CC</sub> pin. This winding should raise the V<sub>CC</sub> voltage above 8V to shut off the internal startup regulator. Powering V<sub>CC</sub> from an auxiliary winding improves conversion efficiency while reducing the power dissipated in the controller. The external V<sub>CC</sub> capacitor must be selected such that the capacitor maintains the V<sub>CC</sub> voltage greater than the V<sub>CC</sub> UVLO falling threshold (6V) during the initial start-up. During a fault condition when the converter auxiliary winding is inactive, external current draw on the V<sub>CC</sub> line should be limited such that the power dissipated in the start-up regulator does not exceed the maximum power dissipation capability of the controller.

An external start-up or other bias rail can be used instead of the internal start-up regulator by connecting the V<sub>CC</sub> and the Vin pins together and feeding the external bias voltage (8-15V) to the two pins.

### Line Under Voltage Detector

The LM5020 contains a line Under Voltage Lock Out (UVLO) circuit. An external set-point voltage divider from Vin to GND sets the operational range of the converter. The resistor divider must be designed such that the voltage at the UVLO pin is greater than 1.25V when Vin is in the desired operating range. If the under voltage threshold is not met, all functions of the controller are disabled and the controller remains in a low power standby state.

UVLO hysteresis is accomplished with an internal 20μA current source that is switched on or off into the impedance of the set-point divider. When the UVLO threshold is exceeded, the current source is activated to instantly raise the voltage at the UVLO pin. When the UVLO pin voltage falls below the 1.25V threshold the current source is turned off, causing the voltage at the UVLO pin to fall. The UVLO pin can also be used to implement a remote enable / disable function. If an external transistor pulls the UVLO pin below the 1.25V threshold, the converter is disabled.

### Error Amplifier

An internal high gain error amplifier is provided within the LM5020. The amplifier's non-inverting input is internally set to a fixed reference voltage of 1.25V. The inverting input is connected to the FB pin. In non-isolated applications, the power converter output is connected to the FB pin via voltage scaling resistors. Loop compensation components are connected between the COMP and FB pins. For most isolated applications the error amplifier function is implemented on the secondary side of the converter and the internal error amplifier is not used. The internal error amplifier is configured as an open drain output and can be disabled by connecting the FB pin to ground. An internal 5K pull-up resistor between a 5V reference and COMP can be used as the pull-up for an optocoupler in isolated applications.

## Current Limit/Current Sense

The LM5020 provides a cycle-by-cycle over current protection function. Current limit is accomplished by an internal current sense comparator. If the voltage at the current sense comparator input exceeds 0.5V, the output is immediately terminated. A small RC filter, located near the controller, is recommended to filter noise from the current sense signal. The CS input has an internal MOSFET which discharges the CS pin capacitance at the conclusion of every cycle. The discharge device remains on an additional 50ns after the beginning of the new cycle to attenuate the leading edge spike on the current sense signal.

The LM5020 current sense and PWM comparators are very fast, and may respond to short duration noise pulses. Layout considerations are critical for the current sense filter and sense resistor. The capacitor associated with the CS filter must be located very close to the LM5020 and connected directly to the pins of the controller (CS and GND). If a current sense transformer is used, both leads of the transformer secondary should be routed to the sense resistor and the current sense filter network. A sense resistor located in the source of the primary power MOSFET may be used for current sensing, but a low inductance resistor is required. When designing with a current sense resistor all of the noise sensitive low power ground connections should be connected together local to the controller and a single connection should be made to the high current power ground (sense resistor ground point).

## Oscillator and Sync Capability

A single external resistor connected between the RT and GND pins sets the LM5020 oscillator frequency. Internal to the LM5020-2 device (50% duty cycle limited option) is an oscillator divide by two circuit. This divide by two circuit creates an exact 50% duty cycle pulse which is used internally to create a precise 50% duty cycle limit function. Because of this, the internal oscillator actually operates at twice the frequency of the output (OUT). For the LM5020-1 device the oscillator frequency and the operational output frequency are the same. To set a desired output operational frequency (F), the RT resistor can be calculated from:

### LM5020-1:

$$RT = \frac{1}{F \times 158 \times 10^{-12}} \quad (1)$$

### LM5020-2:

$$RT = \frac{1}{F \times 316 \times 10^{-12}} \quad (2)$$

The LM5020 can also be synchronized to an external clock. The external clock must have a higher frequency than the free running oscillator frequency set by the RT resistor. The clock signal should be capacitively coupled into the RT pin through a 100pF capacitor. A peak voltage level greater than 3.7 Volts at the RT pin is required for detection of the sync pulse. The sync pulse width should be set between 15 to 150ns by the external components. The RT resistor is always required, whether the oscillator is free running or externally synchronized. The voltage at the RT pin is internally regulated at 2 Volts. The RT resistor should be located very close to the device and connected directly to the pins of the controller (RT and GND).

## PWM Comparator / Slope Compensation

The PWM comparator compares the current ramp signal with the loop error voltage derived from the error amplifier output. The error amplifier output voltage at the COMP pin is offset by 1.4V and then further attenuated by a 3:1 resistor divider. The PWM comparator polarity is such that 0 Volts on the COMP pin will result in a zero duty cycle at the controller output. For duty cycles greater than 50 percent, current mode control circuits are subject to sub-harmonic oscillation. By adding an additional fixed slope voltage ramp signal (slope compensation) to the current sense signal, this oscillation can be avoided. The LM5020-1 integrates this slope compensation by summing a current ramp generated by the oscillator with the current sense signal. Additional slope compensation may be added by increasing the source impedance of the current sense signal. Since the LM5020-2 is not capable of duty cycles greater than 50%, there is no slope compensation feature in this device.



## Soft Start

The softstart feature allows the power converter to gradually reach the initial steady state operating point, thereby reducing start-up stresses and current surges. At power on, after the  $V_{CC}$  and the line undervoltage lockout thresholds are satisfied, an internal 10 $\mu$ A current source charges an external capacitor connected to the SS pin. The capacitor voltage will ramp up slowly and will limit the COMP pin voltage and the duty cycle of the output pulses.

### Gate Driver and Maximum Duty Cycle Limit


The LM5020 provides an internal gate driver (OUT), which can source and sink a peak current of 1 Amp. The LM5020 is available in two duty cycle limit options. The maximum output duty cycle is typically 80% for the LM5020-1 option and precisely equal to 50% for the LM5020-2 option. The maximum duty cycle function for the LM5020-2 is accomplished with an internal toggle flip-flop which ensures an accurate duty cycle limit. The internal oscillator frequency of the LM5020-2 is therefore twice the operating frequency of the PWM controller (OUT pin).

The 80% maximum duty cycle limit of the LM5020-1 is determined by the internal oscillator and varies more than the 50% limit of the LM5020-2. For the LM5020-1 the internal oscillator frequency and the operational frequency of the PWM controller are equal.

## Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event the maximum junction temperature is exceeded. This feature prevents catastrophic failures from accidental device overheating. When activated, typically at 165 degrees Celsius, the controller is forced into a low power standby state, disabling the output driver and the bias regulator. After the temperature is reduced (typical hysteresis = 25°C) the V<sub>CC</sub> regulator is enabled and a softstart sequence initiated.

### Typical Application Circuit: 36V - 75 V<sub>IN</sub> and 3.3V, 4.5A OUT

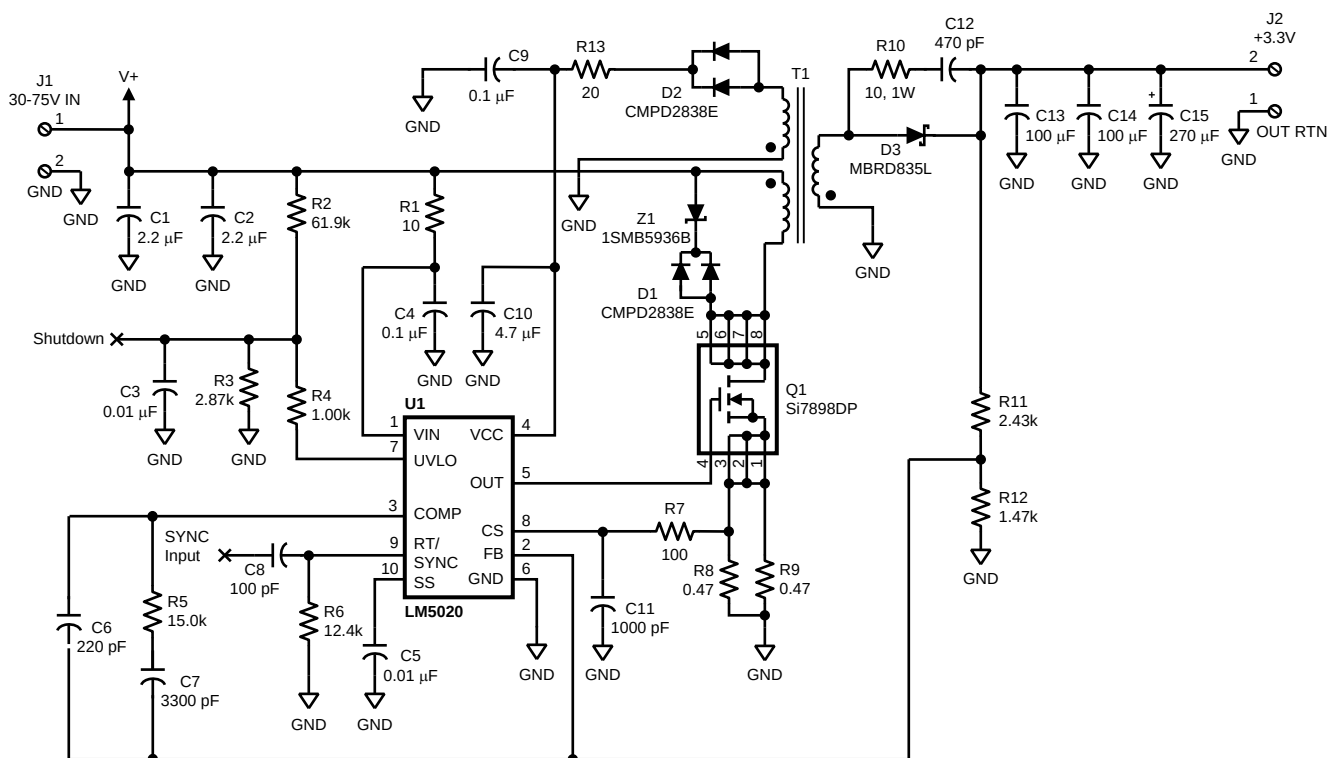

**Table 1. Bill Of Materials**

| ITEM |    | PART NUMBER       | DESCRIPTION                            | VALUE       |
|------|----|-------------------|----------------------------------------|-------------|
| C    | 1  | C4532X7R2A225M    | CAPACITOR, CER, TDK                    | 2.2μF, 100V |
| C    | 2  | C4532X7R2A225M    | CAPACITOR, CER, TDK                    | 2.2μF, 100V |
| C    | 3  | C2012X7R1H103K    | CAPACITOR, CER, TDK                    | 0.01μF, 50V |
| C    | 4  | C3216X7R2A104K    | CAPACITOR, CER, TDK                    | 0.1μF, 100V |
| C    | 5  | C2012X7R1H103K    | CAPACITOR, CER, TDK                    | 0.01μF, 50V |
| C    | 6  | C2012C0G1H221J    | CAPACITOR, CER, KEMET                  | 220pF, 50V  |
| C    | 7  | C2012C0G1H332J    | CAPACITOR, CER, TDK                    | 3300pF, 50V |
| C    | 8  | C2012C0G1H101J    | CAPACITOR, CER, TDK                    | 100pF, 50V  |
| C    | 9  | C2012X7R1H104K    | CAPACITOR, CER, TDK                    | 0.1μF, 50V  |
| C    | 10 | C3216X7R1C475K    | CAPACITOR, CER, TDK                    | 4.7μF, 16V  |
| C    | 11 | C2012C0G1H102J    | CAPACITOR, CER, TDK                    | 1000pF, 50V |
| C    | 12 | C2012C0G1H471J    | CAPACITOR, CER, TDK                    | 470p, 50V   |
| C    | 13 | C4532X7S0G107M    | CAPACITOR, CER, TDK                    | 100μF, 4V   |
| C    | 14 | C4532X7S0G107M    | CAPACITOR, CER, TDK                    | 100μF, 4V   |
| C    | 15 | A700X277M0004AT   | CAPACITOR, ALUM ORGANIC, KEMET         | 270μF, 4V   |
| D    | 1  | CMPD2838E-NSA     | DIODE, SIGNAL, CENTRAL                 |             |
| D    | 2  | CMPD2838E-NSA     | DIODE, SIGNAL, CENTRAL                 |             |
| D    | 3  | MBRD835L          | DIODE, RECTIFIER, ON SEMICONDUCTOR     |             |
| J    | 1  | MKDS 1/2-3.81     | TERM BLK, MINI, 2 POS, PHOENIX CONTACT |             |
| J    | 2  | MKDS 1/2-3.81     | TERM BLK, MINI, 2 POS, PHOENIX CONTACT |             |
| Q    | 1  | SI7898DP          | FET, SILICONIX                         | 150V, 85mΩ  |
| R    | 1  | CRCW120610R0F     | RESISTOR                               | 10          |
| R    | 2  | CRCW12066192F     | RESISTOR                               | 61.9kΩ      |
| R    | 3  | CRCW08052871F     | RESISTOR                               | 2.87kΩ      |
| R    | 4  | CRCW08051001F     | RESISTOR                               | 1.00kΩ      |
| R    | 5  | CRCW08051502F     | RESISTOR                               | 15.0kΩ      |
| R    | 6  | CRCW08051242F     | RESISTOR                               | 12.4kΩ      |
| R    | 7  | CRCW08051000F     | RESISTOR                               | 100         |
| R    | 8  | CRCW12060R47F     | RESISTOR                               | 0.47        |
| R    | 9  | CRCW12060R47F     | RESISTOR                               | 0.47        |
| R    | 10 | CRCW251210R0F     | RESISTOR                               | 10, 1W      |
| R    | 11 | CRCW08052431F     | RESISTOR                               | 2.43K       |
| R    | 12 | CRCW08051471F     | RESISTOR                               | 1.47K       |
| R    | 13 | CRCW080520R0F     | RESISTOR                               | 20          |
| T    | 1  | B0695-A COILCRAFT | TRANSFORMER, FLYBACK, EFD20 CORE       |             |
| T    | 1  | PA0751 PULSE      | TRANSFORMER, FLYBACK, EFD20 CORE       | ALTERNATE   |
| U    | 1  | LM5020-2MM        | CONTROLLER, SINGLE OUT, PWM, NATIONAL  |             |
| Z    | 1  | 1SMB5936B         | DIODE, ZENER, SMB, 30V                 |             |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| LM5020MM-1       | NRND          | VSSOP        | DGS                | 10   | 1000           | TBD                        | Call TI                 | Call TI              | -40 to 125   | SBLB                    |                         |
| LM5020MM-1/NOPB  | ACTIVE        | VSSOP        | DGS                | 10   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | SBLB                    | <a href="#">Samples</a> |
| LM5020MM-2/NOPB  | ACTIVE        | VSSOP        | DGS                | 10   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | SBNB                    | <a href="#">Samples</a> |
| LM5020MMX-1/NOPB | ACTIVE        | VSSOP        | DGS                | 10   | 3500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | SBLB                    | <a href="#">Samples</a> |
| LM5020MMX-2/NOPB | ACTIVE        | VSSOP        | DGS                | 10   | 3500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | SBNB                    | <a href="#">Samples</a> |
| LM5020SD-1       | NRND          | WSOP         | DPR                | 10   | 1000           | TBD                        | Call TI                 | Call TI              | -40 to 125   | 5020-1                  |                         |
| LM5020SD-1/NOPB  | ACTIVE        | WSOP         | DPR                | 10   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | 5020-1                  | <a href="#">Samples</a> |
| LM5020SD-2/NOPB  | ACTIVE        | WSOP         | DPR                | 10   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | 5020-2                  | <a href="#">Samples</a> |
| LM5020SDX-1/NOPB | ACTIVE        | WSOP         | DPR                | 10   | 4500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | 5020-1                  | <a href="#">Samples</a> |
| LM5020SDX-2/NOPB | ACTIVE        | WSOP         | DPR                | 10   | 4500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-1-260C-UNLIM   | -40 to 125   | 5020-2                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.


**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

- <sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- <sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- <sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- <sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

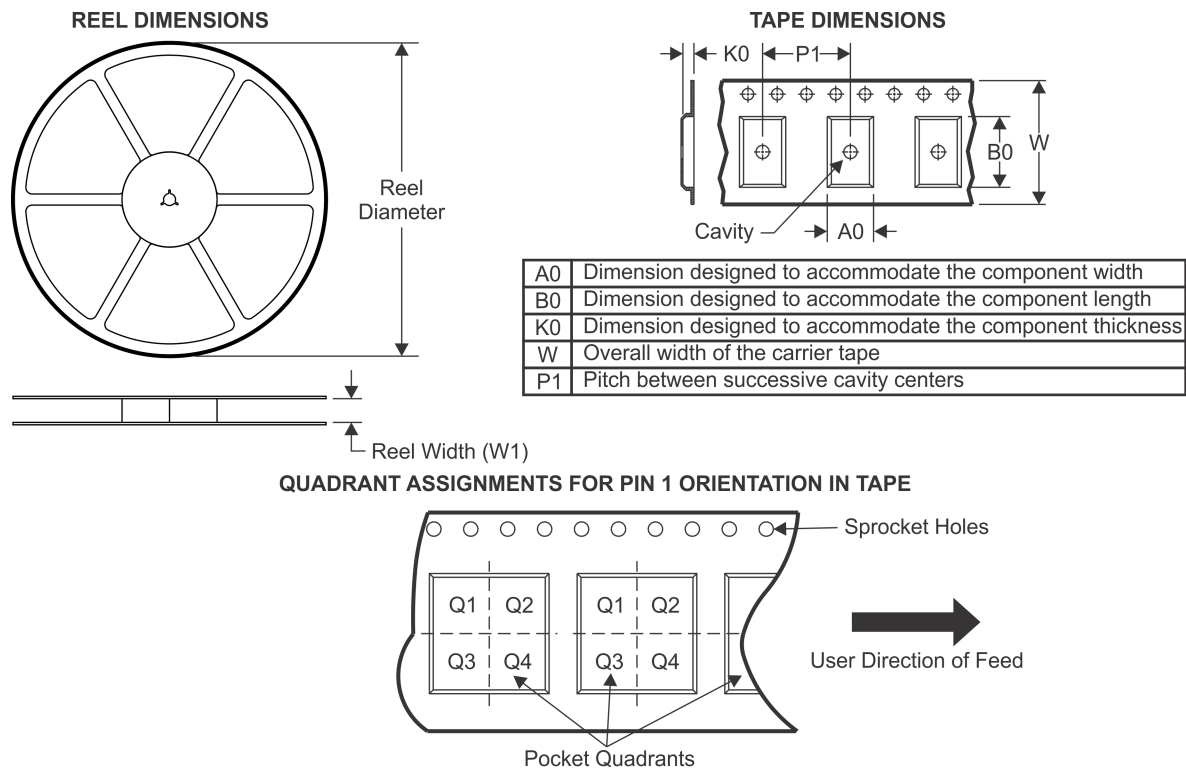**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM5020MM-1       | VSSOP        | DGS             | 10   | 1000 | 178.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM5020MM-1/NOPB  | VSSOP        | DGS             | 10   | 1000 | 178.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM5020MM-2/NOPB  | VSSOP        | DGS             | 10   | 1000 | 178.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM5020MMX-1/NOPB | VSSOP        | DGS             | 10   | 3500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM5020MMX-2/NOPB | VSSOP        | DGS             | 10   | 3500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM5020SD-1       | WSOP         | DPR             | 10   | 1000 | 178.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LM5020SD-1/NOPB  | WSOP         | DPR             | 10   | 1000 | 178.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LM5020SD-2/NOPB  | WSOP         | DPR             | 10   | 1000 | 178.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LM5020SDX-1/NOPB | WSOP         | DPR             | 10   | 4500 | 330.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LM5020SDX-2/NOPB | WSOP         | DPR             | 10   | 4500 | 330.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

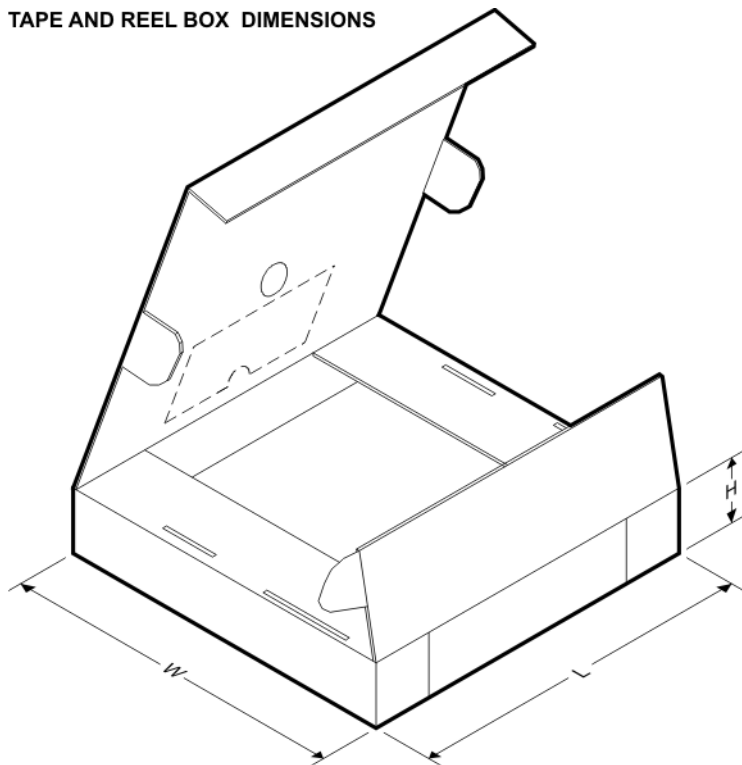


\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM5020MM-1       | VSSOP        | DGS             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020MM-1/NOPB  | VSSOP        | DGS             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020MM-2/NOPB  | VSSOP        | DGS             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020MMX-1/NOPB | VSSOP        | DGS             | 10   | 3500 | 367.0       | 367.0      | 35.0        |
| LM5020MMX-2/NOPB | VSSOP        | DGS             | 10   | 3500 | 367.0       | 367.0      | 35.0        |
| LM5020SD-1       | WSO          | DPR             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020SD-1/NOPB  | WSO          | DPR             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020SD-2/NOPB  | WSO          | DPR             | 10   | 1000 | 210.0       | 185.0      | 35.0        |
| LM5020SDX-1/NOPB | WSO          | DPR             | 10   | 4500 | 367.0       | 367.0      | 35.0        |
| LM5020SDX-2/NOPB | WSO          | DPR             | 10   | 4500 | 367.0       | 367.0      | 35.0        |


## DGS (S-PDSO-G10)

## PLASTIC SMALL-OUTLINE PACKAGE

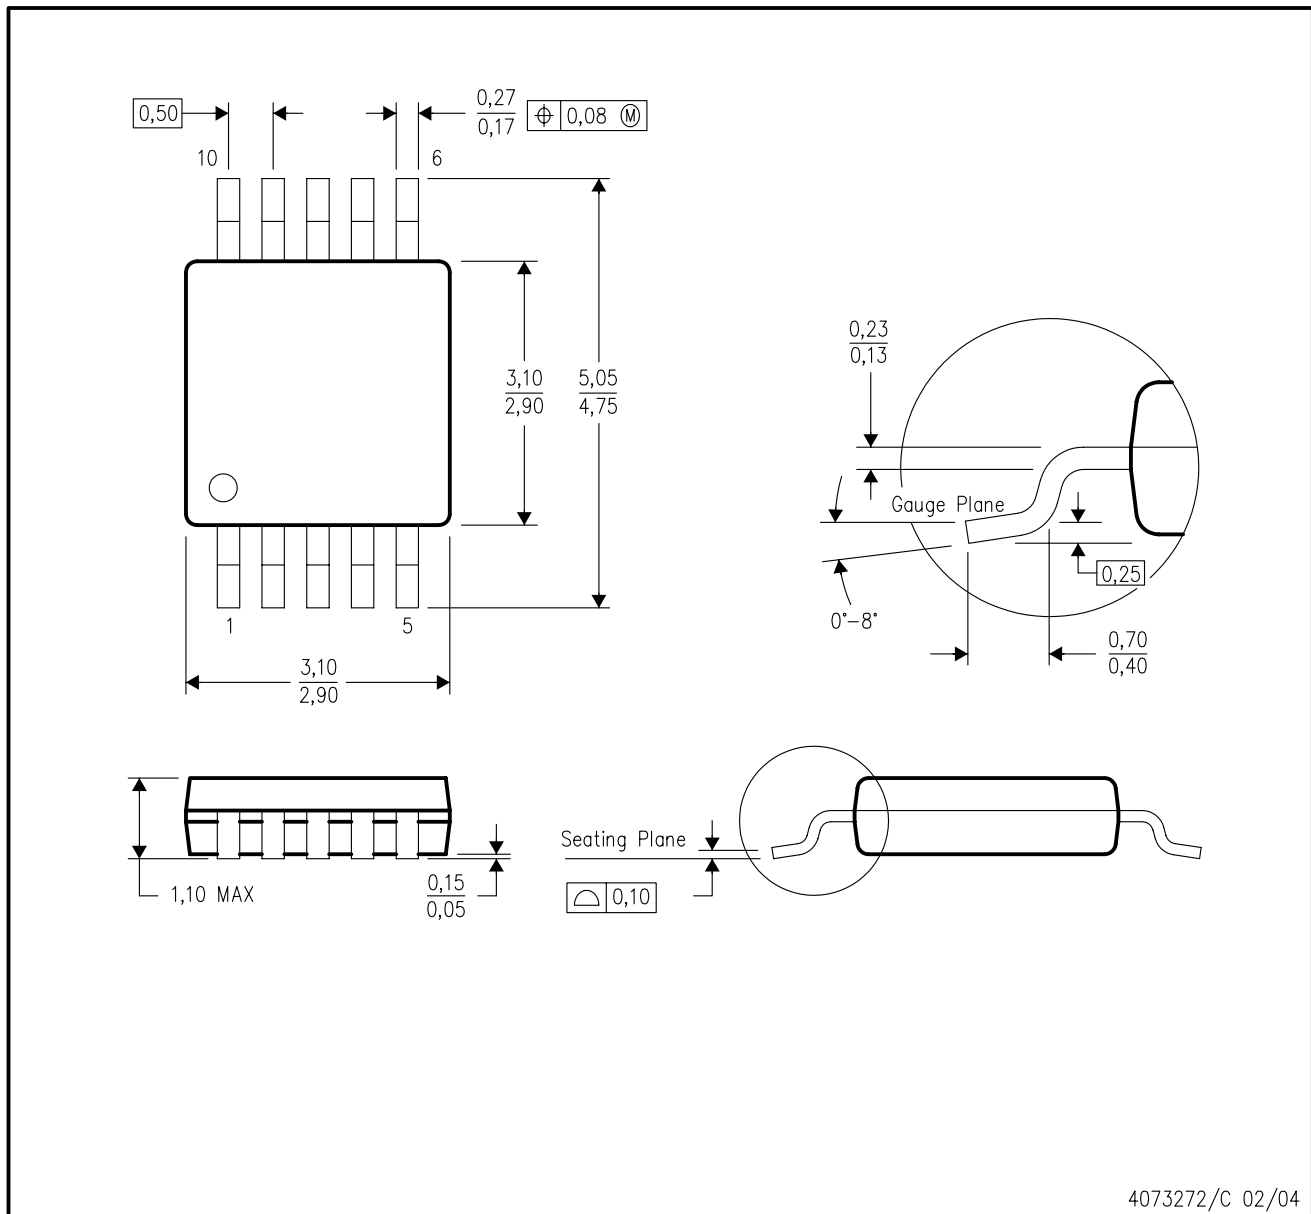

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion.
  - D. Falls within JEDEC MO-187 variation BA.

DPR0010A

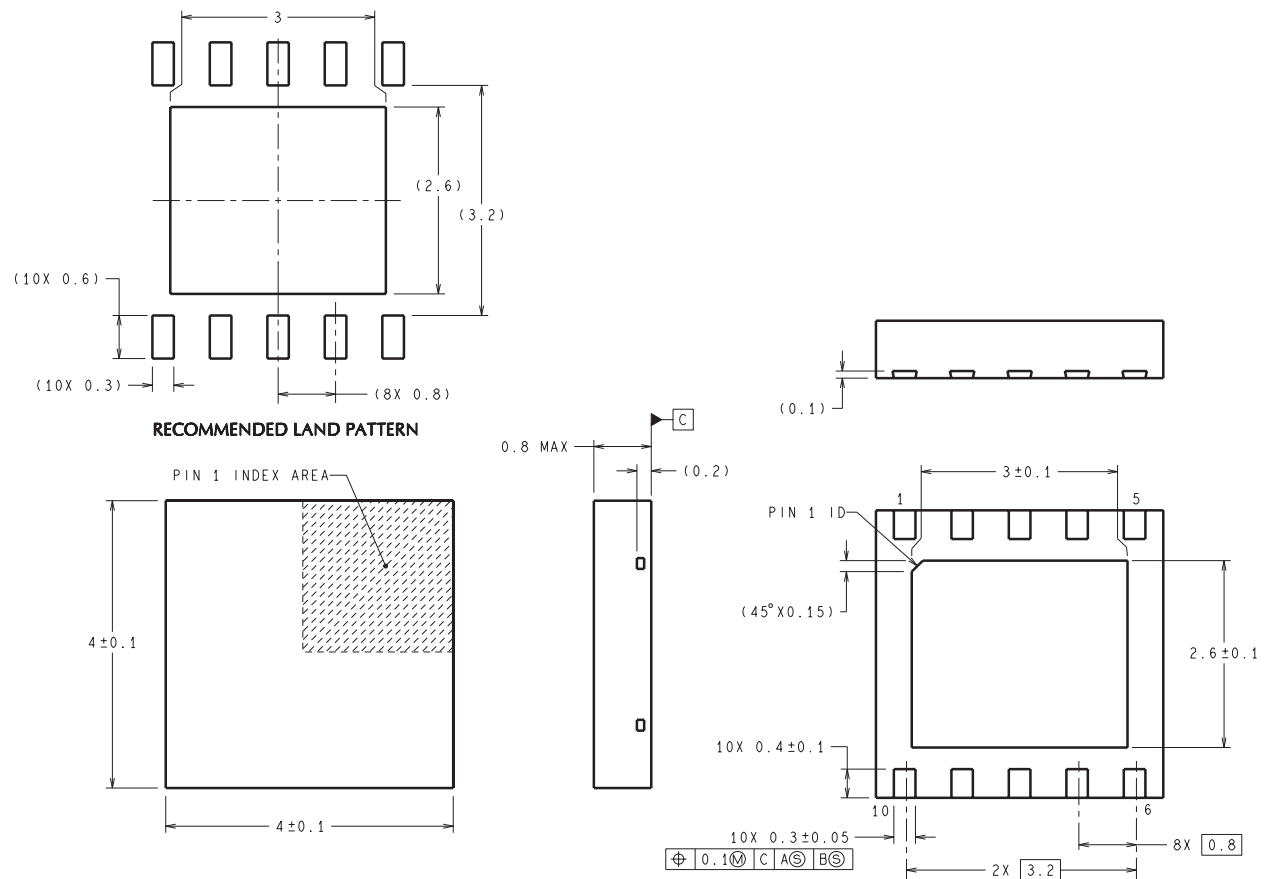

**DIMENSIONS ARE IN MILLIMETERS**

SDC10A (Rev A)



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9