

1.2A, 2.2MHz Step-Down Switching Regulator in 2mmx3mm DFN

DESCRIPTION

Demonstration circuit 1050 is a monolithic step-down DC/DC switching regulator featuring LT3503. The demo board is designed for 3.3V output from a 4.5V to 20V input. The wide input range of the LT3503 allows a variety of input sources. The typical sources are automotive batteries, wall adaptors and industrial supplies. The 2.2MHz switching frequency allows the use of small, low cost inductor and ceramic capacitors, resulting in low, predictable output ripple. The current mode control scheme creates fast transient response and good loop stability. The internal compensation reduces the component count and solution size. The gate drive of the internal switch is boosted to a voltage that is higher than the Vin to ensure saturation of the switch. A charge pump consisting of a diode and capacitor on the demo board performs the boost function. The SHDN pin can be used to set the part in micropower shutdown mode, reducing

the supply current to less than 2uA. The SHDN pin can also be used to program soft start. In this mode, the SHDN pin is driven through an external RC filter to create a voltage ramp on this pin. The soft start function reduces the input current surge during start-up. Cycle by cycle current limit, frequency foldback and thermal shutdown provide the protection against shorted outputs.

The LT3503 datasheet gives a complete description of the part, operation and application information. The data-sheet must be read in conjunction with this quick start guide for demo circuit 1050.

Design files for this circuit board are available. Call the LTC factory.

LTC, LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^{\circ}\text{C}$)

PARAMETER FOR STEP-DOWN CONVERTER	CONDITION	VALUE
Minimum input voltage		4.5V
Maximum input voltage		20V
Output voltage V_{OUT}		3.3V +/- 4%
Maximum output current	$V_{\text{IN}} = 5.5\text{V}$	1A
Maximum output current	$V_{\text{IN}} = 8.5\text{V}$	1.2A
Typical switching frequency		2.2MHz

QUICK START PROCEDURE

Demonstration circuit 1050 is easy to set up to evaluate the performance of the LT3503. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 in the RUN position:
2. With power off, connect the input power supply to Vin and GND.
3. Turn on power at the input.

NOTE. Make sure that the input voltage does not exceed 20V.

4. Check for proper output voltages.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

LT3503

5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

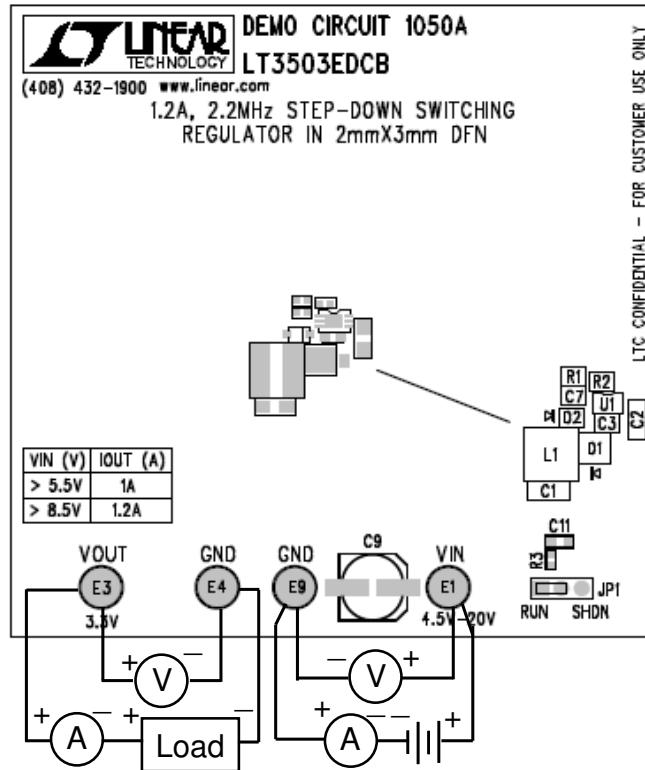


Figure 1. Proper Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.

Customer Notice: Linear Technology has made a best effort to design circuit that meets customer-supplied specifications; however, it remains the customers responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
	1	PROTO	01/23/06
	2	Changes	09/20/06

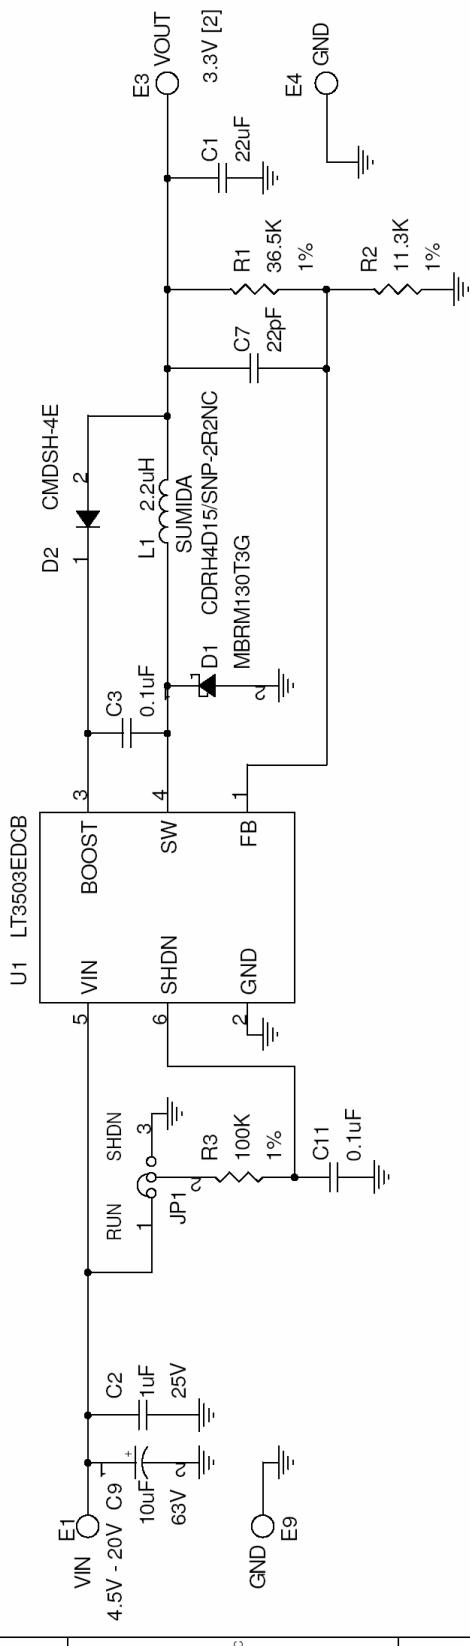

NOTES: UNLESS OTHERWISE SPECIFIED.

[1] DO NOT STUFF.

[2]	VIN (V)	IOUT (A)
	5.5V	1A
	8.5V	1.2A

[1] DO NOT STUFF.	
[2]	
VIN (V)	IOUT (A)
5.5V	1A
8.5V	1.2A
CONTRACT NO.	
APPROVALS	
DRAWN	MEI
CHECKED	
APPROVED	
ENGINEER	
DESIGNER	
TITLE	
SCH. LT3503EDCB, 1.2A, 2.2MHz STEP-DOWN SWITCHING REGULATOR IN 2mmx3mm DFN	
SCALE:	FILE NAME:
Friday, September 29, 2006	1050A-2.DSN
SHEET	1
REV	2

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9