

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1401A

ADJUSTABLE SINGLE RESISTOR LDO REGULATOR

LT3085EDCB

DESCRIPTION

Demonstration circuit 1401A is an adjustable 500mA linear regulator featuring LT®3085. Architected as a precision current source and voltage follower, it allows this new regulator to be used in many applications requiring high current, adjustability to zero output, and no heat sink. Also the device brings out the collector of the pass transistor to allow low dropout operation when used with multiple supplies.

A key feature of the LT3085 is the capability to supply a wide output voltage range. By using a reference current through a single resistor, the output voltage can be programmed to any level between zero and 36V. The DC1401A has a reduced input voltage 25V due to input capacitor voltage rating. And DC1401A is capable of delivering up to 500mA output current. Therefore, the DC1401A can be used as a high current linear regulator, post regulator for switching

supply, variable voltage supply or low output voltage power supply.

Internal protection circuitry includes current limiting and thermal limiting.

LT3085 regulator is offered in 8-lead MSOP (with an Exposed Pad for better thermal characteristics) and 6-lead 2mm × 3mm DFN packages.

The LT3085 datasheet gives a complete description of the part, operation and application information. The datasheet should be read in conjunction with this quick start guide for working on or modifying the demo circuit 1401A.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1. Performance Summary ($T_A = 25^{\circ}\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Vin Voltage	Vout=1.2V	1.7V
Maximum Vin Voltage		25V
Minimum Vcontrol Voltage	Vout=1.2V	2.8V
Maximum Vcontrol Voltage		25V
Output Voltage	JP1, Vout=1.2V	1.2V $\pm 3\%$
	JP1, Vout=1.8V	1.8V $\pm 3\%$
	JP1, Vout=2.5V	2.5V $\pm 3\%$
	JP1, Vout=3.3V	3.3V $\pm 3\%$
	JP1, Vout=5.0V	5.0V $\pm 3\%$
Minimum Output Current		1mA
Maximum Output Current	Vin-Vout<6V	500mA

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1401A

ADJUSTABLE SINGLE RESISTOR LDO REGULATOR

QUICK START PROCEDURE

The DC1401A is easy to set up to evaluate the performance of the LT3085. Refer to Figure 1. for proper measurement equipment setup and following the procedures below:

1. Before proceeding to test, use jumper JP1 for the desired output voltage (1.2V, 1.8V, 2.5V, 3.3V or 5.0V). If the output voltage is different from the above values, use the USER option and install R6. Select R6 according to the following equation: $R_6 = \frac{V_{OUT}}{10\mu A}$.
2. Assume 1.2V is the desired output. Apply 1.7V across V_{in} (to Gnd), and 2.8V across

$V_{control}$. Draw 500mA of load current. The measured V_{out} should be $1.2V \pm 3\%$ (1.174V to 1.246V).

3. Vary V_{in} from 1.7V to 25V, $V_{control}$ from 2.8V to 25V and the load current from 1mA to 500mA. V_{out} should measure $1.2V \pm 3\%$ (1.174V to 1.246V).

Note: Make sure the power dissipation is limited below the thermal limit.

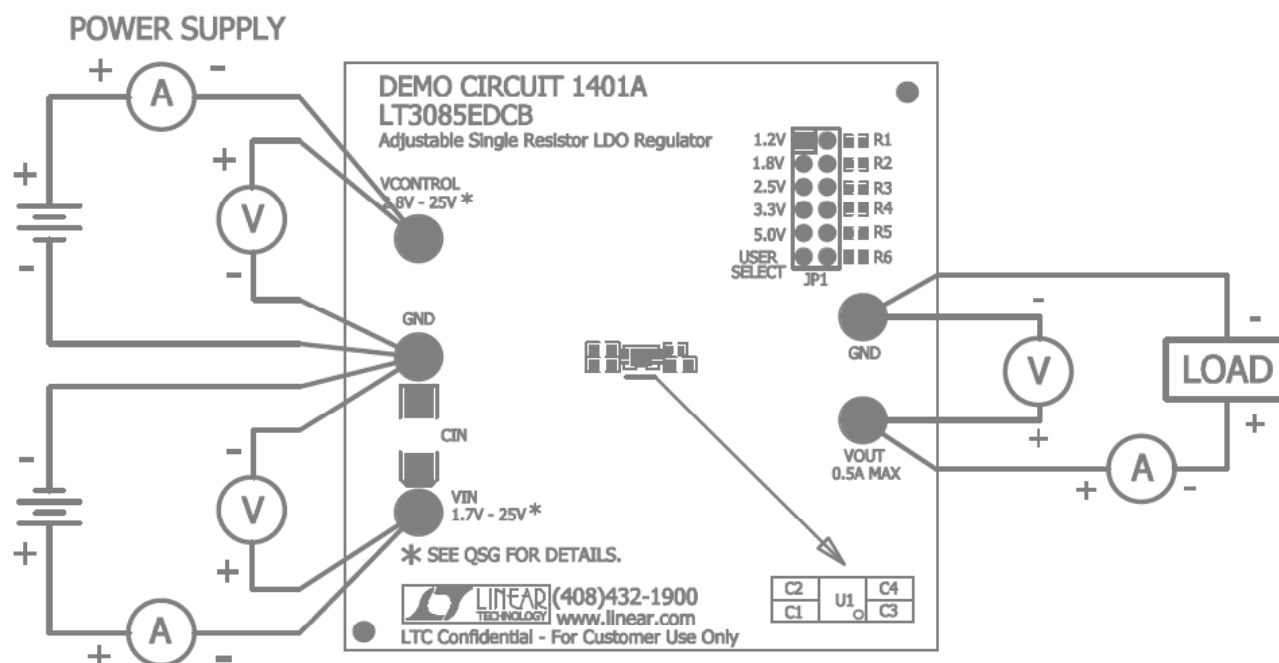


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

INPUT VOLTAGE RANGE

The guaranteed V_{in} dropout voltage is 0.5V at 500mA, the guaranteed $V_{control}$ dropout voltage is 1.6V at 500mA. The maximum V_{in} and maximum $V_{control}$ is

reduced to 25V due to the input capacitor voltage rating.

DUAL SUPPLY OR SINGLE SUPPLY

Use two separate supplies for V_{in} and $V_{control}$, a low dropout voltage can be achieved on the V_{in} pin and the power dissipation is minimized. Alternatively, Tying the

$V_{control}$ to V_{in} through a short wire, a single supply is sufficient to drive the demo circuit 1401A. **AVOID USING A LONG WIRE TO TIE $V_{CONTROL}$ AND V_{IN} .**


OUTPUT CURRENT

The output current will decrease at high input-to-output differential. The actual current output is further limited by the thermal shutdown function, which is related to the board thermal dissipation. **DO NOT**

CONTINUOUSLY OPERATE THE LT3085 TO THE THERMAL LIMIT, WHICH MAY IMPAIR THE DEVICE RELIABILITY. MAXIMUM JUNCTION TEMPERATURE IS 125°C.

THERMAL IMAGE

An example thermal image shows the temperature distribution on board. The test is done in still air at room temperature with 2.0W power dissipation in LT3085.

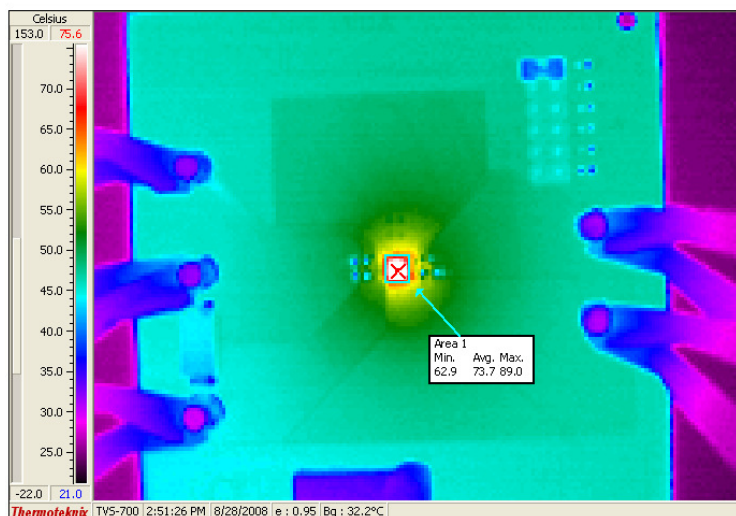


BYPASS CAPACITOR

Since the SET pin is a high impedance node, unwanted signals may couple into the SET pin and cause erratic behavior. This will be most noticeable when operating with minimum output capacitors at full load current. The easiest way to remedy this is to bypass the SET

pin with a small amount of capacitance from SET to ground, 10pF to 20pF is sufficient. A 0.01uF bypass capacitor is used on the demo board to provide a low-noise output. Please refer to datasheet for details.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1401A

ADJUSTABLE SINGLE RESISTOR LDO REGULATOR

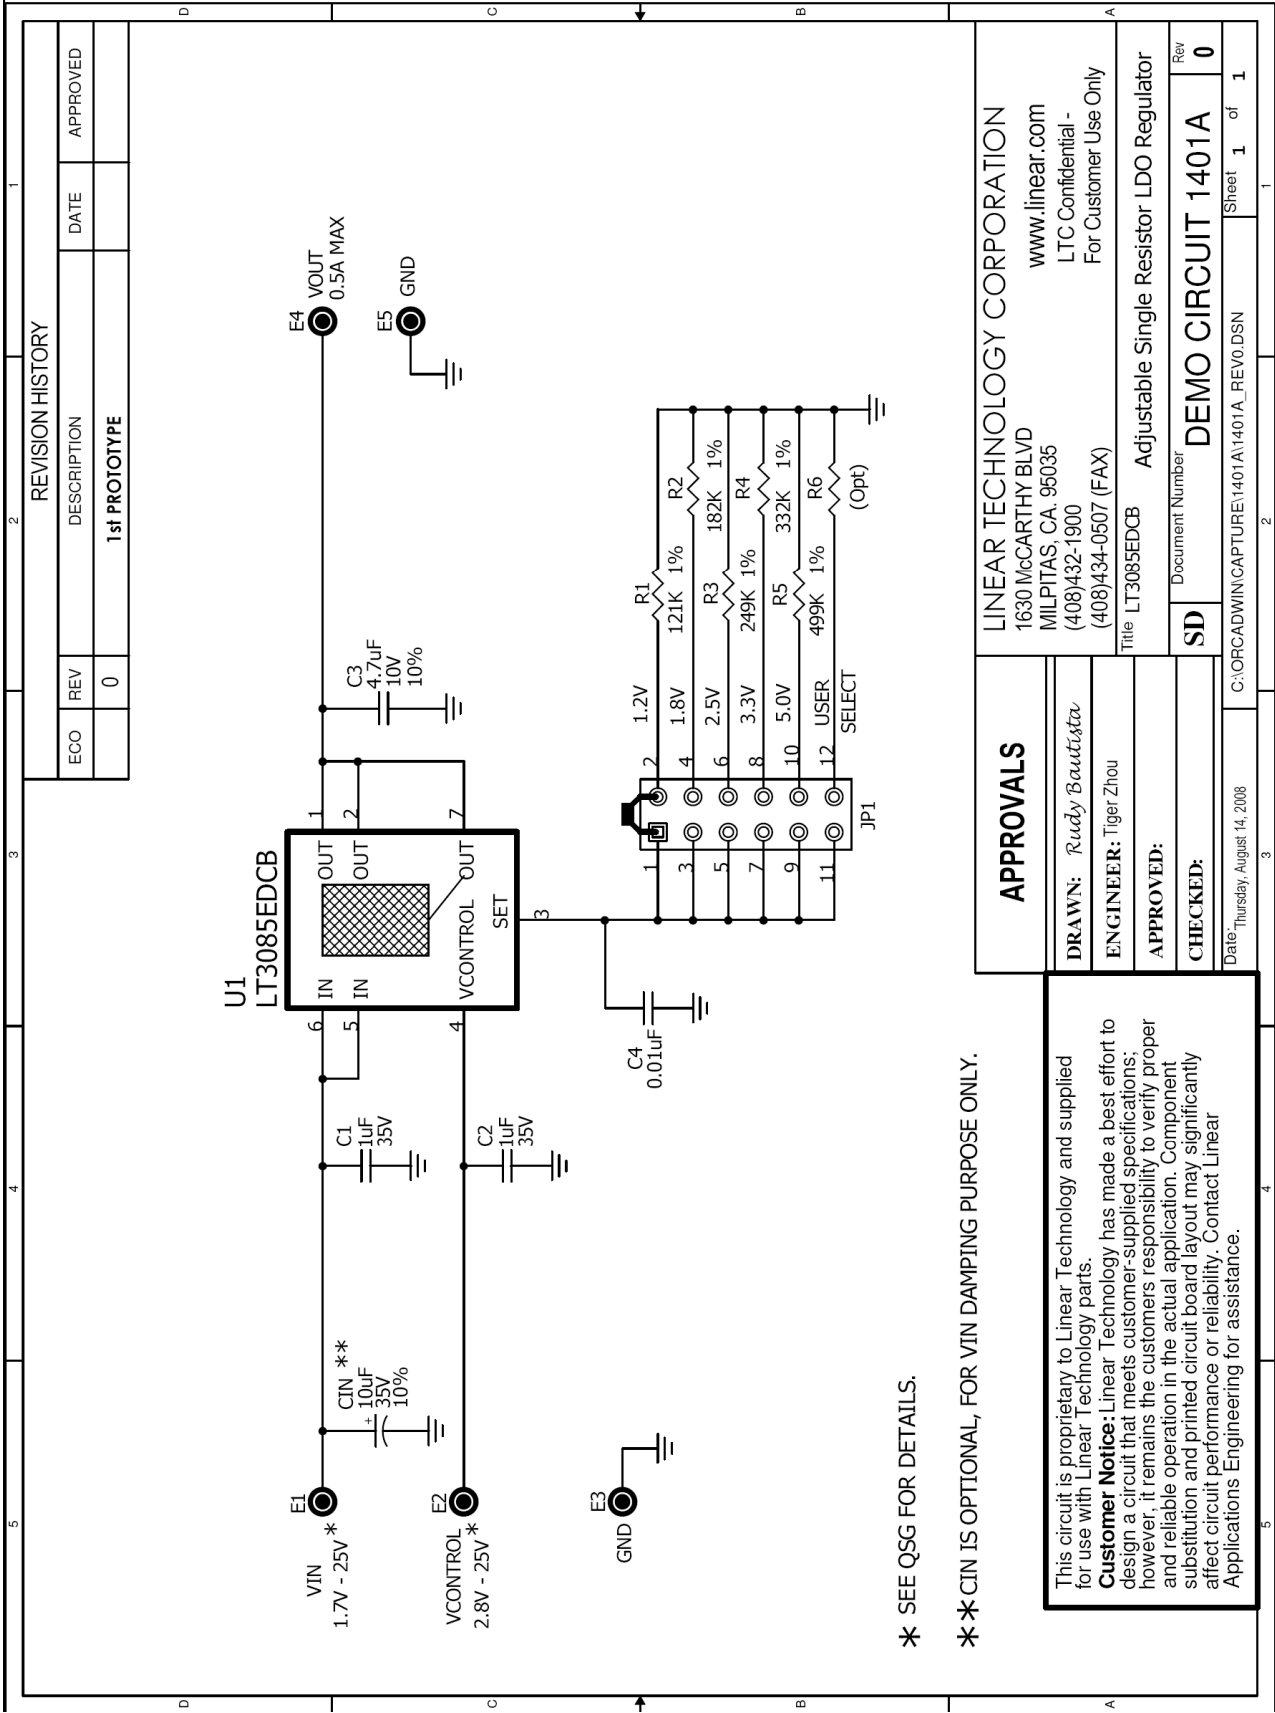

* SEE QSG FOR DETAILS.

** VIN IS OPTIONAL, FOR VIN DAMPING PURPOSE ONLY.

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.

Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customers responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

LINEAR TECHNOLOGY CORPORATION
 1630 McCARTHY BLVD
 MILPITAS, CA. 95035
 (408)432-1900
 (408)434-0507 (FAX)
 www.linear.com
 LTC Confidential -
 For Customer Use Only

APPROVALS

DRAWN: Rudy Bautista
ENGINEER: Tiger Zhou
APPROVED:
CHECKED:

Document Number LT3085EDCB
Title Adjustable Single Resistor LDO Regulator
Rev 0

SD

DEMO CIRCUIT 1401A

Sheet 1 of 1

Date: Thursday, August 14, 2008

C:\ORADWIN\CAPTURE\1401A\1401A_REV0.DSN

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9