


# 1.5/1.9GHz BAND FRONT-END GaAs MMIC

## ■GENERAL DESCRIPTION

NJG1709KC1 is a front-end GaAs MMIC including a LNA, a local amplifier and a mixer, designed mainly for 1.5 or 1.9GHz band cellular phone.

The ultra small & ultra thin FLP10 package is applied.

## ■PACKAGE OUTLINE



NJG1709KC1

## ■FEATURES

- Low Voltage Operation +2.7V typ.
- Low Current Consumption LNA 3.2mA typ.  
Mixer 5.1mA typ. (with Local Amplifier operation current)
- Ultra Small & Ultra Thin package FLP10-C1 (Mount Size: 2.8 x 3.0 x 0.75mm)


### [LNA]

- High Small Signal Gain 18.0dB typ. @  $f_{RF}=1489\text{MHz}$   
16.0dB typ. @  $f_{RF}=1900\text{MHz}$
- Low Noise Figure 1.2dB typ. @  $f_{RF}=1489\text{MHz}$   
1.3dB typ. @  $f_{RF}=1900\text{MHz}$
- High Output IP3 +13.0dBm typ. @  $f_{RF}=1489.0+1489.1\text{MHz}$   
+13.0dBm typ. @  $f_{RF}=1900.0+1900.1\text{MHz}$

### [Mixer]

- High Conversion Gain 12.5dB typ. @  $f_{RF}=1489\text{MHz}$ ,  $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
9.0dB typ. @  $f_{RF}=1900\text{MHz}$ ,  $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$
- Low Noise Figure 6.0dB typ. @  $f_{RF}=1489\text{MHz}$ ,  $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
6.5dB typ. @  $f_{RF}=1900\text{MHz}$ ,  $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$
- High Output IP3 +10.0dBm typ. @  $f_{RF}=1489.0+1489.1\text{MHz}$ ,  $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
+11.0dBm typ. @  $f_{RF}=1900.0+1900.1\text{MHz}$ ,  $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$

## ■PIN CONFIGURATION

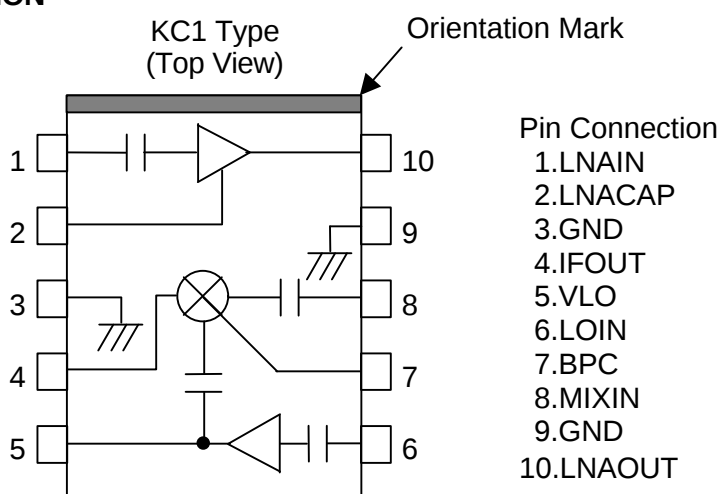

NOTE: Please note that any information on this catalog will be subject to change.

# NJG1709KC1

## ■ABSOLUTE MAXIMUM RATINGS

( $T_a=+25^{\circ}\text{C}$ ,  $Z_s=Z_l=50\Omega$ )

| PARAMETER               | SYMBOL      | CONDITIONS                           | RATINGS  | UNITS              |
|-------------------------|-------------|--------------------------------------|----------|--------------------|
| LNA Voltage             | $V_{LNA}$   |                                      | 5.0      | V                  |
| Mixer Voltage           | $V_{MIX}$   |                                      | 5.0      | V                  |
| Local Amplifier Voltage | $V_{LO}$    |                                      | 5.0      | V                  |
| Input Power 1           | $P_{LNAIN}$ | $V_{LNA}=V_{MIX}=V_{LO}=2.7\text{V}$ | +15      | dBm                |
| Input Power 2           | $P_{LOIN}$  | $V_{LNA}=V_{MIX}=V_{LO}=2.7\text{V}$ | +10      | dBm                |
| Power Dissipation       | $P_D$       |                                      | 550      | mW                 |
| Operating Temperature   | $T_{opr}$   |                                      | -40~+85  | $^{\circ}\text{C}$ |
| Storage Temperature     | $T_{stg}$   |                                      | -55~+125 | $^{\circ}\text{C}$ |

## ■ELECTRICAL CHARACTERISTICS 1 (LNA)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{LNA}=2.7\text{V}$ ,  $V_{MIX}=V_{LO}=0\text{V}$ ,  $f_{RF}=1489\text{MHz}$ ,  $P_{RF}=-36\text{dBm}$ ,  $Z_s=Z_l=50\Omega$ , with test circuit 1

| PARAMETER                          | SYMBOL     | CONDITIONS                       | MIN  | TYP   | MAX  | UNITS |
|------------------------------------|------------|----------------------------------|------|-------|------|-------|
| Operating Frequency                | freq       |                                  | 1470 | 1489  | 1510 | MHz   |
| LNA Voltage                        | $V_{LNA}$  |                                  | 2.5  | 2.7   | 4.5  | V     |
| LNA Operating Current              | $I_{LNA}$  | $P_{RF}$ , $P_{LO}=\text{OFF}$   | -    | 3.2   | 4.1  | mA    |
| Small Signal Gain                  | Gain       |                                  | 16.0 | 18.0  | 20.0 | dB    |
| Gain Flatness                      | $G_{flat}$ | $f_{RF}=1470\sim 1520\text{MHz}$ | -    | 0.5   | 1.0  | dB    |
| Noise Figure                       | NF         |                                  | -    | 1.2   | 1.5  | dB    |
| Pout at 1dB Gain Compression point | $P_{-1dB}$ |                                  | -3.0 | -1.0  | -    | dBm   |
| Output 3rd order Intercept point   | OIP3       | $f_{RF}=1489.0+1489.1\text{MHz}$ | +8.0 | +13.0 | -    | dBm   |
| RF IN VSWR                         | $VSWR_i$   |                                  | -    | 1.5   | -    |       |
| RF OUT VSWR                        | $VSWR_o$   |                                  | -    | 1.5   | -    |       |

## ■ELECTRICAL CHARACTERISTICS 2 (Mixer)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{LNA}=0\text{V}$ ,  $V_{MIX}=V_{LO}=2.7\text{V}$ ,  $f_{RF}=1489\text{MHz}$ ,  $f_{LO}=1619\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$ ,  $P_{LO}=-15\text{dBm}$ ,  $Z_s=Z_l=50\Omega$ , with test circuit 1

| PARAMETER                         | SYMBOL    | CONDITIONS                       | MIN  | TYP   | MAX  | UNITS |
|-----------------------------------|-----------|----------------------------------|------|-------|------|-------|
| Operating Frequency               | freq      |                                  | 1470 | 1489  | 1510 | MHz   |
| Mixer Voltage                     | $V_{MIX}$ |                                  | 2.5  | 2.7   | 4.5  | V     |
| Local Amplifier Voltage           | $V_{LO}$  |                                  | 2.5  | 2.7   | 4.5  | V     |
| Mixer Operating Current           | $I_{MIX}$ | $P_{RF}$ , $P_{LO}=\text{OFF}$   | -    | 4.3   | 5.7  | mA    |
| Local Amplifier Operating Current | $I_{LO}$  | $P_{RF}$ , $P_{LO}=\text{OFF}$   | -    | 0.8   | 1.3  | mA    |
| Conversion Gain                   | $G_c$     |                                  | 11.0 | 12.5  | -    | dB    |
| Noise Figure                      | NF        |                                  | -    | 6.0   | 9.0  | dB    |
| Output 3rd Order Intercept Point  | OIP3      | $f_{RF}=1489.0+1489.1\text{MHz}$ | +7.0 | +10.0 | -    | dBm   |
| MIXER IN VSWR                     | $VSWR_M$  |                                  | -    | 1.5   | -    |       |
| LOCAL IN VSWR                     | $VSWR_l$  |                                  | -    | 1.5   | -    |       |
| IF OUT VSWR                       | $VSWR_i$  |                                  | -    | 1.5   | -    |       |

## ■ELECTRICAL CHARACTERISTICS 3 (LNA)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{\text{LNA}}=2.7\text{V}$ ,  $V_{\text{MIX}}=V_{\text{LO}}=0\text{V}$ ,  $f_{\text{RF}}=1900\text{MHz}$ ,  $P_{\text{RF}}=-36\text{dBm}$ ,  
 $Z_s=Z_i=50\Omega$ , with test circuit 2

| PARAMETER                          | SYMBOL            | CONDITIONS                                | MIN  | TYP   | MAX  | UNITS |
|------------------------------------|-------------------|-------------------------------------------|------|-------|------|-------|
| Operating Frequency                | freq              |                                           | 1890 | 1900  | 1920 | MHz   |
| LNA Voltage                        | $V_{\text{LNA}}$  |                                           | 2.5  | 2.7   | 4.5  | V     |
| LNA Operating Current              | $I_{\text{LNA}}$  | $P_{\text{RF}}, P_{\text{LO}}=\text{OFF}$ | -    | 3.2   | 4.1  | mA    |
| Small Signal Gain                  | Gain              |                                           | 14.0 | 16.0  | 18.0 | dB    |
| Gain Flatness                      | $G_{\text{flat}}$ | $f_{\text{RF}}=1890\sim 1920\text{MHz}$   | -    | 0.5   | 1.0  | dB    |
| Noise Figure                       | NF                |                                           | -    | 1.3   | 1.5  | dB    |
| Pout at 1dB Gain Compression point | $P_{-1\text{dB}}$ |                                           | -2.0 | 0     | -    | dBm   |
| Output 3rd Order Intercept point   | OIP3              | $f_{\text{RF}}=1900.0+1900.1\text{MHz}$   | +9.0 | +13.0 | -    | dBm   |
| RF IN VSWR                         | $\text{VSWR}_i$   |                                           | -    | 2.0   | -    |       |
| RF OUT VSWR                        | $\text{VSWR}_o$   |                                           | -    | 2.0   | -    |       |

## ■ELECTRICAL CHARACTERISTICS 4 (Mixer)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{\text{LNA}}=0\text{V}$ ,  $V_{\text{MIX}}=V_{\text{LO}}=2.7\text{V}$ ,  $f_{\text{RF}}=1900\text{MHz}$ ,  $f_{\text{LO}}=1660\text{MHz}$   
 $P_{\text{RF}}=-30\text{dBm}$ ,  $P_{\text{LO}}=-15\text{dBm}$ ,  $Z_s=Z_i=50\Omega$ , with test circuit 2

| PARAMETER                         | SYMBOL           | CONDITIONS                                | MIN  | TYP   | MAX  | UNITS |
|-----------------------------------|------------------|-------------------------------------------|------|-------|------|-------|
| Operating Frequency               | freq             |                                           | 1890 | 1900  | 1920 | MHz   |
| Mixer Voltage                     | $V_{\text{MIX}}$ |                                           | 2.5  | 2.7   | 4.5  | V     |
| Local Amplifier Voltage           | $V_{\text{LO}}$  |                                           | 2.5  | 2.7   | 4.5  | V     |
| Mixer Operating Current           | $I_{\text{MIX}}$ | $P_{\text{RF}}, P_{\text{LO}}=\text{OFF}$ | -    | 4.3   | 5.7  | mA    |
| Local Amplifier Operating Current | $I_{\text{LO}}$  | $P_{\text{RF}}, P_{\text{LO}}=\text{OFF}$ | -    | 0.8   | 1.3  | mA    |
| Conversion Gain                   | $G_c$            |                                           | 7.0  | 9.0   | -    | dB    |
| Noise Figure                      | NF               |                                           | -    | 6.5   | 9.0  | dB    |
| Output 3rd Order Intercept point  | OIP3             | $f_{\text{RF}}=1900.0+1900.1\text{MHz}$   | +7.0 | +11.0 | -    | dBm   |
| MIXER IN VSWR                     | $\text{VSWR}_M$  |                                           | -    | 1.5   | -    |       |
| LOCAL IN VSWR                     | $\text{VSWR}_L$  |                                           | -    | 1.5   | -    |       |
| IF OUT VSWR                       | $\text{VSWR}_i$  |                                           | -    | 1.5   | -    |       |

## ■ TERMINAL INFORMATION


| No. | SYMBOL | FUNCTION                                                                                                                                                                                                                                                                 |
|-----|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | LNAIN  | RF input terminal of LNA. An external matching circuit is required.                                                                                                                                                                                                      |
| 2   | LNACAP | Terminal for the bypass capacitor of LNA. The bypass capacitor C1 shown in test circuits should be connected to this terminal as close as possible.                                                                                                                      |
| 3   | GND    | Ground terminal (0V)                                                                                                                                                                                                                                                     |
| 4   | IFOUT  | IF signal output terminal. The IF signal is output through external matching circuit connected to this terminal. Please connect inductances L7, L8 and power supply as shown in test circuits, since this terminal is also the terminal of mixer power supply.           |
| 5   | VLO    | Power supply terminal for local amplifier. Please place R1, R2 and L11 shown in test circuits at very close to this terminal.                                                                                                                                            |
| 6   | LOIN   | Local signal input terminal to local amplifier. An external matching circuit is required.                                                                                                                                                                                |
| 7   | BPC    | Terminal for the bypass capacitor of mixer. The bypass capacitor C4 shown in test circuits should be connected to this terminal as close as possible.                                                                                                                    |
| 8   | MIXIN  | RF signal input terminal to mixer. An external matching circuit is required.                                                                                                                                                                                             |
| 9   | GND    | Ground terminal (0V)                                                                                                                                                                                                                                                     |
| 10  | LNAOUT | Signal output terminal of LNA. The RF signal from LNA goes out through external matching circuit connected to this terminal. Please connect inductances L3, L4 and power supply as shown in test circuits, since this terminal is also the terminal of LNA power supply. |

### CAUTION


- 1) Ground terminal (No.3, 9) should be connected to the ground plane as close as possible.

## ■ TYPICAL CHARACTERISTICS 1 (LNA, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)


### Gain, NF vs. Frequency

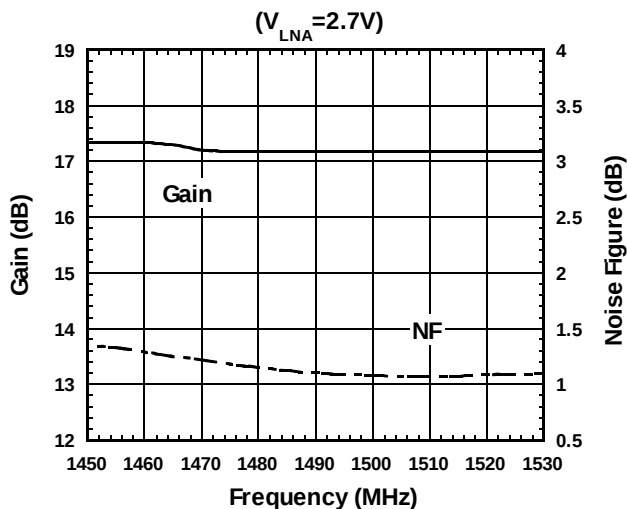


### Pout vs. Pin

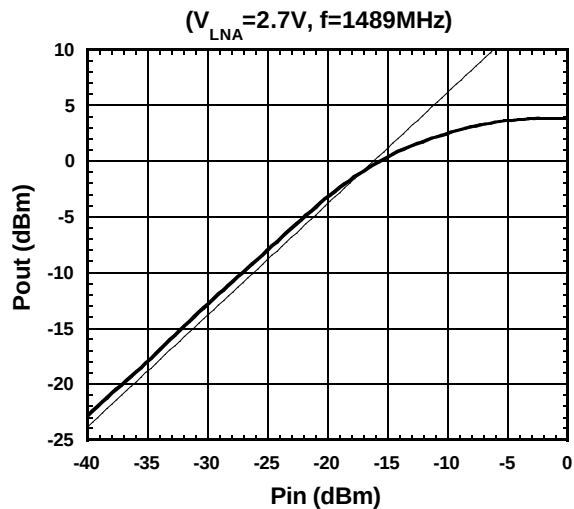


### Pout, IM3 vs. Pin

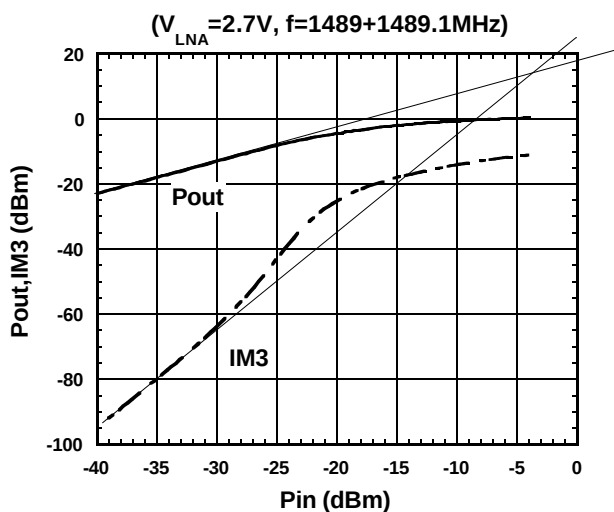


### Gain, NF vs. $V_{LNA}$

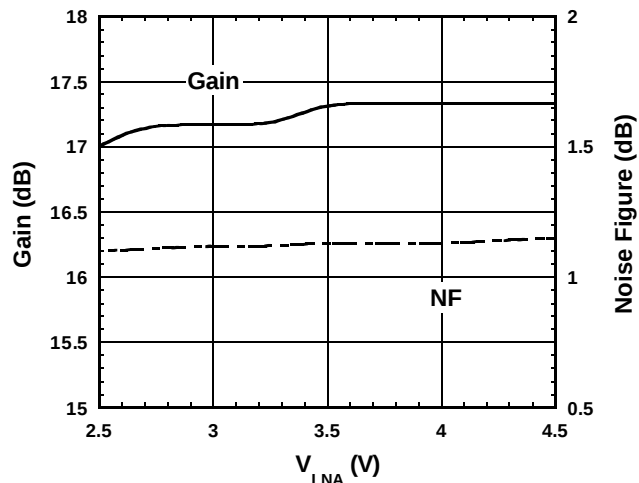

### $I_{LNA}$ vs. $V_{LNA}$




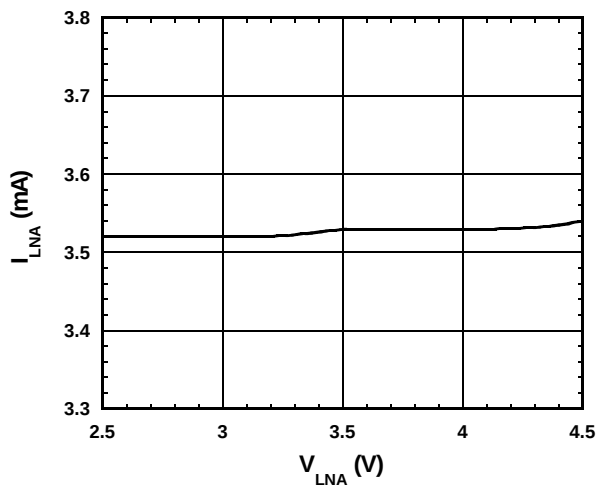


### P-1dB vs. $V_{LNA}$

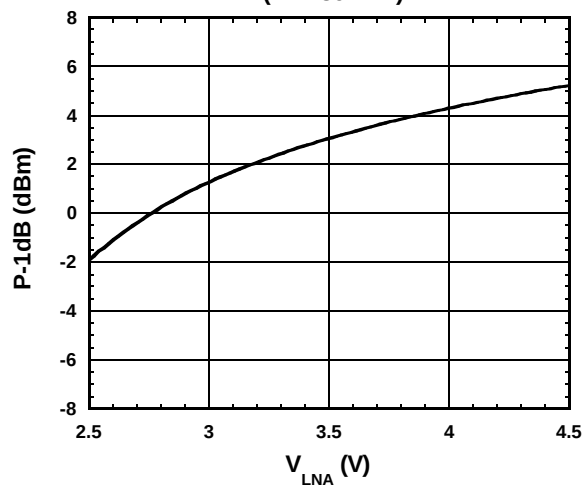

# NJG1709KC1

## ■TYPICAL CHARACTERISTICS 1 (LNA, f=1.5GHz, f<sub>LO</sub>=1619MHz, with test circuit 1)

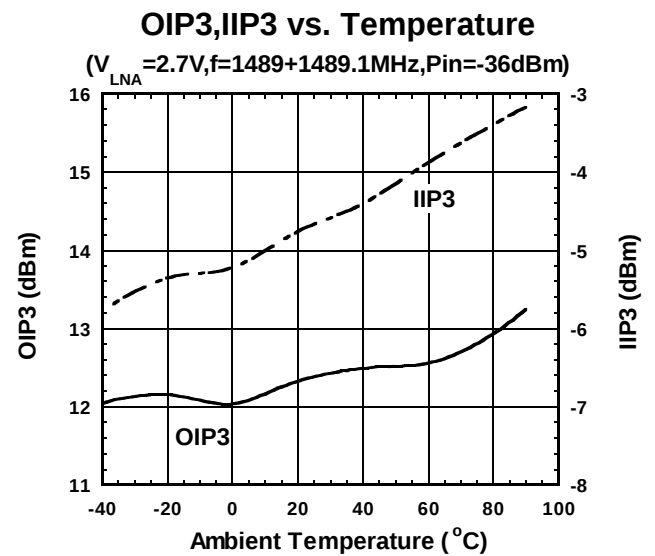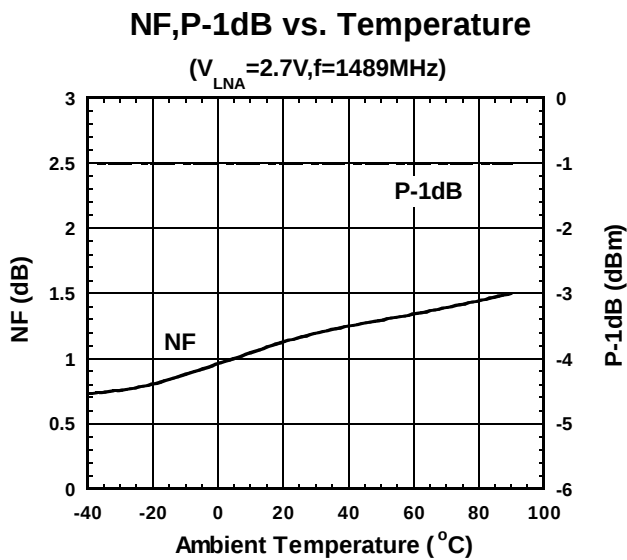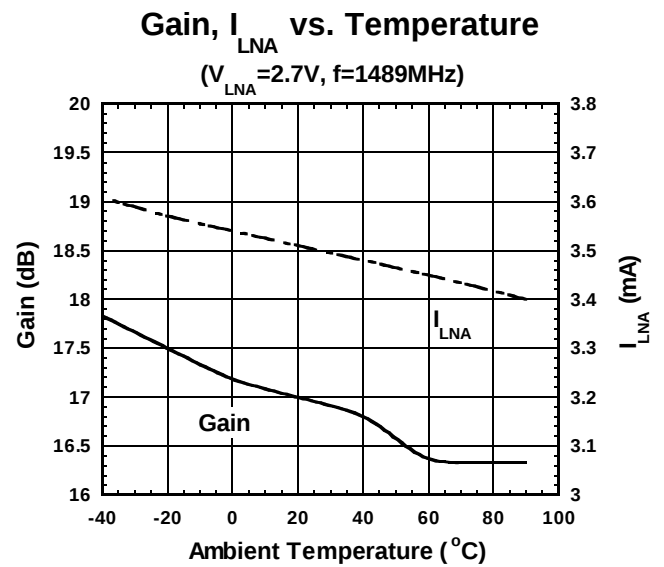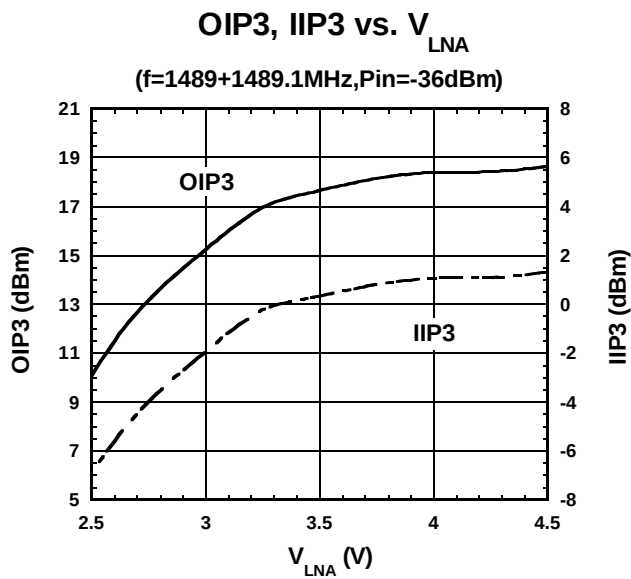


The value of OIP3 and IIP3 shown in typical characteristics are calculated


$$OIP3 = \frac{3 \times P_{out} - IM3}{2}$$

$$IIP3 = OIP3 - \text{Gain} \quad @Pin = -36dBm$$


## ■TYPICAL CHARACTERISTICS 1 (LNA, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)

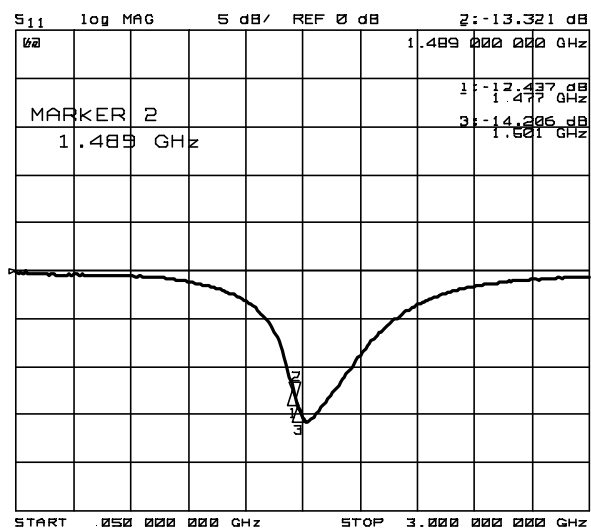


S<sub>11</sub>

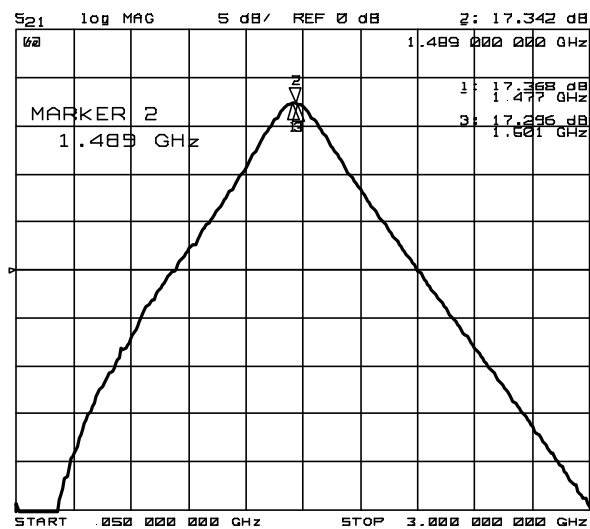

S<sub>21</sub>

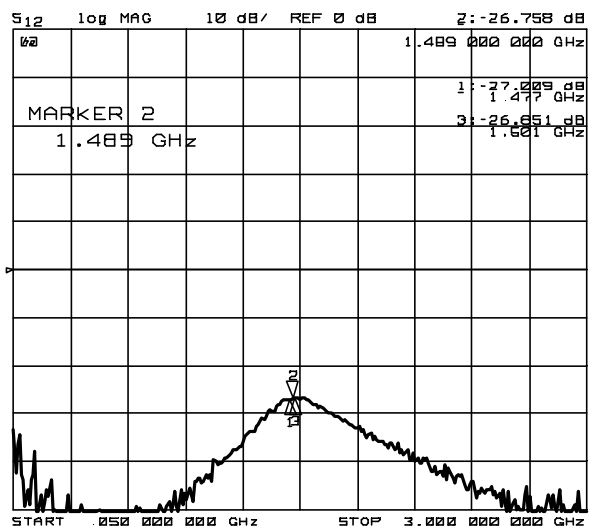

S<sub>12</sub>

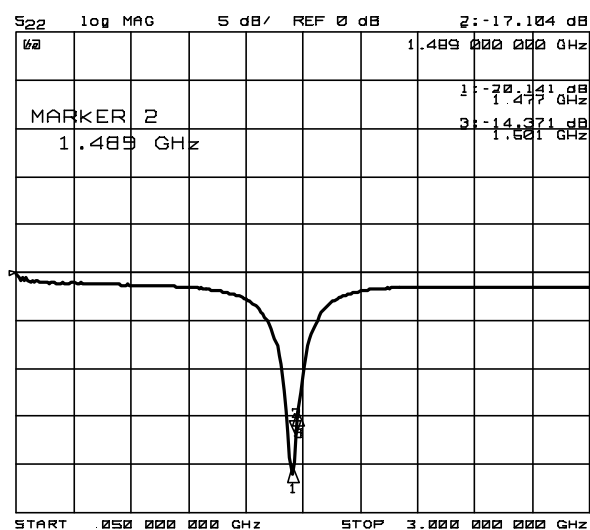

S<sub>22</sub>

Condition


$$V_{LNA}=2.7V$$

$$V_{MIX}=V_{LO}=0V$$

# NJG1709KC1

## ■ TYPICAL CHARACTERISTICS 1 (MIXER, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)


Conversion Gain, Noise Figure  
vs. RF Frequency

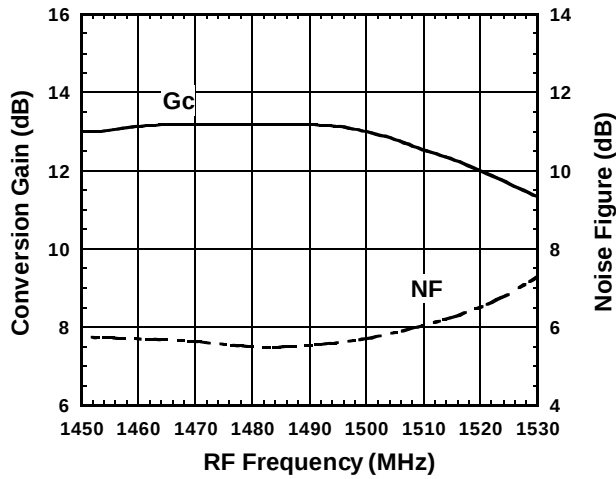

Condition

$f_{IF}=130\text{MHz}$   
 $P_{RF}=-30\text{dBm}$   
 $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Upper LOCAL


Conversion Gain, Noise Figure  
vs. LO Power

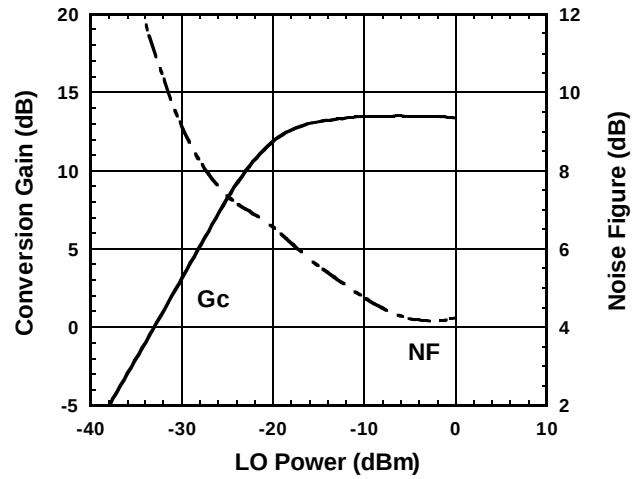

Condition

$f_{IF}=130\text{MHz}$   
 $f_{RF}=1489\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1619\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

OIP3, IIP3 vs. LO Power

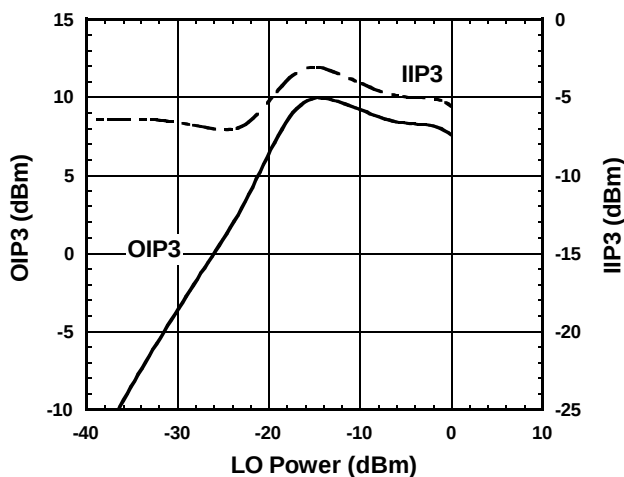

Condition


$f_{IF}=130\text{MHz}$   
 $f_{RF1}=1489.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1489.1\text{MHz}$   
 $f_{LO}=1619\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

$$\text{OIP3} = \frac{3 \times \text{IF} - \text{IM3}}{2}$$
  

$$\text{IIP3} = \text{OIP3} - G_c$$
  
 @  $P_{RF} = -30\text{dBm}$

## ■ TYPICAL CHARACTERISTICS 1 (MIXER, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)


Conversion Gain, Noise Figure  
vs.  $V_{MIX}$ ,  $V_{LO}$

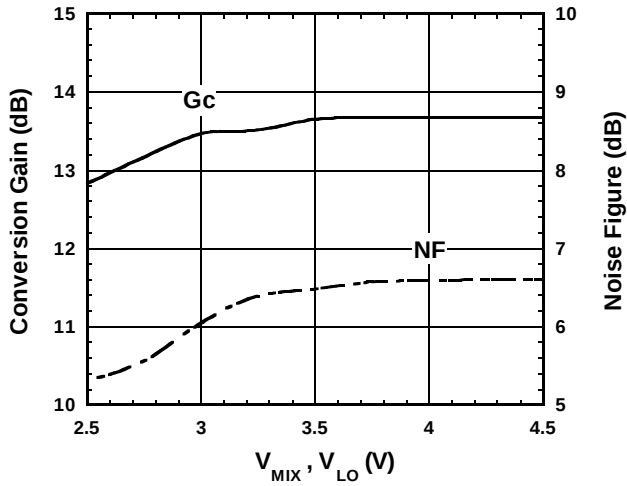

Condition

$f_{IF}=130\text{MHz}$   
 $f_{RF}=1489\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$


OIP3, IIP3 vs.  $V_{MIX}$ ,  $V_{LO}$

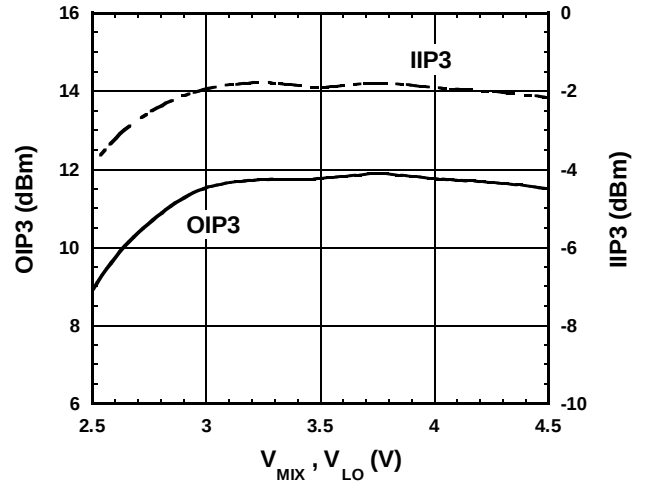

Condition

$f_{IF}=130\text{MHz}$   
 $f_{RF1}=1489.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1489.1\text{MHz}$   
 $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
 $OIP3 = \frac{3 \times IF - IM3}{2}$   
 $IIP3 = OIP3 - Gc$   
 @  $P_{RF} = -30\text{dBm}$


IF, IM3 vs. RF Power

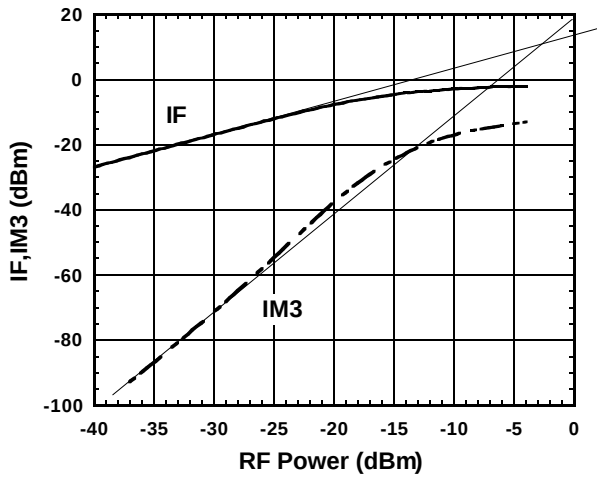

Condition

$f_{IF}=130\text{MHz}$   
 $f_{RF1}=1489.0\text{MHz}$   
 $f_{RF2}=1489.1\text{MHz}$   
 $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

IF Output Power vs. RF Power

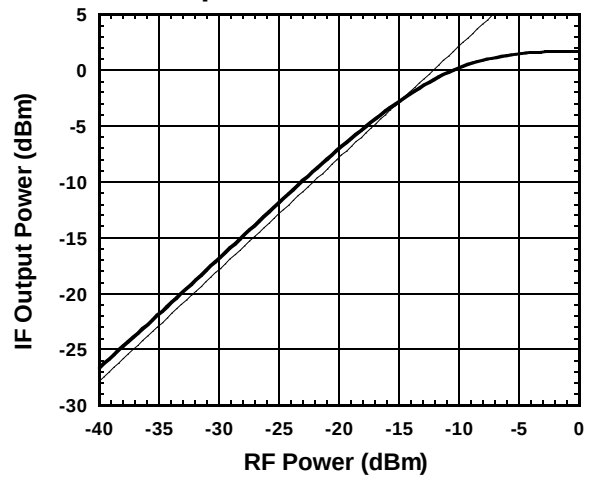


Condition


$f_{IF}=130\text{MHz}$   
 $f_{RF}=1489\text{MHz}$   
 $f_{LO}=1619\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

# NJG1709KC1


## ■TYPICAL CHARACTERISTICS 1 (MIXER, $f_{IF}=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)

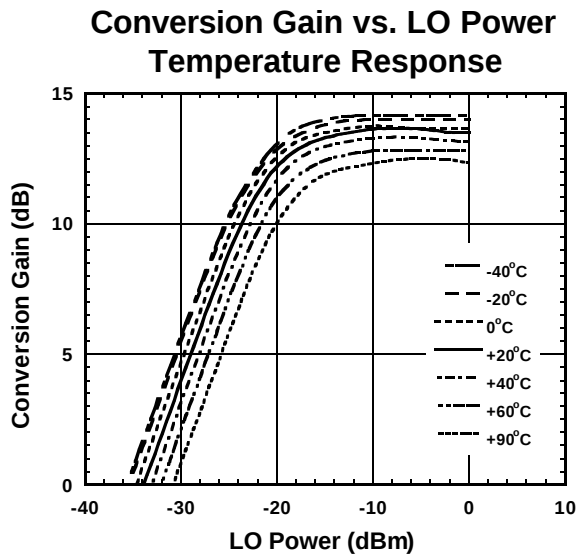

Condition  
 $f_{IF}=130\text{MHz}$   
 $f_{RF}=1489\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1619\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

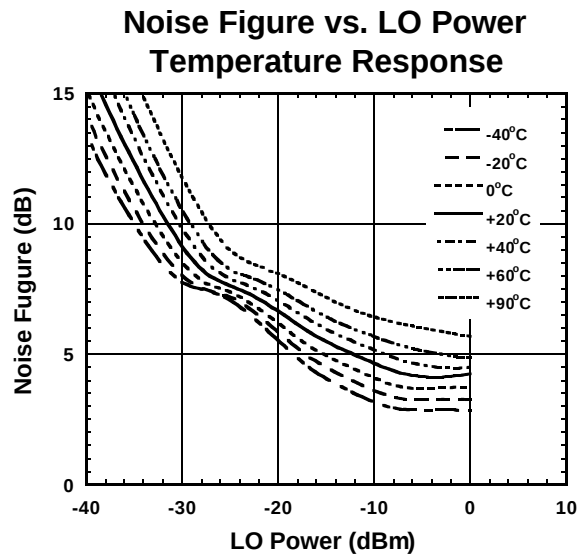

Condition  
 $f_{IF}=130\text{MHz}$   
 $f_{RF}=1489\text{MHz}$   
 $f_{LO}=1619\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$



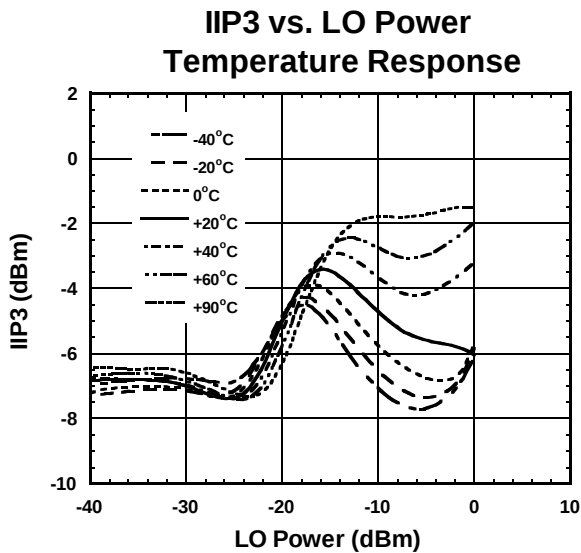


Condition  
 $f_{IF}=130\text{MHz}$   
 $f_{RF1}=1489.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1489.1\text{MHz}$   
 $f_{LO}=1619\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

$$IIP3 = \frac{3 \times IF - IM3}{2} - Gc$$

@  $P_{RF} = -30\text{dBm}$

## ■TYPICAL CHARACTERISTICS 1 (MIXER, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)

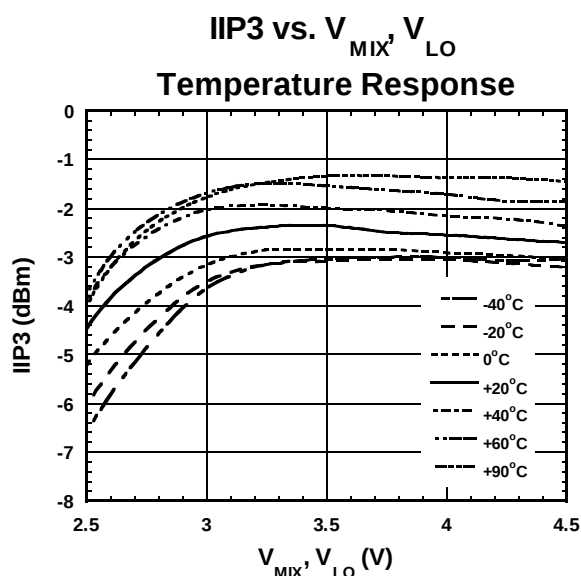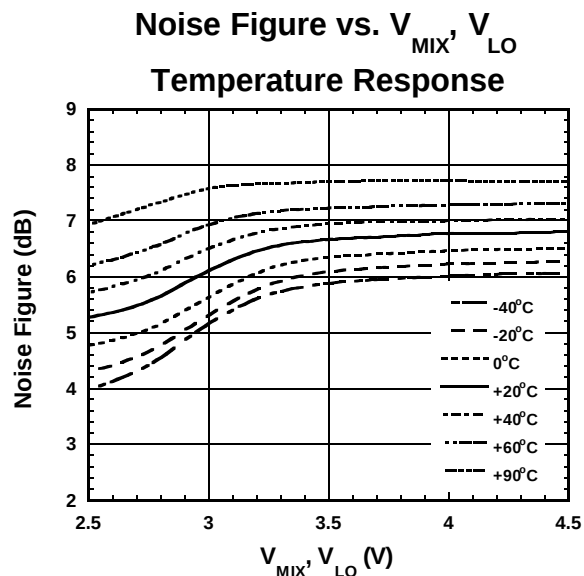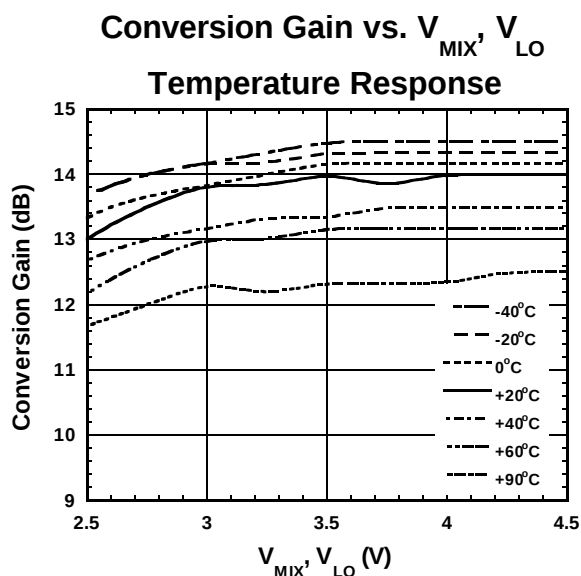


$$IIP3 = \frac{3 \times IF - IM3}{2} - G_c$$

@  $P_{RF} = -30\text{dBm}$

## ■TYPICAL CHARACTERISTICS 1 (MIXER, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)

MIXER IN PORT IMPEDANCE  
( $P_{LO}=-15\text{dBm}$ )

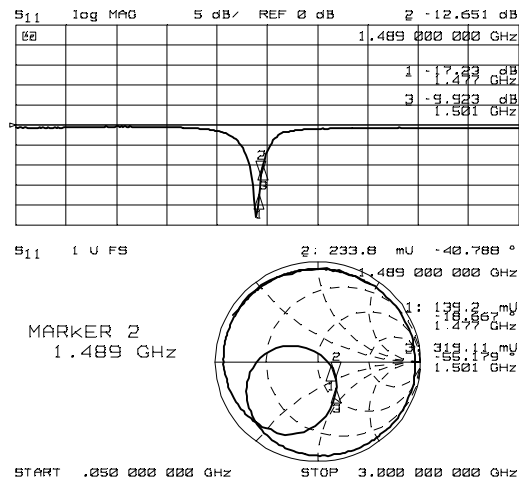


Condition

$$V_{LNA}=0V$$

$$V_{MIX}=V_{LO}=2.7V$$

LOCAL IN PORT IMPEDANCE

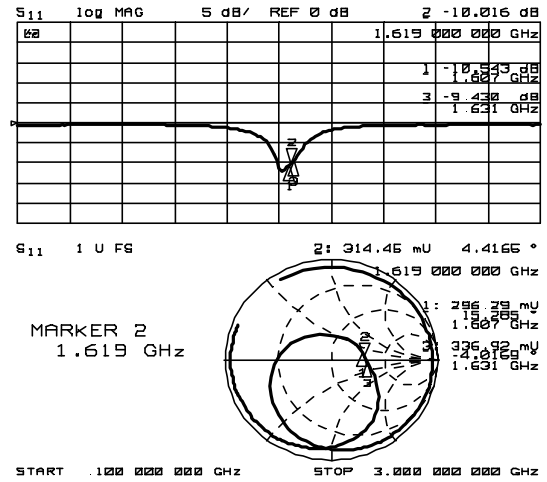


Condition

$$V_{LNA}=0V$$

$$V_{MIX}=V_{LO}=2.7V$$

IF OUT PORT IMPEDANCE

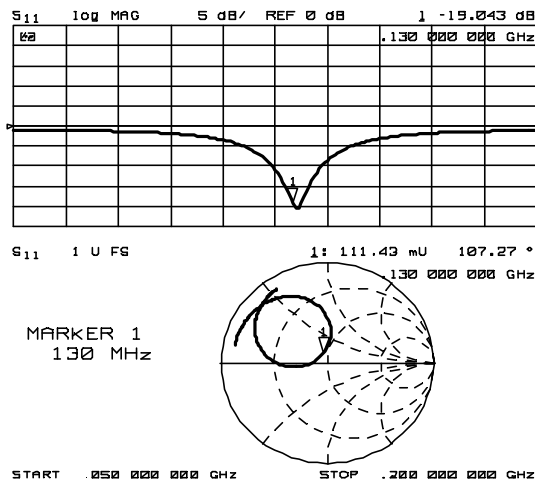


Condition

$$V_{LNA}=0V$$

$$V_{MIX}=V_{LO}=2.7V$$


## ■TYPICAL CHARACTERISTICS 1 (LNA+MIXER, $f=1.5\text{GHz}$ , $f_{LO}=1619\text{MHz}$ , with test circuit 1)

RF IN – LOCAL IN ISOLATION  
(RF IN → LOCAL IN)

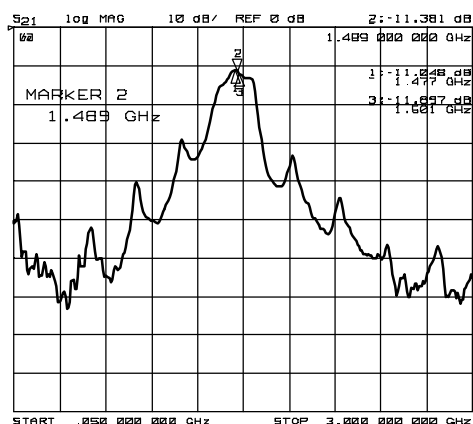


Condition

$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF IN  
 Port2:LOCAL IN

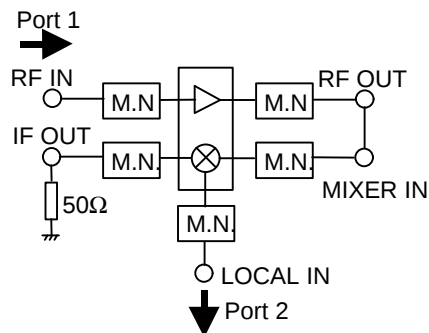


RF OUT – MIXER IN  
 Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$

RF OUT – MIXER IN ISOLATION  
(RF OUT → MIXER IN)

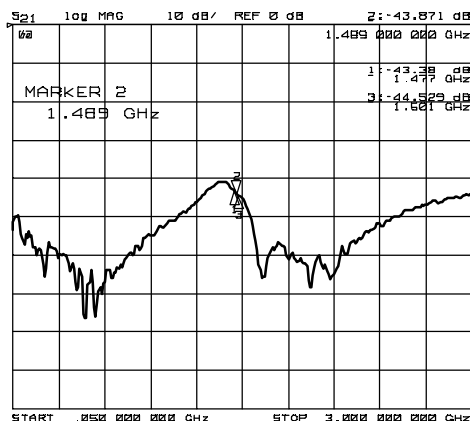


Condition

$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF OUT  
 Port2:MIXER IN

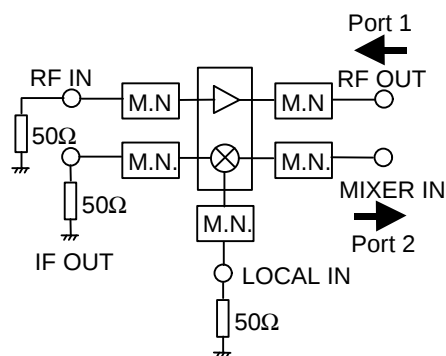


RF IN – IF OUT ISOLATION  
(RF IN → IF OUT)

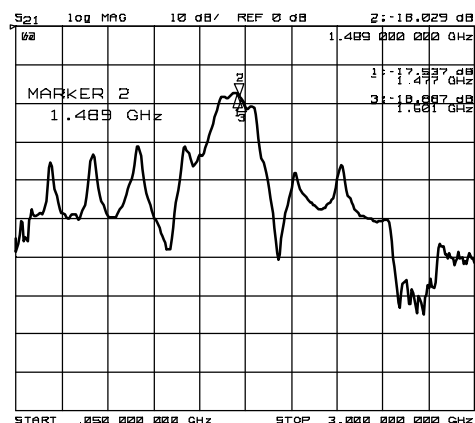


Condition

$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF IN  
 Port2:IF OUT


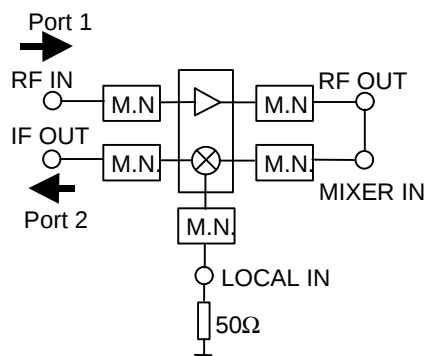


RF OUT – MIXER IN  
 Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$


\_\_\_\_\_



$V_{LNA}=2.7V$   
 $V_{MIX}=V_{LO}=2.7V$   
 $P_{LO}=-15dBm$   
 Port1: LOCAL IN  
 Port2: IF OUT




$V_{LNA}=2.7V$   
 $V_{MIX}=V_{LO}=2.7V$   
 $P_{LO}=-15dBm$   
 Port1: LOCAL IN  
 Port2: RF IN




## ■ TYPICAL CHARACTERISTICS 2 (LNA, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)


### Gain, NF vs. Frequency

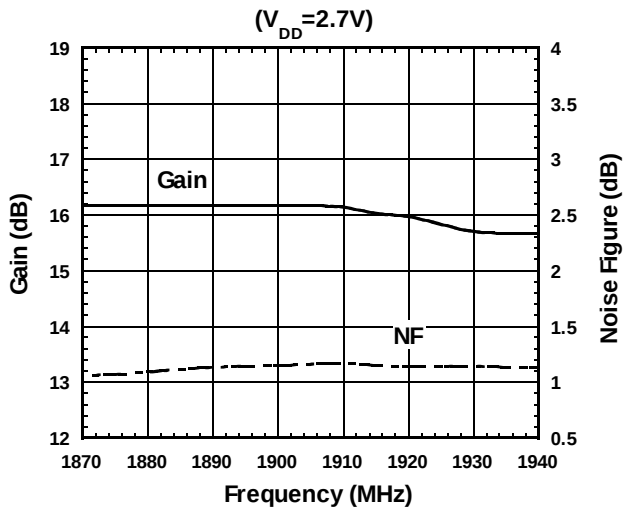


### Pout vs. Pin

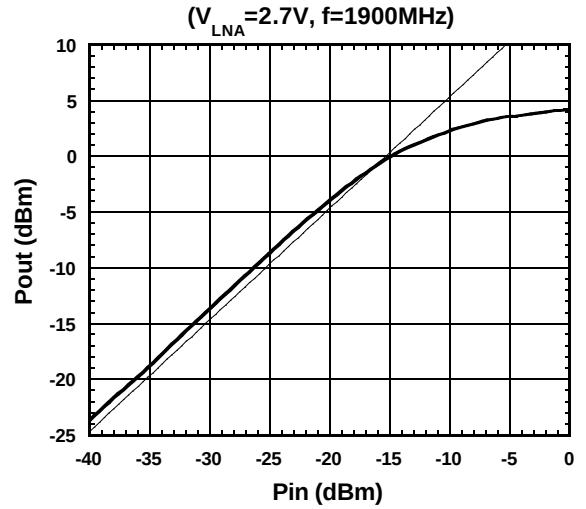


### Pout, IM3 vs. Pin

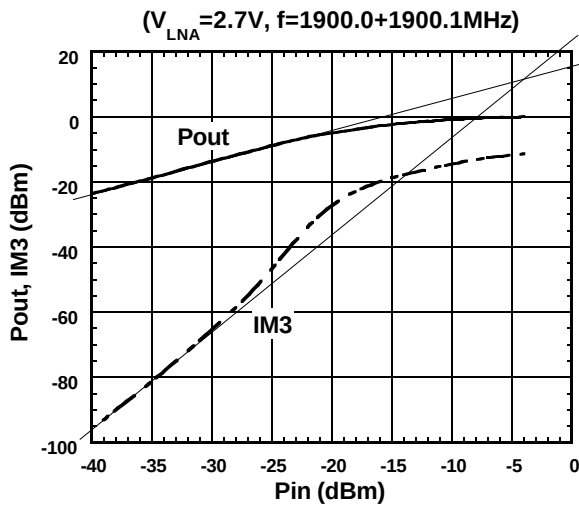


### Gain, NF vs. $V_{LNA}$

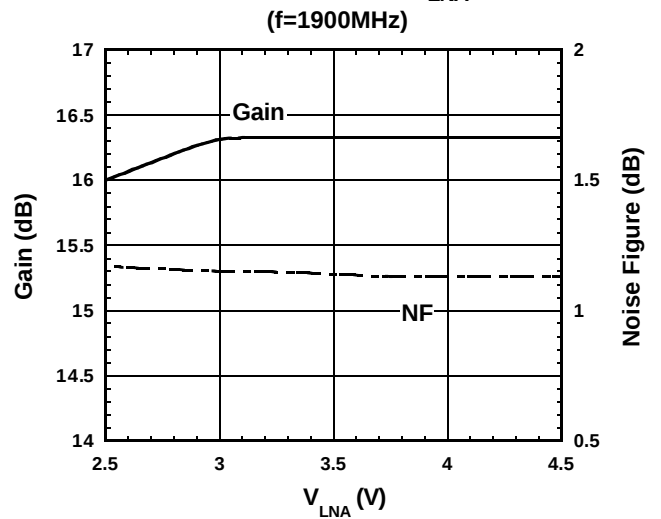





### $I_{LNA}$ vs. $V_{LNA}$

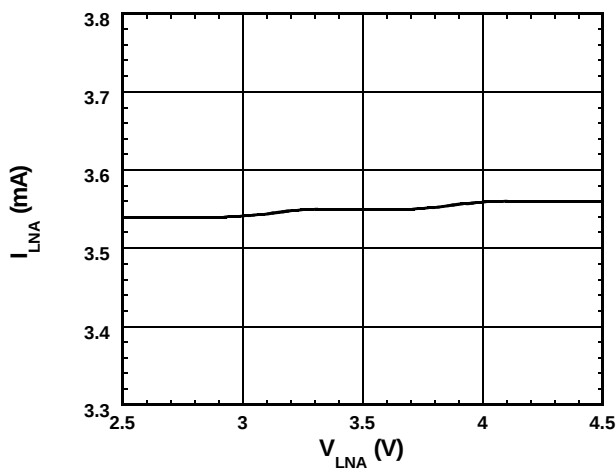

### P-1dB vs. $V_{LNA}$

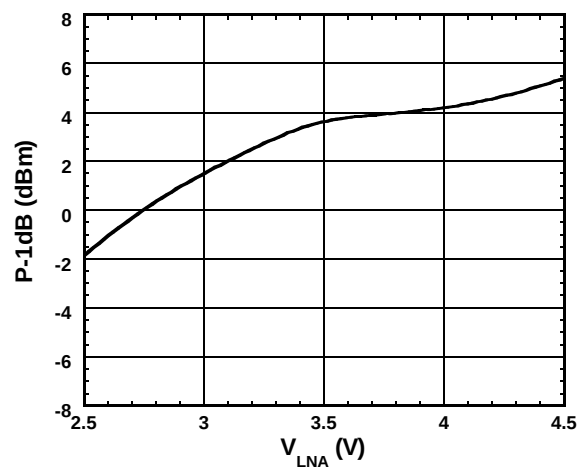

## ■ TYPICAL CHARACTERISTICS 2 (LNA, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)

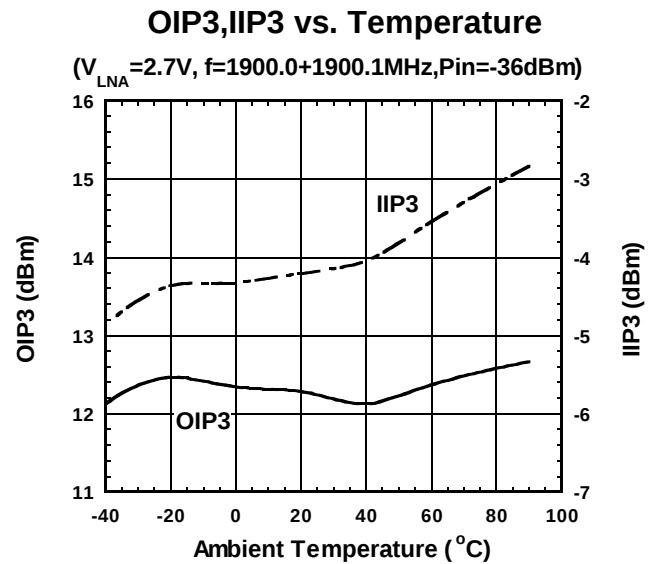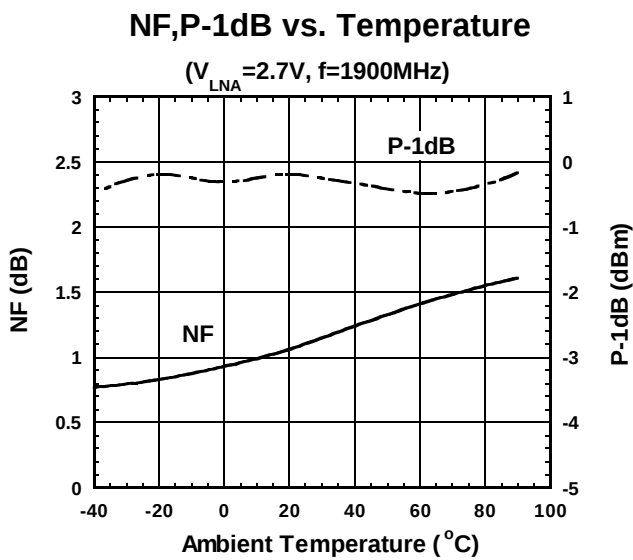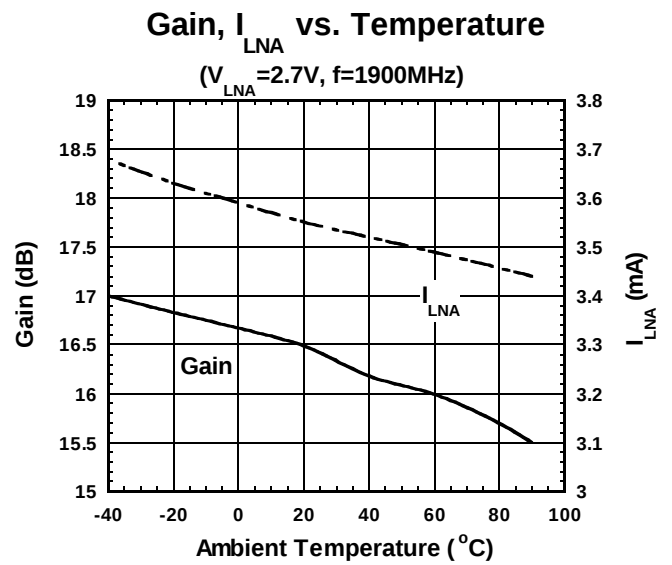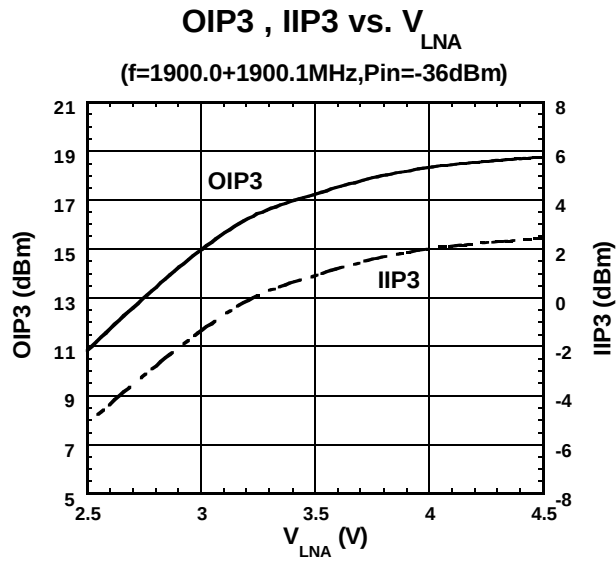


The value of OIP3 and IIP3 shown in typical characteristics are calculated


$$\text{OIP3} = \frac{3 \times P_{out} - \text{IM3}}{2}$$

$$\text{IIP3} = \text{OIP3} - \text{Gain} \quad @P_{in} = -36\text{dBm}$$


## ■TYPICAL CHARACTERISTICS 2 (LNA, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)

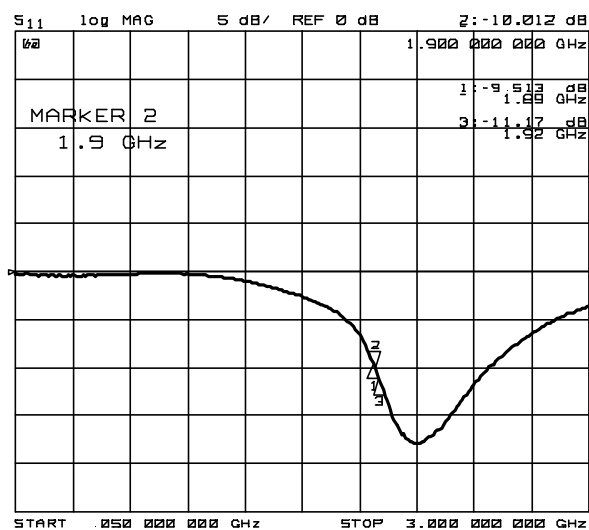


S11

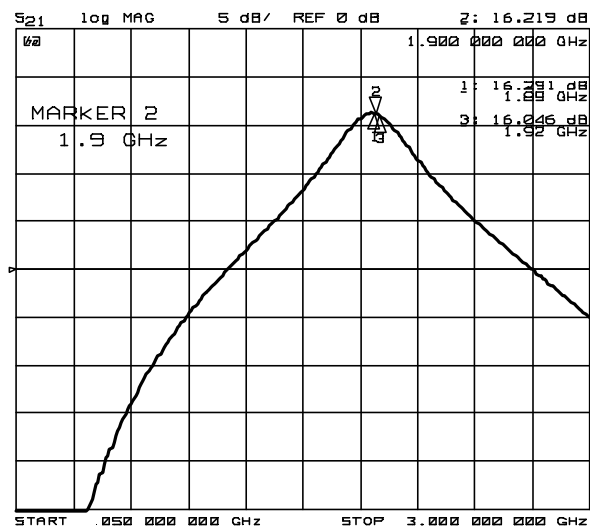

S21

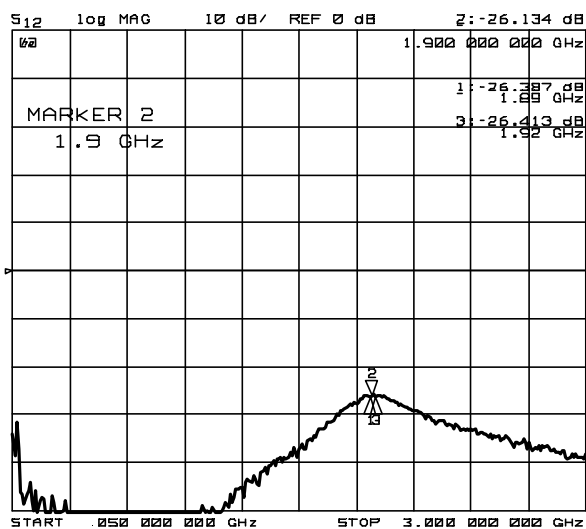

S12

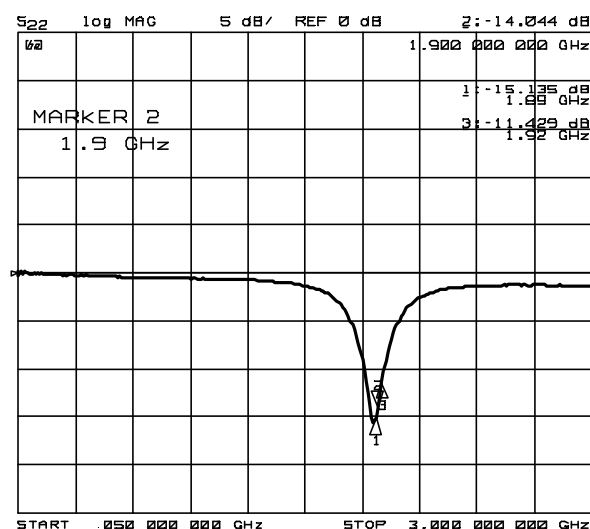

S22


Condition

$$V_{LNA}=2.7V$$

$$V_{MIX}=V_{LO}=0V$$

## ■ TYPICAL CHARACTERISTICS 2 (MIXER, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)


Conversion Gain, Noise Figure  
vs. RF Frequency

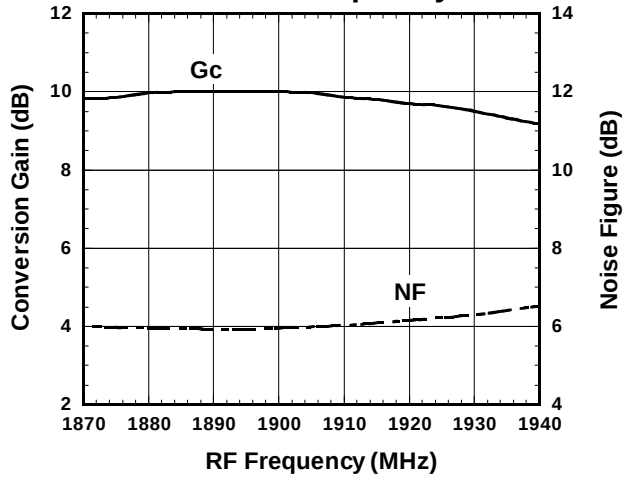

Condition

$f_{IF}=240\text{MHz}$   
 $P_{RF}=-30\text{dBm}$   
 $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Upper LOCAL


Conversion Gain, Noise Figure  
vs. LO Power

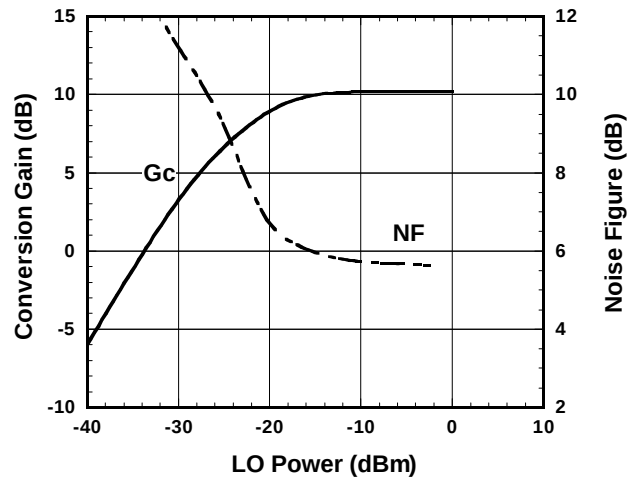

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF}=1900\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1660\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

OIP3, IIP3 vs. LO Power

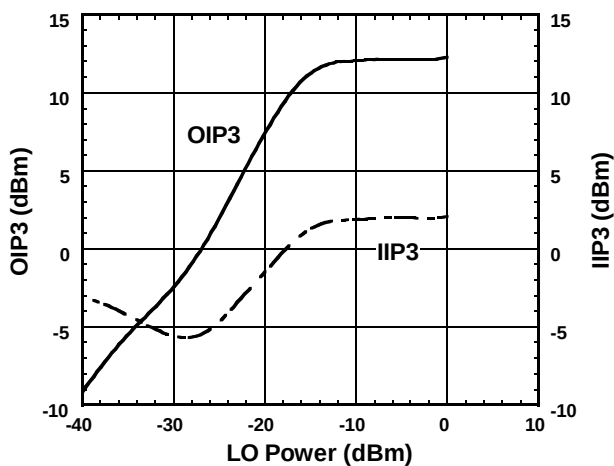

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF1}=1900.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1900.1\text{MHz}$   
 $f_{LO}=1660\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$


$$\text{OIP3} = \frac{3 \times \text{IF} - \text{IM3}}{2}$$

$$\text{IIP3} = \text{OIP3} - G_c$$
 @  $P_{RF} = -30\text{dBm}$

## ■TYPICAL CHARACTERISTICS 2 (MIXER, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)

### Conversion Gain, Noise Figure


vs.  $V_{MIX}$ ,  $V_{LO}$

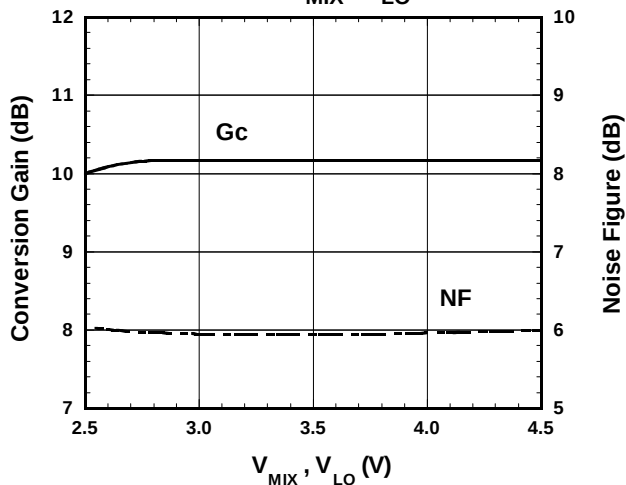

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF}=1900\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$

### OIP3, IIP3 vs. $V_{MIX}$ , $V_{LO}$

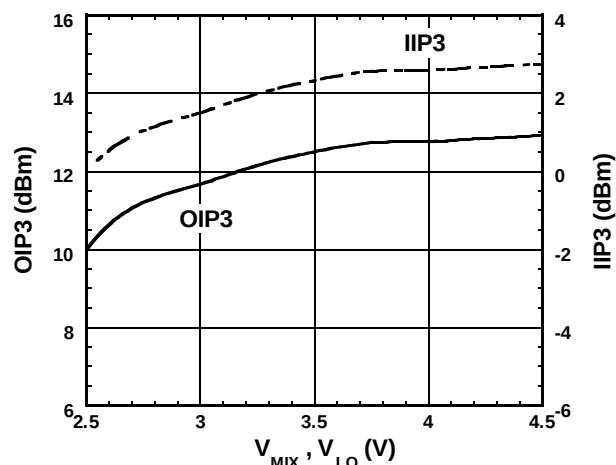


Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF1}=1900.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1900.1\text{MHz}$   
 $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$

$OIP3 = \frac{3 \times IF - IM3}{2}$   
 $IIP3 = OIP3 - Gc$   
 @  $P_{RF} = -30\text{dBm}$


### IF, IM3 vs. RF Power

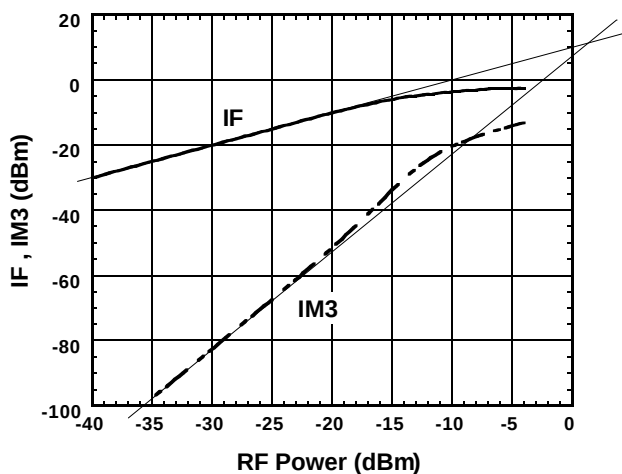

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF1}=1900.0\text{MHz}$   
 $f_{RF2}=1900.1\text{MHz}$   
 $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

### IF Output Power vs. RF Power

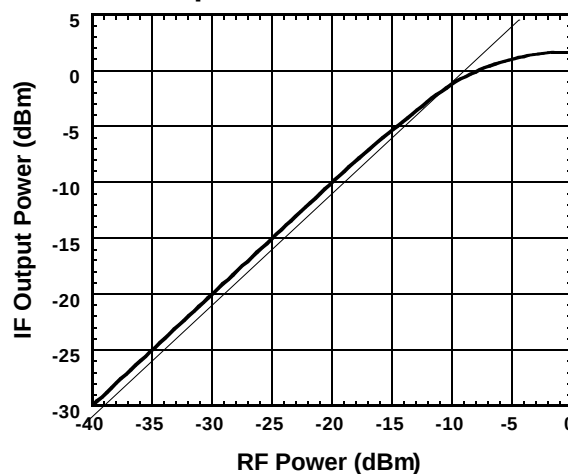


Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF}=1900\text{MHz}$   
 $f_{LO}=1660\text{MHz}$ ,  $P_{LO}=-15\text{dBm}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

## ■TYPICAL CHARACTERISTICS 2 (MIXER, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)


**Conversion Gain vs. LO Power  
Temperature Response**

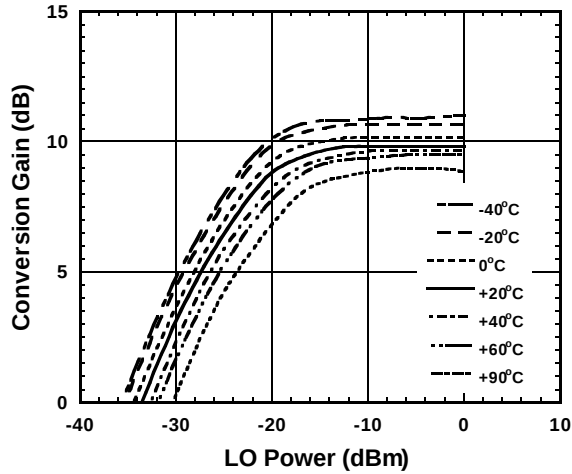

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF}=1900\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=1660\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$


**Noise Figure vs. LO Power  
Temperature Response**

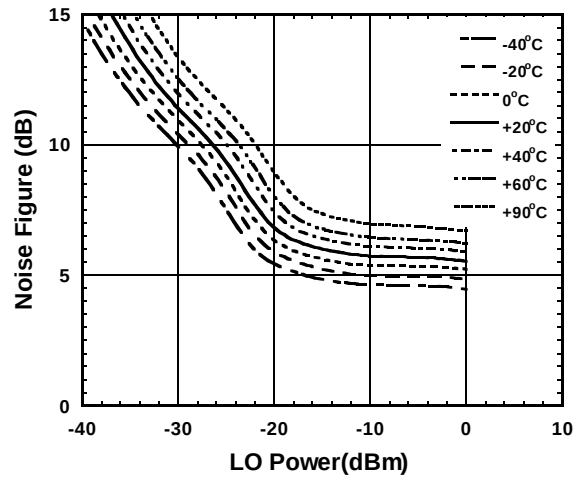

Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF}=1900\text{MHz}$   
 $f_{LO}=1660\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

**IIP3 vs. LO Power  
Temperature Response**

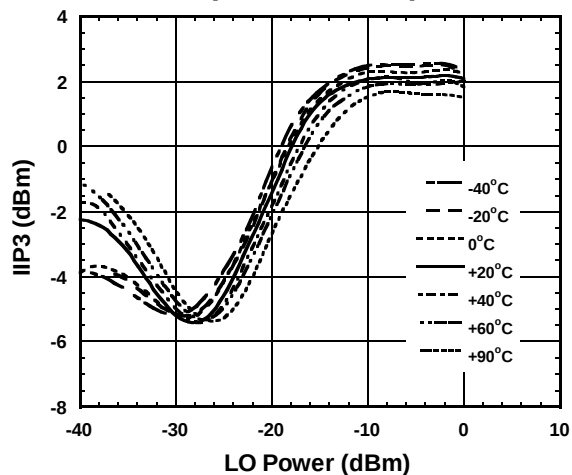




Condition

$f_{IF}=240\text{MHz}$   
 $f_{RF1}=1900.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=1900.1\text{MHz}$   
 $f_{LO}=1660\text{MHz}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$

$$IIP3 = \frac{3 \times IF - IM3}{2} - G_c$$

@  $P_{RF} = -30\text{dBm}$

## ■TYPICAL CHARACTERISTICS 2 (MIXER, $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)

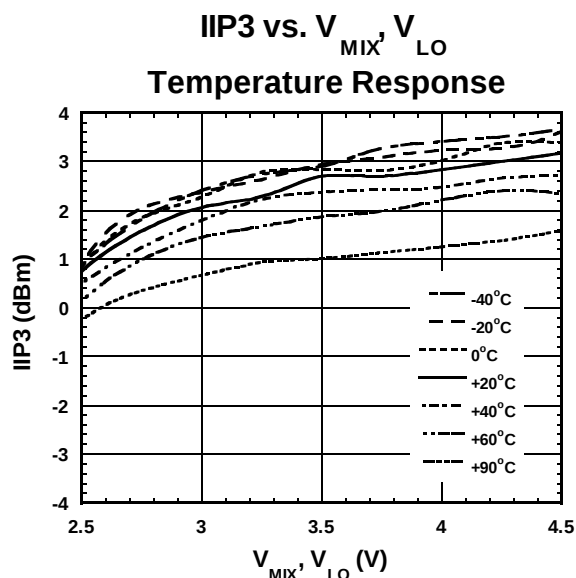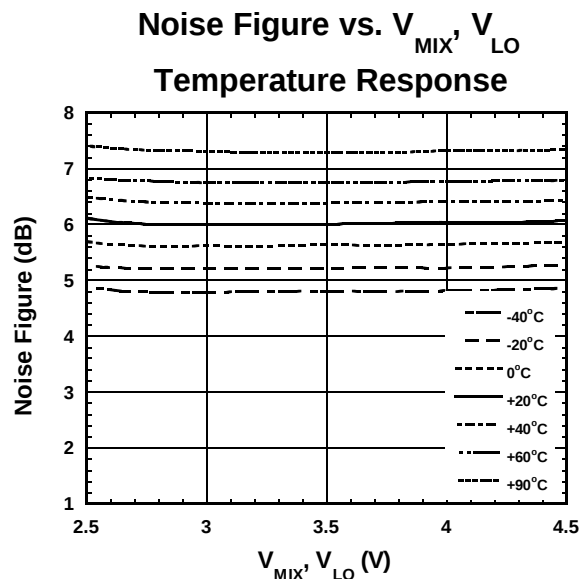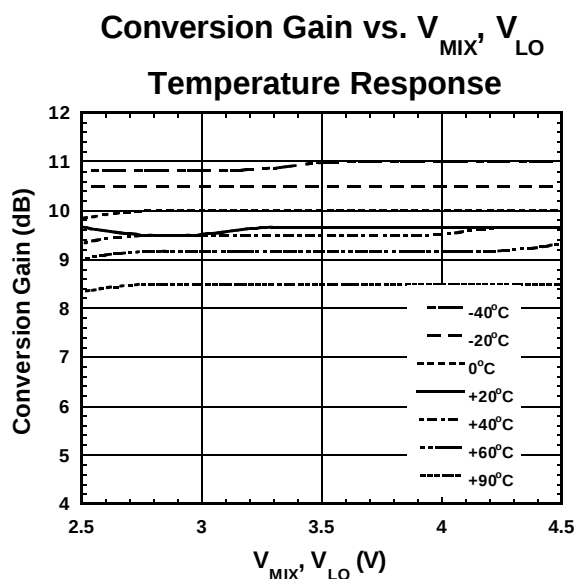


$$IIP3 = \frac{3 \times IF - IM3}{2} - G_C$$


@  $P_{RF} = -30\text{dBm}$

■TYPICAL CHARACTERISTICS 2 (MIXER, f=1.9GHz, f<sub>LO</sub>=1660MHz, with test circuit 2)


MIXER IN PORT IMPEDANCE

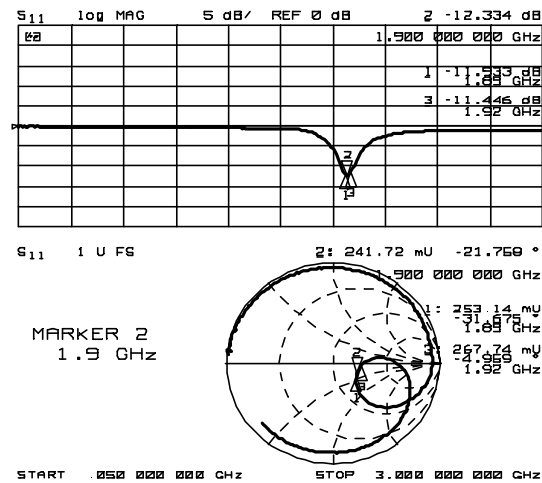

LOCAL IN PORTIMPEDANCE

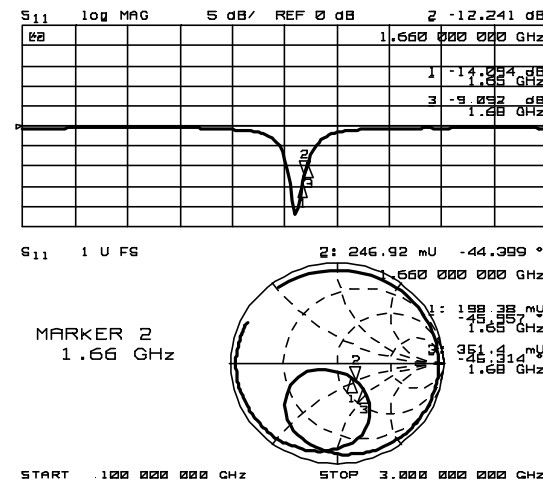


IF OUT PORT IMPEDANCE

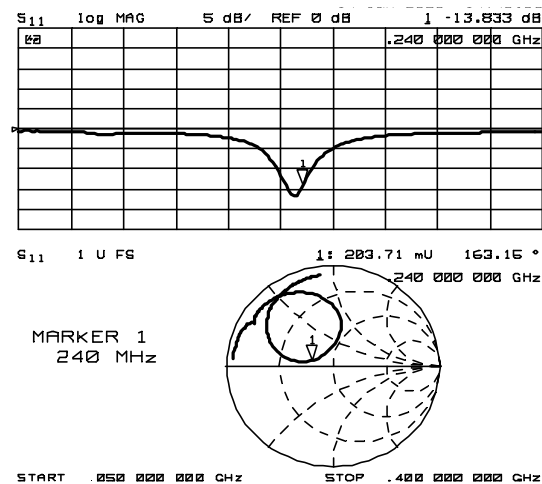


## ■TYPICAL CHARACTERISTICS 2 (LNA+MIXER $f=1.9\text{GHz}$ , $f_{LO}=1660\text{MHz}$ , with test circuit 2)

RF IN – LOCAL IN ISOLATION  
(RF IN → LOCAL IN)

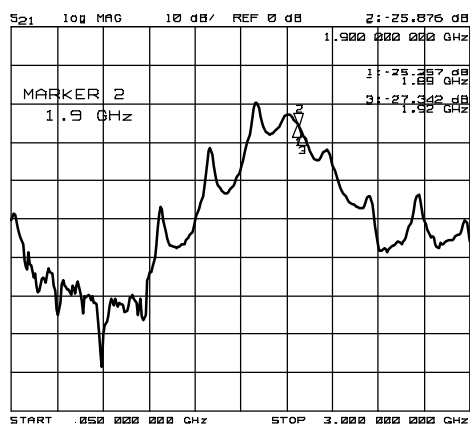


Condition

$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF IN  
 Port2:LOCAL IN

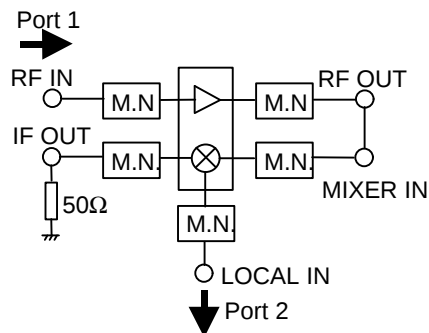


RF OUT – MIXER IN  
 Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$

RF OUT – MIXER IN ISOLATION  
(RF OUT → MIXER IN)

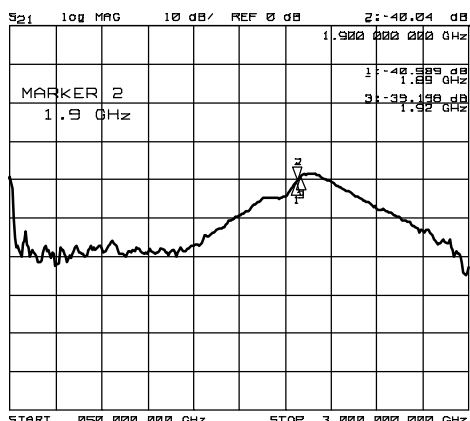


Condition

$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF OUT  
 Port2:MIXER IN

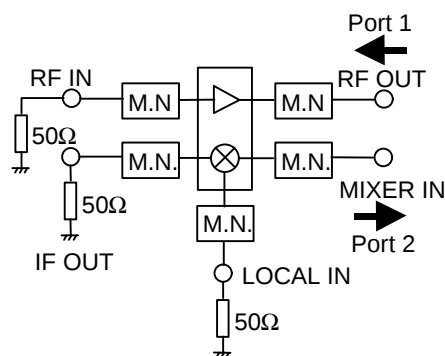


RF IN – IF OUT ISOLATION  
(RF IN → IF OUT)

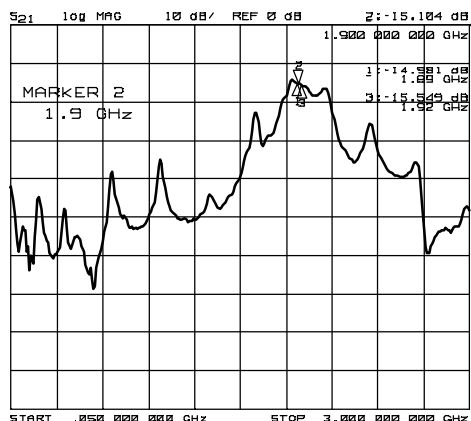

Condition


$V_{LNA}=2.7\text{V}$   
 $V_{MIX}=V_{LO}=2.7\text{V}$   
 Port1:RF IN  
 Port2:IF OUT

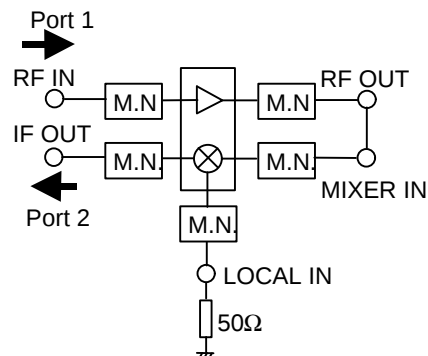


RF OUT – MIXER IN  
 Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$

# NJG1709KC1


## ■TYPICAL CHARACTERISTICS 2 (LNA+MIXER, f=1.9GHz, f<sub>LO</sub>=1660MHz, with test circuit 2)

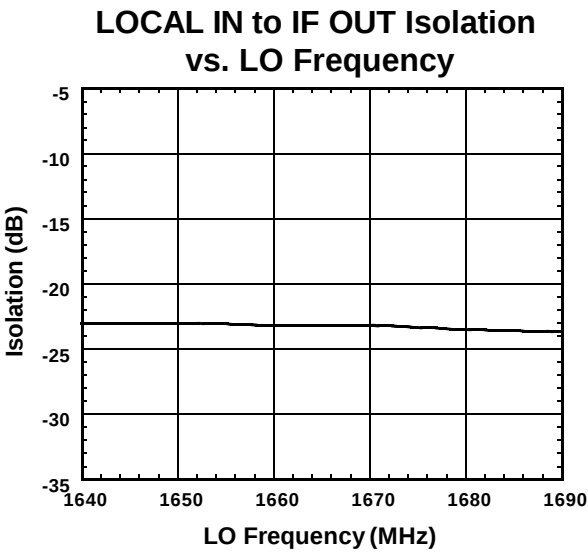


Condition  
 $V_{LNA}=2.7V$   
 $V_{MIX}=V_{LO}=2.7V$   
 $P_{LO}=-15dBm$   
Port1: LOCAL IN  
Port2: IF OUT

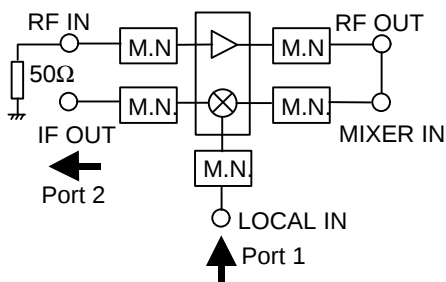

RF OUT – MIXER IN  
Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$

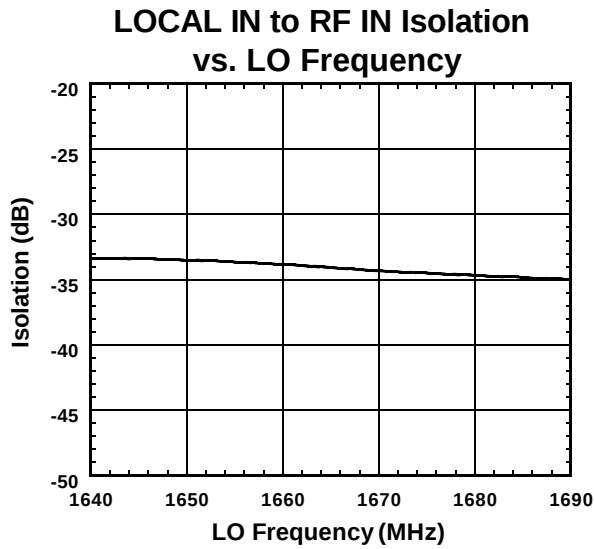


Condition  
 $V_{LNA}=2.7V$   
 $V_{MIX}=V_{LO}=2.7V$   
 $P_{LO}=-15dBm$   
Port1: LOCAL IN  
Port2: RF IN

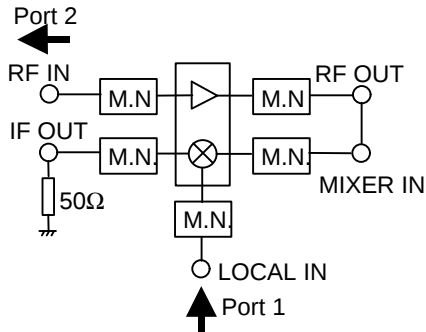


RF OUT – MIXER IN  
Coaxial Cable  
 $Z_0=50\text{ ohm}$ ,  $L=260\text{ mm}$

## ■TEST CIRCUIT 1 (1.5GHz BAND)

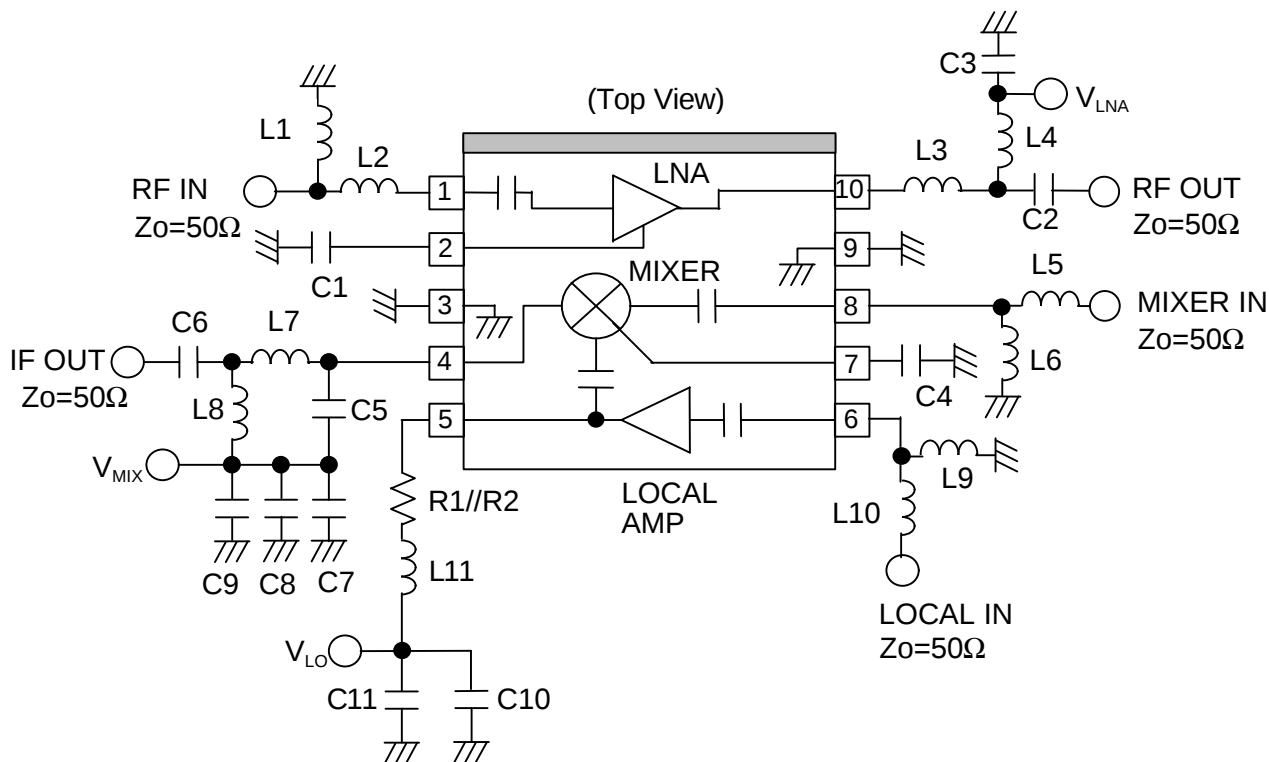

## ■TEST CIRCUIT 2 (1.9GHz BAND)

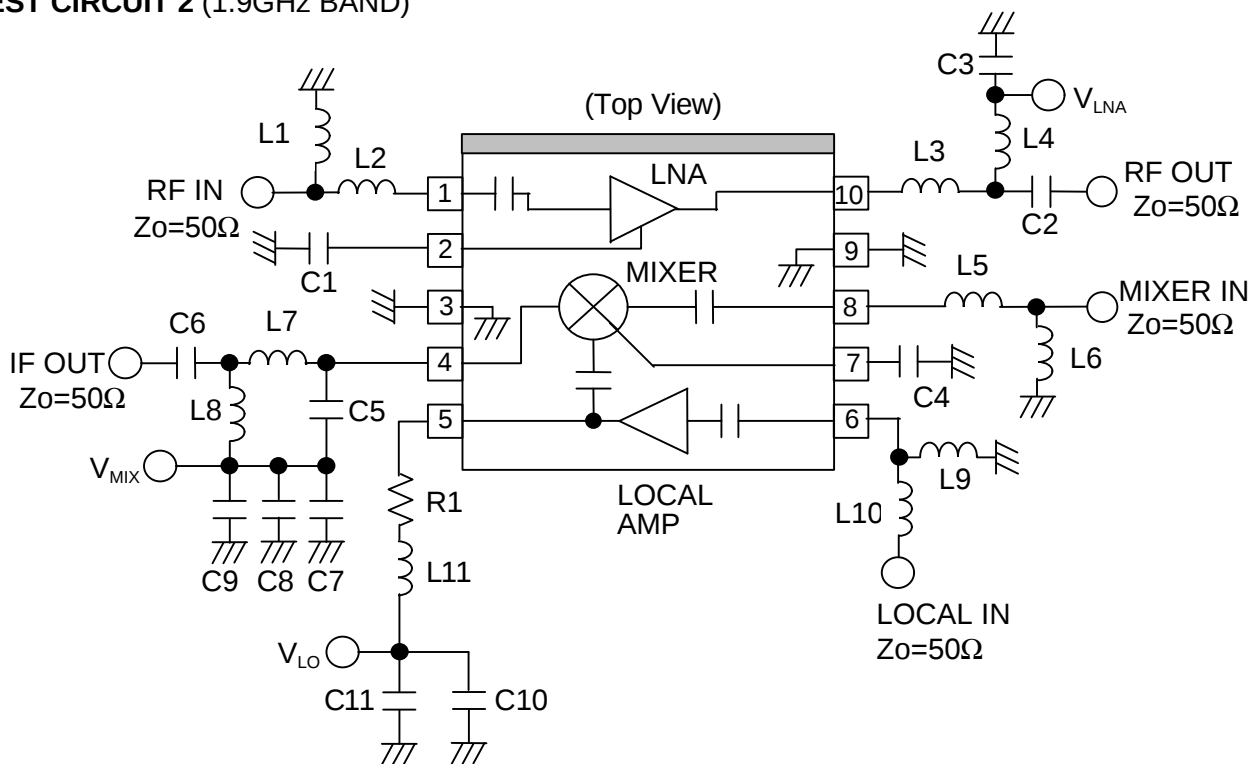



# NJG1709KC1

## ■TEST CIRCUIT

### PARTS LIST

| PART ID | 1.5GHz BAND                                                                 | 1.9GHz BAND                                                                 | COMMENT              |
|---------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------|
|         | Upper LOCAL                                                                 | Lower LOCAL                                                                 |                      |
|         | $f_{LO}=1619\text{MHz}$<br>$P_{LO}=-15\text{dBm}$<br>$f_{IF}=130\text{MHz}$ | $f_{LO}=1660\text{MHz}$<br>$P_{LO}=-15\text{dBm}$<br>$f_{IF}=240\text{MHz}$ |                      |
| L1      | 12nH                                                                        | 10nH                                                                        | TAIYO-YUDEN (HK1005) |
| L2      | 12nH                                                                        | 6.8nH                                                                       | TAIYO-YUDEN (HK1005) |
| L3      | 10nH                                                                        | 5.6nH                                                                       | TAIYO-YUDEN (HK1005) |
| L4      | 2.7nH                                                                       | 1.5nH                                                                       | TAIYO-YUDEN (HK1005) |
| L5      | 18nH                                                                        | 3.9nH                                                                       | TAIYO-YUDEN (HK1005) |
| L6      | 15nH                                                                        | 1.2nH                                                                       | TAIYO-YUDEN (HK1005) |
| L7      | 82nH                                                                        | 47nH                                                                        | TAIYO-YUDEN (HK1608) |
| L8      | 33nH                                                                        | 18nH                                                                        | TAIYO-YUDEN (HK1005) |
| L9      | 22nH                                                                        | 18nH                                                                        | TAIYO-YUDEN (HK1005) |
| L10     | 15nH                                                                        | 18nH                                                                        | TAIYO-YUDEN (HK1005) |
| L11     | 8.2nH                                                                       | 8.2nH                                                                       | TAIYO-YUDEN (HK1005) |
| C1      | 30pF                                                                        | 7pF                                                                         | MURATA (GRM36)       |
| C2      | 39pF                                                                        | 12pF                                                                        | MURATA (GRM36)       |
| C3      | 1000pF                                                                      | 1000pF                                                                      | MURATA (GRM36)       |
| C4      | 1000pF                                                                      | 1000pF                                                                      | MURATA (GRM36)       |
| C5      | 12pF                                                                        | 6pF                                                                         | MURATA (GRM36)       |
| C6      | 1000pF                                                                      | 1000pF                                                                      | MURATA (GRM36)       |
| C7      | 10pF                                                                        | 10pF                                                                        | MURATA (GRM36)       |
| C8      | 100pF                                                                       | 100pF                                                                       | MURATA (GRM36)       |
| C9      | 1000pF                                                                      | 1000pF                                                                      | MURATA (GRM36)       |
| C10     | 10pF                                                                        | 10pF                                                                        | MURATA (GRM36)       |
| C11     | 100pF                                                                       | 100pF                                                                       | MURATA (GRM36)       |
| R1      | 18Ω                                                                         | 10Ω                                                                         | CHIP SIZE 1005       |
| R2      | 18Ω                                                                         | -                                                                           | CHIP SIZE 1005       |

## RECOMMENDED PCB DESIGN


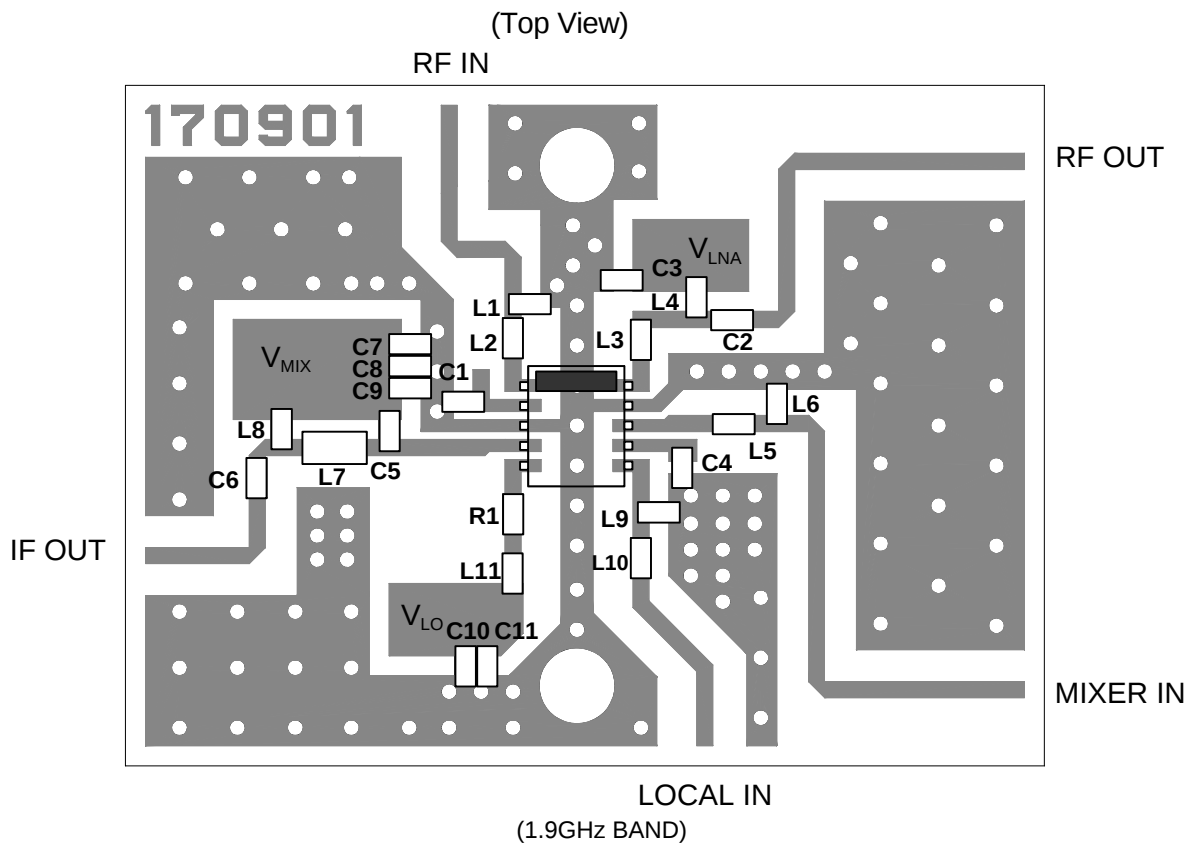
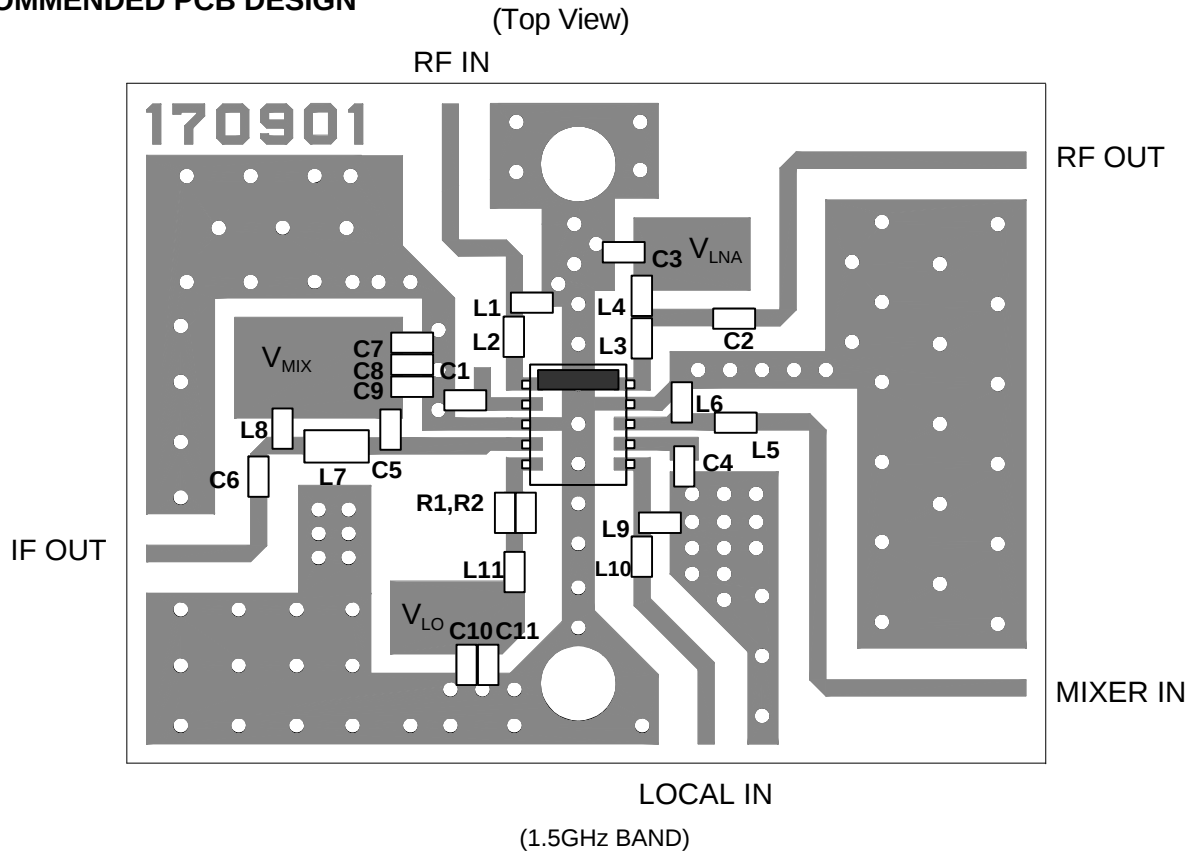


PCB (FR-4) :  $t = 0.2 \text{ mm}$


MICROSTRIP LINE WIDTH =  $0.4 \text{ mm}$  ( $Z_0 = 50\Omega$ )

PCB SIZE =  $23.0 \times 17.0 \text{ mm}$

*New Japan Radio Co., Ltd.*

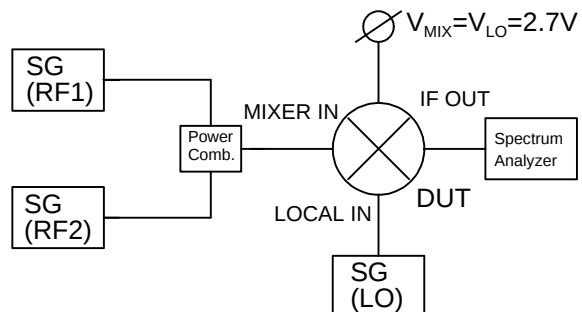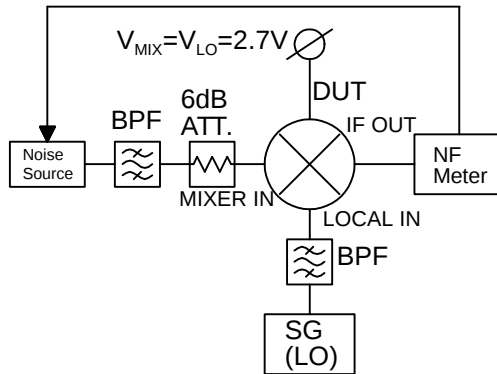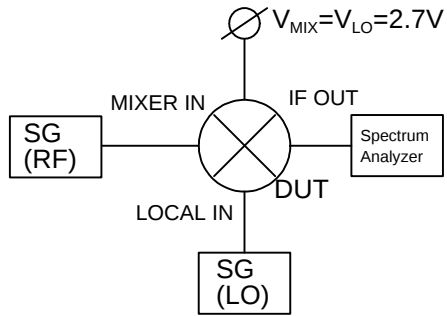

## ■PACKAGE OUTLINE (FLP10-C1)

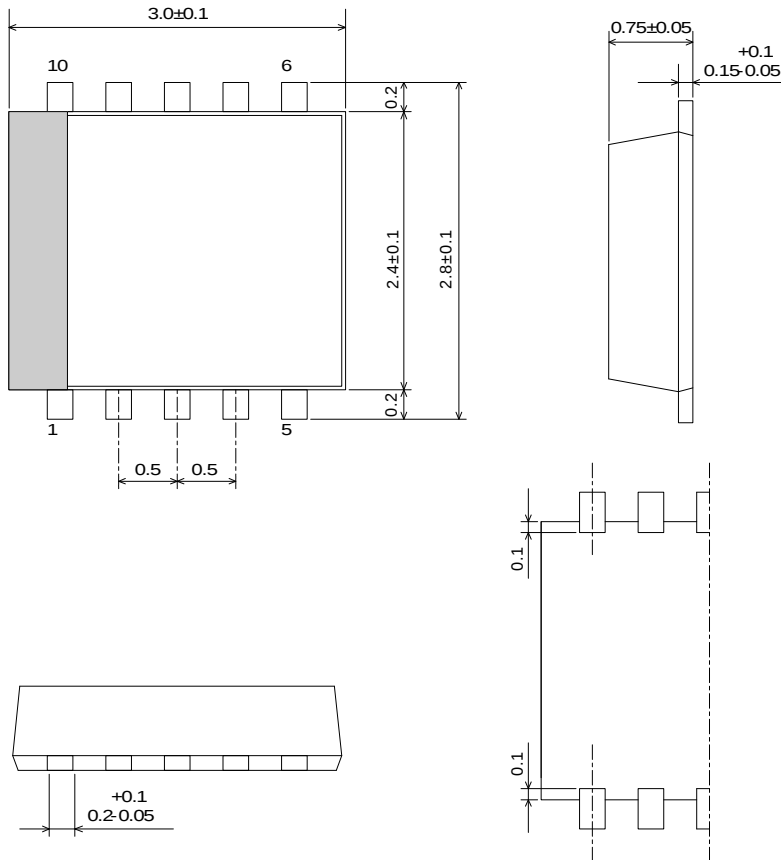

|                     |                  |
|---------------------|------------------|
| Lead material       | : Copper         |
| Lead surface finish | : Solder plating |
| Molding material    | : Epoxy resin    |
| UNIT                | : mm             |
| Weight              | : 15mg           |

### Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9