100Mbps Half-Duplex RS-485/RS-422 Transceivers for Long Cables

General Description

The MAX22500E/MAX22501E half-duplex ESD-protected RS-485/RS-422 transceivers are optimized for high-speed (up to 100Mbps) communication over long cables. These transceivers feature integrated hot-swap protection

and a fail-safe receiver, ensuring a logic-high on the receiver output when input signals are shorted or open for longer than 10µs (typ).

The MAX22500E features integrated preemphasis circuitry that extends the distance and increases the data rate of reliable communication by reducing inter-symbol interference (ISI) caused by long cables. The MAX22500E features a flexible logic interface down to 1.6V.

The MAX22501E operates without preemphasis and is powered from a 3V to 5.5V supply.

The MAX22500E is available in a 10-pin TDFN-EP package. The MAX22501E is available in a 8-pin TDFN-EP package and an 8-pin μ MAX package. Both transceivers operate over the -40°C to +125°C ambient temperature range.

Applications


- Motion Control
- Encoder Interfaces
- Field Bus Networks
- Industrial Control Systems
- Backplane Busses

Benefits and Features

- High-Speed Operation Over Long Distances
 - · Up to 100Mbps Data Rate
 - Integrated Preemphasis Extends Cable Length (MAX22500E)
 - · High Receiver Sensitivity
 - · Wide Receiver Bandwidth
 - · Symmetrical Receiver Thresholds
- Integrated Protection Increases Robustness
 - -15V to +15V Common Mode Range
 - ±15kV ESD Protection (Human Body Model)
 - ±7kV IEC 61000-4-2 Air-Gap ESD Protection
 - ±6kV IEC 61000-4-2 Contact Discharge ESD Protection
 - · Withstands up to ±4kV EFT
 - · Driver Outputs are Short-Circuit Protected
- Flexibility for Many Different Applications
 - 3V to 5.5V Supply Range
 - Low Voltage Logic Supply Down to 1.6V (MAX22500E)
 - Low 5µA (max) Shutdown Current
 - Available in 8-pin or 10-pin TDFN Package and an 8-pin μMAX Package
 - -40°C to +125°C Operating Temperature Range

Ordering Information appears at end of data sheet.

Simplified Block Diagram

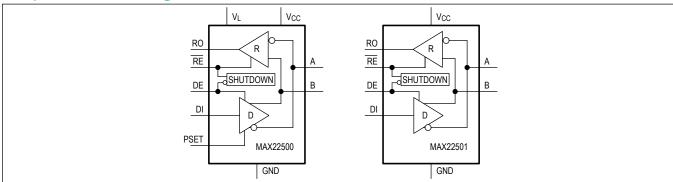

μΜΑΧ is a registered trademark of Maxim Integrated Products, Inc.



100Mbps Half-Duplex RS-485/RS-422 Transceivers for Long Cables

Absolute Maximum Ratings

V _{CC} 0.3V to +6V	Continuous Power Dissipation ($T_A = +70^{\circ}C$) (10-Pin TDFN
RE, DE, DI, V _L 0.3V to +6V	(derate 24.4mW/°C above +70°C))1951mW
RO (MAX22500E only)0.3V to (V _L + 0.3V)	Continuous Power Dissipation (T _A = +70°C) (8-pin µMAX)(derate
RO (MAX22501E only)0.3V to (V _{CC} + 0.3V)	at 4.8mW°C above +70°C)387.8mW
PSET0.3V to (V _{CC} +0.3V)	Operating Temperature Range40°C to +125°C
A, B15V to +15V	Junction Temperature+150°C
Short-Circuit Duration (RO, A, B) to GND	Storage Temperature Range65°C to +150°C
Continuous Power Dissipation ($T_A = +70^{\circ}C$) (8-Pin TDFN (derate	Lead Temperature (Soldering 10sec)+300°C
24.4mW/°C above +70°C))	Reflow Temperature+270°C
	*

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information

TDFN8

Package Code	T833-2				
Outline Number	21-0137				
Land Pattern Number	90-0059				
THERMAL RESISTANCE, SINGLE-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	54°C/W				
Junction-to-Case Thermal Resistance (θ _{JC})	8°C/W				
THERMAL RESISTANCE, FOUR-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	41°C/W				
Junction-to-Case Thermal Resistance (θ _{JC})	8°C/W				

TDFN10

Package Code	T1033-2				
Outline Number	<u>21-0137</u>				
Land Pattern Number	<u>90-0061</u>				
THERMAL RESISTANCE, SINGLE-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	54°C/W				
Junction-to-Case Thermal Resistance (θ _{JC})	9°C/W				
THERMAL RESISTANCE, FOUR-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	41°C/W				
Junction-to-Case Thermal Resistance (θ_{JC})	9°C/W				

8-pin µMAX

Package Code	U8+1				
Outline Number	<u>21-0136</u>				
Land Pattern Number	90-0092				
THERMAL RESISTANCE, SINGLE-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	221°C/W				
Junction-to-Case Thermal Resistance (θ_{JC})	42°C/W				
THERMAL RESISTANCE, FOUR-LAYER BOARD					
Junction-to-Ambient (θ _{JA})	206°C/W				
Junction-to-Case Thermal Resistance (θ_{JC})	42°C/W				

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

 $(V_{CC} = 3V \text{ to } 5.5V, V_L = 1.6V \text{ to } V_{CC} \text{ (MAX22500E only)}, V_L \leq V_{CC}, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.)}$

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
POWER				'			
			Preemphasis disabled	3.0		5.5	
Supply Voltage	V _{CC}	MAX22500E	Preemphasis enabled	4.5	5	5.5	V
		MAX22501E	•	3.0		5.5	
Committee Comment		DE = high,	MAX22500E		12.7	16.5	^
Supply Current	ICC	RE= low, no load	MAX22501E		4	5.6	mA
Shutdown Supply Current	I _{SHDN}	DE = low, RE= high				5	μА
Logic Supply Voltage	VL	MAX22500E only	MAX22500E only			V _{CC}	V
Logic Supply Current	ΙL	MAX22500E only, n	o load on RO		16.4	23	μA
DRIVER							
Differential Driver		Figure 4 Figure 2	R _L = 54Ω	1.5			V
Output	V_{OD}	Figure 1, Figure 2	R _L = 100Ω	2.0]
		MAX22500E only,	R _L = 54Ω	1.33	1.37	1.41	
Differential Driver Preemphasis Ratio	D _{PRE}	preemphasis enabled, $4.5V \le V_{CC} \le 5.5V$ (Note 3)	R _L = 100Ω	1.33	1.37	1.41	V/V
Change in Magnitude of Differential Output Voltage	ΔV _{OD}	R_L = 54Ω, <u>Figure 1</u> (Note 4)				0.2	V

Electrical Characteristics (continued)

 $(V_{CC} = 3V \text{ to } 5.5V, V_L = 1.6V \text{ to } V_{CC} \text{ (MAX22500E only)}, V_L \leq V_{CC}, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.)} \\ (\underline{Note~1}, \underline{Note~2})$

PARAMETER	SYMBOL	COND	ITIONS	MIN	TYP	MAX	UNITS
Driver Common-Mode Output Voltage	V _{OC}	R_L = 54Ω, Normal m preemphasis, Figure			V _{CC} /2	3	V
Change In Magnitude of Common-Mode Voltage	ΔV _{OC}	R_L = 100Ω or 54Ω, <u>F</u>	Figure 1 (Note 4)			0.2	V
Single-Ended Driver Output High	V _{OH}	A or B output, I _{OUT} :	= -20mA	2.2			V
Single-Ended Driver Output Low	V _{OL}	A or B output, I _{OUT} :	= +20mA			0.8	V
Differential Output Capacitance	C _{OD}	$DE = \overline{RE} = high, f = 4$	lMHz		50		pF
Driver Short-Circuit Output Current	I _{OST}	-15V ≤ V _{OUT} ≤ +15V	1			250	mA
RECEIVER							
		DE = GND, V _{CC} =	V _{IN} = +12V			+1350	
Input Current (A and B)	$I_{A,B}$	GND, +3.6V or 5.5V	V _{IN} = -7V	-1100			μA
Differential Input Capacitance	C_A,B	Between A and B, DE = GND, f = 2MHz			50		pF
Common Mode Voltage Range	V _{CM}			-15		+15	V
Receiver Differential Threshold High	V _{TH_H}	-15V ≤ V _{CM} ≤ +15V		+50		+200	mV
Receiver Differential Threshold Low	V _{TH_L}	-15V ≤ V _{CM} ≤ +15V		-200		-50	mV
Receiver Input Hysteresis	ΔV _{TH}	$V_{CM} = 0V$, time from than t_{D_FS}	V _{CM} = 0V, time from last transition is less than t _D _{FS}		250		mV
Differential Input Fail- Safe Level	V _{TH_FS}	-15V ≤ V _{CM} ≤ +15V		-50		+50	mV
LOGIC INTERFACE (RE,	RO, DE, DI)			•			
			MAX22500E	2/3xV _L			
Input Voltage High	V_{IH}	DE, DI, RE	MAX22501E	2/3 x V _{CC}			V
			MAX22500E			1/3 x V _L	
Input Voltage Low	V_{IL}	DE, DI, RE				1/3 x V _{CC}	V
Input Current	I _{IN}	DI and DE, RE (after first transition)		-2		+2	μA
Input Impedance on First Transition	R _{IN_FT}	DE, RE				10	kΩ
RO Output High Voltage	High Voltage V_{OH} $\overline{RE} = (V_A - I_{OUT})$ $\overline{RE} = (V_A - I_{OUT})$	\overline{RE} = GND, $(V_A - V_B) > 200$ mV, I_{OUT} = -1mA	MAX22500E	V _L – 0.4			V
The state of the s		\overline{RE} = GND, $(V_A - V_B) > 200$ mV, I_{OUT} = -1mA	MAX22501E	V _{CC} - 0.4			v

Electrical Characteristics (continued)

 $(V_{CC} = 3V \text{ to } 5.5V, V_L = 1.6V \text{ to } V_{CC} \text{ (MAX22500E only)}, V_L \leq V_{CC}, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.)} \\ (\underline{Note~1}, \underline{Note~2})$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS		
RO Output Low Voltage	V _{OL}	\overline{RE} = GND, $(V_A - V_B)$ < -200mV, I_{OUT} = +1mA			0.4	V		
Three-State Output Current at Receiver	I _{OZR}	RE= high, 0 ≤ V _{RO} ≤ V _{CC}	-1		+1	μA		
PROTECTION								
Thermal Shutdown Threshold	T _{SH}	Temperature rising		+160		°C		
Thermal Shutdown Hysteresis	T _{SH_HYS}			10		°C		
		Human Body Model		±15				
ESD Protection (A and B Pins)		IEC61000-4-2 Air Gap Discharge to GND	±7		kV			
<i>D</i> : mo,		IEC61000-4-2 Contact Discharge to GND	·	±6				
ESD Protection (All Other Pins)		Human Body Model		±2		kV		

Electrical Characteristics—Switching

 $(V_{CC} = 3V \text{ to } 5.5V, V_L = 1.6V \text{ to } V_{CC} \text{ (MAX22500E only)}, V_L \leq V_{CC}, TA = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted (Notes 1, 2))}$

PARAMETER	SYMBOL	COND	MIN	TYP	MAX	UNITS	
DRIVER (Note 5)	•						
Driver Propagation	t _{DPLH}	$R_L = 54\Omega$, $CL = 50pH$	F, Figure 3, Figure 4		7	20	ns
Delay	t _{DPHL}	$R_L = 54\Omega$, $CL = 50pH$	F, Figure 3, Figure 4		7	20	115
			MAX22501E			1.2	
Differential Driver Output Skew	t _{DSKEW}	$ t_{DPLH} - t_{DPHL} , R_L$ = 54 Ω , C_L = 50pF, Figure 3, Figure 4	MAX22500E, V _L = V _{CC} , V _{CC} ≥ 3V			1.2	ns
	(Note 6)		MAX22500E, V _L ≠ V _{CC}			1.6	
Driver Differential Output Rise and Fall Time	t _{HL} , t _{LH}	$R_L = 54\Omega, C_L = 50pF$ (Note 6)	F, Figure 4		1.6	3	ns
Data Rate	DR					100	Mbps
Driver Enable to Output High	t _{DZH}	$R_L = 500\Omega$, $CL = 50\mu$	oF, <u>Figure 5</u> , <u>Figure 6</u>		15	30	ns
Driver Enable to Output Low	t _{DZL}	$R_L = 500\Omega, C_L = 50p$	F, Figure 5, Figure 6		15	30	ns
Driver Disable Time from High	t _{DHZ}	$R_L = 500\Omega$, $C_L = 50pF$, Figure 5, Figure 6			23	30	ns
Driver Disable Time from Low	t _{DLZ}	$R_L = 500\Omega$, $C_L = 50pF$, Figure 5, Figure 6			23	30	ns
Driver Enable from Shutdown to Output High	^t DZH(SHDN)	$R_L = 1k\Omega$, $C_L = 15pF$		52	100	μs	

Electrical Characteristics—Switching (continued)

 $(V_{CC} = 3V \text{ to } 5.5V, V_L = 1.6V \text{ to } V_{CC} \text{ (MAX22500E only)}, V_L \le V_{CC}, TA = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted (Notes 1, 2))}$

PARAMETER	SYMBOL	COND	ITIONS	MIN	TYP	MAX	UNITS
Driver Enable from Shutdown to Output Low	t _{DZL(SHDN)}	$R_L = 1k\Omega$, $C_L = 15pF$	$R_L = 1k\Omega$, $C_L = 15pF$, Figure 5, Figure 6		52	100	μs
Time to Shutdown	tshdn	(Notes 7, 8)		50	140	800	ns
		MAX22500E only,	R _{PSET} = 4kΩ	10	13	16	ns
Driver Preemphasis Interval	t _{PRE}	$4.5V \le V_{CC} \le 5.5V$, $R_L = 100\Omega$, Figure 2	R _{PSET} = 400kΩ	0.8	1	1.2	μs
RECEIVER (Note 5)							
Delay to Fail-Safe Operation	t _{D_FS}				10		μs
Receiver Output Skew	t _{RSKEW}	t _{RPHL} - t _{RPLH} , C _L = Figure 7, Figure 8 (N			2.5	ns	
Data Rate	DR				100	Mbps	
Receiver Propagation Delay	^t RPLH, ^t RPHL	C _L = 15pF, <u>Figure 7</u> ,		17	20	ns	
Receiver Enable to Output High	t _{RZH}	R_L = 1kΩ, C_L = 15pF, <u>Figure 9</u>			19	30	ns
Receiver Enable to Output Low	t _{RZL}	$R_L = 1k\Omega$, $C_L = 15pF$	F, Figure 9		19	30	ns
Receiver Disable Time from High	t _{RHZ}	$R_L = 1k\Omega$, $C_L = 15pF$, <u>Figure 9</u>		12	30	ns
Receiver Disable Time from Low	t _{RLZ}	$R_L = 1k\Omega$, $C_L = 15pF$	$R_L = 1k\Omega$, $C_L = 15pF$, Figure 9		12	30	ns
Receiver Enable from Shutdown to Output High	^t RZH(SHDN)	R_L = 1kΩ, C_L = 15pF, <u>Figure 9</u>			52	100	μs
Receiver Enable from Shutdown to Output Low	^t RZL(SHDN)	R_L = 1kΩ, C_L = 15pF, <u>Figure 9</u>			52	100	μs
Time to Shutdown	tshdn	(Notes 7, 8)		50	140	800	ns

- Note 1: All devices are 100% production tested at T_A = +25°C. Specifications for all temperature limits are guaranteed by design.
- Note 2: All currents into the device are positive; all currents out of the device are negative. All voltages are referenced to device ground, unless otherwise noted.
- Note 3: V_{ODP} is the differential voltage between A and B during the preemphasis interval on the MAX22500E, and is the differential voltage when preemphasis is disabled. $V_{ODP} = D_{PRE} \times V_{OD}$.
- Note 4: ΔV_{OD} and ΔV_{OC} are the changes in V_{OD} and V_{OC} , respectively, when the DI input changes state.
- **Note 5:** Capacitive load includes test probe and fixture capacitance.
- Note 6: Not production tested. Guaranteed by design.
- Note 7: Shutdown is enabled by driving $\overline{\text{RE}}$ high and DE low. The device is guaranteed to have entered shutdown after t_{SHDN} has elapsed.
- **Note 8:** The timing parameter refers to the driver or receiver enable delay, when the device has exited the initial hot-swap protect state and is in normal operating mode.




Figure 1. Driver DC Test Load

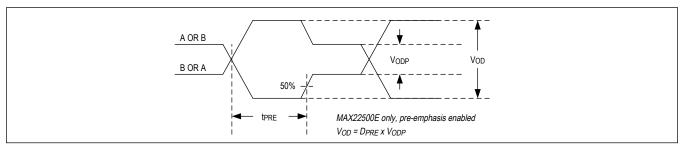


Figure 2. Driver Preemphasis Timing




Figure 3. Driver Timing Test Circuit

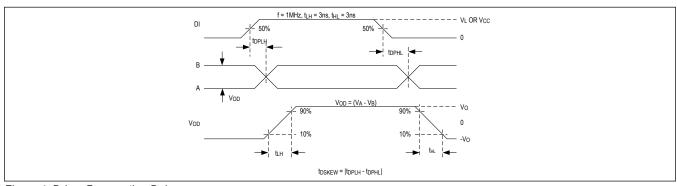


Figure 4. Driver Propagation Delays

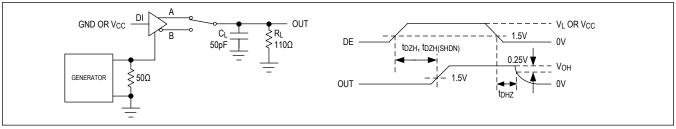


Figure 5. Driver Enable and Disable Times (t_{DZH}, t_{DHZ})

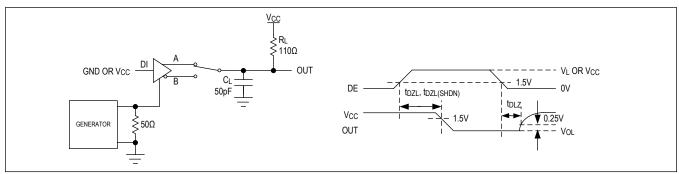


Figure 6. Driver Enable and Disable Times (t_{DZL}, t_{DLZ})




Figure 7. Receiver Propagation Delay Test Circuit

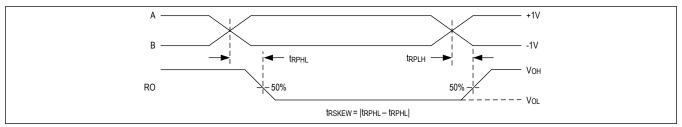


Figure 8. Receiver Propagation Delays



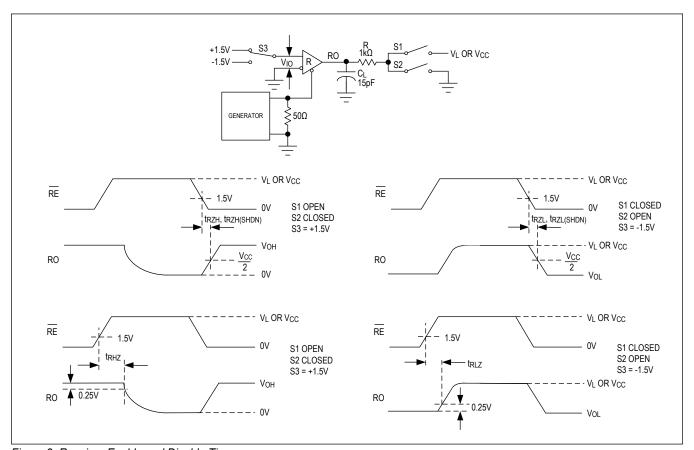



Figure 9. Receiver Enable and Disable Times


Typical Operating Characteristics


 $(V_{CC} = 5V, V_L = V_{CC} \text{ (MAX22500E only)}, 60\Omega \text{ termination between A and B, } T_A = 25^{\circ}\text{C, unless otherwise noted.)}$



























Typical Operating Characteristics (continued)


 $(V_{CC}$ = 5V, V_L = V_{CC} (MAX22500E only), 60Ω termination between A and B, T_A = 25°C, unless otherwise noted.)













Pin Configurations


MAX22500E TDFN-EP

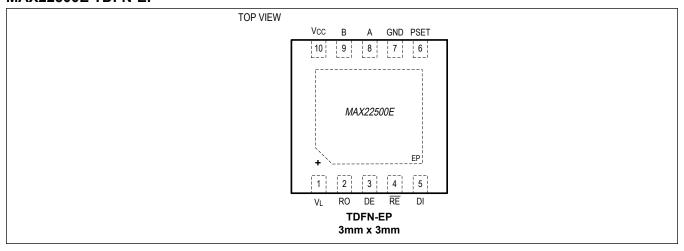

MAX22501E TDFN-EP

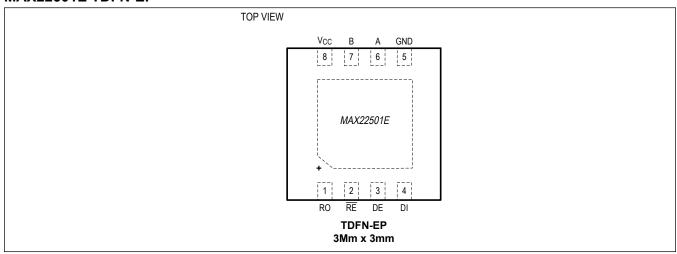

MAX22501E µMAX

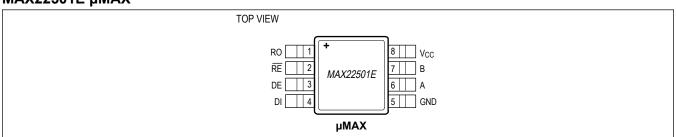

100Mbps Half-Duplex RS-485/RS-422 Transceivers for Long Cables

Pin Description

	PIN		PIN		PIN		NAME	FUNCTION
MAX22500E	MAX22501E	MAX22501E	NAIVIE	FUNCTION				
1	_	_	V _L Logic Supply Input. V _L defines the interface logic levels on land RO. Apply a voltage between 1.6V to 5.5V to V _L . Bypasto ground with a 0.1μF capacitor as close to the device as possible.					
2	1	1	RO	Receiver Output. See the Receiving Function Table for more information.				
3	3	3	DE	Driver Output Enable. Force DE high to enable driver. Pull DE low to three-state the driver output.				
4	2	2	RE	Receiver Enable. Pull \overline{RE} high to disable and the receiver and tristate RO. The device is in low-power shutdown when \overline{RE} = high and DE = low.				
5	4	4	DI	Driver Input. See the Transmitting Function Table for more information.				
6	_	_	PSET	Preemphasis Select Control Input. Connect a resistor from PSET to GND to select the preemphasis duration. See the \underline{Layout} $\underline{Recommendations}$ in the $\underline{Applications\ Information}$ section for more information. To disable preemphasis, connect PSET to GND or V_{CC} .				
7	5	5	GND	Ground				
8	6	6	Α	Noninverting Receiver Input/Driver Output				
9	7	7	В	Inverting Receiver Input/Driver Output				
10	8	8	V _{CC}	Supply Input. Bypass V _{CC} to ground with a 0.1µF ceramic capacitor as close to the device as possible.				

Functional Diagrams

Half-Duplex

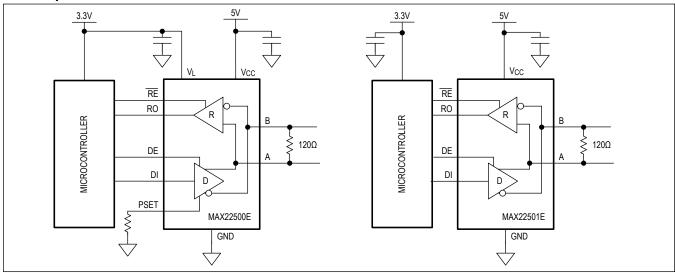


Table 1. Transmitting Function Table

INPUTS			OUTPUTS				
RE	DE	DI	Α	В			
Х	1	1	1	0			
Х	1	0	0	1			
0	0	Х	High Impedance High Impedance				
1	0	Х	Shutdown. A and B are high impedance				

X = Don't care

Table 2. Receiving Function Table

		INPUTS	OUTPUTS	
RE	DE	(V _A - V _B)	Time from Last A-B Transition	RO
0	Х	≥ +200mV	Always	1
0	х	-200mV < (V _A - V _B) < +200mV	< t _{D_FS}	Indeterminate RO is latched to previous value
0	Х	$-50 \text{mV} < (V_{A} - V_{B}) < +50 \text{mV}$	> t _{D_FS}	1
0	Х	≤ -200mV	Always	0
0	0	Open/Shorted	> t _{D_FS}	1
1	1	Х	X	High Impedance
1	0	Х	X	Shutdown. RO is high impedance

X = Don't care

Detailed Description

The MAX22500E/MAX22501E ESD-protected RS-485/RS-422 transceivers are optimized for high-speed, half-duplex communications over long cables. Both transceivers feature integrated hot-swap functionality to eliminate false transitions on the driver during power-up or during a hot-plug event. These transceivers also feature fail-safe receiver inputs, guaranteeing a logic-high on the receiver output when inputs are shorted or open for longer than 10µs (typ).

Receiver Threshold Voltages

The MAX22500E and MAX22501E receivers feature large threshold hysteresis of 250mV (typ) for increased differential noise rejection. Additionally, the receivers feature symmetrical threshold voltages. Symmetric thresholds have the advantage that recovered data at the RO output does not have duty cycle distortion. Typically, fail-safe receivers, which have unipolar (non-symmetric) thresholds, show some duty cycle distortion at high signal attenuation due to long cable lengths.

Preemphasis (MAX22500E only)

The MAX22500E features integrated driver preemphasis circuitry, which strongly improves signal integrity at high data rates over long distances by reducing inter-symbol interference (ISI) caused by long cables. Preemphasis is set by connecting a resistor (RPSET) between PSET and ground. Long cables attenuate the high-frequency content of transmitted signals due to the cable's limited bandwidth. This causes signal/pulse distortion at the receiving end, resulting in ISI. ISI causes jitter in data and clock recovery circuits. ISI can be visualized by considering the following cases: If a series of ones (1's) is transmitted, followed by a zero (0), the transmission-line voltage has risen to a high value by the end of the string of ones. It takes longer for the signal to move toward the '0' state because the starting voltage on the line is so far from the zero crossing. Similarly, if a data pattern has a string of zeros followed by a one and then another zero, the one-to-zero transition starts from a voltage that is much closer to the zero-crossing ($V_A - V_B = 0$) and it takes much less time for the signal to reach the zero crossing. Preemphasis reduces ISI by boosting the differential signal amplitude at every transition edge, counteracting the high frequency attenuation of the cable. When the DI input changes from a logic-low to a logic-high, the differential output $(V_A - V_B)$ is driven high to V_{ODP} . At the end of the preemphasis interval, the differential voltage returns to a lower level (V_{OD}) . The preemphasis differential high voltage (V_{ODP}) is typically 1.37 the V_{OD} voltage. If DI switches back to a logic-low state before the preemphasis interval ends, the differential output switches directly from the 'strong' VODP high to a 'strong' low (-VODP). Driver behavior is similar when the DI input changes from a logic-high to a logic-low. When this occurs, the differential output is pulled low to -VODP until the end of the preemphasis interval, at which point $V_A - V_B = -V_{ODP}$.

Setting the Preemphasis Interval

Connect a resistor (R_{PSET}) between PSET and GND to set the preemphasis time interval on the MAX22500E. An optimum preemphasis interval ranges from 1 to 1.5 unit intervals (bit time). Use the following equation to calculate the resistance needed on PSET to achieve a 1.2 preemphasis interval:

$$R_{PSFT} = 400 \times 10^9 / DR$$

where DR is the data rate and 1Mbps \leq DR \leq 100Mbps. Preemphasis only minimally degrades the jitter on the eye diagram when using short cables, making it reasonable to permanently enable preemphasis on systems where cable lengths may vary or change. Figure 10 and Figure 11 are eye diagrams taken at 100Mbps over a 10m Cat-5e cable. Note that the eye varies only slightly as preemphasis is enabled or disabled. Figure 12 and Figure 13 show the driver eye diagrams over a long cable length. The MAX22500E was used as the driver and the eye diagrams were taken at the receiver input after a length of 100m Cat-5e cable. Figure 12 shows the signal at the receiver when the driver preemphasis is disabled. Figure 13 shows the receiver signal when preemphasis is enabled.

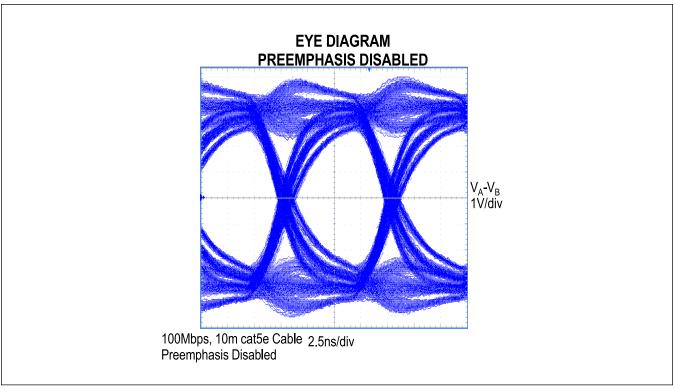


Figure 10. Eye Diagram, 100Mbps Over 10m Cat-5e Cable, Preemphasis Disabled

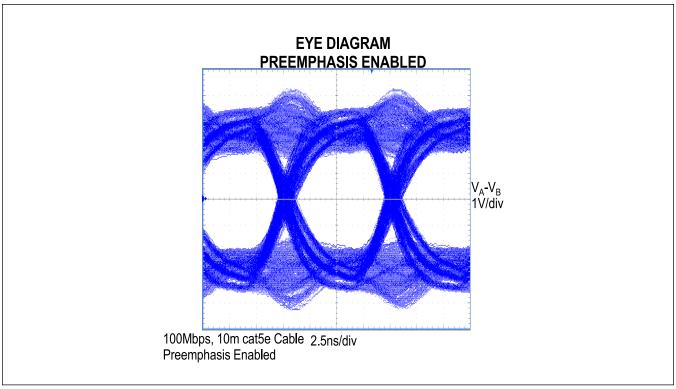


Figure 11. Eye Diagram, 100Mbps Over 10m Cat-5e Cable, Preemphasis Enabled

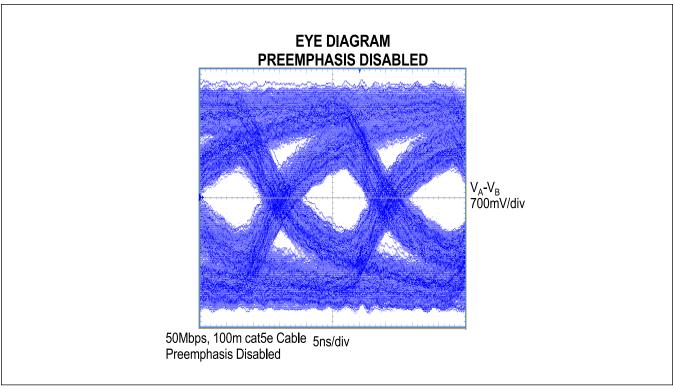


Figure 12. Eye Diagram, 50Mbps Over 100m Cat-5e Cable, Preemphasis Disabled

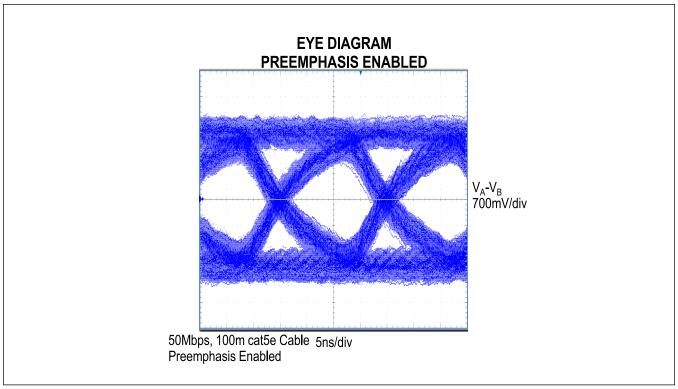


Figure 13. Eye Diagram, 50Mbps Over 100m Cat-5e Cable, Preemphasis Enabled

Fail-Safe Functionality

The MAX22500E/MAX22501E feature fail-safe receiver inputs, guaranteeing a logic-high on the receiver output (RO) when the receiver inputs are shorted or open for longer than $10\mu s$ (typ). When the differential receiver input voltage is greater than -50mV [($V_A - V_B$) $\ge -50mV$] for more than $10\mu s$ (typ), RO is logic-high. For example, in the case of a terminated bus with all transmitters disabled, the receiver's differential input voltage is pulled to 0V by the termination resistor, so ($V_A - V_B = 0V$) > -50mV and RO is guaranteed to be a logic-high after $10\mu s$ (typ).

Driver Single-Ended Operation

The A and B outputs on the MAX22500E/MAX22501E can be used in the standard differential operating mode or as single-ended outputs. Because the driver outputs swing rail-to-rail, they can also be used as individual standard TTL logic outputs.

Hot-Swap Capability

The DE and $\overline{\text{RE}}$ enable inputs feature hot-swap functionality. At each input there are two NMOS devices, M1 and M2 (Figure 14). When V_{CC} ramps from zero, an internal 10ms timer turns on M2 and sets the SR latch, which also turns on M1. Transistors M2 (a 500 μ A current sink) and M1 (a 100 μ A current sink) pull DE to GND through a 5k Ω resistor. M2 is designed to pull DE to the disabled state against an external parasitic capacitance up to 100pF that can drive DE high. After 10 μ s, the timer deactivates M2 while M1 remains on, holding DE low against three-state leakages that can drive DE high. M1 remains on until an external source overcomes the required input current. At this time, the SR latch resets and M1 turns off. When M1 turns off, DE reverts to a standard, high-impedance CMOS input. Whenever V_{CC} drops below 1V, the hot-swap input is reset.

There is a complimentary circuit for \overline{RE} that uses two PMOS devices to pull \overline{RE} to V_{CC} .

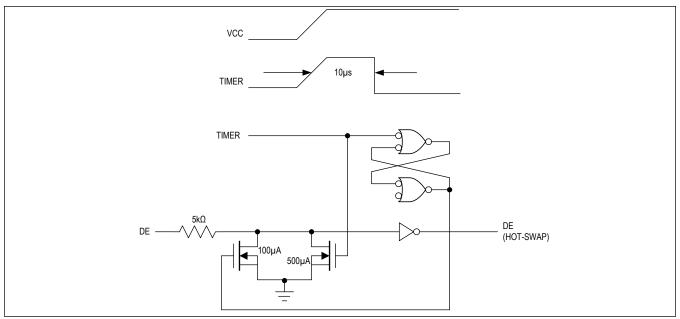


Figure 14. Simplified Structure of the Driver Enable (DE) Pin

Driver Output Protection

Two mechanisms prevent excessive output current and power dissipation caused by faults or by bus contention. The first, a current limit on the output stage provides immediate protection against short circuits over the whole common-mode voltage range. The second, a thermal-shutdown circuit, forces the driver outputs into a high-impedance state if the die temperature exceeds +160°C (typ).

Low-Power Shutdown Mode

The MAX22500E/MAX22501E feature a low-power shutdown mode to reduce supply current when the transceiver is not needed. Pull the $\overline{\text{RE}}$ input high and the DE input low to put the device in low-power shutdown mode. If the inputs are in this state for at least 800ns, the parts are guaranteed to enter shutdown. The MAX22500E/MAX22501E draw 5 μ A (max) of supply current when the device is in shutdown. The $\overline{\text{RE}}$ and DE inputs can be driven simultaneously. The MAX22500E/MAX22501E are guaranteed not to enter shutdown if $\overline{\text{RE}}$ is high and DE is low for less than 50ns.

Applications Information

Layout Recommendations

Ensure that the preemphasis set resistor (R_{PSET}) is located close to the PSET and GND pins in order to minimize interference by other signals. Minimize the trace length to the PSET resistor. Additionally, place a ground plane under R_{PSET} and surround it with ground connections/traces to minimize interference from the A and B switching signals. See <u>Figure 15</u>.

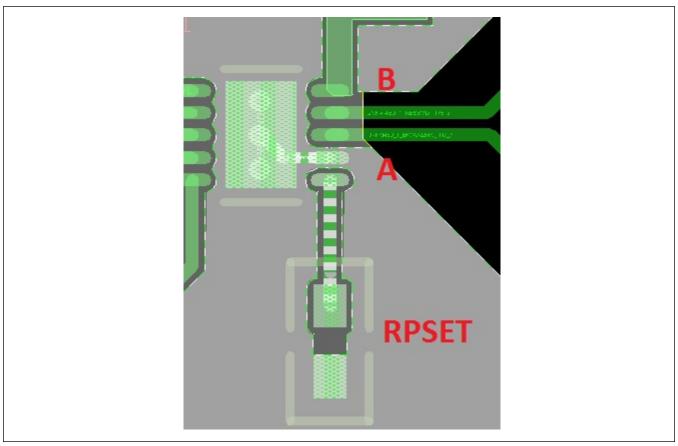


Figure 15. Sample PSET Resistor Placement

Network Topology

The MAX22500E/MAX22501E transceivers are designed for high-speed bidirectional RS-485/RS-422 data communications. Multidrop networks can cause impedance discontinuities which affect signal integrity. Maxim recommends using a point-to-point network topology (<u>Figure 16</u>), instead of a multidrop topology, when communicating with high data rates. Terminate the transmission line at both ends with the cable's characteristic impedance to reduce reflections.

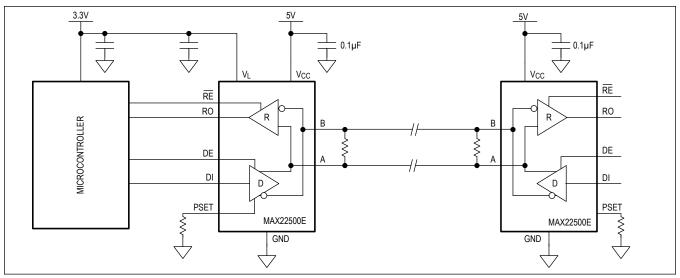


Figure 16. Point-to-Point Half-Duplex Communication for High Speeds

Ordering Information

PART	PREEMPHASIS	LOGIC SUPPLY	PIN-PACKAGE	PIN-PITCH (mm)	PACKAGE CODE
MAX22500EATB+	Y	Y	TDFN10-EP*	0.5	T1033+2
MAX22500EATB+T	Y	Y	TDFN10-EP*	0.5	T1033+2
MAX22501EATA+	N	N	TDFN8-EP*	0.65	T833+2
MAX22501EATA+T	N	N	TDFN8-EP*	0.65	T833+2
MAX22501EAUA+	N	N	μMAX8	0.65	U8+1
MAX22501EAUA+T	N	N	μMAX8	0.65	U8+1

⁺ Denotes a lead (Pb)-free/RoHS-compliant package.

^{*} EP = Exposed Pad

100Mbps Half-Duplex RS-485/RS-422 Transceivers for Long Cables

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	6/17	Initial release	_
1	6/20	Added MAX22501EAUA+ and MAX22501EAUA+T to the <i>Ordering Information</i> section; updated the <i>Benefits and Features</i> section and Table 2; added TOC14; fixed various typos	1, 5-6, 14-16, 25

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at https://www.maximintegrated.com/en/storefront/storefront.html.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9