
2.5mm Pitch Connector for Full Lock and Discrete Wire Connection

DF1E Series

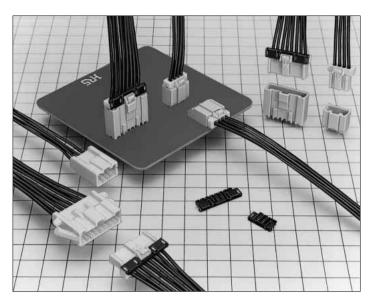

Features

1. Full Lock Function Added

The inner lock system adopts a full lock mechanism. This mechanism prevents disengagement to occur due to an unexpected external shock. (Refer to photo 1)

2. Increase in Crimping Contact Fixation Force and **Semi-insertion Prevention**

The double lock is activated for the use method to give a stress to the cable, to increase crimping contact fixation force, and to prevent the semi-insertion of the crimping contact. (Refer to photo 2)

3. Mold Lance Adopted

Since the contact lance may be deformed involving in the contact after the crimping process, the mold lance has been adopted.

4. Mis-insertion Prevention

Equipped with the mechanism to completely prevent reverse insertion and insertion between dissimilar contacts.

5. Means to Prevent Solder Crack

The glass enforcement resin is adopted for the pin header to prevent a solder crack to occur due to heat compression.

6. Correspond to Potting


Corresponding to potting, the pin header is provided for product variations.


Corresponding to potting up to 8mm and mounting height 19.8mm (no retainer), the low profile is achieved.

7. Production Facility Cost Reduction

The female crimping contact uses the DF1B series crimping contact, which has been conventionally marketed. Investment for new facilities isn't needed. However, if the retainer is installed in the cable with AWG#22 or more wire, use the DF1E crimping contact. The female crimping contact for in-line is used together with the DF1B applicator. Therefore, no investment is needed for new facilities.

UL. C-CL Listed





8. Various Applications

With the same series, various applications can be used for the board solder dip type and inline.

9. Listed by UL. C-UL

■Applications

Electronic equipment, office machines, industrial equipment, and consumer equipment, and so on

■Products Specifications

Current rating Note 1. AWG#20 to 24: ЗА 26: 2A Operating Temperature Range: -35 to +85℃ Note 2. Storage Temperature Range: -10 to +60°C Note 3. Rating 28: 1A Operating Moisture Range: 40 to 80% Storage Moisture Range : 40 to 70% Note 3. 30: 0.5A Voltage rating 250VAC

C-UL Rating						
		AWG#20 to #22:3A				
	Current rating	AWG#24 to #28:1A				
Rating		AWG#30 : 0.5A				
	Voltage rating	30V AC				

■UL/C-UL File No. and Recognition No.

UL :E52653 C-UL :E52653

Item	Specification	Condition
1. Contact Resistance	30m ohms max.	Measured at 20mV max. and 1mA
2. Insulation Resistance	1000M ohms min.	500V DC
3. Withstanding voltage	No flashover or insulation breakdown.	650V AC/1 minute
4. Single Insertor/Extraction Forth	MIN 0.29N, MAX 4.41N	Measured at the square steel pin with 0.635±0.002
5. Durability (Mating/un-mating)	30m ohms max	30 cycles
6. Vibration	No electrical discontinuity of 1 μ s or more	Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 directions.
7. Shock	No electrical discontinuity of 1 μ s or more	Acceleration of 490 m/s², 11 ms duration, sine half-wave waveform, 3 cycles in each of the 3 axis
8. Humidity (Steady state)	30m ohms max	96 hours at temperature of 40±2°C and humidity of 90% to 95%
9. Temperature Cycle	30m ohms max.	(-55°C: 30 minutes-> 5 to 35°C: 5 minutes-> 85°C: 30 minutes-> 5 to 35°C: 5 minutes) 5 cicles
10. Resistance to Soldering heat	No deformation of components affecting performance.	Flow: 260°C for 10 seconds
		Manual soldering: 300°C for 3 seconds

Note 1: Current rating of header is 3A.

■Material

Product	Part	Material	Treatment	Remarks
Socket	Insulator	Polyamide	White	UL94V-0
Header	Insulator	Polyamide	Beige	UL94V-0
neadei	Contact	Brass	Tin-lead plated	
In-line Plug	Insulator	Polyamide	White	UL94V-0
retainer	Insulator	Polyamide	Black	UL94V-0
Crimping contact	Contact	Phosphor copper	Tin plated	

Note 2: Includes temperature rise caused by current flow.

Note 3: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non conducting condition of installed connectors in storage, shipment or during transportation.

Note 4: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a

specific part number shown.

■Ordering Information

●Pin Header

DF1E	C	-	*	P	-	2.5	DSA
0	2		3	4		6	6

With Boss | With Boss | C | Without Boss | G | Without Boss | G | Without Boss | G | Frint reader |

C | Without Boss | G | Without Boss | G | Frint reader |

S | Contact Pitch : 2.5mm |

F | Fift reader |

S | Contact Pitch : 2.5mm |

F | Fift reader |

S | Contact Pitch : 2.5mm |

F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | F | Fift reader |

S | Contact Pitch : 2.5mm |

S | F | F | F | F |

S | F | F | F | F |

S | F | F | F | F |

S | Contact Pitch : 2.5mm |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F | F |

S | F | F |

S | F | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

S | F | F |

Series Name : DF1E

Pold Types (Note. 1)

Series Name : DF1E

Potting

Note 2: The potting header has 2 to 10 contacts.

Standard Product

Socket

$$\frac{\mathsf{DF1E}}{\bullet} - \frac{*}{\circ} \frac{\mathsf{S}}{\circ} - \frac{2.5}{\circ} \frac{\mathsf{C}}{\circ}$$

Number of Contacts : 2 to 15 contacts
 S: Socket
 Contact Pitch : 2.5mm
 Form Type
 C : Crimping socket

Number of Contacts : 2 to 15 contacts

(note. 2)

4 Connector Type

P: Pin Header

Connector type

●In-line Plug

$$\frac{\mathsf{DF1E}}{\mathsf{0}} \ \frac{\mathsf{A}}{\mathsf{2}} - \frac{\mathsf{*}}{\mathsf{3}} \ \frac{\mathsf{EP}}{\mathsf{4}} - \frac{2.5}{\mathsf{5}} \ \frac{\mathsf{C}}{\mathsf{6}}$$

Series Name : DF1E
 In-line Plug type
 Blank: With Panel mount Lock
 A : Without Panel mount Lock
 Form Type
 C : Crimping socket

Crimping Contact

Series Name:
Socket side: DF1B (Note 1)
DF1E (Note 1)
Plug side: DF1E

30: AWG#20 to #22
2428: WG#24 to #28
30: AWG#30

3 Packaging Type
SCF: Female contact: Reel
SC: Female contact: Bag
PCF: Male contact: Reel
PC: Male contact: Bag

Note 1 : When the retainer is used, use DF1E-2022SC(F), DF1B-2428SC(F), and DF1B-30SC(F) contacts.


When no retainer is used, all DF1B-**SC(F) and DF1E-2022SC(F) contacts can be used.

Retainer

$$\frac{\mathsf{DF1E}}{\bullet} - \frac{*}{2} \frac{\mathsf{RS/P}}{\bullet} - \frac{2.5}{\bullet}$$


Series Name : DF1E
 Number of Contacts : 2 to 10 contacts
 RS/P : Retainer
 Commonly used for socket and in-line plug
 Contacts Pitch:2.5mm

■Application Pattern

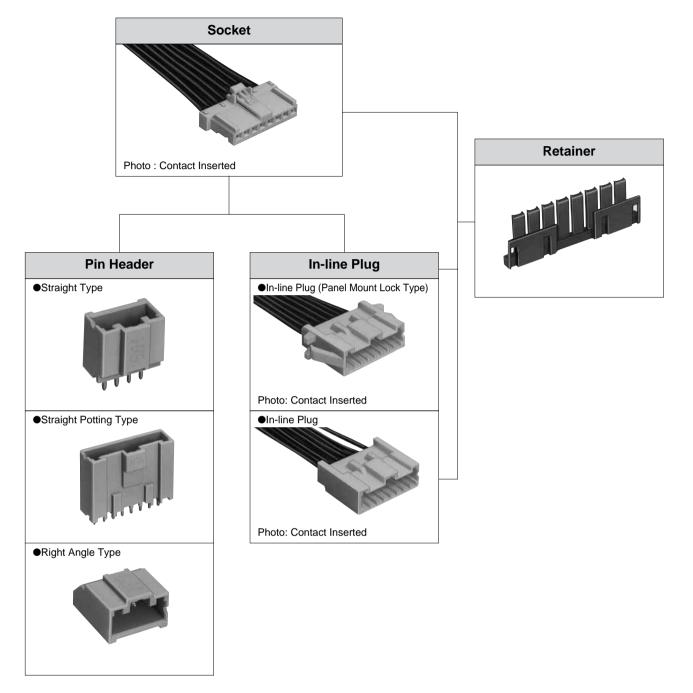

■Right Angle Pin Header



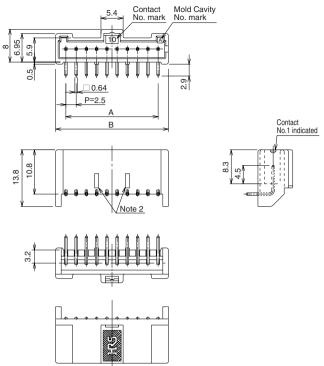


					l
Part Number	CL No.	Number of Contacts	А	В	RoHS
DF1E - 2P-2.5DS(**)	541 – 0985– 0 –**	2	2.5	7.5	
DF1E - 3P-2.5DS(**)	541 – 0986– 3 –**	3	5.0	10.0	
DF1E - 4P-2.5DS(**)	541 – 0987– 6 –**	4	7.5	12.5	
DF1E - 5P-2.5DS(**)	541 – 0988– 9 –**	5	10.0	15.0	
DF1E - 6P-2.5DS(**)	541 – 0989– 1 –**	6	12.5	17.5	
DF1E - 7P-2.5DS(**)	541 – 0990– 0 –**	7	15.0	20.0	
DF1E - 8P-2.5DS(**)	541 – 0991– 3 –**	8	17.5	22.5	
DF1E - 9P-2.5DS(**)	541 – 0992– 6 –**	9	20.0	25.0	Yes
DF1E -10P-2.5DS(**)	541 – 0993– 9 –**	10	22.5	27.5	
DF1E -11P-2.5DS(**)	541 – 0994– 1 –**	11	25.0	30.0	
DF1E -12P-2.5DS(**)	541 – 0995– 4 –**	12	27.5	32.5	
DF1E -13P-2.5DS(**)	541 – 0996– 7 –**	13	30.0	35.0	
DF1E -14P-2.5DS(**)	541 – 0997– 0 –**	14	32.5	37.5	
DF1E -15P-2.5DS(**)	541 – 0998– 2 –**	15	35.0	40.0	

[Specific No.] -* *, (* *) (01): Gold plated (05): Tin plated


- Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to the Specific No.
- Note 2. : The 2 to 4 contacts differ in two convex portions from those in above figures. The 2 and 3 contacts are not contained, but the 4 contact connector is contained in the center at one point.
- Note 3.: Styles of 2 to 4 contact connectors partially differ from those in above figures.

PCB mounting pattern (Board Thickness $t = 1.6 \pm 0.1$)



■Straight Pin Header



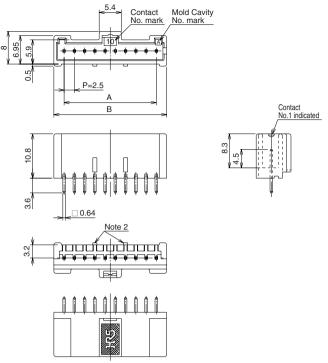


Part Number	CL No.	Number of Contacts	А	В	RoHS
DF1EC- 2P-2.5DSA(**)	541- 0867- 4 -**	2	2.5	7.5	
DF1EC- 3P-2.5DSA(**)	541- 0868- 7 -**	3	5.0	10.0	
DF1EC- 4P-2.5DSA(**)	541- 0869- 0 -**	4	7.5	12.5	
DF1EC- 5P-2.5DSA(**)	541- 0870- 9 -**	5	10.0	15.0	
DF1EC- 6P-2.5DSA(**)	541- 0871- 1 -**	6	12.5	17.5	
DF1EC- 7P-2.5DSA(**)	541- 0872- 4 -**	7	15.0	20.0	
DF1EC- 8P-2.5DSA(**)	541- 0873- 7 -**	8	17.5	22.5	
DF1EC- 9P-2.5DSA(**)	541- 0874- 0 -**	9	20.0	25.0	Yes
DF1EC-10P-2.5DSA(**)	541- 0875- 2 -**	10	22.5	27.5	
DF1EC-11P-2.5DSA(**)	541- 0876- 5 -**	11	25.0	30.0	
DF1EC-12P-2.5DSA(**)	541- 0877- 8 -**	12	27.5	32.5	
DF1EC-13P-2.5DSA(**)	541- 0878- 0 -**	13	30.0	35.0	
DF1EC-14P-2.5DSA(**)	541- 0879- 3 -**	14	32.5	37.5	
DF1EC-15P-2.5DSA(**)	541- 0880- 2 -**	15	35.0	40.0	


[Specific No.] -* *, (* *) (01): Gold plated (05): Tin plated


- Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to the Specific No.
- Note 2.: The 2 to 4 contacts differ in two convex portions from those in above figures. The 2 and 3 contacts are not contained, but the 2 and 3 contacts are not contained, and 4 contact is in the center at one point.
- Note 3. : Styles of 2 to 4 contacts partially differ from those in above figures.

PCB mounting pattern (Board Thickness $t = 1.6 \pm 0.1$)



■Straight Pin Header for Potting



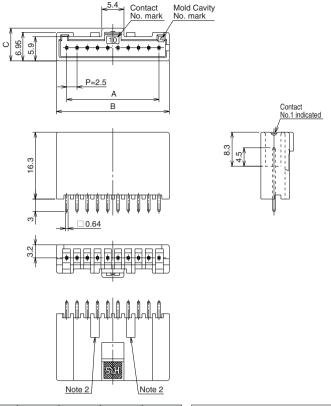


Part Number	CL No.	Number of Contacts	Α	В	С	RoHS
DF1EG - 2P-2.5DSA(**)	541 – 0923 – 3**	2	2.5	7.5	8.0	
DF1EG - 3P-2.5DSA(**)	541 – 0924 – 6**	3	5.0	10.0	8.0	
DF1EG - 4P-2.5DSA(**)	541 – 0925 – 9**	4	7.5	12.5	8.0	
DF1EG - 5P-2.5DSA(**)	541 – 0926 – 1**	5	10.0	15.0	7.8	
DF1EG - 6P-2.5DSA(**)	541 – 0927 – 4**	6	12.5	17.5	7.8	
DF1EG - 7P-2.5DSA(**)	541 – 0928 – 7**	7	15.0	20.0	7.8	Yes
DF1EG - 8P-2.5DSA(**)	541 – 0929 – 0**	8	17.5	22.5	7.8	
DF1EG - 9P-2.5DSA(**)	541 - 0930 - 9**	9	20.0	25.0	7.8	
DF1EG -10P-2.5DSA(**)	541 – 0931 – 1**	10	22.5	27.5	7.8	
DF1EG -11P-2.5DSA(**)	541 - 0932 - 4**	11	25.0	30.0	7.8	


[Specific No.] -* *, (* *) (05): Tin plated


- Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the product per bag. However, the quantity for delivery will be changed according to spec number.
- Note 2.: The 2 to 6 and 9 to 10 contact connectors differ in two convex portions from those in above figures. The 2 to 5 and 9 to 10 contacts are not contained, but the 6 contact is bonded to the convex portion at both ends.
- Note 3. : Styles of 2 to 4 contact may partially differ from the above figures.

PCB mounting pattern (Board Thickness $t = 1.6 \pm 0.1$)



■In-line Plug (Panel Mount Lock Type)



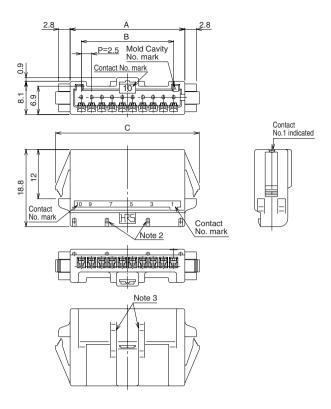


Part Number	CL No.	Number of Contacts	Α	В	С	D	Е	RoHS
DF1E- 2EP-2.5C	541- 0943- 0	2	8.0	2.5	15.0	8.4	11.9	
DF1E- 3EP-2.5C	541- 0944- 3	3	10.5	5.0	17.5	10.9	14.4	
DF1E- 4EP-2.5C	541- 0945- 6	4	13.0	7.5	20.0	13.4	16.9	
DF1E- 5EP-2.5C	541- 0946- 9	5	15.5	10.0	22.5	15.9	19.4	
DF1E- 6EP-2.5C	541- 0947- 1	6	18.0	12.5	25.0	18.4	21.9	Yes
DF1E- 7EP-2.5C	541- 0948- 4	7	20.5	15.0	27.5	20.9	24.4	
DF1E- 8EP-2.5C	541- 0949- 7	8	23.0	17.5	30.0	23.4	26.9	
DF1E- 9EP-2.5C	541- 0950- 6	9	25.5	20.0	32.5	25.9	29.4	
DF1E-10EP-2.5C	541- 0951- 9	10	28.0	22.5	35.0	28.4	31.9	


Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to the Specific No.

- Note 2.: In regard to 2 to 5 contacts, the retainer fixed convex portions are located at both ends.
- Note 3. In regard to 2 to 7 contacts, 2 convex portions are different from those in the above figures.
- Note 4. Use the no radius side at the panel edge in the looking area.
- Note 5.: Panel fixation is loosened. (May be enlarged according to the panel board thickness.)
- Note 6.: Styles of 2 to 4 contact partially differ from those in the above figures.
- * Refer to page B156 for the retainer.


◆ Panel Cutout


Χ
1.5
1.0
0.5
0.0





■In-line Plug



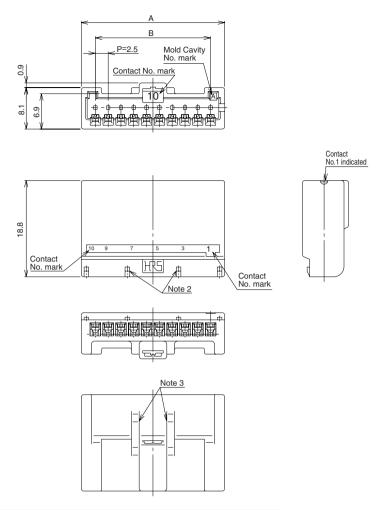



Part Number	CL No.	Number of Contacts	Α	В	RoHS
DF1EA - 2EP-2.5C	541 – 0957 – 5	2	8.0	2.5	
DF1EA - 3EP-2.5C	541 – 0958 – 8	3	10.5	5.0	
DF1EA - 4EP-2.5C	541 – 0959 – 0	4	13.0	7.5	
DF1EA - 5EP-2.5C	541 – 0960 – 0	5	15.5	10.0	
DF1EA - 6EP-2.5C	541 – 0961 – 2	6	18.0	12.5	Yes
DF1EA - 7EP-2.5C	541 – 0962 – 5	7	20.5	15.0	
DF1EA - 8EP-2.5C	541 – 0963 – 8	8	23.0	17.5	
DF1EA - 9EP-2.5C	541 – 0964 – 0	9	25.5	20.0	
DF1EA -10EP-2.5C	541 – 0965 – 3	10	28.0	22.5	

Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to the Specific No.

- Note 2.: In regard to 2 to 5 contacts, the retainer fixed convex portions are located at both ends.
- Note 3.: 2 to 7 contacts do not contain two convex portions, which is different from the above figure.
- Note 4.: Styles of 2 to 4 contacts partially differ from the above figures.
- * Refer to page B156 for retainer.

■Socket



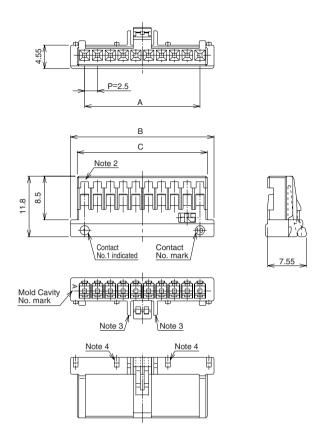

Part Number	CL No.	Number of Contacts	Α	В	С	RoHS
DF1E - 2S-2.5C	541 – 0811 – 0	2	2.5	8.0	5.4	
DF1E - 3S-2.5C	541 – 0812 – 2	3	5.0	10.5	7.9	
DF1E - 4S-2.5C	541 – 0813 – 5	4	7.5	13.0	10.4	
DF1E - 5S-2.5C	541 – 0814 – 8	5	10.0	15.5	12.9	
DF1E - 6S-2.5C	541 – 0815 – 0	6	12.5	18.0	15.4	
DF1E - 7S-2.5C	541 – 0816 – 3	7	15.0	20.5	17.9	
DF1E - 8S-2.5C	541 – 0817 – 6	8	17.5	23.0	20.4	
DF1E - 9S-2.5C	541 – 0818 – 9	9	20.0	25.5	22.9	Yes
DF1E -10S-2.5C	541 – 0819 – 1	10	22.5	28.0	25.4	
DF1E -11S-2.5C	541 – 0820 – 0	11	25.0	30.5	27.9	
DF1E -12S-2.5C	541 – 0821 – 3	12	27.5	33.0	30.4	
DF1E -13S-2.5C	541 – 0822 – 6	13	30.0	35.5	32.9	
DF1E -14S-2.5C	541 – 0823 – 9	14	32.5	38.0	35.4	
DF1E -15S-2.5C	541 – 0824 – 1	15	35.0	40.5	37.9	

Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to spec number.

Note 2.: The 2 contact connector is equipped with the convex portion to prevent false-insertion.


Note 3.: The 2 consult Has no wall on the locking side

Note 4.: The 2 to 5 contacts contain the retainer fixed convex portions at both ends.

* Refer to page B156 for the retainer.


■Retainer



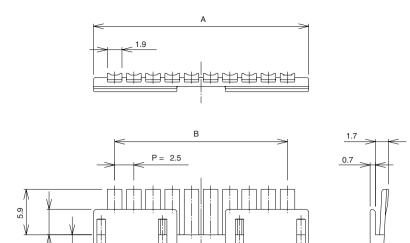

Note2






Part Number	CL No.	Number of Contacts	А	В	RoHS
DF1E - 2RS/P-2.5	541 – 0971 – 6	2	8.0	2.5	
DF1E - 3RS/P-2.5	541 – 0972 – 9	3	10.5	5.0	
DF1E - 4RS/P-2.5	541 – 0973 – 1	4	13.0	7.5	
DF1E - 5RS/P-2.5	541 – 0974 – 4	5	15.5	10.0	
DF1E - 6RS/P-2.5	541 – 0975 – 7	6	18.0	12.5	Yes
DF1E - 7RS/P-2.5	541 – 0976 – 0	7	20.5	15.0	
DF1E - 8RS/P-2.5	541 – 0977 – 2	8	23.0	17.5	
DF1E - 9RS/P-2.5	541 – 0978 – 5	9	25.5	20.0	
DF1E -10RS/P-2.5	541 – 0979 – 8	10	28.0	22.5	

Note 1.: A packaging quantity is delivered by the bag unit (100 pcs.). If needed, please order the products per bag. However, the quantity for delivery will be changed according to spec number.

Note 2.: The 2 to 4 contacts contain socket and plug fixed holes at both ends.

* This retainer can be used together with the socket and relay plug.

■Plug Crimping Contact

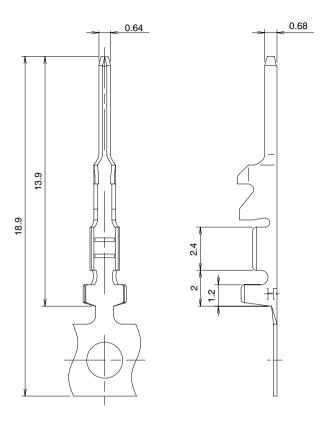

Applicable Cable (Tin plating annealed copper wire)

Conductor Size (Wire construction)
AWG # 20 (21 cores./0.18mm)
AWG # 22 (17 cores./0.16mm)
AWG # 24 (11 cores./0.16mm)
AWG # 26 (7 cores./0.16mm)
AWG # 28 (7 cores./0.127mm)
AWG # 30 (7 cores./0.1mm)

Recommended Cable

UL1061, UL1007

Strip Length

3.0 to 3.7mm

Note: If other cables are used instead of the applicable cable, contact Hirose sales department.


Part Number	CL No.	CL No. Applicable	Applicable Cable		Packaging	Quantity	RoHS
	Cable Indicat	Cable Indication	AWG	Jacket Diameter	Туре	Quantity	KUHS
DF1E - 2022PCF	541 – 0937 – 8	20	AWG # 20	1.2 to 1.9mm	Reel	10,000	
DF1E - 2022PC	541 – 0938 – 0	22	AWG # 22	1.2 to 1.911111	Bag	100	
DF1E - 2428PCF	541 – 0939 – 3	24	AWG # 24	0.9 to 1.5mm	Reel	10,000	Yes
DF1E – 2428PC	541 – 0940 – 2	28	AWG # 28	0.9 to 1.511111	Bag	100	162
DF1E - 30PCF	541 – 0941 – 5	- 30	AVA/C # 20	0.6 to 1.2mm	Reel	10,000	
DF1E - 30PC	541 – 0942 – 8		AWG # 30	0.0 (0 1.211111	Bag	100	

Crimping Contact Extraction Tool DF-C-PO(B)

■Socket Crimping Contact

●DF1E-2022SCF

●DF1B - * * * * SCF

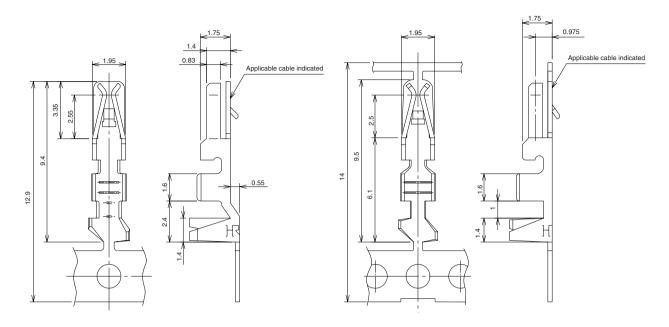

Applicable Cable (Tin plating annealed copper wire)

Conductor S	Size (Wire construction)
AWG # 2	20 (21 cores./0.18mm)
AWG # 2	22 (17 cores./0.16mm)
AWG # 2	24 (11 cores./0.16mm)
AWG # 2	26 (7 cores./0.16mm)
AWG # 2	28 (7 cores./0.127mm)
AWG # 3	30 (7 cores./0.1mm)

Recommended Cable

UL1061, UL1007

Strip Length

2.0mm to 2.5mm

Note: If other cables are used instead of the applicable cable, consult Hirose sales department.

Part Number	CL No.	Applicable Cable Indication	Applicable Cable		Packaging	Quantity	RoHS
	Cal No.		AWG	Jacket Diameter	Type	Quantity	KUIIS
DF1E - 2022SCF	541 – 0999 – 5	20	AWG # 20	1.2 to 1.9mm	Reel	10,000	
DF1E - 2022SC	541 – 1000 – 2	22	AWG # 22	1.2 to 1.911111	Bag	100	
DF1B - 2022SCF	541 – 0223 – 1	20 22	AWG # 20	1.2 to 1.9mm	Reel	10,000	
DF1B - 2022SC	541 – 0224 – 4		AWG # 22	1.2 to 1.911111	Bag	100	Yes
DF1B - 2428SCF	541 – 0678 – 1	24 28	AWG # 24	0.9 to 1.5mm	Reel	10,000	165
DF1B - 2428SC	541 – 0679 – 4		AWG # 28	0.9 to 1.511111	Bag	100	
DF1B - 30SCF	541 – 0682 – 9	- 30	AWG # 30	0.6 to 1.2mm	Reel	10,000	
DF1B - 30SC	541 – 0683 – 1		AVVG # 30	0.0 to 1.211111	Bag	100	

Crimping Contact Extraction Tool DF-C-PO(B)


◆Crimping Tools

Item	Part Number	CL No.	Applicable Contact
	AP105 – DF1E – 2022S	901 – 4561 – 0	DF1E - 2022SCF
	AP105 – DF1B – 2022S	901 – 4510 – 9	DF1B - 2022SCF
	AP105 – DF1B – 2428S	901 – 4518 – 0	DF1B - 2428SCF
Applicator	AP105 – DF1B – 30S	901 – 4517 – 8	DF1B - 30SCF
	AP105 – DF1B – 2022P	901 – 4509 – 0	DF1E – 2022PCF
	AP105 – DF1B – 2428P	901 – 4521 – 5	DF1E – 2428PCF
	AP105 – DF1B – 30P	901 – 4519 – 3	DF1E - 30PCF
Main Press Unit	CM – 105	901 – 0005 – 4	
Manual Crimping Tool	HT102/DF1E - 2022S	550 – 0277 – 1	DF1E - 2022SC
	DF1B – TA2022SHC	550 - 0182 - 7	DF1B - 2022SC
	DF1B – TA2428SHC	550 - 0209 - 1	DF1B - 2428SC
	DF1B – TA30SHC	550 - 0211 - 3	DF1B - 30SC
	HT102/DF1BE – 2022P	550 - 0278 - 4	DF1E - 2022PC
	HT102/DF1BE – 2428P	550 - 0279 - 7	DF1E – 2428PC
	HT102/DF1BE - 30P	550 - 0280 - 6	DF1E - 30PCF
Contact Extraction Tool	DF – C – PO (B)	550 – 0179 – 2	DF1E - 2022SC (F) DF1B - * * * * SC (F) DF1E - * * * PC (F)


Note 1.: Add "©" to the last number of the product, in order to use DF1B series tools, which have been conventionally merchandized. Note 2.: If any trouble has occurred due to other tools, which are not designated by Hirose, Hirose won't guarantee any products.

◆Application Pattern

Standard Header

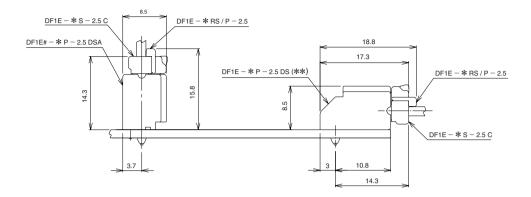


Header for Potting



●Panel Mounting Lock In-line Plug

25.3 DF1E - *RS/P - 2.5 DF1E - *S - 2.5 C DF1E - *S - 2.5 C

●In-line Plug



● Precautions

1. Recommended Soldering Condition	n Flow: 260℃ for 10 seconds		
	Manual soldering: 300℃ for 3 seconds		
2. Cleaning Condition	Refer to Nylon Connector Use Hand book.		
	However, if the connector is cleaned by the potting header, the detergent remains within the		
	connector, which will cause malfunction.		
3. Connection Condition	Refer to Nylon Connector Use Hand book.		
4. Cautions	● To remove the connector, if the connector is forcedly removed, it will cause connector		
	damage. If the connector is hardly removed, slightly push the connector once, and then		
	remove it using the lock.		
	● In some method for laying the cable within equipment, a tension may be applied to the		
	cable so as to remove the contact. In this case, it is recommended to use the retainer.		
	● Incomplete insertion of the contact can be prevented by mounting a retainer; however,		
	mounting of a retainer might not be possible when the contact protrudes beyond the		
	socket. Insert the contact securely and then mount the retainer.		
	● If the potting process is implemented, it is desirable to fill the connector with resin,		
	considering the resin surface tensile force.		
	● The color phase of this product may be slightly different from that of the forming product		
	according to the manufacturing lot and future storage conditions, however the difference		
	doesn't affect the performance.		
5. Precautions	Refer to Nylon Connector Use Hand book.		

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9