

# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers




### GENERAL DESCRIPTION ITF TECHNOLOGY

The ITF SMD 3dB 90° Coupler is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The ITF 3dB 90° Coupler is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

### Recommended Pad Layout Dimensions mm (inches)

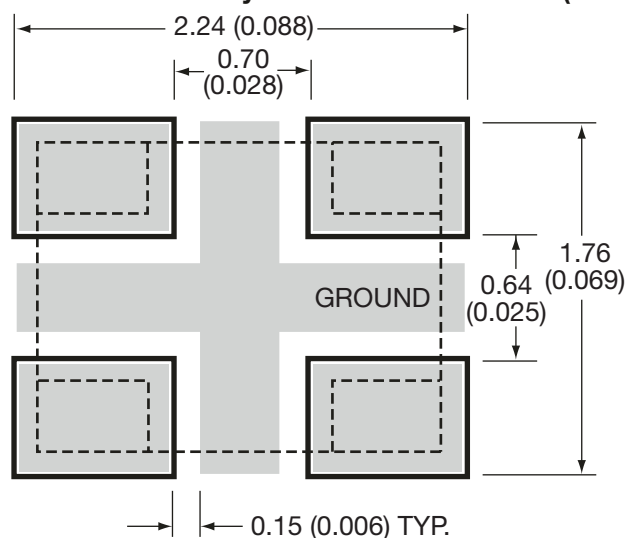

### APPLICATIONS

- Balanced Amplifiers and Signal Distribution in Mobile Communications

### FEATURES


- Miniature 0805 size
- Low I. Loss
- High Isolation
- Power Handling: 10W RF CW
- Surface Mountable
- Supplied on Tape and Reel
- Operating Temperature -40°C to +85°C

### DIMENSIONS:


millimeters (inches)

|   |                            |
|---|----------------------------|
| L | 2.03±0.10<br>(0.080±0.004) |
| W | 1.55±0.10<br>(0.061±0.004) |
| T | 0.98±0.15<br>(0.037±0.006) |
| A | 0.56±0.25<br>(0.022±0.010) |
| B | 0.35±0.15<br>(0.014±0.006) |

### Bottom View

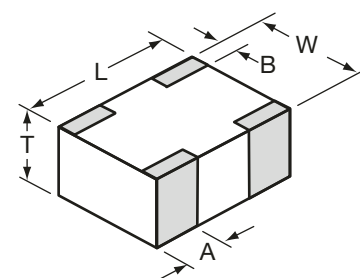

### TERMINALS (Top View) Orientation in Tape

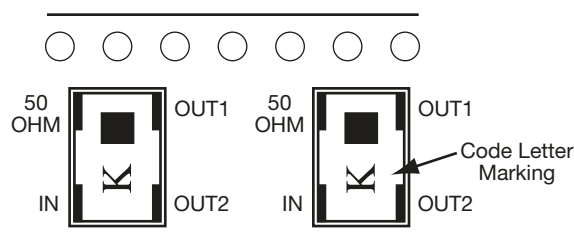

### ELECTRICAL PARAMETERS\*

| Part Number**   | Frequency F <sub>0</sub><br>[MHz] | I. Loss @ F <sub>0</sub><br>[dB] | Phase Balance<br>[deg] max. | Code Letter<br>Marking |
|-----------------|-----------------------------------|----------------------------------|-----------------------------|------------------------|
| DB0805A0880AWTR | 880±30                            | 0.35                             | 3                           | Y                      |
| DB0805A0915AWTR | 915±30                            | 0.35                             | 3                           | V                      |
| DB0805A0967AWTR | 967±30                            | 0.35                             | 3                           | V                      |
| DB0805A1350AWTR | 1350±50                           | 0.35                             | 3                           | C                      |
| DB0805A1650AWTR | 1650±50                           | 0.35                             | 3                           | F                      |
| DB0805A1800AWTR | 1800±50                           | 0.30                             | 3                           | F                      |
| DB0805A1850AWTR | 1850±50                           | 0.30                             | 3                           | K                      |
| DB0805A1900AWTR | 1900±50                           | 0.30                             | 3                           | K                      |
| DB0805A1950AWTR | 1950±50                           | 0.25                             | 3                           | K                      |
| DB0805A2140AWTR | 2140±50                           | 0.25                             | 3                           | L                      |
| DB0805A2325AWTR | 2325±50                           | 0.25                             | 3                           | T                      |

\*With Recommended Pad Layout

NOTE: Additional Frequencies Available Upon Request

### \*\*LEAD FREE TERMINATION PART NUMBERS: DB0805AxxxxASTR





# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



880 ± 30MHz DB0805A0880AWTR

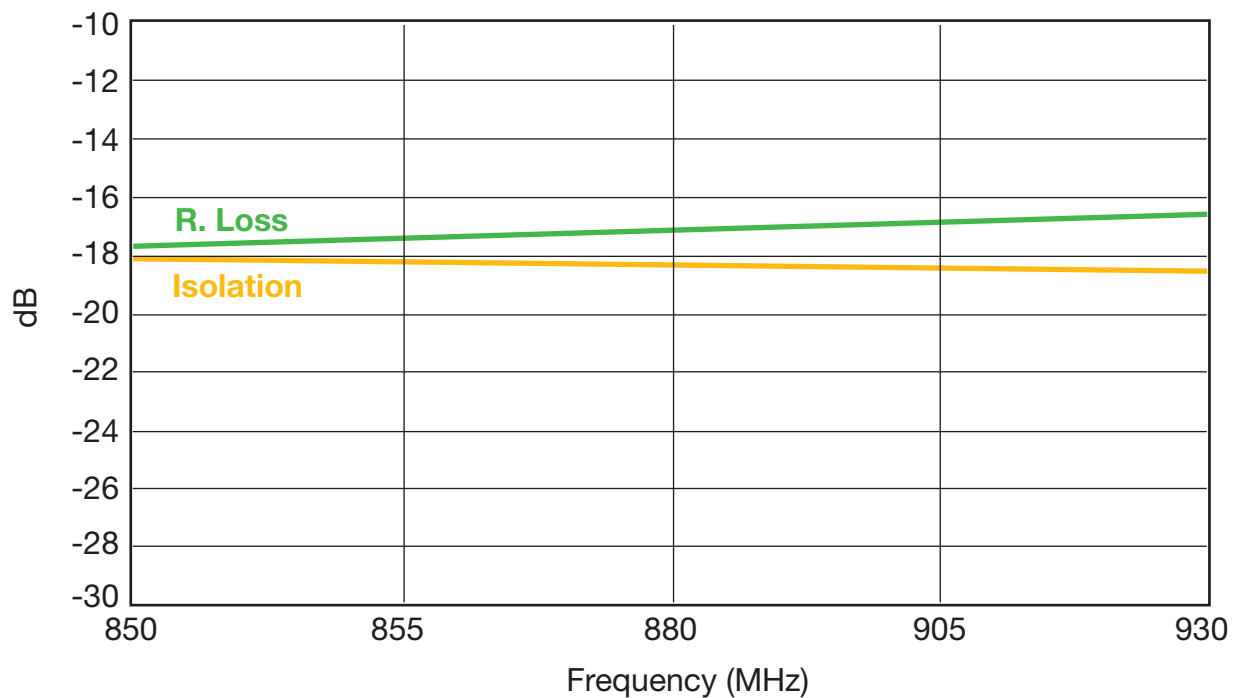
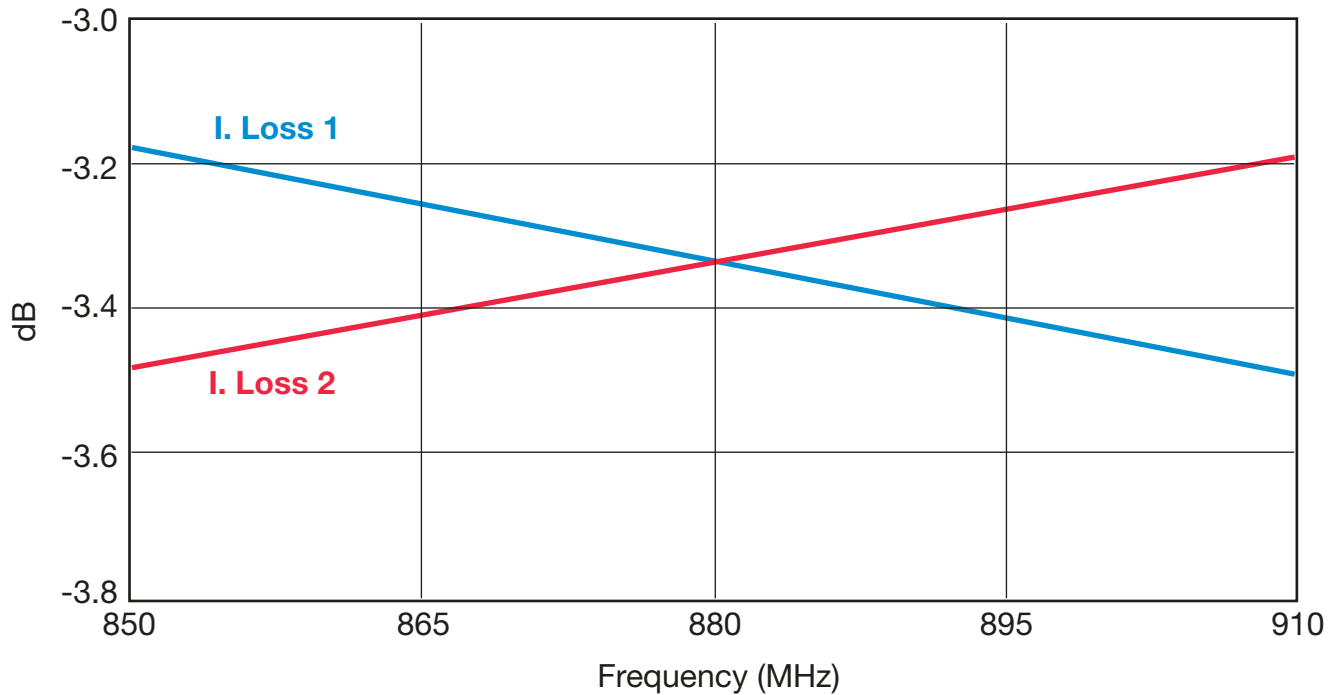


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



915  $\pm$  30MHz DB0805A0915AWTR

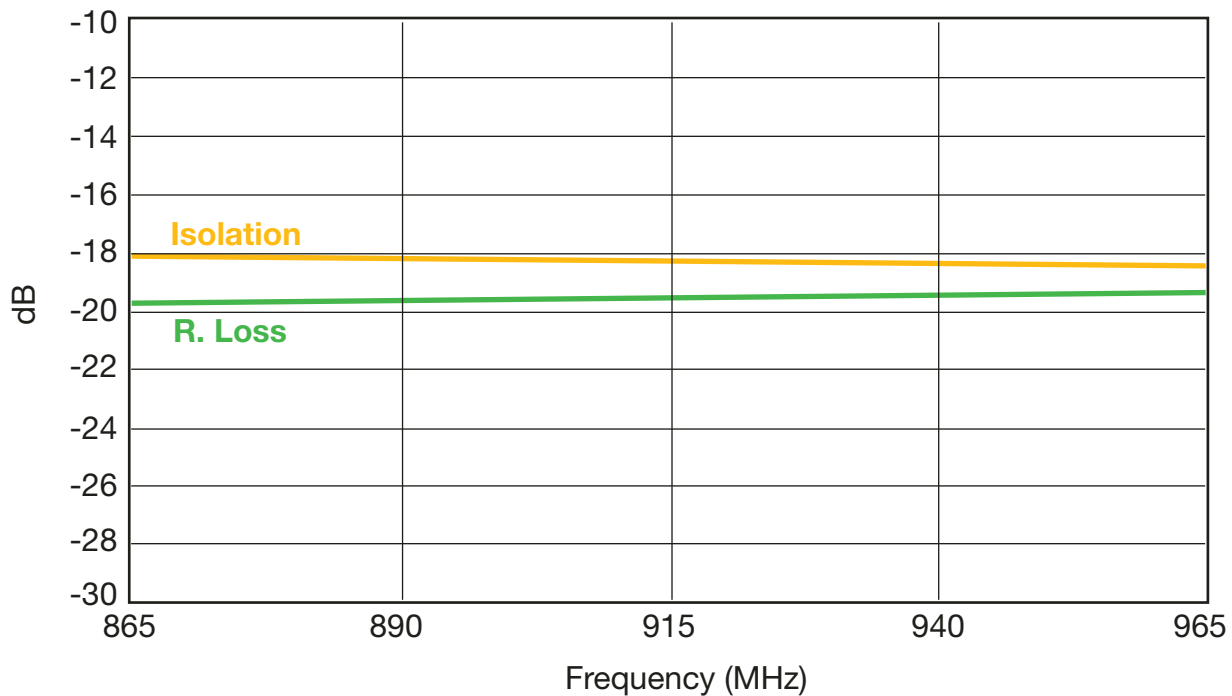
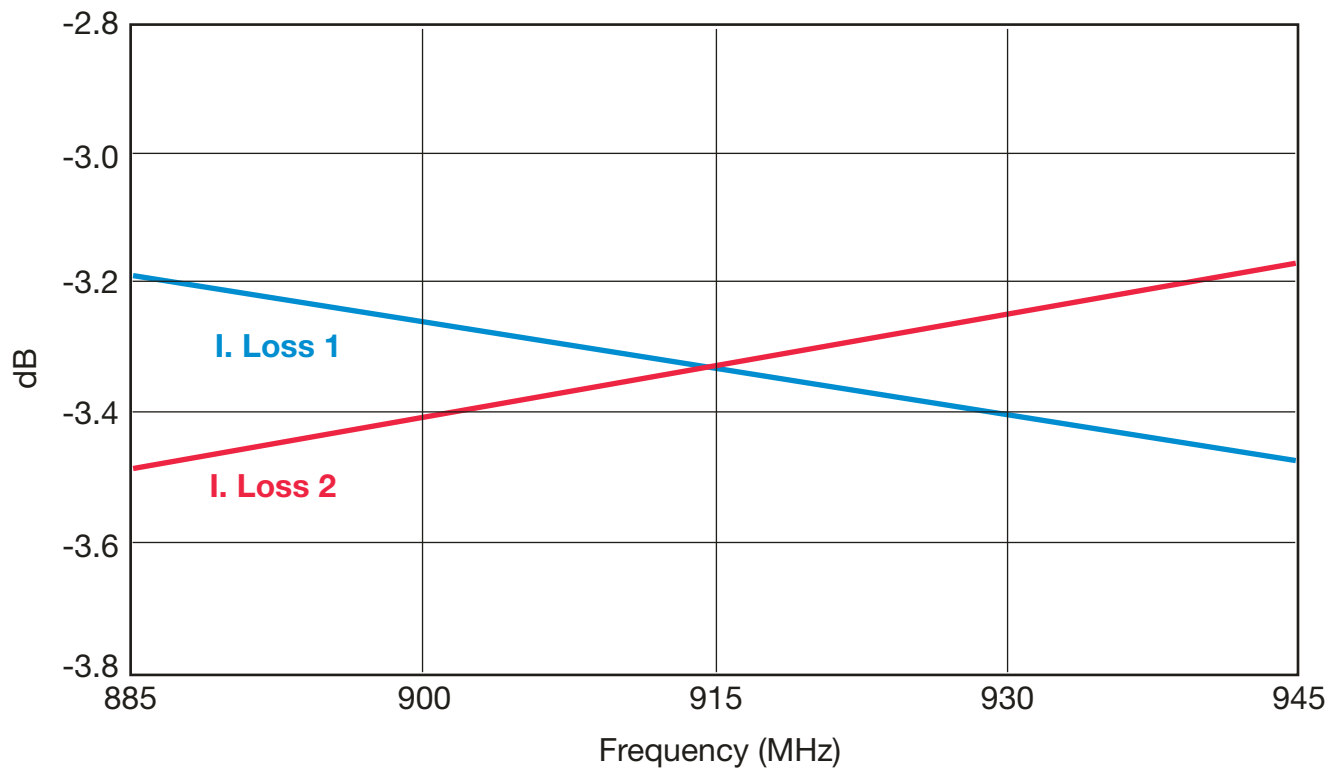


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



967± 30MHz DB0805A0967AWTR

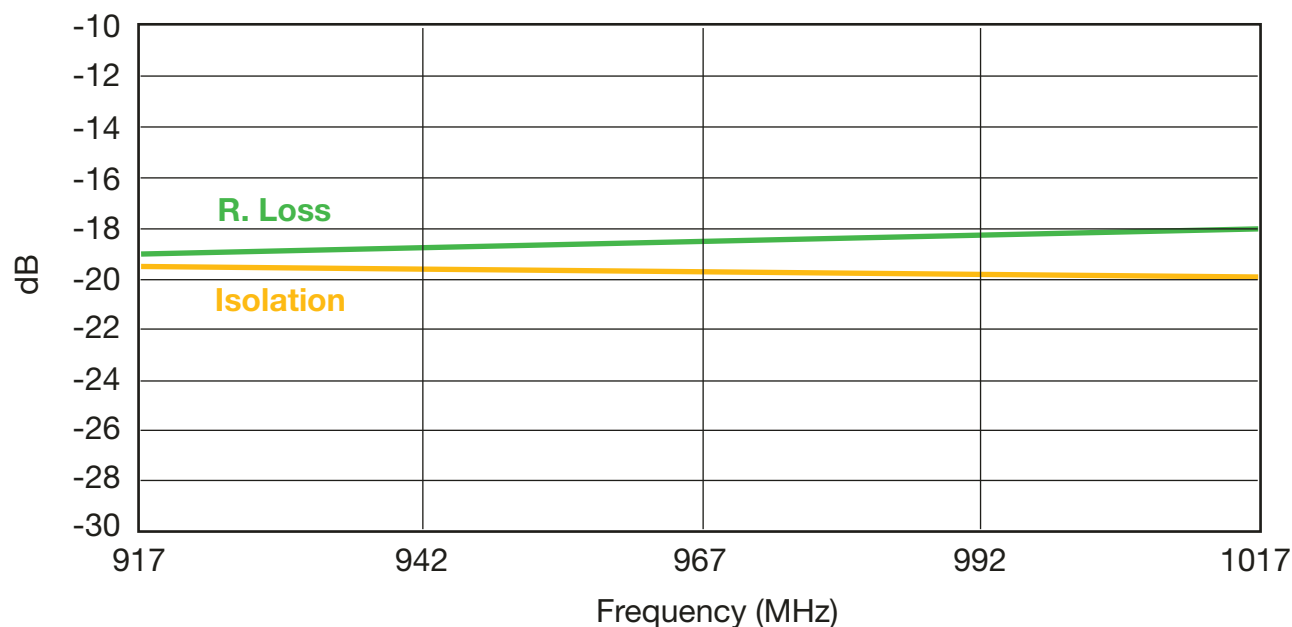
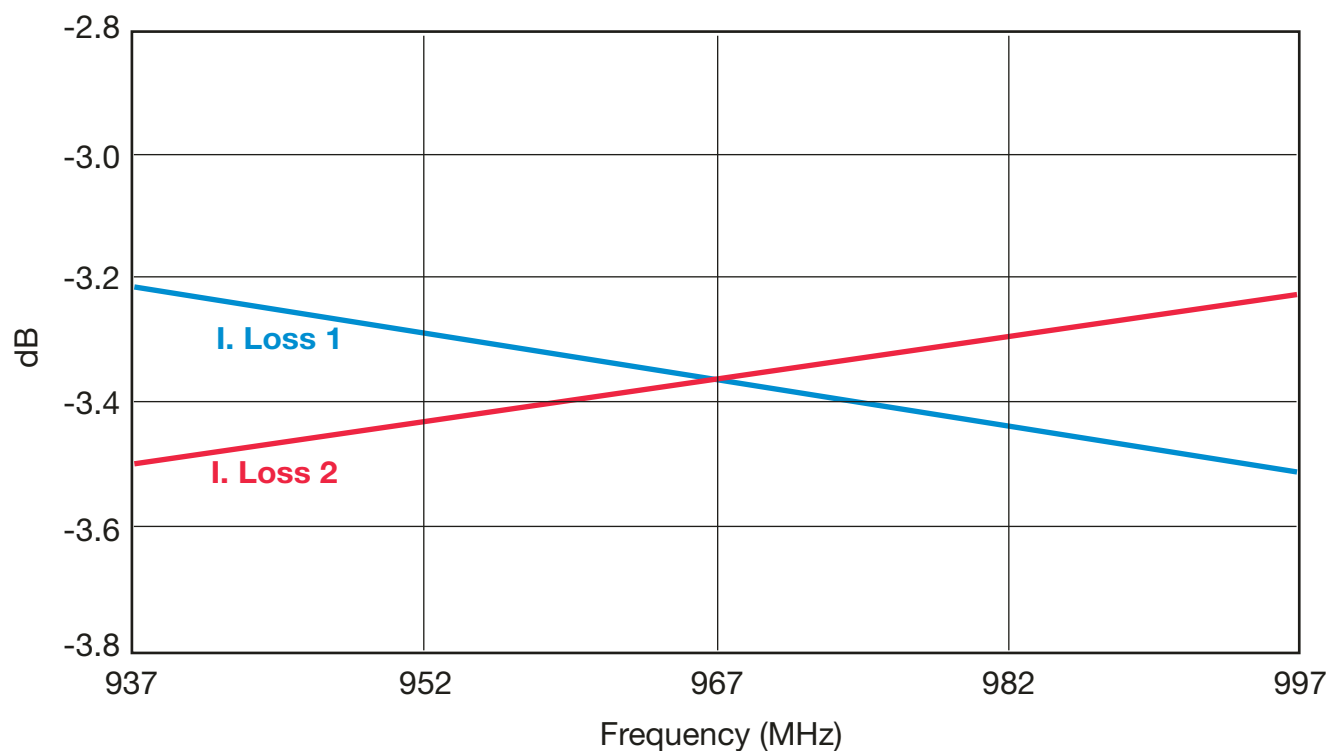


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1350 ± 50MHz DB0805A1350AWTR

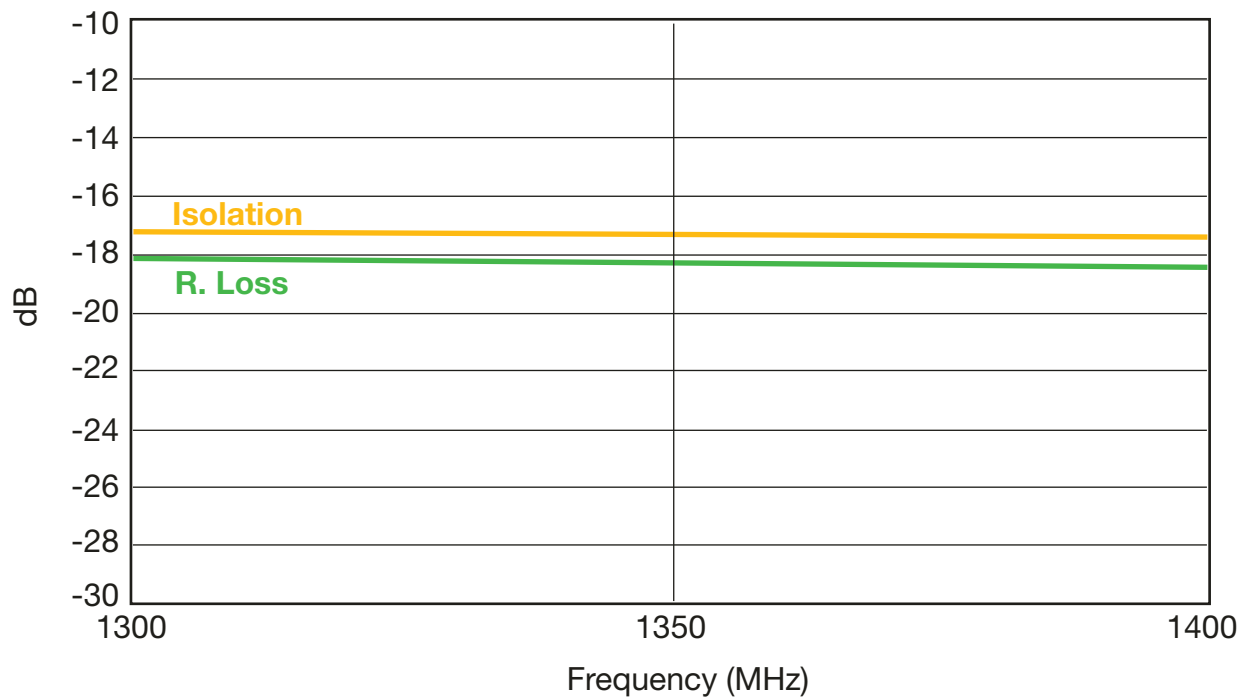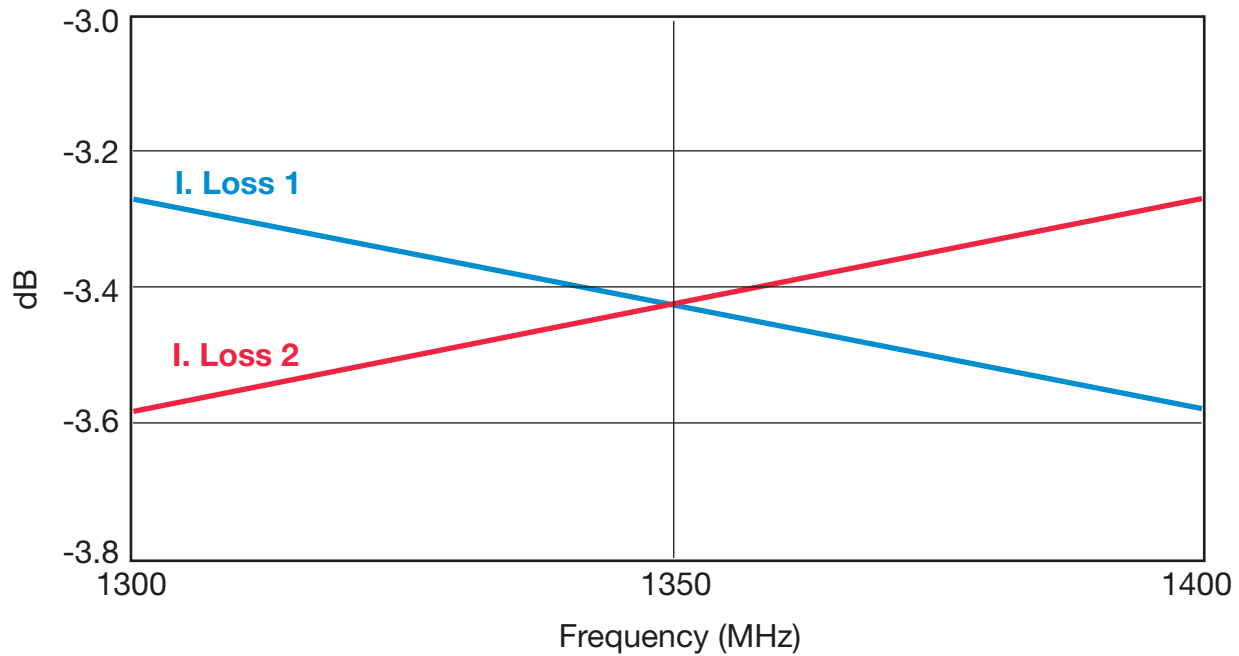



3

# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1650 ± 50MHz DB0805A1650AWTR

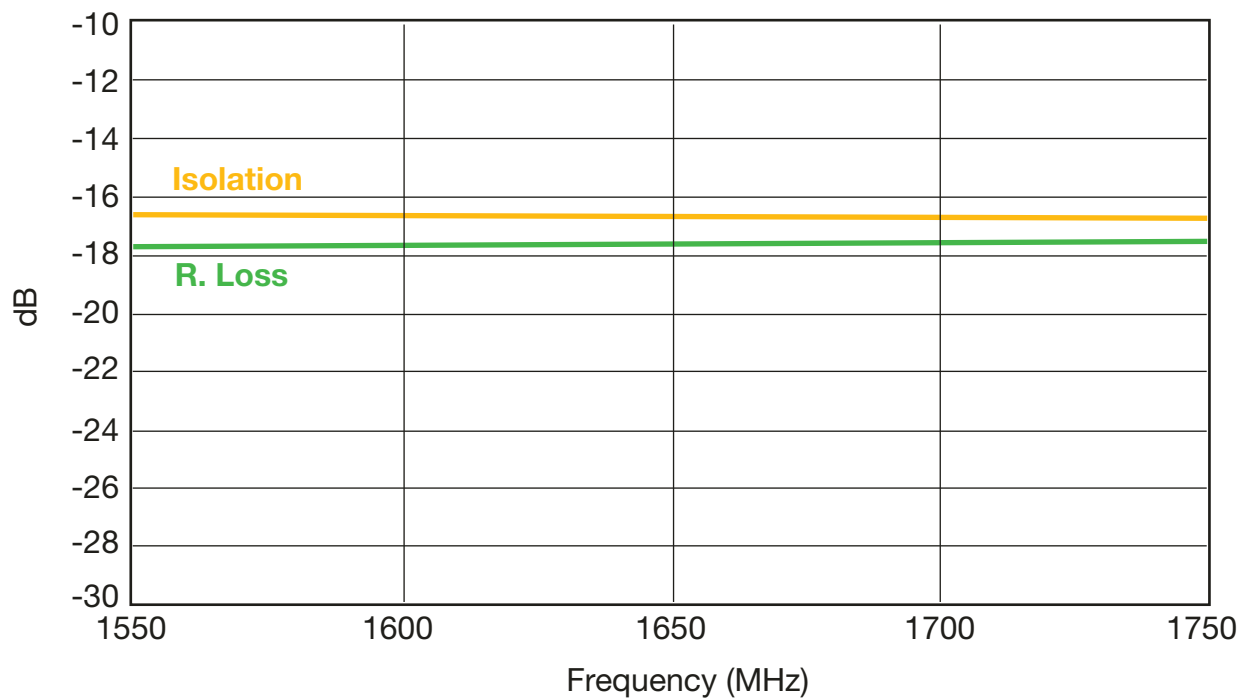
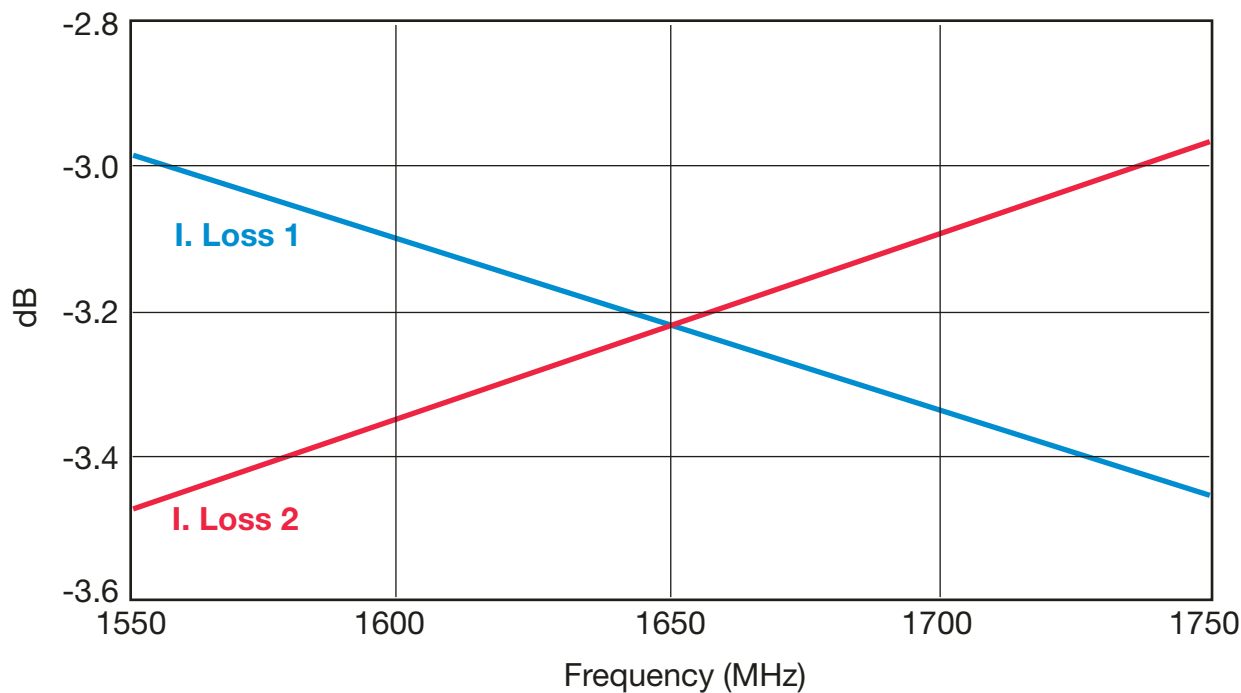


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1800 ± 50MHz DB0805A1800AWTR

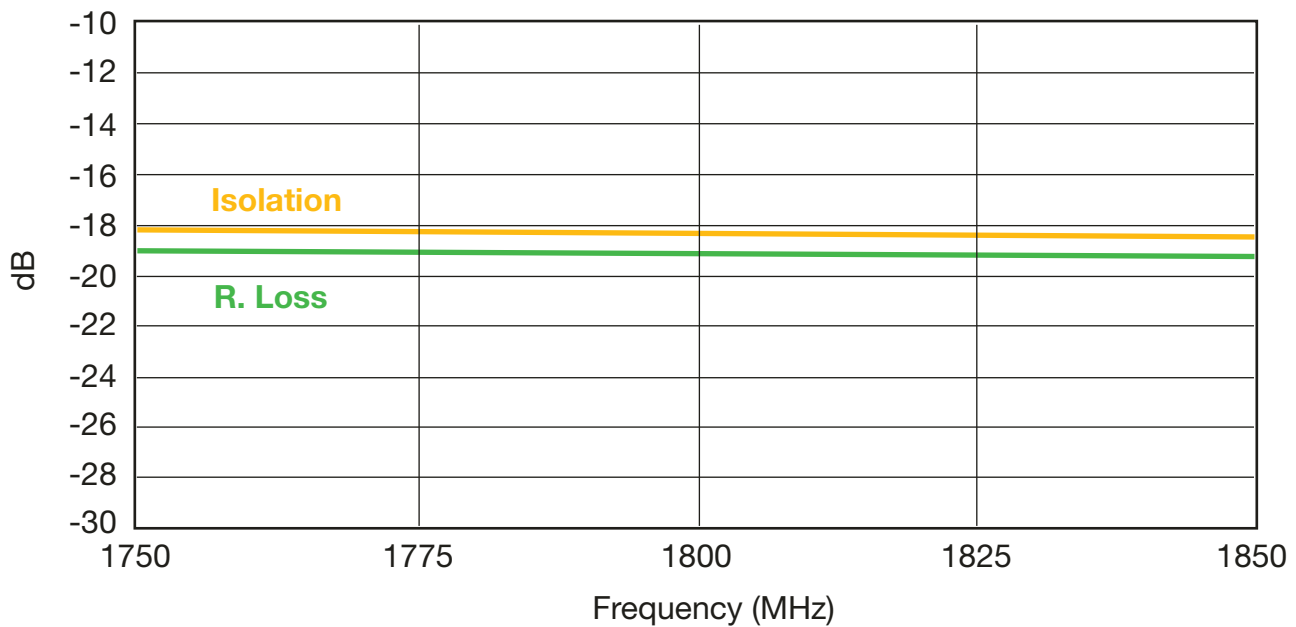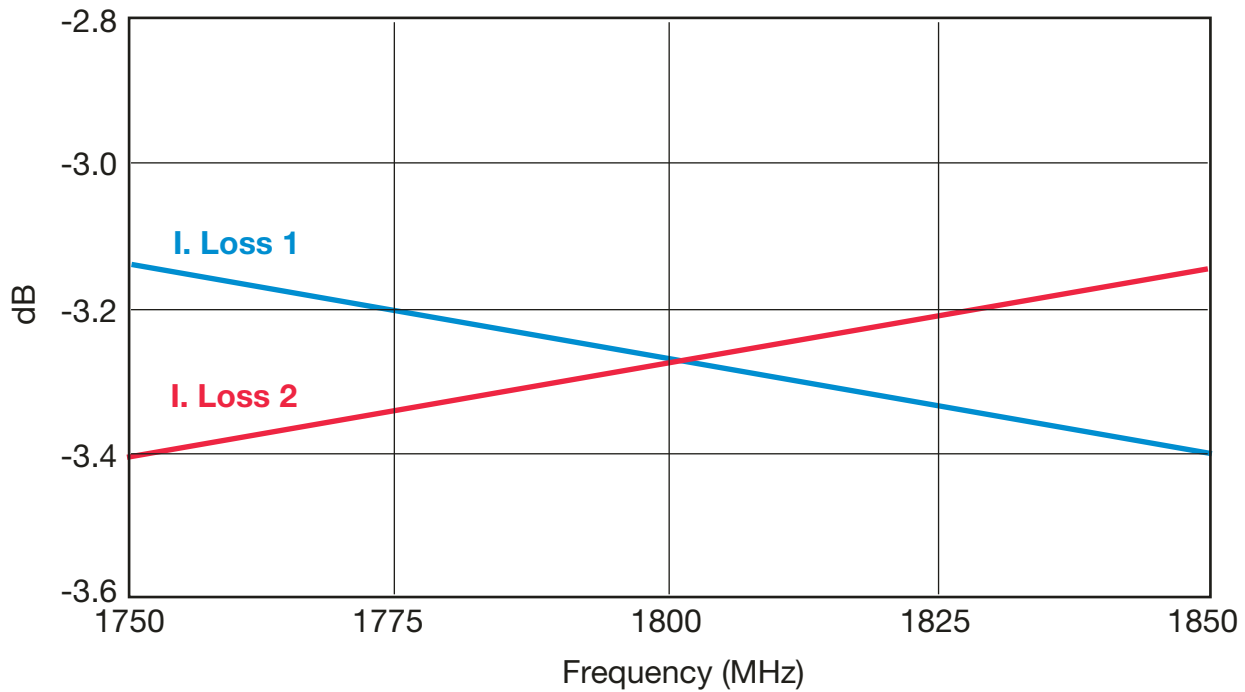



3

# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1850 ± 50MHz DB0805A1850AWTR

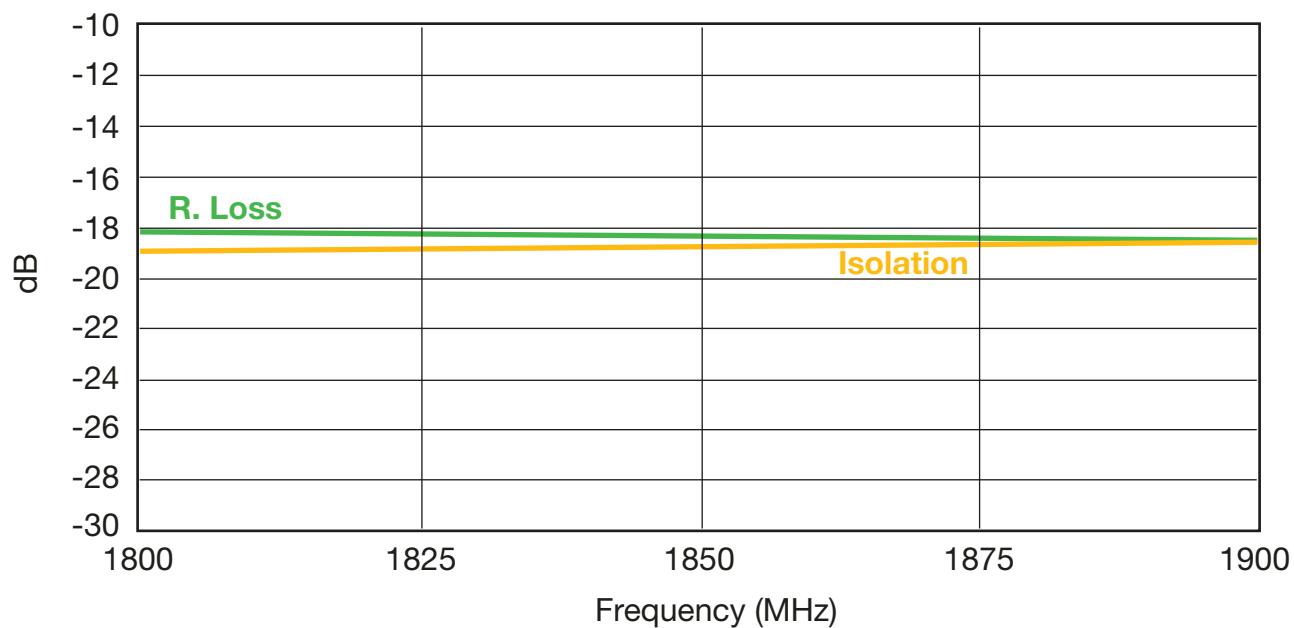
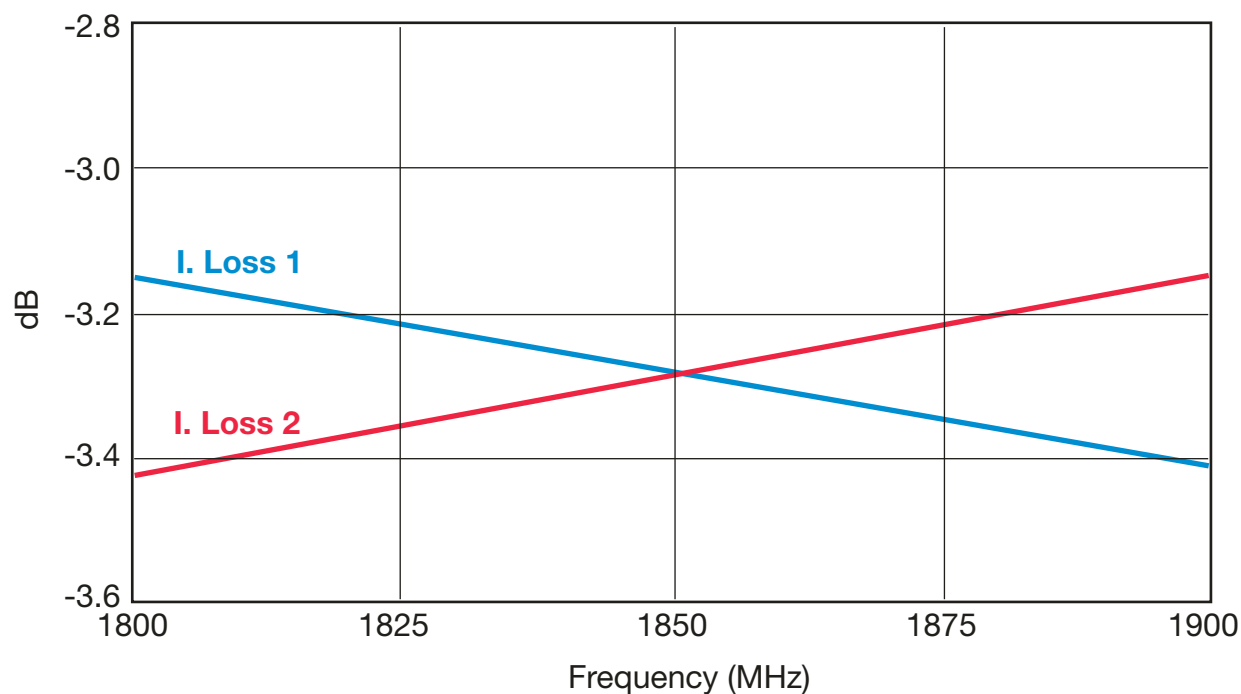


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1900  $\pm$  50MHz DB0805A1900AWTR

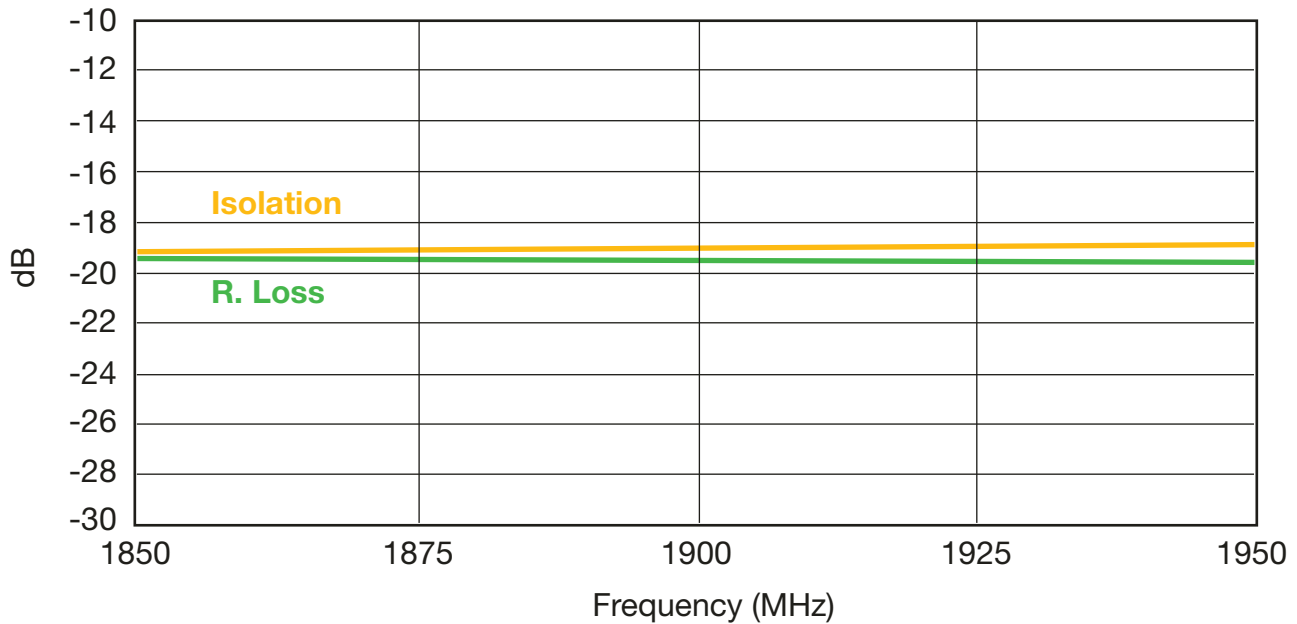
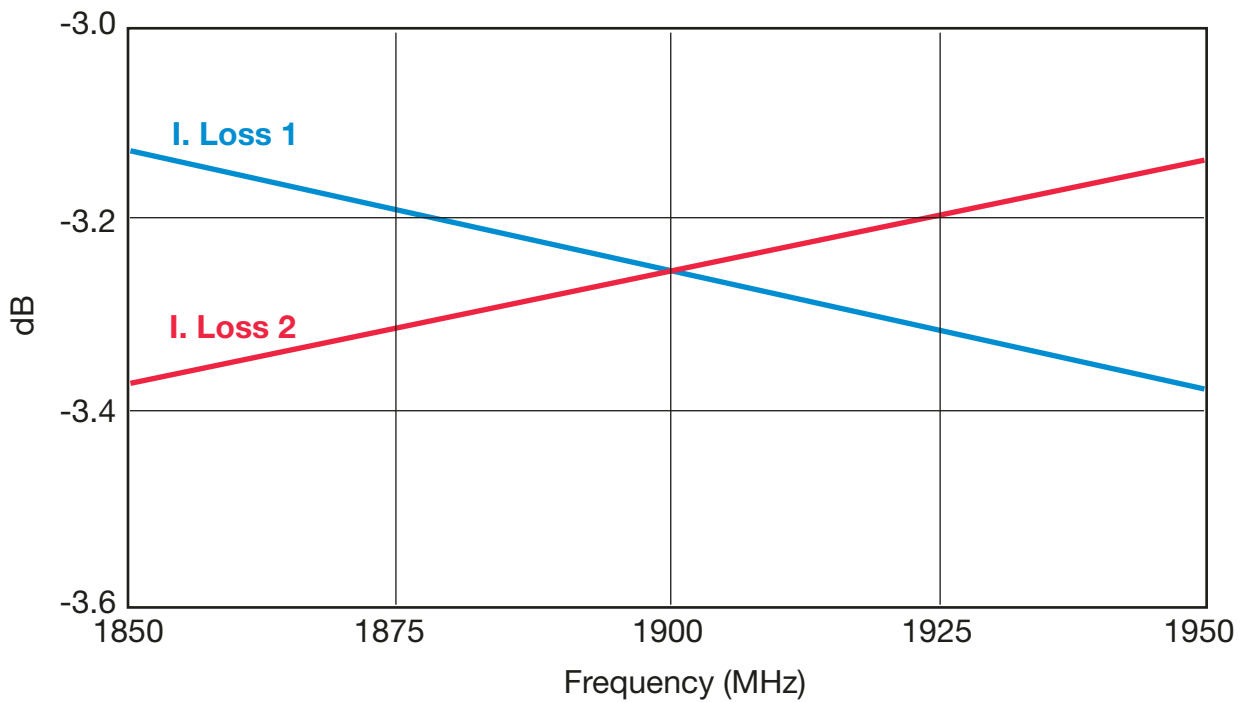


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



1950 ± 50MHz DB0805A1950AWTR

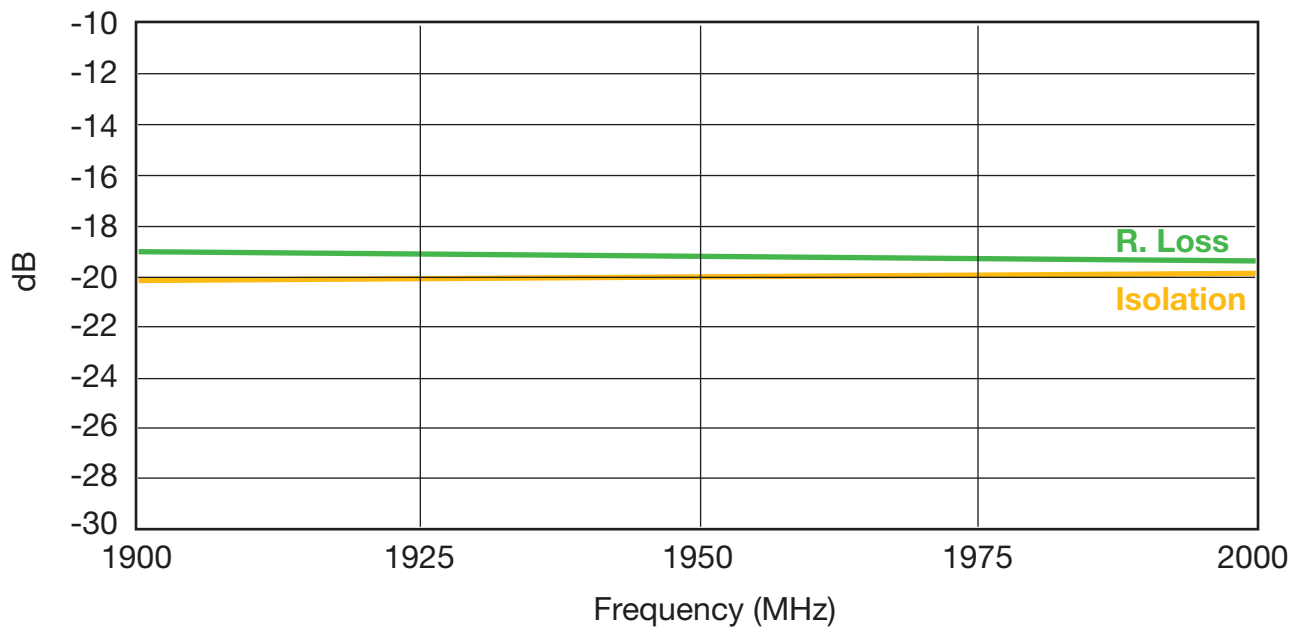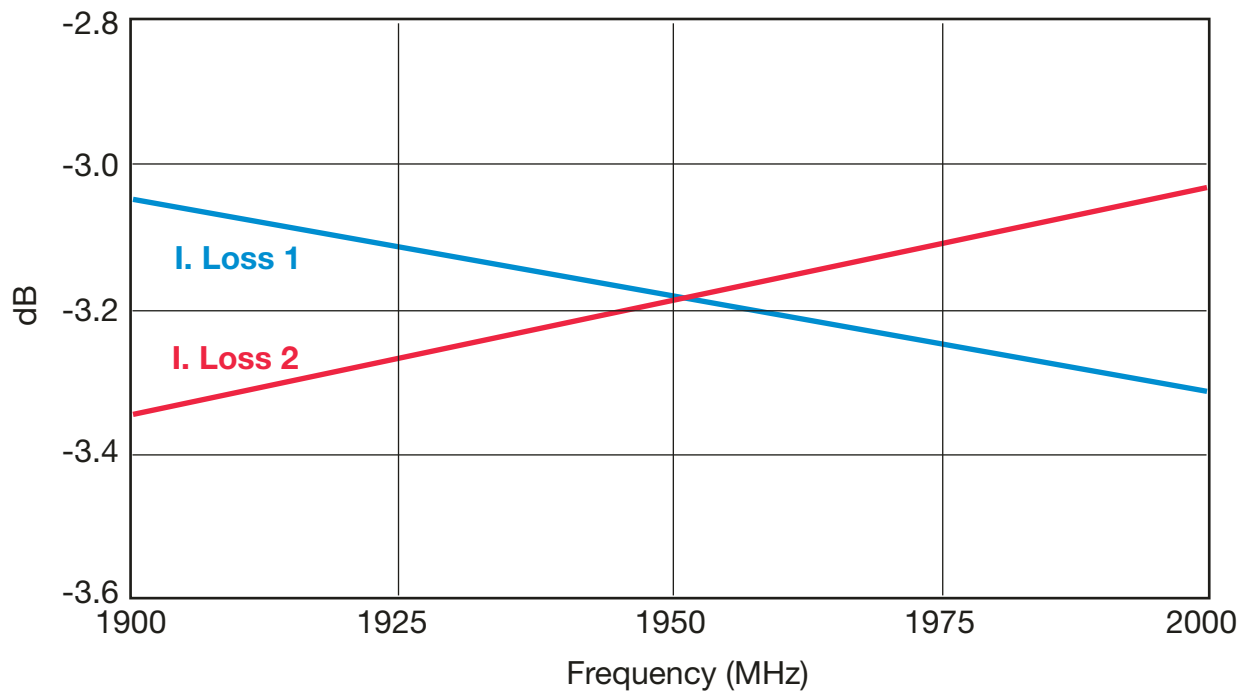


# Thin-Film Directional Couplers


## DB0805 3dB 90° Couplers



2140 ± 50MHz DB0805A2140AWTR

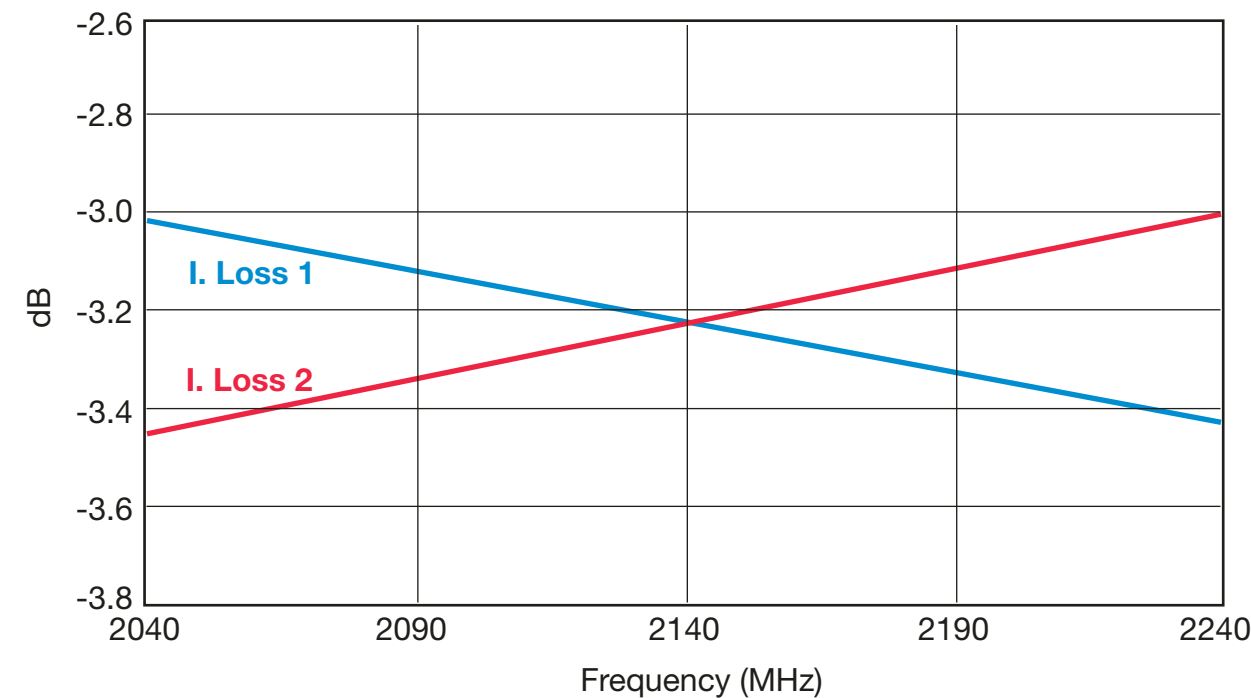

3


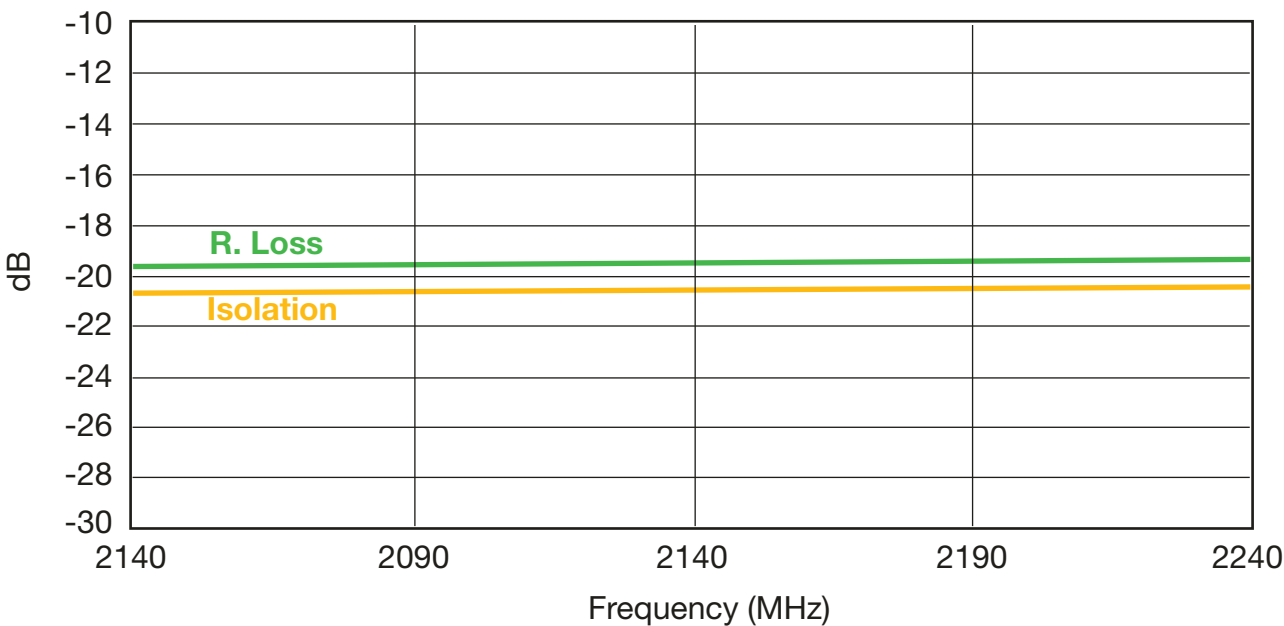


# Thin-Film Directional Couplers

## DB0805 3dB 90° Couplers



2325  $\pm$  50MHz DB0805A2325AWTR

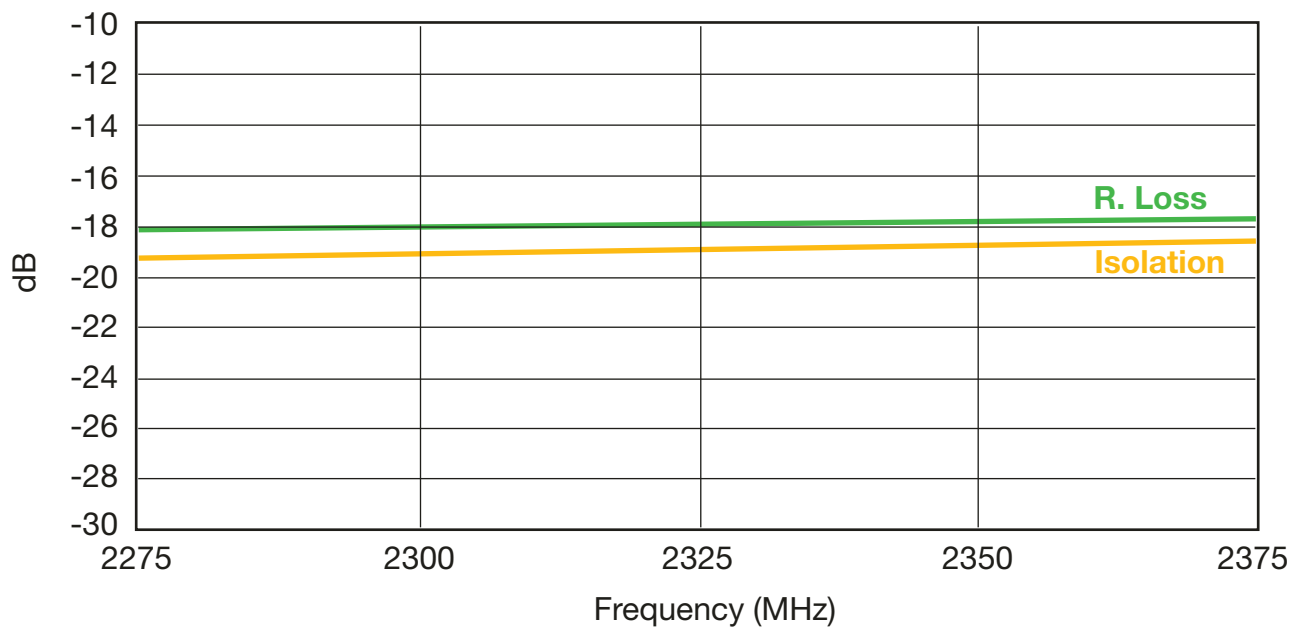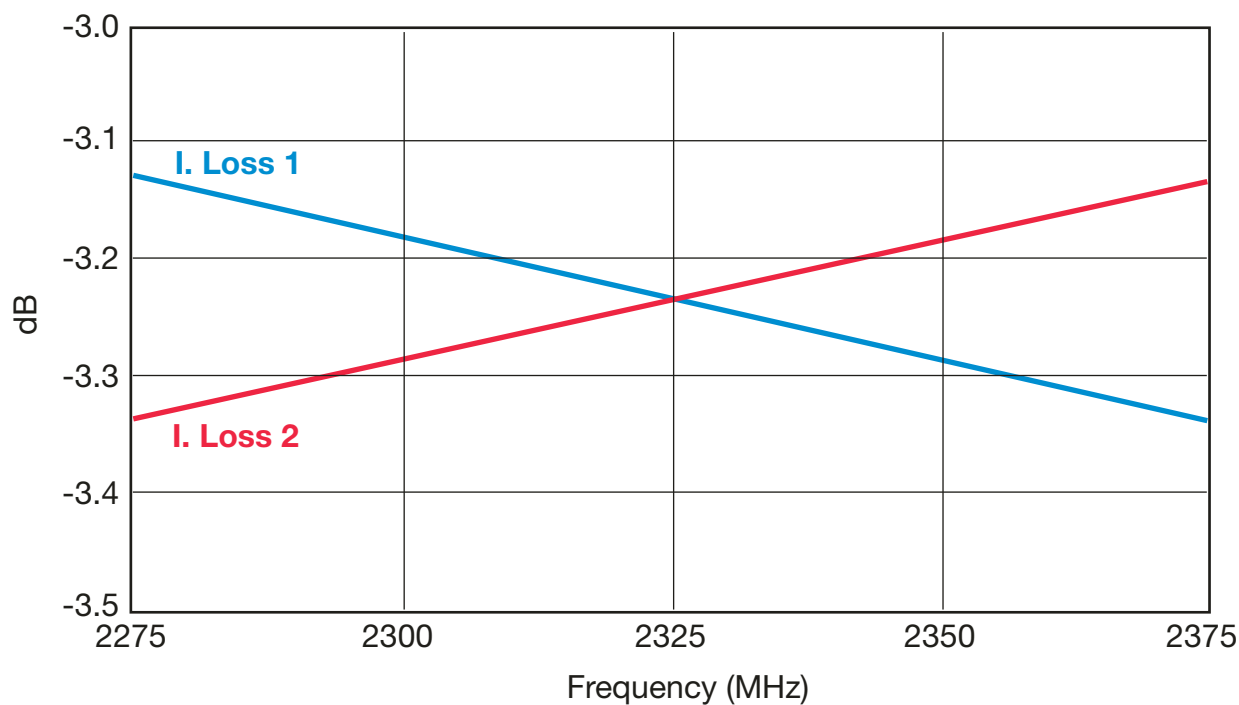

## DB0805 3dB 90° Test Jigs

### GENERAL DESCRIPTION

These jigs are designed for testing the DB0805 3dB 90° Couplers using a Vector Network Analyzer.

They consist of a dielectric substrate, having 50Ω microstrips as conducting lines and a bottom ground plane located at a distance of 0.254mm from the microstrips.

The substrate used is Neltec's NH9338ST0254C1BC.

The connectors are SMA type (female), 'Johnson Components Inc.' Product P/N: 142-0701-841.

Both a measurement jig and a calibration jig are provided.

The calibration jig is designed for a full 2-port calibration, and consists of an open line, short line and through line. LOAD calibration can be done by a 50Ω SMA termination.

### MEASUREMENT PROCEDURE

When measuring a component, it can be either soldered or pressed using a non-metallic stick until all four ports touch the appropriate pads. Set the VNA to the relevant frequency band. Connect the VNA using a 10dB attenuator on the jig

terminal connected to port 2. Follow the VNA's instruction manual and use the [calibration jig](#) to perform a full 2-port calibration in the required bandwidths.

#### Place the coupler on the [measurement jig](#) as follows:

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| Input (Coupler) ⚡ Connector 1 (Jig) | Output 1 (Coupler) ⚡ Connector 3 (Jig) |
| 50Ω (Coupler) ⚡ Connector 2 (Jig)   | Output 2 (Coupler) ⚡ Connector 4 (Jig) |

#### To measure [R. Loss](#) and [I. Loss 1](#) connect:


|                                  |                                  |
|----------------------------------|----------------------------------|
| Connector 1 (Jig) ⚡ Port 1 (VNA) | Connector 3 (Jig) ⚡ Port 2 (VNA) |
| Connector 2 (Jig) ⚡ 50Ω          | Connector 4 (Jig) ⚡ 50Ω          |

#### To measure [R. Loss](#) and [I. Loss 2](#) connect:

|                                  |                                  |
|----------------------------------|----------------------------------|
| Connector 1 (Jig) ⚡ Port 1 (VNA) | Connector 3 (Jig) ⚡ 50Ω          |
| Connector 2 (Jig) ⚡ 50Ω          | Connector 4 (Jig) ⚡ Port 2 (VNA) |

#### To measure [Isolation](#) connect:

|                         |                                  |
|-------------------------|----------------------------------|
| Connector 1 (Jig) ⚡ 50Ω | Connector 3 (Jig) ⚡ Port 1 (VNA) |
| Connector 2 (Jig) ⚡ 50Ω | Connector 4 (Jig) ⚡ Port 2 (VNA) |

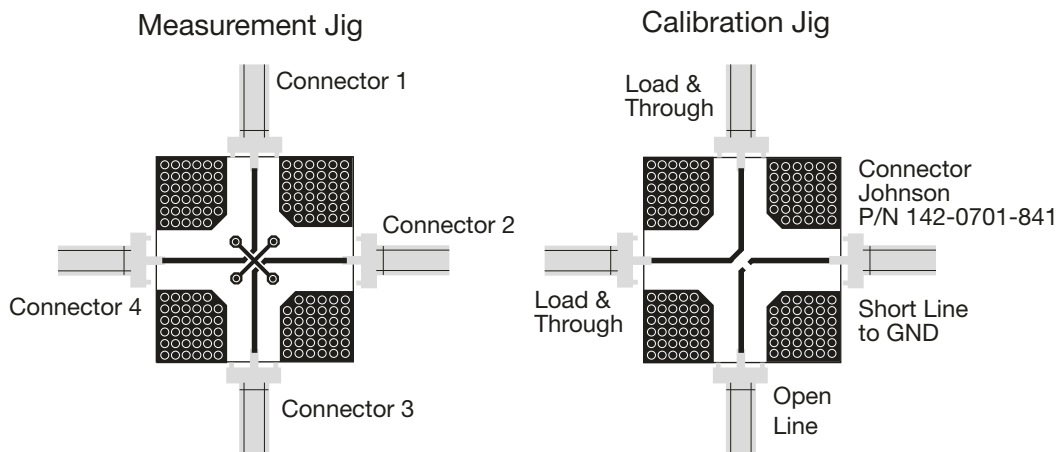

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9