

Manual Supplement

Manual Title: 28 II Ex Users
Print Date: November 2011
Revision/Date:

Supplement Issue: **1**
Issue Date: 2/12
Page Count: 7

This supplement contains information necessary to ensure the accuracy of the above manual. This manual is distributed as an electronic manual on the following CD-ROM:

| | |
|-----------------|----------|
| CD Title: | 28 II Ex |
| CD Rev. & Date: | 11/2011 |
| CD PN: | 3945765 |

Change #1, 60849 & 60854

On page 1, replace the second paragraph with:

The Product is designed for operation in potentially explosive areas of Zone 1, 2, 21, 22, and M1 as specified in Directive 1999/92/EC and 94/9/EC (ATEX). There can be dangerous consequences if you do not follow these instructions.

On page 2, replace the last bullet with:

Industrial use in potentially explosive areas of zone 1, 2, 21, 22, or M1, in accordance with ATEX requirements (see the EX safety instructions & regulations section)

On page 7, replace the entire page with:

Ex-Certification Data

- Ex-Type certificate no: PTB 11 ATEX 2028 X
IECEX PTB 11.0080X
- Ex-Designation: ATEX: II 2G Ex ia IIC T4 Gb
II 2D Ex ia IIIC T130 °C Db
I M1 Ex ia I Ma
IECEX: Ex ia IIC T4 Gb
Ex ia IIIC T130 °C Db
Ex ia I Ma
- CE: CE0102
- Operating Temperature: -15 °C to 50 °C
- Storage Temperature: -40 °C to +60 °C
- Batteries: 3 AAA Alkaline batteries, NEDA 24A IEC LR03. Table 7 shows the approved batteries for this Product.

For connections to intrinsically-safe circuits, observe these Product connections:

Voltage – measurement input $U_i = 65 \text{ V}$:

$U_0 = 9.54 \text{ V}$
 $C_i = \text{negligible}$
 $I_0 = \text{negligible}$ $I_i = \text{negligible}$
 $L_i = \text{negligible}$

$P_0 = 3.4 \text{ mW}$ $R_i = 2.47\text{K}$

| Lo/Co | | | | | | |
|-------------------|------|------|---|-----|-----|------|
| Lo/mH | 1000 | 100 | 2 | 0.5 | 0.1 | 0.01 |
| Co/ μF | 0 | 0.61 | 1 | 1.4 | 2.1 | 3.6 |

Current – measurement input $I_i = 5 \text{ A}$:

$U_0 = 0 \text{ V}$ $U_i = 65 \text{ V}$
 $C_0 = 1000 \mu\text{F}$ $C_i = \text{negligible}$
 $I_0 = 0 \text{ mA}$
 $L_0 = 1000 \text{ mH}$ $L_i = \text{negligible}$
 $P_0 = 0 \text{ mW}$

mA/ μA Jack

$U_0 = 1.95 \text{ V}$ $U_i = 65 \text{ V}$
 $C_i = \text{negligible}$
 $I_0 = 9.7 \mu\text{A}$ $I_i = \text{Internally limited by a } 440 \text{ mA fuse}$
 $L_i = \text{negligible}$
 $P_0 = \text{negligible}$


| Lo/Co | | | | | | |
|-------------|------|-----|----|----|-----|-------|
| Lo/mH | 1000 | 100 | 5 | 1 | 0.5 | 0.005 |
| Co/ μ F | 0 | 14 | 19 | 25 | 30 | 1000 |

For measurements on protected electric circuits:


- Approved for Zones 2 and 1, device group II, explosion group IIC (explosive gases, vapors and mist), temperature class T4.
- Approved for Zones 21 and 22, device group II, explosion group IIIC, conducting and non-conducting dust, fibers, and flyings.
- Approved for use in mines. Device group I, explosion group I, methane, and coal dust.

On page 43, replace Table 10 with:

Table 10. Replacement Parts

| Description | Qty. | Fluke Part or Model Number |
|--|------|----------------------------|
| Fuse, 11 A, 1000 V, FAST | 1 | 803293 |
| 28 II Ex Fuse Assembly | 1 | 4016494 |
| Alligator Clip, Black | 1 | AC172 or AC175 |
| Alligator Clip, Red | 1 | |
| Test Lead Set | 1 | TL175 |
| 28 II Ex Manual Information Pack (Includes Users Manual, CD & Getting Started Manual) | 1 | 4013990 |
| Fluke Input Cap, Amp Jack Plugs for DMM's (10 packs) | 1 | 4145825 |
| <p> To ensure safety, use exact replacement only.</p> | | |

On page 44, replace Figure 12 with:

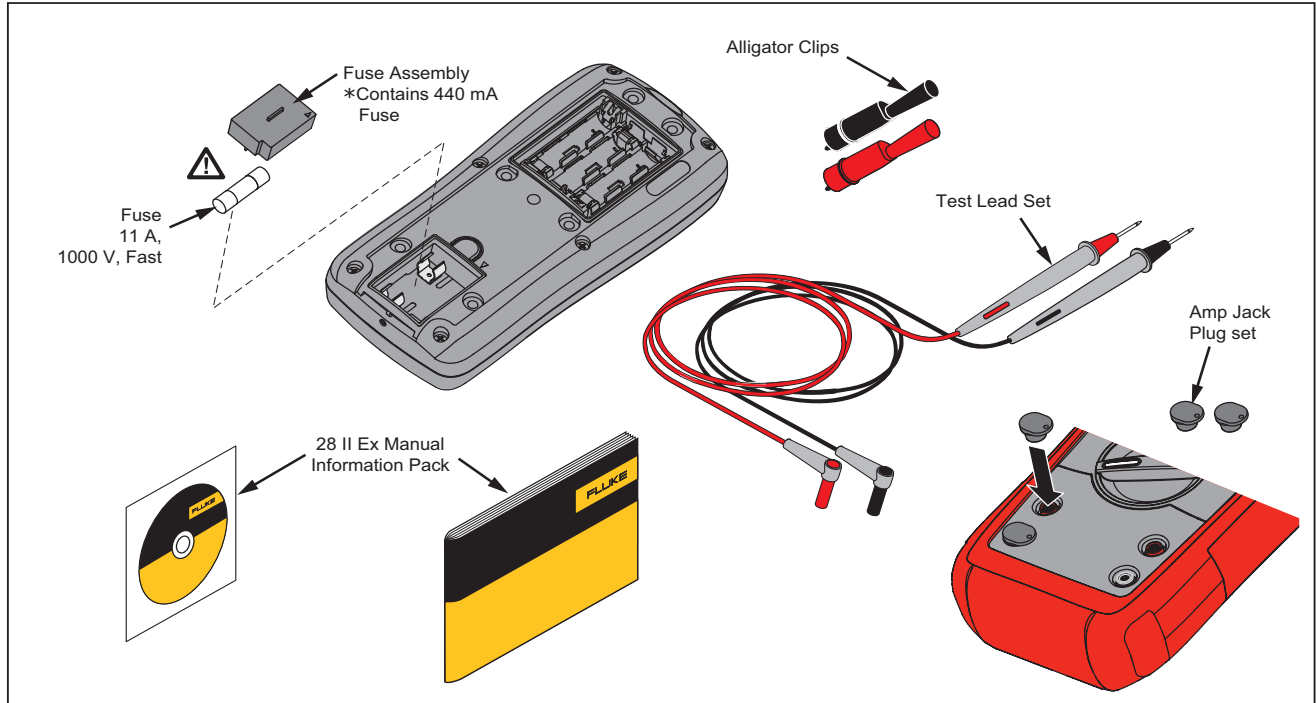

grt11.eps

Figure 12. Replacement Parts

On page 45, Replace Table 11 with:


Table 11. Accessories

| Item | Description |
|---|------------------------------------|
| AC172 or AC175 | Alligator Clips |
| TL175 | Silicone test lead set with probes |
| Amp Jack Plug Set | 2 Pack for DMM's |
| I400 | ⚠ AC Current Clamp ^[1] |
| 80PK-27 | ⚠ Temperature Probe ^[2] |
| <p>All accessories in this table are approved for use in explosive hazardous environments. Fluke accessories are available from an authorized Fluke distributor.</p> <p>[1] ⚠ Warning - To prevent personal injury or property damage, do not use this accessory in hazardous areas where dust is moved, transported, or conveyed.</p> <p>[2] ⚠ Warning - To prevent personal injury or property damage, do not use this accessory in dust hazardous areas.</p> | |

On page 46, under **Temperature** replace Storage with:

Storage -40 °C to +85 °C (without battery)
 -40 °C to +60 °C (with battery)

On page 47, replace **Certifications** with:

CertificationsCSA, TÜV, CE,  ATEX, IECEx

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9