



- Low offset voltage and offset current
- Low offset voltage and current drift
- Low input bias current
- Low input noise voltage
- Large common mode and differential voltage ranges

|                                        |                 |
|----------------------------------------|-----------------|
| Supply Voltage                         | ± 22V           |
| Internal Power Dissipation (Note 1)    |                 |
| Metal Can                              | 500mW           |
| Differential Input Voltage             | ± 30V           |
| Input Voltage (Note 2)                 | ± 15V           |
| Storage Temperature Range              | -65°C to +150°C |
| Operating Temperature Range(HC)        | 0°C to 70°C     |
| (HM)                                   | -55°C to +125°C |
| Lead Temperature(Soldering, 10s)       | 300°C           |
|                                        | 260°C           |
| Output Short Circuit Duration (Note 3) | Indefinite      |

**Note 3.** Short Circuit may be to ground or either supply. Rating applies to +125°C case temperature or +75°C ambient temperature for  $I_{SET} \leq 30\mu A$ .

|             | Dice          | TO-99 Can    |
|-------------|---------------|--------------|
| $\mu$ A777C | $\mu$ A777C/D | $\mu$ A777HC |
| $\mu$ A777M | $\mu$ A777M/D | $\mu$ A777MC |


The  $\mu A777$  is a monolithic Precision Operational Amplifier. It is an excellent choice when performance versus cost trade-offs are possible between super beta or FET input operational amplifiers and low cost general purpose operational amplifiers. Low offset and bias currents improve system accuracy when used in applications such as long term integrators, sample and hold circuits and high source impedance summing amplifiers. Even though the input bias current is extremely low, the  $\mu A777$  maintains full  $\pm 30V$  differential voltage range. High common mode input voltage range, latch-up protection, short circuit protection and simple frequency compensation make the device versatile and easily used.

(outline dwg TY)












**ELECTRICAL CHARACTERISTICS FOR μA777** ( $V_S = \pm 15V$ ,  $T_A = 25^\circ C$ ,  $C_C = 30pF$  unless otherwise specified)

| PARAMETERS                                                           |           | CONDITIONS                                                                      | MIN    | TYP          | MAX         | UNITS |
|----------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------|--------|--------------|-------------|-------|
| Input Offset Voltage                                                 |           | $R_S \leq 50k\Omega$                                                            |        | 0.7          | 5.0         | mV    |
| Input Offset Current                                                 |           |                                                                                 |        | 0.7          | 20.0        | nA    |
| Input Bias Current                                                   |           |                                                                                 |        | 25           | 100         | nA    |
| Input Resistance                                                     |           |                                                                                 | 1.0    | 2.0          |             | MΩ    |
| Input Capacitance                                                    |           |                                                                                 |        | 3.0          |             | pF    |
| Offset Voltage Adjustment Range                                      |           |                                                                                 |        | ±25          |             | mV    |
| Large Signal Voltage Gain                                            |           | $R_L \geq 2k\Omega$ , $V_{OUT} = \pm 10V$                                       | 25,000 | 250,000      |             | V/V   |
| Output Resistance                                                    |           |                                                                                 |        | 100          |             | Ω     |
| Output Short Circuit Current                                         |           |                                                                                 |        | ±25          |             | mA    |
| Supply Current                                                       |           |                                                                                 |        | 1.9          | 2.8         | mA    |
| Power Consumption                                                    |           |                                                                                 |        | 60           | 85          | mW    |
| Transient Response<br>(Voltage Follower,<br>Gain of 1)               | Rise Time | $V_{IN} = 20mV$ , $C_C = 30pF$<br>$R_L = 2k\Omega$ , $C_L \leq 100pF$           |        | 0.3          |             | μs    |
|                                                                      | Overshoot |                                                                                 |        | 5.0          |             | %     |
| Slew Rate<br>(Voltage Follower, Gain of 1)                           |           | $R_L \geq 2k\Omega$                                                             |        | 0.5          |             | V/μs  |
| Transient Response<br>(Voltage Follower,<br>Gain of 10)              | Rise Time | $V_{IN} = 20mV$ , $C_C = 3.5pF$<br>$R_L = 2k\Omega$ , $C_L \leq 100pF$          |        | 0.3          |             | μs    |
|                                                                      | Overshoot |                                                                                 |        | 5.0          |             | %     |
| Slew Rate<br>(Voltage Follower, Gain of 10)                          |           | $R_L \leq 2k\Omega$ , $C_C = 3.5pF$                                             |        | 5.5          |             | V/μs  |
| The following specifications apply over operating temperature range. |           |                                                                                 |        |              |             |       |
| Input Offset Voltage                                                 |           | $R_S \leq 50k\Omega$                                                            |        | 0.8          | 5.0         | mV    |
| Average Input Offset Voltage Drift                                   |           | $R_S \leq 50k\Omega$                                                            |        | 4.0          | 30          | μV/°C |
| Input Offset Current                                                 |           |                                                                                 |        |              | 40          | nA    |
| Average Input Offset Current Drift                                   |           | $25^\circ C \leq T_A \leq +70^\circ C$<br>$0^\circ C \leq T_A \leq +25^\circ C$ |        | 0.01<br>0.02 | 10.3<br>0.6 | nA/°C |
| Input Bias Current                                                   |           |                                                                                 |        |              | 200         | nA    |
| Input Voltage Range                                                  |           |                                                                                 | ±12    | ±13          |             | V     |
| Common Mode Rejection Ratio                                          |           | $R_S \leq 50k\Omega$                                                            | 70     | 95           |             | dB    |
| Supply Voltage Rejection Ratio                                       |           | $R_S \leq 50k\Omega$                                                            |        | 15           | 150         | μV/V  |
| Large Signal Voltage Gain                                            |           | $R_L \geq 2k\Omega$ , $V_{OUT} = \pm 10V$                                       | 15,000 |              |             | V/V   |
| Output Voltage Swing                                                 |           | $R_L \geq 10k\Omega$                                                            | ±12    | ±14          |             | V     |
|                                                                      |           | $R_L \geq 2k\Omega$                                                             | ±10    | ±13          |             | V     |
| Power Consumption                                                    |           |                                                                                 |        | 60           | 100         | mW    |

**EQUIVALENT CIRCUIT**

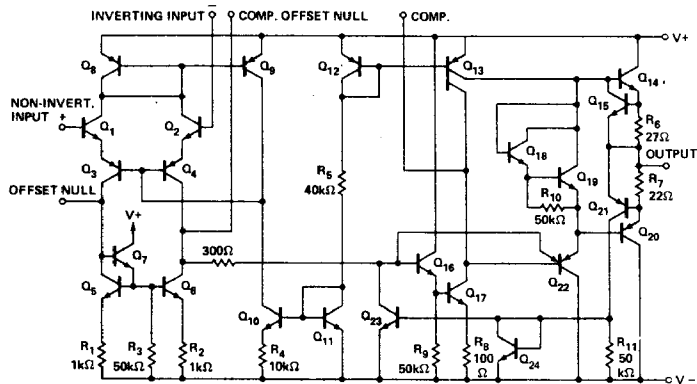


**TYPICAL PERFORMANCE CURVES**

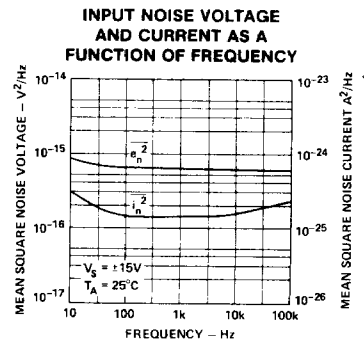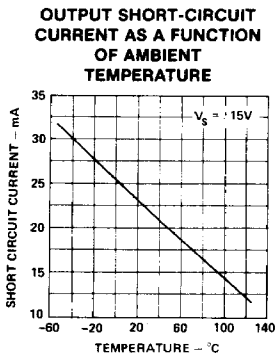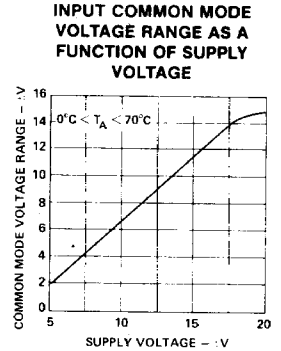


**TYPICAL PERFORMANCE CURVES**


**OPEN LOOP VOLTAGE GAIN  
AS A FUNCTION OF  
FREQUENCY**




**OPEN LOOP PHASE  
RESPONSE AS A  
FUNCTION OF FREQUENCY**




**OUTPUT VOLTAGE SWING  
AS A FUNCTION OF  
FREQUENCY**




**OPEN LOOP VOLTAGE GAIN  
AS A FUNCTION OF  
FREQUENCY FOR VARIOUS  
GAIN/COMPENSATION OPTIONS**




**FREQUENCY RESPONSE  
FOR VARIOUS  
CLOSED-LOOP GAINS**




**COMPENSATION  
CAPACITANCE AS A  
FUNCTION OF CLOSED  
LOOP VOLTAGE GAIN**




**INPUT RESISTANCE,  
OUTPUT RESISTANCE,  
AND INPUT CAPACITANCE  
AS A FUNCTION OF FREQUENCY**




**COMMON MODE REJECTION  
RATIO AS A FUNCTION OF  
FREQUENCY**




**INPUT OFFSET VOLTAGE  
DRIFT AS A FUNCTION  
OF TIME**




**VOLTAGE FOLLOWER  
TRANSIENT RESPONSE  
(GAIN OF 1)**



**TRANSIENT RESPONSE  
TEST CIRCUIT**




**VOLTAGE FOLLOWER  
LARGE SIGNAL  
PULSE RESPONSE**




# TYPICAL PERFORMANCE CURVES

**THERMAL RESPONSE OF INPUT OFFSET VOLTAGE TO STEP CHANGE OF CASE TEMPERATURE**





**STABILIZATION TIME OF INPUT OFF-SET VOLTAGE FROM POWER TURN-ON**




## FEED FORWARD COMPENSATION


**LARGE SIGNAL FEEDFORWARD TRANSIENT RESPONSE**

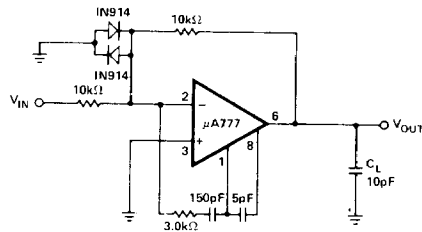

**VOLTAGE OFFSET NULL CIRCUIT**




SUGGESTED




ALTERNATE

**GAIN TEST CIRCUIT**

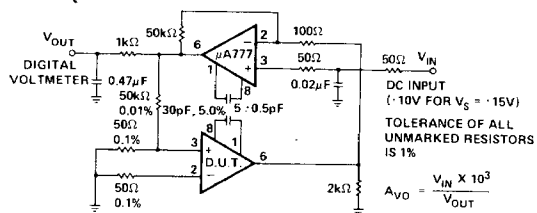


# TYPICAL APPLICATIONS

## BIAS COMPENSATED LONG TIME INTEGRATOR



\*ADJUST  $R_3$  FOR MINIMUM INTEGRATOR DRIFT

## CAPACITANCE MULTIPLIER




$$C = \frac{R_1}{R_3} C_1$$


$$I_L = \frac{V_{OS} + I_{OS} R_1}{R_3}$$

$$R_S = R_3$$

## SAMPLE AND HOLD




## AMPLIFIER FOR CAPACITANCE TRANSDUCERS




LOW FREQUENCY CUTOFF  $R_1 \times C_1$

## BILATERAL CURRENT SOURCE




$$I_{OUT} = \frac{R_3 V_{IN}}{R_1 R_5} ; R_1 = R_2 ; R_3 = R_4 + R_5$$

## HIGH SLEW RATE POWER AMPLIFIER

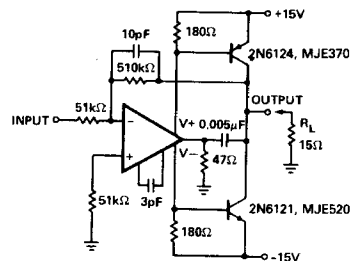

## ±100V COMMON MODE RANGE INSTRUMENTATION AMPLIFIER

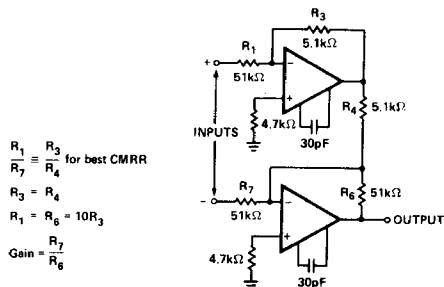


$$\frac{R_1}{R_7} = \frac{R_3}{R_4} \text{ for best CMRR}$$

$$R_3 = R_4$$

$$R_1 = R_6 = 10R_3$$

$$\text{Gain} = \frac{R_7}{R_6}$$

## INSTRUMENTATION AMPLIFIER WITH HIGH COMMON MODE REJECTION

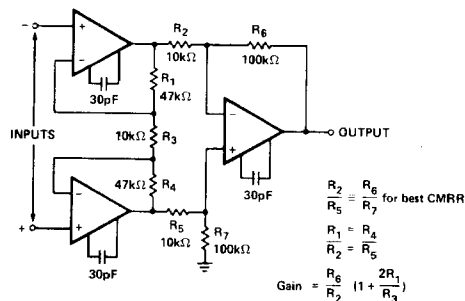

$$\frac{R_2}{R_5} = \frac{R_6}{R_7} \text{ for best CMRR}$$

$$\frac{R_1}{R_2} = \frac{R_4}{R_5}$$

$$\text{Gain} = \frac{R_6}{R_2} \left( 1 + \frac{2R_1}{R_3} \right)$$

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9