




**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**

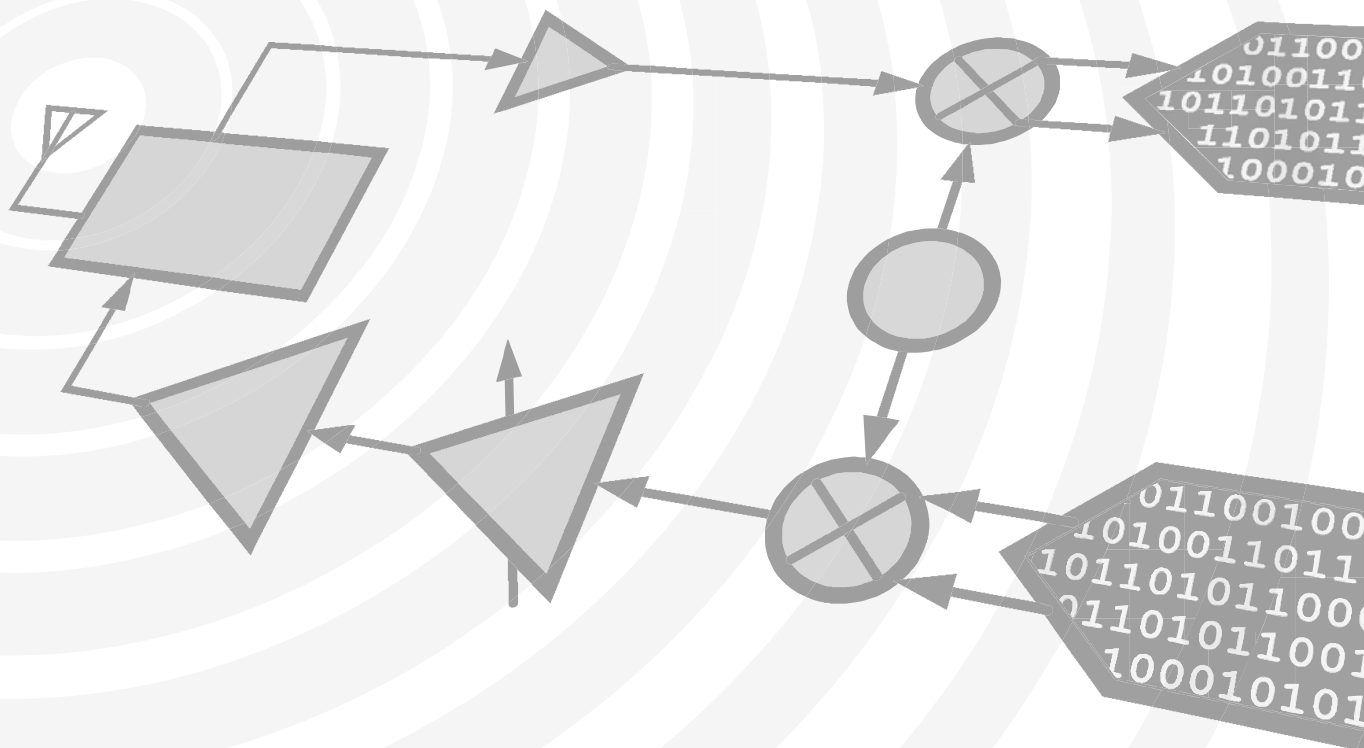

MICROWAVE CORPORATION v06.0412



# HMC713MS8 / 713MS8E


**54 dB, LOGARITHMIC  
DETECTOR / CONTROLLER, 45 - 2700 MHz**

## Typical Applications

The HMC713MS8(E) is ideal for:

- Cellular Infrastructure
- WiMAX, WiBro & LTE/4G
- Power Monitoring & Control Circuitry
- Receiver Signal Strength Indication (RSSI)
- Automatic Gain & Power Control
- Military, ECM & Radar

## Functional Diagram

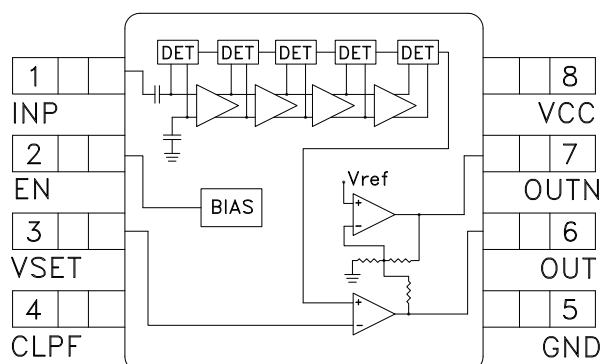

## Features

- Wide Dynamic Range: up to 54 dB
- High Accuracy:  
±1 dB with 54 dB Range Up To 2.7 GHz
- Fast Output Response Time
- Supply Voltage: +2.7 to +5.5V
- Power-Down Mode
- Excellent Stability over Temperature
- MSOP-8 SMT Package: 14.8 mm<sup>2</sup>

## General Description

The HMC713MS8(E) Logarithmic Detector/Controller is ideal for converting RF signals with frequencies in the 45 MHz to 2700 MHz range, to a proportional DC voltage at its output. The HMC713MS8(E) employs a successive compression technology which delivers 54 dB of dynamic range with high conversion accuracy over a wide input frequency range. As the input signal is increased, successive amplifiers move into saturation one by one creating an accurate approximation of the logarithm function. The outputs of a series of detectors are summed, converted into voltage domain and buffered to drive the OUT output. For detection mode, the OUT pin is connected to the VSET input and will provide a nominal logarithmic slope of 17 mV/dB and an intercept of -68 dBm. The HMC713MS8(E) can also be used in the controller mode where an external voltage is applied to the VSET pin to create an AGC or APC feedback loop.

## Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{CC} = +3V$ [1]

| Parameter                                                             | Typ. | Typ. | Typ. | Typ. | Typ. | Typ. | Units |
|-----------------------------------------------------------------------|------|------|------|------|------|------|-------|
| Input Frequency                                                       | 45   | 100  | 900  | 1900 | 2200 | 2700 | MHz   |
| ±3 dB Dynamic Range                                                   | 60   | 61   | 61   | 62   | 62   | 68   | dB    |
| ±3 dB Dynamic Range Center                                            | -26  | -28  | -28  | -30  | -31  | -27  | dBm   |
| ±1 dB Dynamic Range                                                   | 53   | 54   | 54   | 54   | 53   | 59   | dB    |
| OUT Slope                                                             | 17.3 | 17.3 | 17.2 | 17.1 | 17.1 | 17.2 | mV/dB |
| OUT Intercept                                                         | -68  | -68  | -69  | -71  | -72  | -70  | dBm   |
| Variation of OUT with Temperature from -40°C to +85°C @ -20 dBm Input | -0.8 | -1   | -0.9 | -0.5 | -0.6 | -0.5 | dB    |

[1] Detector mode measurements; OUT (Pin 6) is shorted to VSET (Pin 3) through an RC network.



MICROWAVE CORPORATION v06.0412




# HMC713MS8 / 713MS8E

**54 DB, LOGARITHMIC  
DETECTOR / CONTROLLER, 45 - 2700 MHz**


## Electrical Specifications, (continued)

| Parameter                         | Conditions                                             | Min.      | Typ.              | Max.      | Units |
|-----------------------------------|--------------------------------------------------------|-----------|-------------------|-----------|-------|
| <b>Power Down (EN) Interface</b>  |                                                        |           |                   |           |       |
| Voltage Range for Normal Mode     |                                                        | 0.8 x Vcc |                   |           | V     |
| Voltage Range for Powerdown Mode  |                                                        |           |                   | 0.2 x Vcc | V     |
| Threshold Voltage                 |                                                        |           | Vcc/2             |           | V     |
| <b>Power Supply (Vcc)</b>         |                                                        |           |                   |           |       |
| Operating Voltage Range           |                                                        |           | 2.7 - 5.5         |           | V     |
| Supply Current in Normal Mode     |                                                        |           | 17                |           | mA    |
| Supply Current in Power Down Mode |                                                        |           | 0.3               |           | mA    |
| <b>OUT Interface</b>              |                                                        |           |                   |           |       |
| Rise Time                         | CLPF= 0, No Power to -10 dBm, 10% - 90%                |           | 24                |           | ns    |
| Fall Time                         | CLPF= 0, -10 dBm to No Power, 90% - 10%                |           | 70                |           | ns    |
| Output Video BW                   | 3 dB reduction in demodulated output voltage           |           | 16                |           | MHz   |
| Voltage Range                     | Closed Loop (Eval Board Setup)                         |           | 0.2 - 1.2         |           | V     |
| Voltage Range                     | Open Loop                                              |           | 0.1 to (Vcc -0.1) |           | V     |
| Current Drive Source / Sink       |                                                        |           | 3.5 / 0.51        |           | mA    |
| <b>OUTN Interface</b>             |                                                        |           |                   |           |       |
| Current Drive Source / Sink       |                                                        |           | 3.6 / 0.47        |           | mA    |
| <b>OUTN Interface</b>             |                                                        |           |                   |           |       |
| Output Voltage Range              |                                                        |           | 0.2 - 2.1         |           | V     |
| <b>RF Input</b>                   |                                                        |           |                   |           |       |
| Input Return Loss (S11)           | F= 50 MHz to 2.5 GHz<br>Z <sub>0</sub> = 50Ω, See plot |           | 10                |           | dB    |
| <b>VSET Interface</b>             |                                                        |           |                   |           |       |
| Input Impedance                   |                                                        |           | 1                 |           | MΩ    |
| Input Voltage Range               | Eval Board                                             |           | 0.2 - 1.2         |           | V     |
| Low Frequency Gain                | VSET to OUT                                            |           | 64                |           | dB    |
| Open Loop Corner Frequency        |                                                        |           | 11                |           | kHz   |


**Output Voltage & Error  
vs. Input Power,  $F_{in} = 45$  MHz**

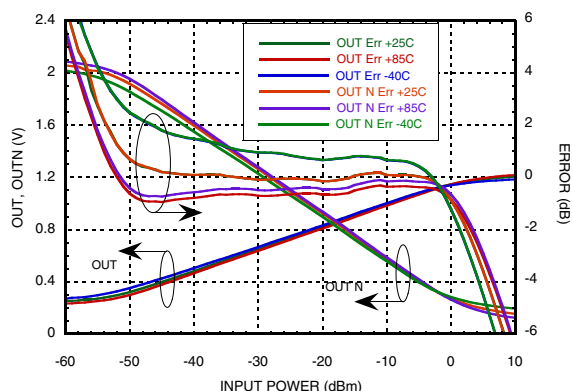


**Output Voltage & Error  
vs. Input Power,  $F_{in} = 100$  MHz**

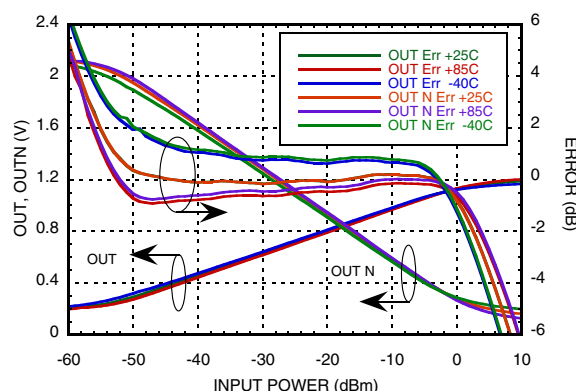


**Output Voltage & Error  
vs. Input Power,  $F_{in} = 900$  MHz**

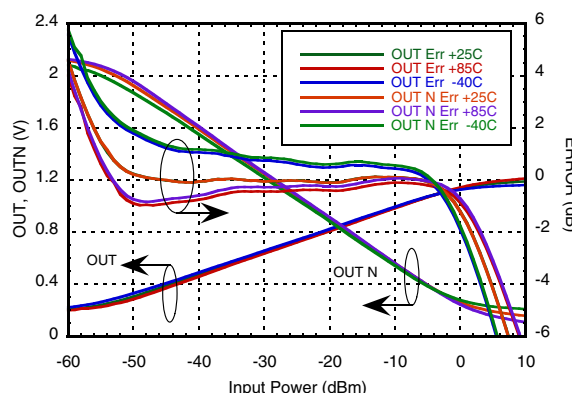


**Output Voltage & Error  
vs. Input Power,  $F_{in} = 1900$  MHz**

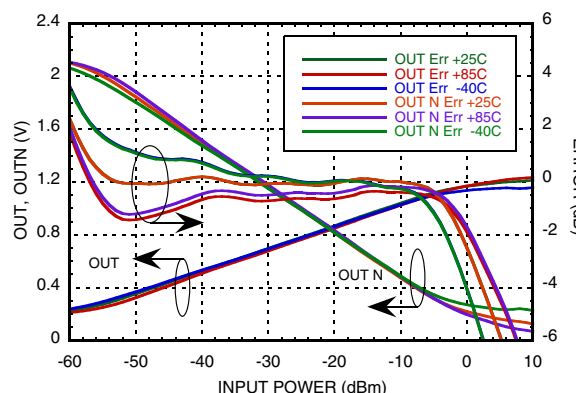

**Output Voltage & Error  
vs. Input Power,  $F_{in} = 2200$  MHz**

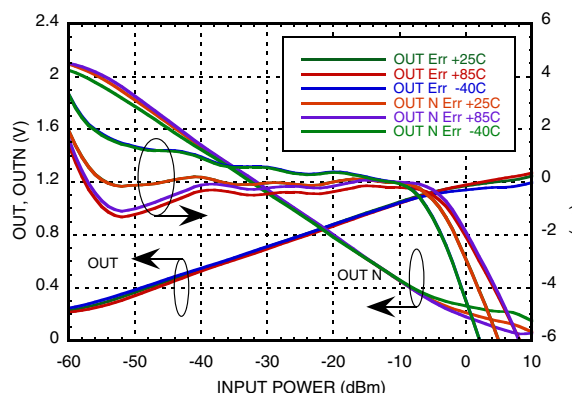

**Output Voltage & Error  
vs. Input Power,  $F_{in} = 2700$  MHz**

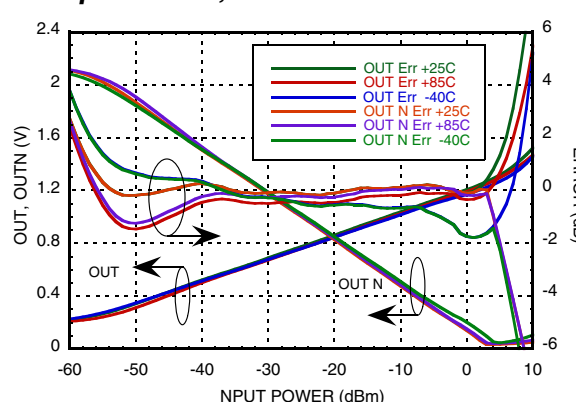


Unless otherwise noted:  $V_{cc} = +3V$ ,  $T_A = +25^\circ C$

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


**OUT Slope vs. Frequency**

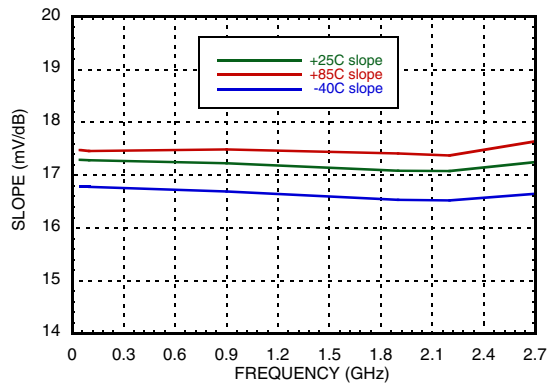


**OUT Slope vs. Supply Voltage**

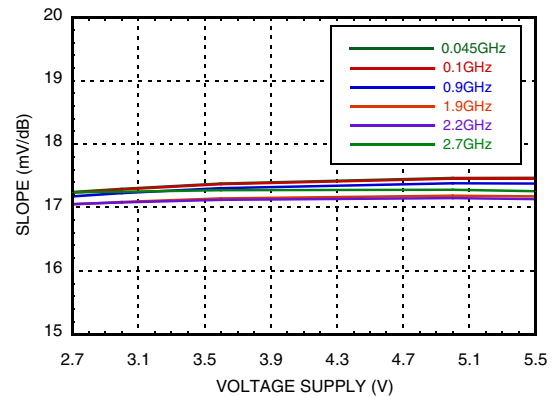


**OUT Intercept vs. Frequency**

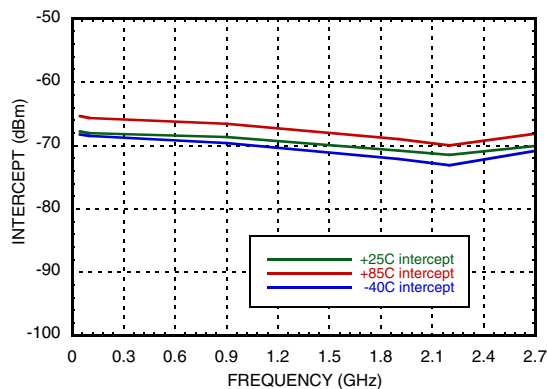


**OUT Intercept vs. Supply Voltage**

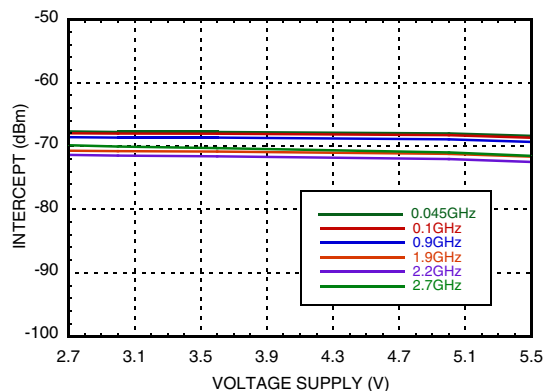

**OUT vs. Frequency & Input Power**

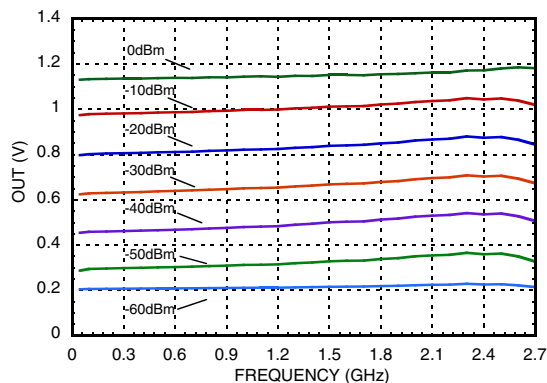

**OUT Voltage & Error vs. Frequency**





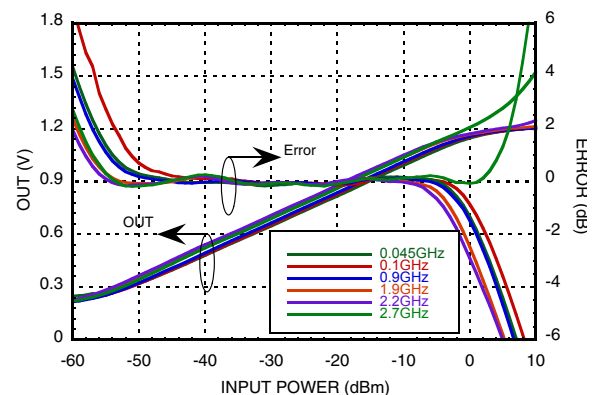


Unless otherwise noted:  $V_{CC} = +3V$ ,  $T_A = +25^\circ C$

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

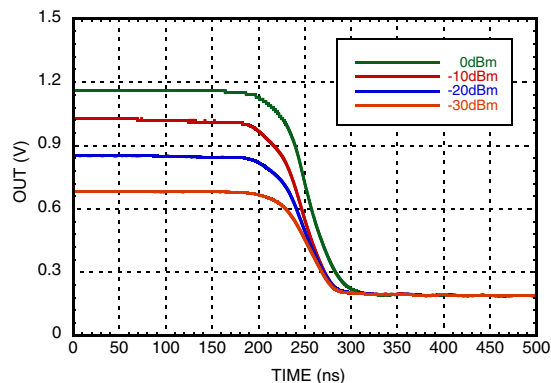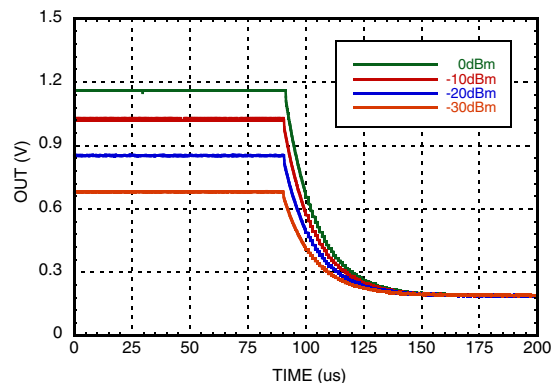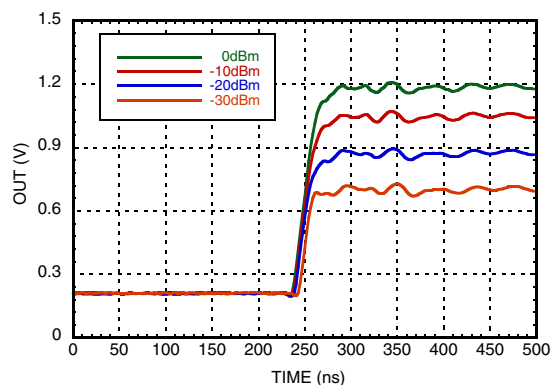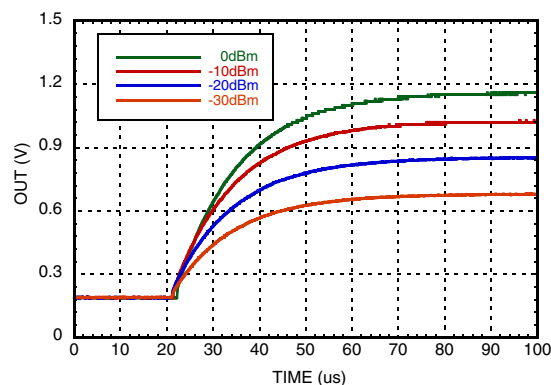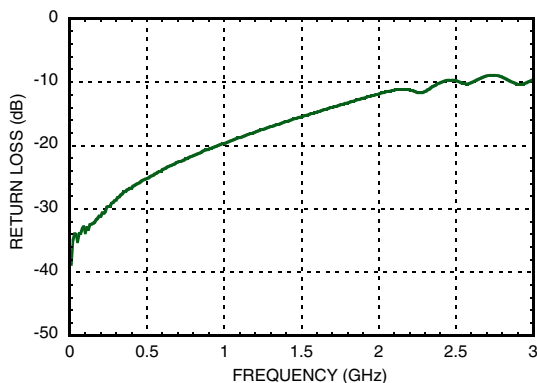**Output Response**
**Fall Time @ 900 MHz, C1 = Open**

**Output Response**
**Fall Time @ 900 MHz, C1 = 10nF**

**Output Response**
**Rise Time @ 900 MHz, C1 = Open**

**Output Response**
**Rise Time @ 900 MHz, C1 = 10nF**

**Input Return Loss**


Unless otherwise noted:  $V_{CC} = +3V$ ,  $T_A = +25^\circ C$

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


### Absolute Maximum Ratings

|                                                                           |                |
|---------------------------------------------------------------------------|----------------|
| Vcc                                                                       | 0 to +5.6V     |
| EN                                                                        | 0 to +5.6V     |
| VSET                                                                      | 0 to +5.6V     |
| OUT Output Current                                                        | 5 mA           |
| OUTN Output Current                                                       | 5 mA           |
| RF Input Power                                                            | 12 dBm         |
| Junction Temperature                                                      | 125 °C         |
| Continuous P <sub>diss</sub> (T = 85°C)<br>(Derate 5.43 mW/°C above 85°C) | 0.22 Watts     |
| Thermal Resistance (R <sub>m</sub> )<br>(junction to lead)                | 184 °C/W       |
| Storage Temperature                                                       | -65 to +150 °C |
| Operating Temperature                                                     | -40 to +85 °C  |
| ESD Sensitivity (HBM)                                                     | Class 1C       |



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

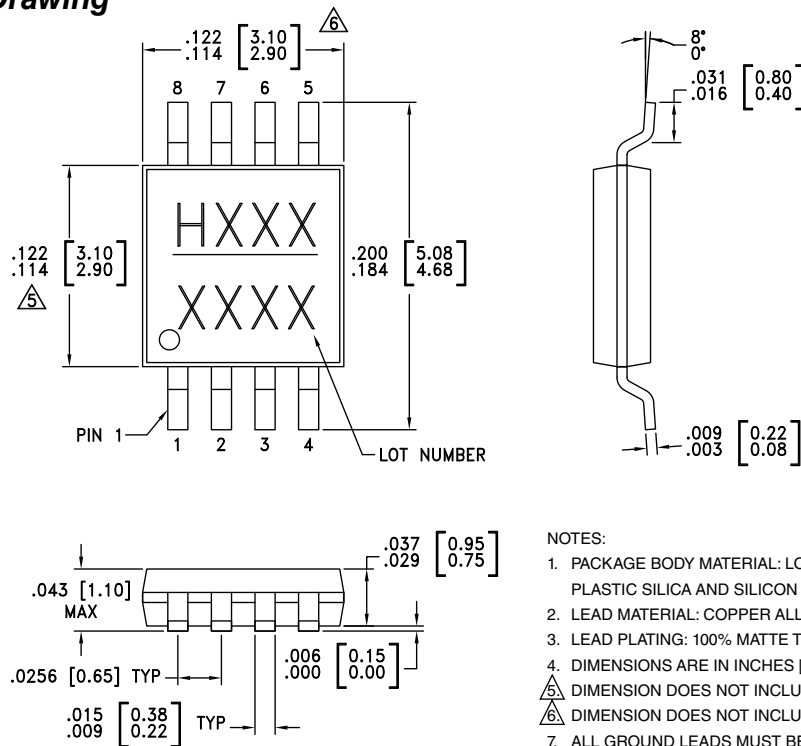

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC713MS8   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H713<br>XXXX                   |
| HMC713MS8E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H713<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)





MICROWAVE CORPORATION v06.0412



**HMC713MS8 / 713MS8E**

**54 DB, LOGARITHMIC  
DETECTOR / CONTROLLER, 45 - 2700 MHz**


**Pin Descriptions**

| Pin Number | Function | Description                                                                                                                                                                                                                                                                                                                                                     | Interface Schematic |
|------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1          | INP      | RF input pin.                                                                                                                                                                                                                                                                                                                                                   |                     |
| 2          | EN       | <p>Enable pin.</p> <p>Apply <math>V_{EN} &gt; 0.8 \times V_{cc}</math> for normal operation.</p> <p>Apply <math>V_{EN} &lt; 0.2 \times V_{cc}</math> to disable the HMC713MS8E and reduce supply current to 0.3mA.</p> <p>To ensure proper start-up apply the power-up sequence shown in the "Power-Up Timing Diagram" attached to the application circuit.</p> |                     |
| 3          | VSET     | <p>Set point input for controller mode.</p> <p>Connect to OUT with the resistor network shown in evaluation board drawing for detector mode.</p>                                                                                                                                                                                                                |                     |
| 4          | CLPF     | Connection for ground referenced external lowpass filter capacitor.                                                                                                                                                                                                                                                                                             |                     |
| 5          | GND      | Device ground.                                                                                                                                                                                                                                                                                                                                                  |                     |

### Pin Descriptions (Continued)
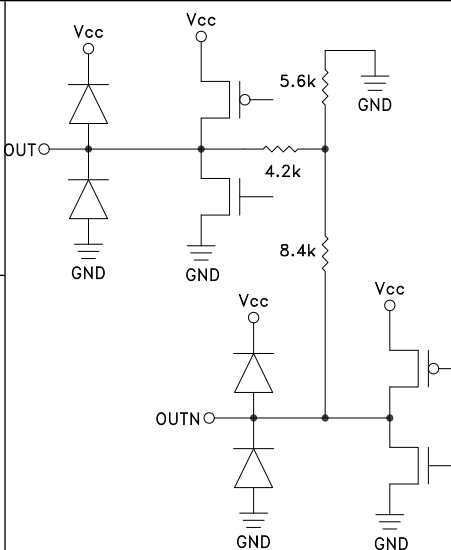
| Pin Number | Function | Description                                                                                                                           | Interface Schematic                                                                   |
|------------|----------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 6          | OUT      | Logarithmic output that converts the input power to a DC level in controller mode. Output voltage increases with increasing amplitude |     |
| 7          | OUTN     | Inverted logarithmic output.<br>$OUTN = 2.55 - 2 \times OUT$                                                                          |                                                                                       |
| 8          | Vcc      | Bias Supply.<br>Connect supply voltage to all this pin with appropriate filtering.                                                    |  |

### Application & Evaluation PCB Schematic

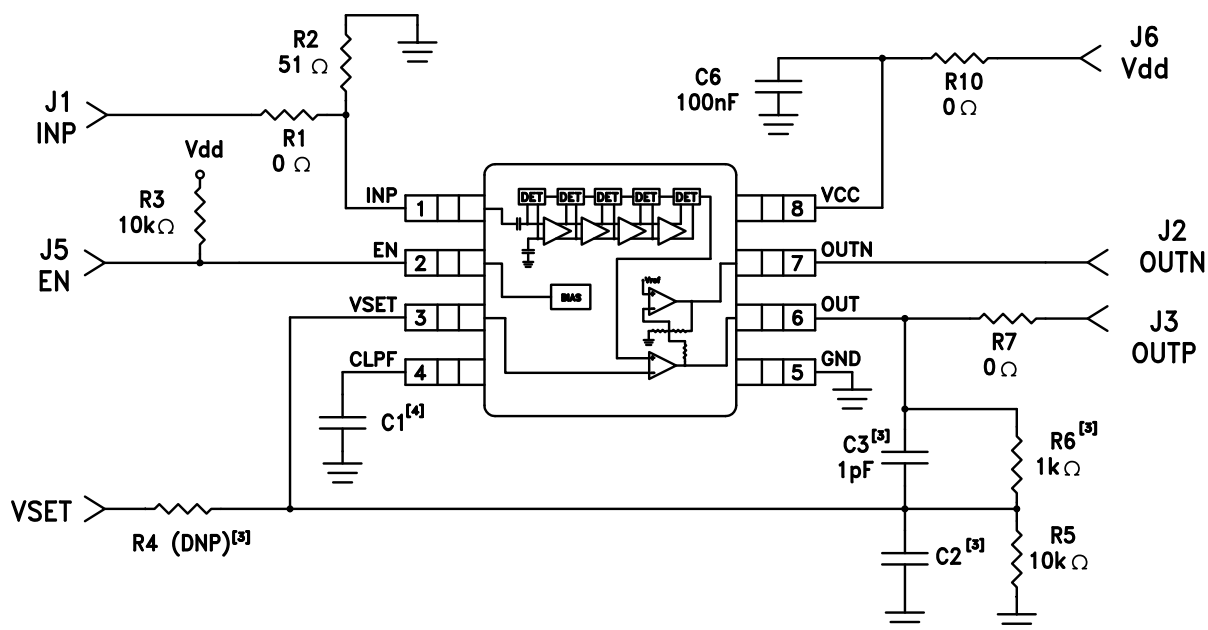

#### Notes


Note 1: The HMC713MS8(E) evaluation board is pre-assembled for single-ended input, and detector/RSSI mode.


Note 2: For detector mode, connect high impedance volt meter to the OUT / OUTN port.

Note 3: For controller mode, remove R6 & C3 and install 1k  $\Omega$  resistor (R4) and 100pF capacitor (C2), then make appropriate connection to OUT and VSET. In controller mode, the OUT / OUTN output can be used to drive a variable gain amplifier, or a variable attenuator, either directly or through a buffer or microcontroller. VSET should be connected to an external supply, typically between +0.2 and +1.2V.

Note 4: An external capacitance C1 can be connected to CLPF port for additional filtering of OUT and OUTN outputs..

### Power-Up Timing Diagram

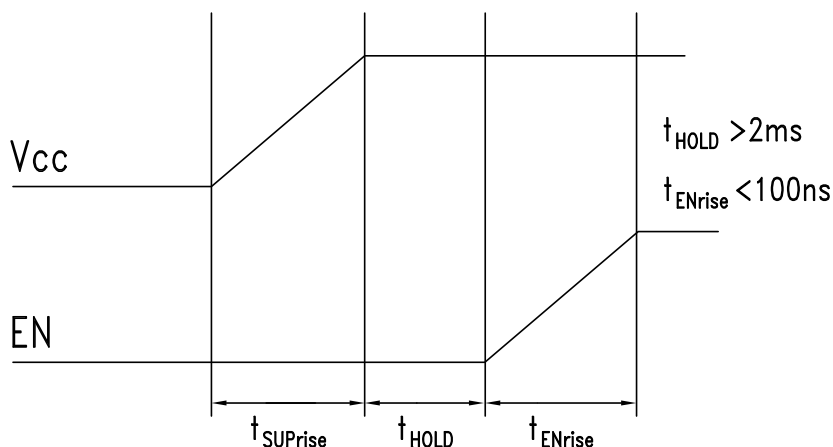

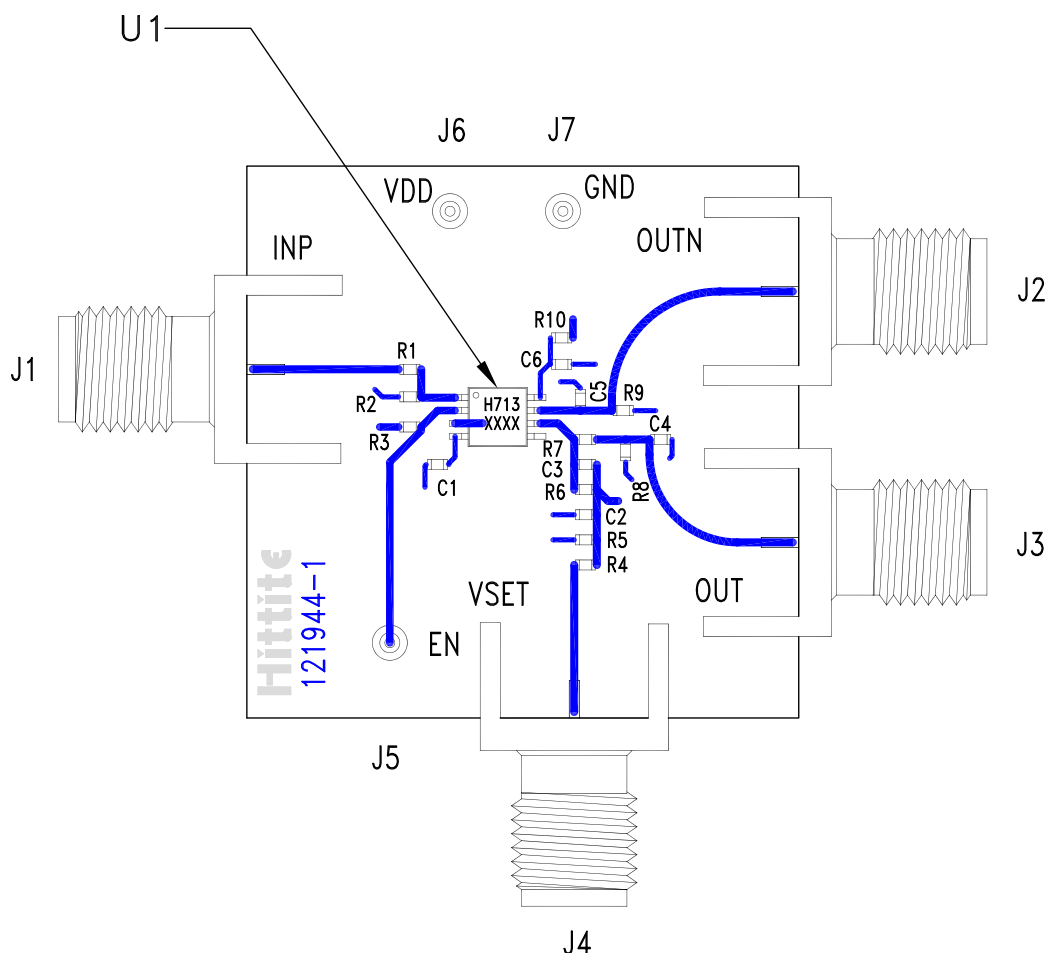**Evaluation PCB**

**List of Materials for Evaluation PCB 121947 <sup>[1]</sup>**

| Item               | Description                                       |
|--------------------|---------------------------------------------------|
| J1 - J3            | PC Mount SMA Connector                            |
| J5 - J7            | DC Pin                                            |
| C3                 | 1 pF Capacitor, 0402 Pkg.                         |
| C6                 | 0.1 $\mu$ F Capacitor, 0402 Pkg.                  |
| R1, R7, R10        | 0 $\Omega$ Resistor, 0402 Pkg.                    |
| R2                 | 51 $\Omega$ Resistor, 0402 Pkg.                   |
| R3, R5             | 10k Resistor, 0402 Pkg.                           |
| R6                 | 1k Resistor, 0402 Pkg.                            |
| U1                 | HMC713MS8(E)<br>Logarithmic Detector / Controller |
| PCB <sup>[2]</sup> | 121944 Evaluation PCB                             |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9