

Precision, Dual, JFET Input Operational Amplifier

FEATURES

- Low Input Offset Voltage
- Low Input Offset Voltage Drift
- Low Supply Current
- High Slew Rate
- Wide Bandwidth
- Low Noise
- Low Input Bias Current
- No Phase Reversal
- RF noise Immunity
- Guaranteed Temperature
- Operating Voltage
- Package

$V_{IO}=400\mu V$ max.
 $V_{IO}=700\mu V$ max.
 $(T_a = -40^\circ C \text{ to } +125^\circ C)$
 $\Delta V_{IO}/\Delta T=5\mu V/^\circ C$ max.
 $(T_a = -40^\circ C \text{ to } +125^\circ C)$
 $I_{CC}=3mA$ max.
 $SR=20V/\mu s$ typ.
 $f_t=7MHz$ typ.
 $e_n=10nV/\sqrt{Hz}$
 $(\text{at } f=1kHz \text{ typ.})$
 $I_B=80pA$ max.
 $(\text{at } T_a=25^\circ C)$

$T_{opr} = -40^\circ C \text{ to } +125^\circ C$
 $V_{opr} = \pm 4.5V \text{ to } \pm 16V$
 MSOP8 (VSP8)
 meet JEDEC MO-187-DA
 SOP8 JEDEC 150 mil

GENERAL DESCRIPTION


The NJM8512 is a dual high precision JFET input operational amplifier featuring low offset, low offset drift, low bias current, high slew rate, low noise and wide operating temperature range.

The precision performance, high speed and low noise make the NJM8512 especially suitable for filter and amplification of high speed and small signal in instruments, automated test equipment, sensors and other precision applications.

PACKAGE OUTLINE



NJM8512AR
 NJM8512BR
 (MSOP8 (VSP8))




NJM8512AE
 NJM8512BE
 (SOP8)

APPLICATIONS

- Current Sensor
- Photodiode Amplification
- Reference Voltage Circuit
- Automatic Test Equipment

PIN CONFIGURATION

(Top View)





MSOP8(VSP8)
 SOP8

PIN FUNCTION

- 1: OUTPUT A
- 2: -INPUT A
- 3: +INPUT A
- 4: V^-
- 5: +INPUT B
- 6: -INPUT B
- 7: OUTPUT B
- 8: V^+

ELECTRICAL CHARACTERISTICS

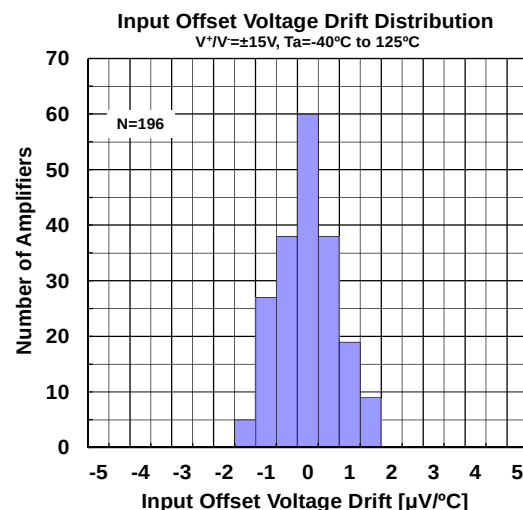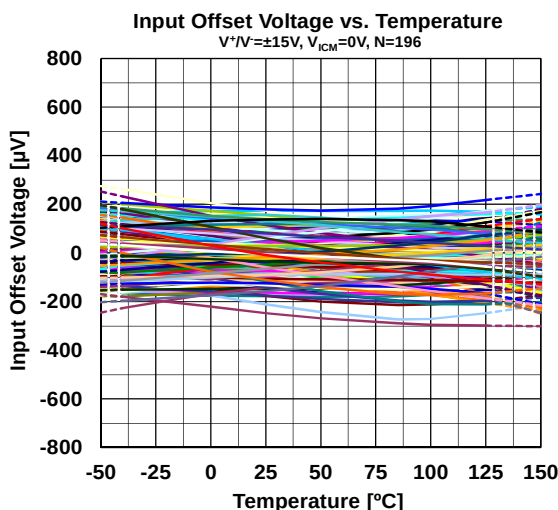

NJM8512

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V^+V^-	± 18	V
Differential Input Voltage	V_{ID}	± 36 (Note1)	V
Input Voltage	V_{IN}	$V^- - 0.3$ to $V^+ + 0.3$ (Note2)	V
Input Current	I_{IN}	± 10 (Note3)	mA
Power Dissipation MSOP8 (VSP8) SOP8	P_D	(2-layer / 4-layer) 595 (Note4) / 805 (Note4) 690 (Note4) / 1000 (Note4)	mW
Output Short-Circuit Duration		Infinite ($T_a \leq 25^\circ\text{C}$) (Note4)	
Operating Temperature Range	T_{opr}	-40 to +125	°C
Storage Temperature Range	T_{stg}	-65 to +150	°C

(Note1) Differential Input Voltage is the voltage difference between +INPUT and -INPUT.


(Note2) The normal operation will establish when any input is within the Common Mode Input Voltage Range of electrical characteristics.

(Note3) If the input voltage exceeds the supply voltage, the input current must be limited 10 mA or less by using a restriction resistance.

(Note4) 2-layer : EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting.

4-layer : EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting.

See Figure "Fig.1-1 : Power Dissipation Curve" when ambient temperature is over 25°C.

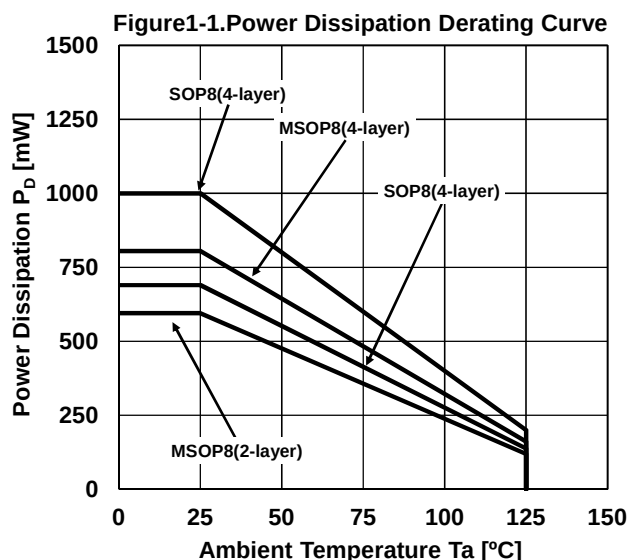

■ RECOMMENDED OPERATING VOLTAGE (Ta=25°C)

PARAMETER	SYMBOL	RATING	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V^+V^-		± 4.5	-	± 16	V

■ ELECTRICAL CHARACTERISTICS ($V^+ / V^- = \pm 15V$, $T_a = 25^\circ C$, $V_{ICM} = 0V$, unless otherwise noted.)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Characteristics						
Input Offset Voltage						
NJM8512BR/NJM8512BE	V _{IO1}		-	80	400	μV
	V _{IO2}	Ta = -40°C to 125°C	-	-	700	μV
NJM8512AR/NJM8512AE	V _{IO1}		-	80	800	μV
	V _{IO2}	Ta = -40°C to 125°C	-	-	1400	μV
Input Offset Voltage Drift						
NJM8512BR/NJM8512BE	ΔV _{IO} /ΔT	Ta = -40°C to 125°C	-	0.8	5	μV/°C
NJM8512AR/NJM8512AE	ΔV _{IO} /ΔT	Ta = -40°C to 125°C	-	1	9	μV/°C
Input Bias Current	I _{B1}		-	25	80	pA
	I _{B2}	Ta = -40°C to 125°C	-	-	35	nA
Input Offset Current	I _{IO1}		-	6	75	pA
	I _{IO2}	Ta = -40°C to 125°C	-	-	2	nA
Common Mode Input Voltage Range	V _{ICM1}	CMR ≥ 86dB	-12.5	-	+12.5	V
	V _{ICM2}	CMR ≥ 80dB, Ta = -40°C to 125°C	-12.5	-	+12.5	V
Common Mode Rejection Ratio	CMR1	V _{CM} = -12.5V to +12.5V	86	108	-	dB
	CMR2	V _{CM} = -12.5V to +12.5V, Ta = -40°C to 125°C	80	-	-	dB
	CMR3	V _{CM} = -10V to +10V	100	120	-	dB
Voltage Gain	A _{V1}	R _L =2kΩ, V _O = -13.5V to +13.5V	90	100	-	dB
	A _{V2}	R _L =2kΩ, V _O = -13.5V to +13.5V, Ta = -40°C to 125°C	82	-	-	dB
	A _{V3}	R _L =10kΩ, V _O = -13.5V to +13.5V	98	106	-	dB
Input capacitance	C _{IN}		-	10	-	pF
Channel Separation	CS	DC	-	125	-	dB
Output Characteristics						
Maximum Output Voltage	V _{OH1}	R _L =10kΩ, Ta = -40°C to 125°C	+14.0	+14.2	-	V
	V _{OL1}	R _L =10kΩ, Ta = -40°C to 125°C	-	-14.9	-14.6	V
	V _{OH2}	R _L =2kΩ, Ta = -40°C to 125°C	+13.8	+14.1	-	V
	V _{OL2}	R _L =2kΩ, Ta = -40°C to 125°C	-	-14.8	-14.4	V
	V _{OH31}	R _L =600Ω	+13.5	+13.9	-	V
	V _{OH32}	R _L =600Ω, Ta = -40°C to 125°C	+11.4	-	-	V
	V _{OL41}	R _L =600Ω	-	-14.3	-13.8	V
	V _{OL42}	R _L =600Ω, Ta = -40°C to 125°C	-	-	-12.1	V
Supply Characteristics						
Supply Current	I _{CC1}	G _V =+1, R _L =∞	-	2.6	3.0	mA
	I _{CC2}	G _V =+1, R _L =∞, Ta = -40°C to 125°C	-	-	3.3	mA
Supply Voltage Rejection Ratio	SVR1	V ⁺ /V ⁻ = ±4.5V to ±16V	86	110	-	dB
	SVR2	V ⁺ /V ⁻ = ±4.5V to ±16V, Ta = -40°C to 125°C	80	-	-	dB
Dynamic Performance						
Unity Gain Frequency	f _T	G _V =+100, R _L =2kΩ, C _L =10pF	-	7	-	MHz
Slew Rate	+SR	RISE, G _V =+1, V _{IN} =1V _{pp} , R _L =2kΩ	-	20	-	V/μs
	-SR	FALL, G _V =+1, V _{IN} =1V _{pp} , R _L =2kΩ	-	20	-	V/μs
Settling Time	ts1	To 0.1%, 0V to 10V step, G _V =+1	-	0.7	-	μs
	ts2	To 0.01%, 0V to 10V step, G _V =+1	-	1.0	-	μs
Phase Margin	Φ _M		-	70	-	deg
Total Harmonic Distortion	THD	fo=1kHz, G _V =+1, R _L =2kΩ	-	0.0004	-	%
Noise Performance						
Input Voltage Noise Density	V _{NI}	fo=0.1Hz to 10Hz	-	0.9	-	μV _{pp}
	en1	fo=10Hz	-	20	-	nV/√ Hz
	en2	fo=100Hz	-	11	-	nV/√ Hz
	en3	fo=1kHz	-	10	-	nV/√ Hz
	en4	fo=10kHz	-	9	-	nV/√ Hz







NJM8512







■ELECTRICAL CHARACTERISTICS ($V^+V^- = \pm 5V$, $T_a = 25^\circ C$, $V_{ICM} = 0V$, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Characteristics						
Input Offset Voltage						
NJM8512BR/NJM8512BE	V_{IO1}		-	80	400	μV
	V_{IO2}	$T_a = -40^\circ C$ to $125^\circ C$	-	-	700	μV
NJM8512AR/NJM8512AE	V_{IO1}		-	80	800	μV
	V_{IO2}	$T_a = -40^\circ C$ to $125^\circ C$	-	-	1400	μV
Input Offset Voltage Drift						
NJM8512BR/NJM8512BE	$\Delta V_{IO}/\Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	0.8	5	$\mu V/^\circ C$
NJM8512AR/NJM8512AE	$\Delta V_{IO}/\Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	1	9	$\mu V/^\circ C$
Input Bias Current	I_{B1}		-	21	75	pA
	I_{B2}	$T_a = -40^\circ C$ to $125^\circ C$	-	-	31	nA
Input Offset Current	I_{IO1}		-	5	50	pA
	I_{IO2}	$T_a = -40^\circ C$ to $125^\circ C$	-	-	2	nA
Common Mode Input Voltage Range	V_{ICM1}	$CMR \geq 86dB$	-2	-	+2.5	V
	V_{ICM2}	$CMR \geq 80dB$, $T_a = -40^\circ C$ to $125^\circ C$	-2	-	+2.5	V
Common Mode Rejection Ratio	CMR1	$V_{CM} = -2V$ to $+2.5V$	86	108	-	dB
	CMR2	$V_{CM} = -2V$ to $+2.5V$, $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
	CMR3	$V_{CM} = -1V$ to $+2V$	92	113	-	dB
Voltage Gain	A_{V1}	$R_L = 2k\Omega$, $V_O = -3V$ to $+3V$	85	93	-	dB
	A_{V2}	$R_L = 2k\Omega$, $V_O = -3V$ to $+3V$, $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
	A_{V3}	$R_L = 10k\Omega$, $V_O = -3V$ to $+3V$	90	100	-	dB
Input capacitance	C_{IN}		-	10	-	pF
Channel Separation	CS	DC	-	125	-	dB
Output Characteristics						
Maximum Output Voltage	V_{OH1}	$R_L = 10k\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	+4.1	+4.3	-	V
	V_{OL1}	$R_L = 10k\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	-	-4.9	-4.7	V
	V_{OH2}	$R_L = 2k\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	+3.9	+4.2	-	V
	V_{OL2}	$R_L = 2k\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	-	-4.9	-4.5	V
	V_{OH31}	$R_L = 600\Omega$	+3.7	+4.1	-	V
	V_{OH32}	$R_L = 600\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	+3.6	-	-	V
	V_{OL41}	$R_L = 600\Omega$	-	-4.8	-4.3	V
	V_{OL42}	$R_L = 600\Omega$, $T_a = -40^\circ C$ to $125^\circ C$	-	-	-4.2	V
Supply Characteristics						
Supply Current	I_{CC1}	$G_V = +1$, $R_L = \infty$	-	2.0	3.0	mA
	I_{CC2}	$G_V = +1$, $R_L = \infty$, $T_a = -40^\circ C$ to $125^\circ C$	-	-	3.3	mA
Dynamic Performance						
Unity Gain Frequency	fT	$G_V = +100$, $R_L = 2k\Omega$, $C_L = 10pF$	-	7	-	MHz
Slew Rate	+SR	RISE, $G_V = +1$, $V_{IN} = 1V_{pp}$, $R_L = 2k\Omega$	-	18	-	V/ μs
	-SR	FALL, $G_V = +1$, $V_{IN} = 1V_{pp}$, $R_L = 2k\Omega$	-	18	-	V/ μs
Settling Time	ts1	To 0.1%, 0V to 4V step, $G_V = +1$	-	0.5	-	μs
Phase Margin	Φ_M		-	65	-	deg
Total Harmonic Distortion	THD	$f_o = 1kHz$, $G_V = +1$, $R_L = 2k\Omega$	-	0.0005	-	%
Noise Performance						
Input Voltage Noise Density	V_{NI}	$f_o = 0.1Hz$ to $10Hz$	-	0.9	-	μV_{pp}
	en1	$f_o = 10Hz$	-	20	-	$nV/\sqrt{Hz}$
	en2	$f_o = 100Hz$	-	11	-	$nV/\sqrt{Hz}$
	en3	$f_o = 1kHz$	-	10	-	$nV/\sqrt{Hz}$
	en4	$f_o = 10kHz$	-	9	-	$nV/\sqrt{Hz}$

■ ELECTRICAL CHARACTERISTICS

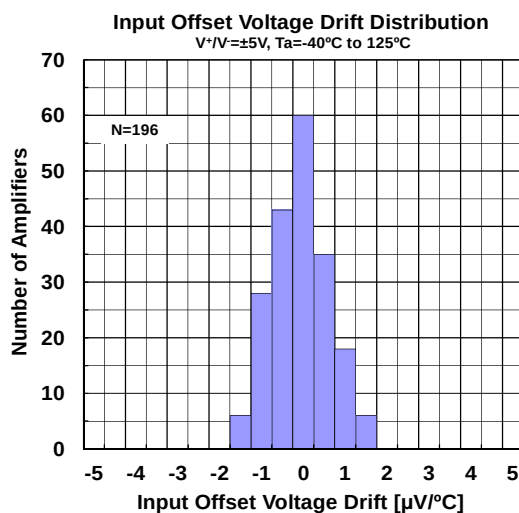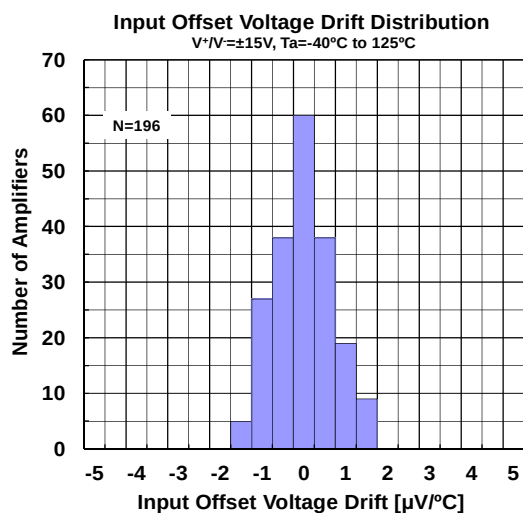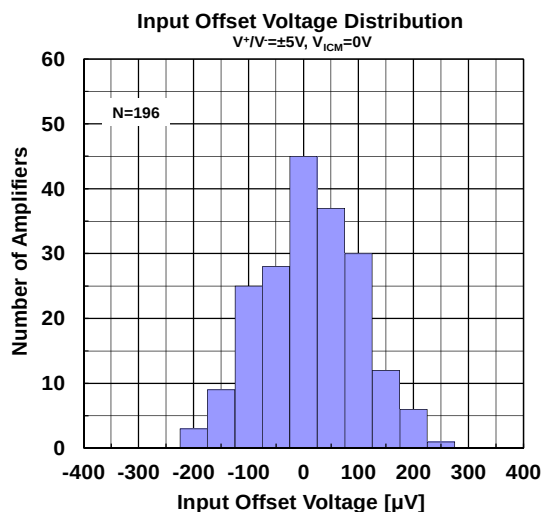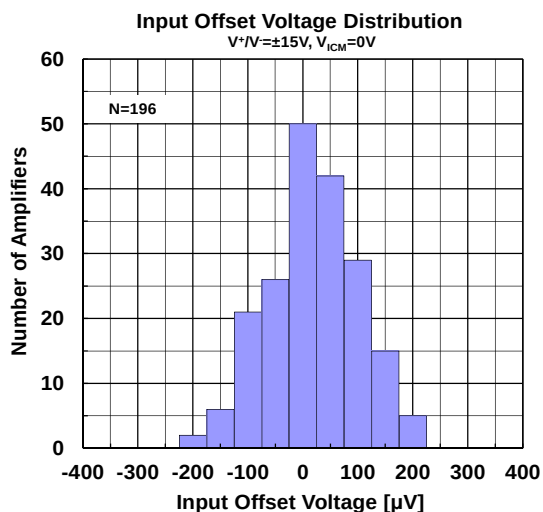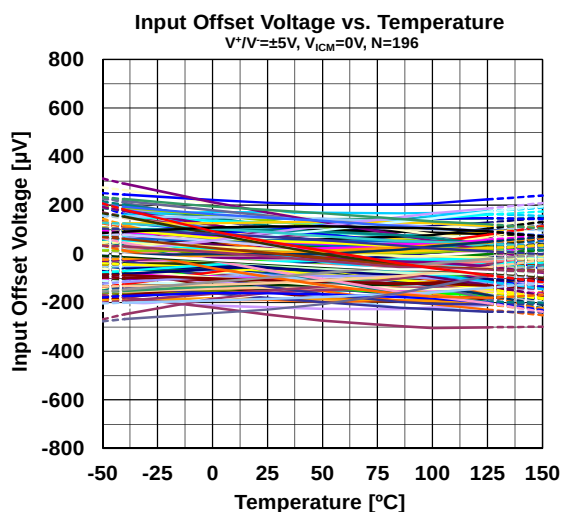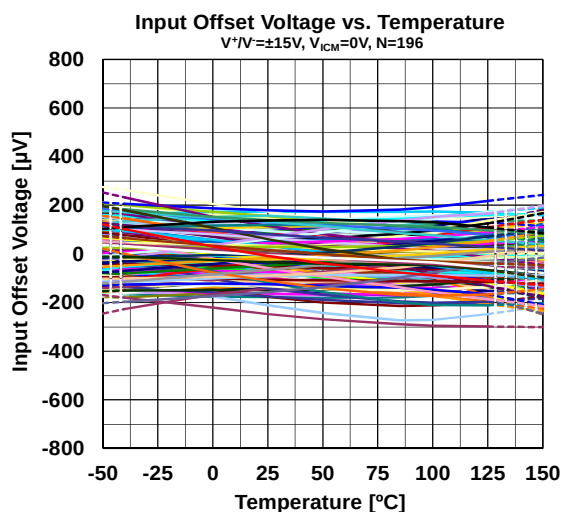


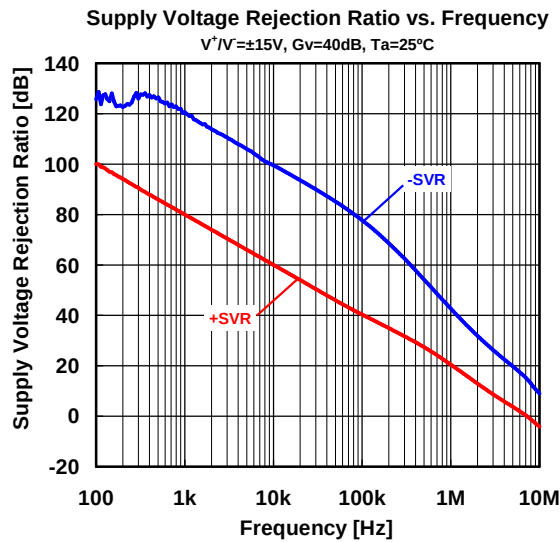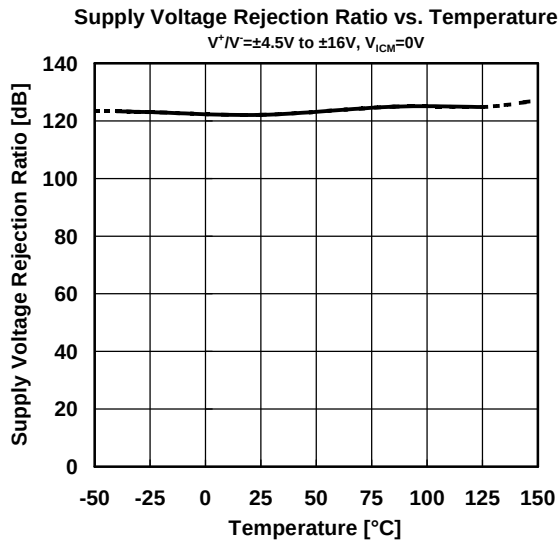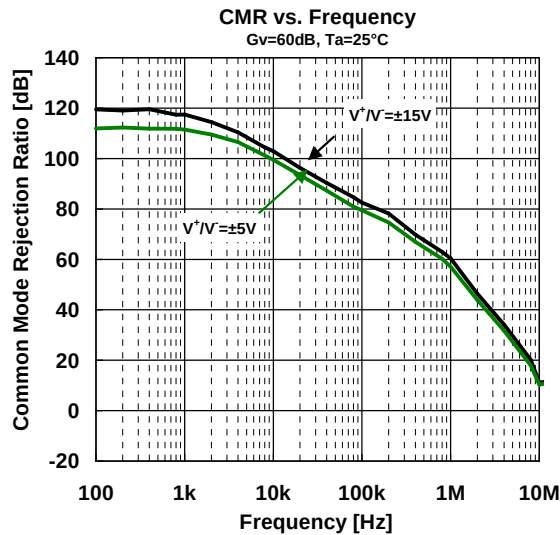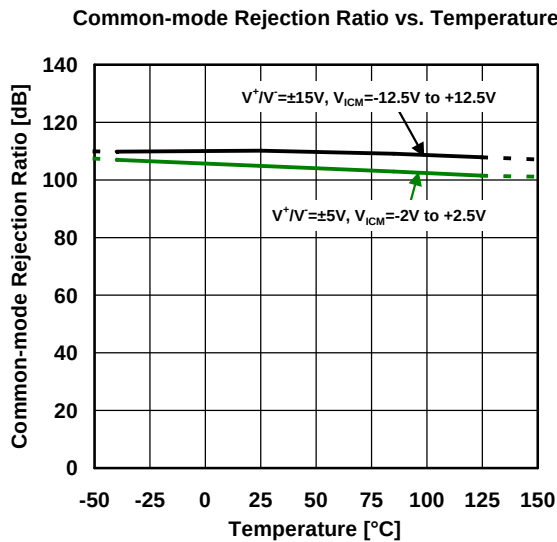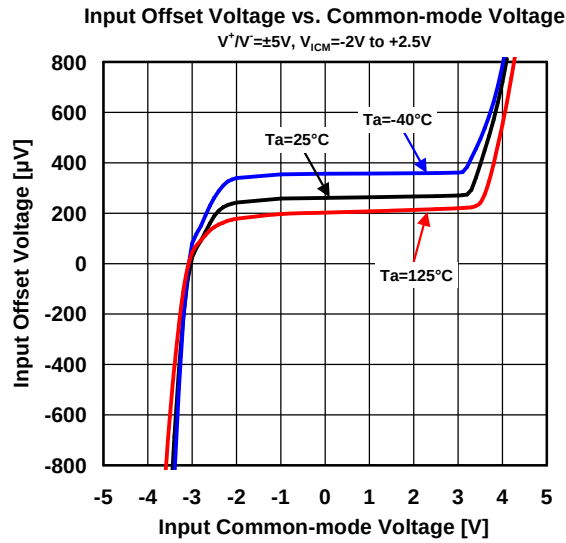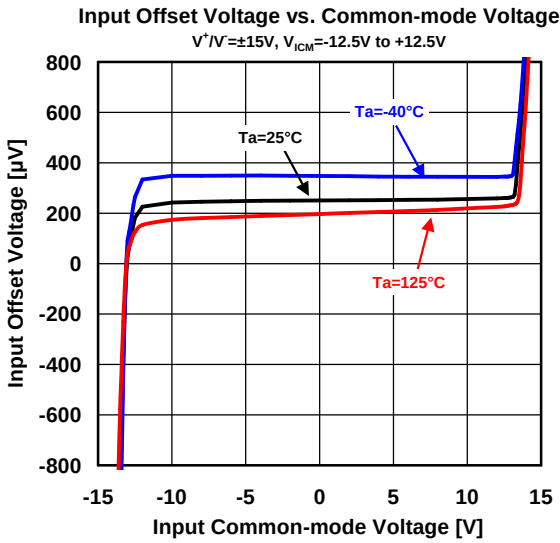

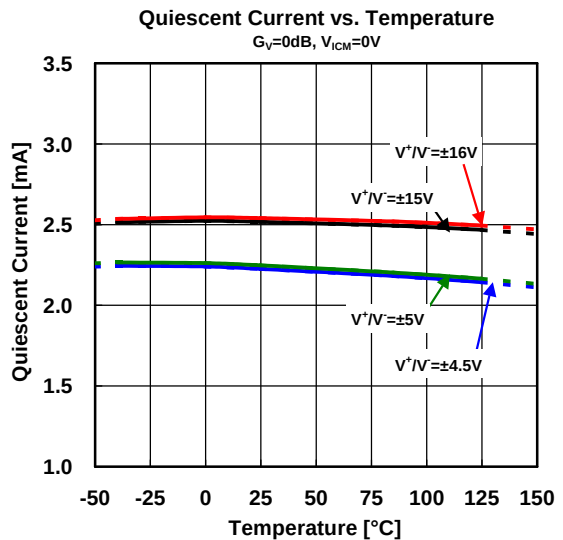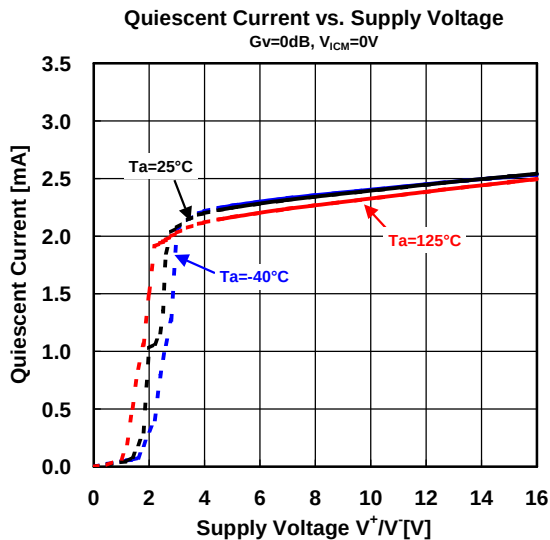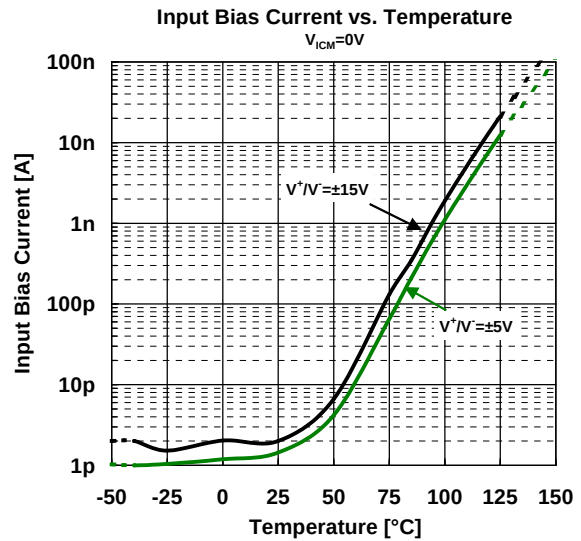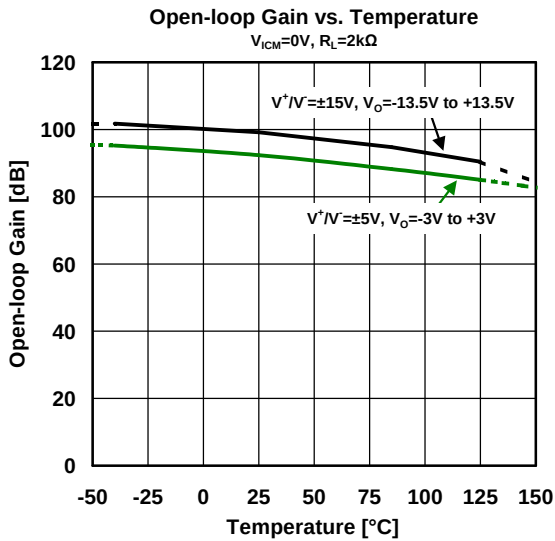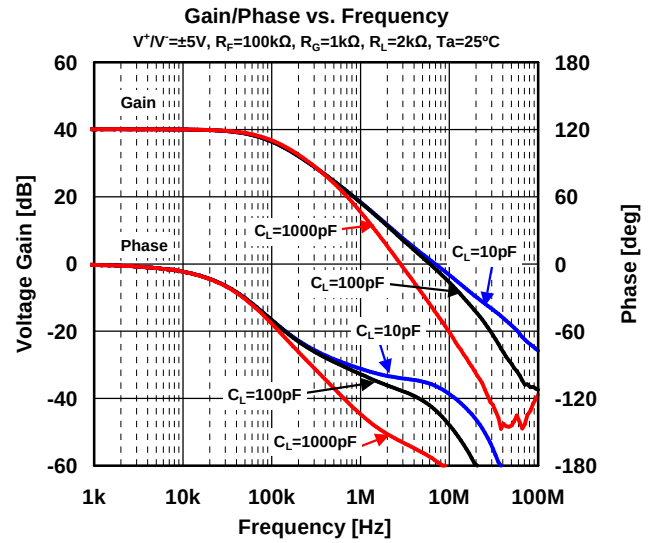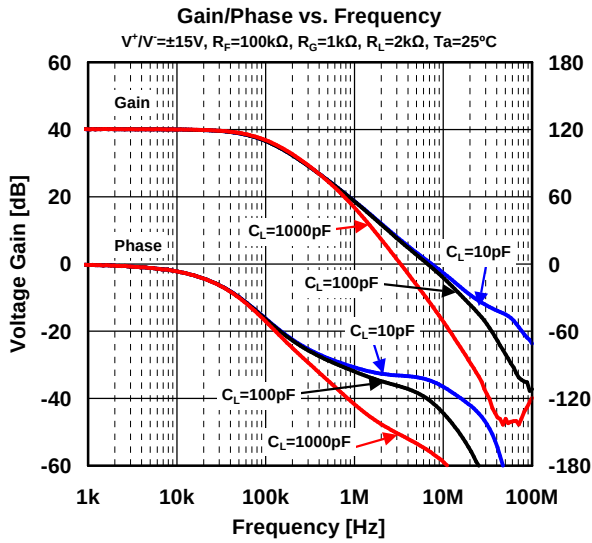


Maximum Output Voltage vs. Load Resistance

$V^+/V^- = \pm 15V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

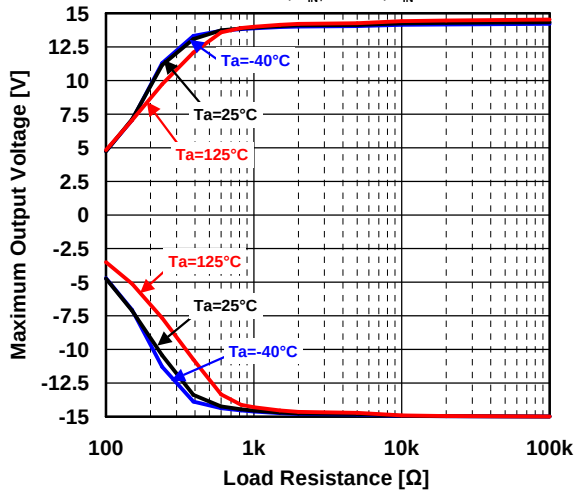


Maximum Output Voltage vs. Load Resistance

$V^+/V^- = \pm 5V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

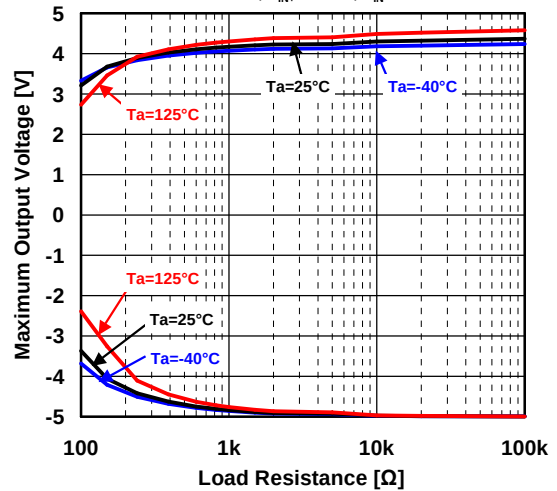


Maximum Output Voltage vs. Temperature

$V^+/V^- = \pm 15V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

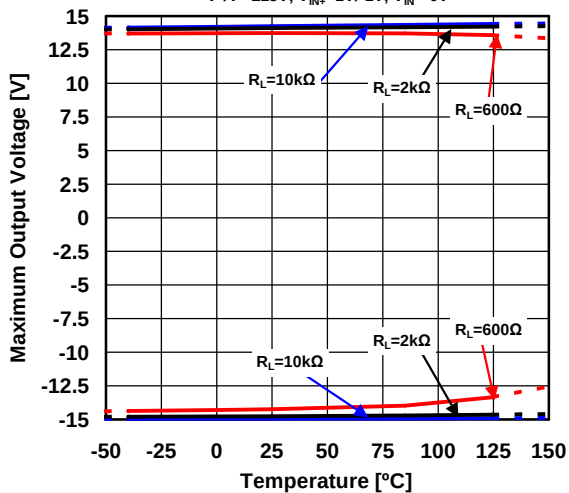


Maximum Output Voltage vs. Temperature

$V^+/V^- = \pm 5V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

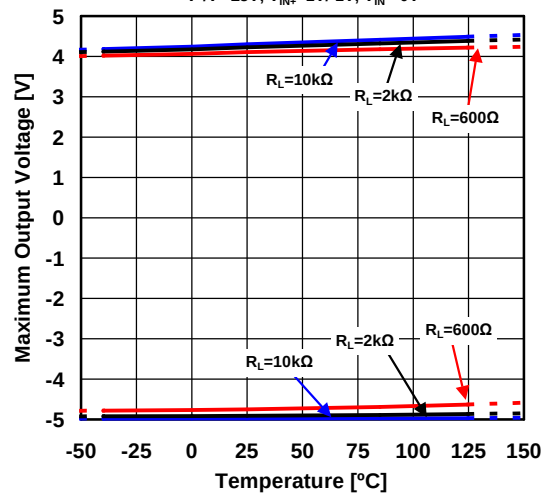


Maximum Output Voltage vs. Output Current

$V^+/V^- = \pm 15V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

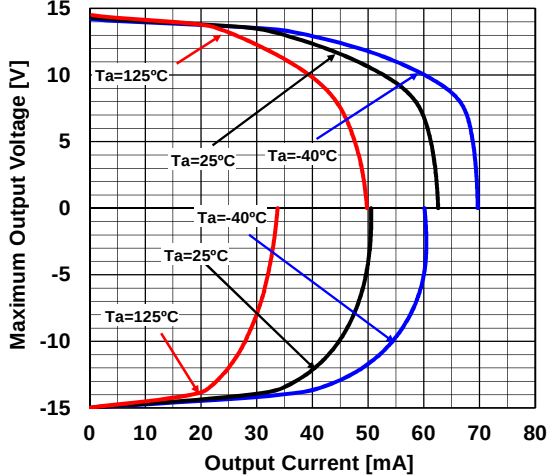


Maximum Output Voltage vs. Output Current

$V^+/V^- = \pm 5V$, $V_{IN+} = 1V$, $V_{IN-} = 0V$

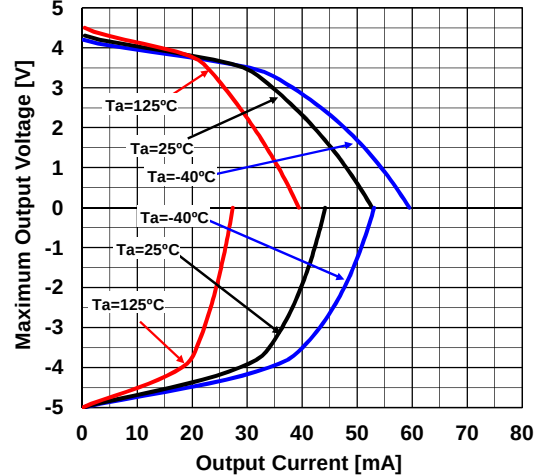


Small-Signal Step Response (Load Capacitance)

$V^+/V^- = \pm 15V$, $G_v = 0dB$, $V_{IN} = 1V_{pp}$, $R_L = 2k\Omega$, $T_a = 25^\circ C$

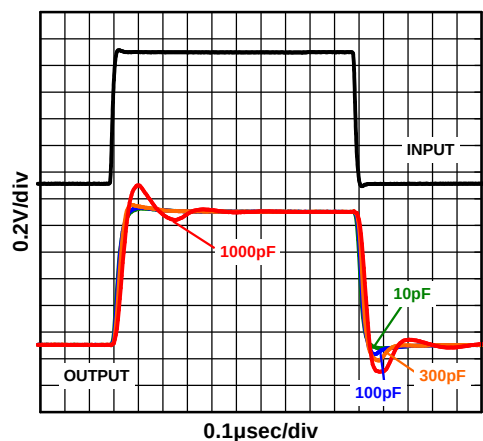


Small-Signal Step Response (Temperature)

$V^+/V^- = \pm 15V$, $G_v = 0dB$, $V_{IN} = 1V_{pp}$, $R_L = 2k\Omega$, $C_L = 10pF$

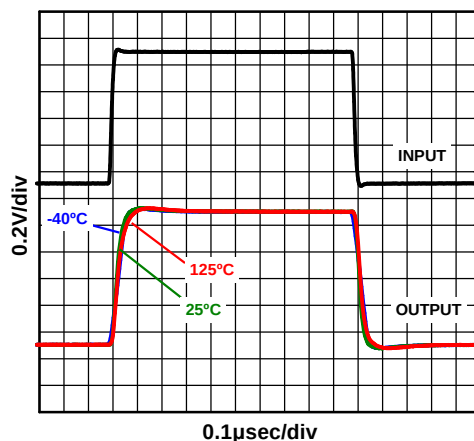


Large Signal Step Response

$V^+/V^- = \pm 15V$, $G_v = 0dB$, $V_{IN} = 10V_{pp}$, $R_L = 2k\Omega$

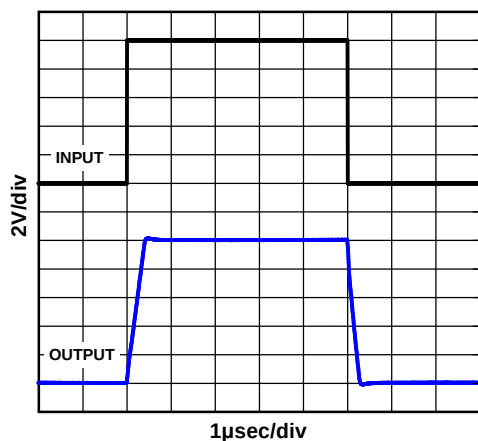


Input Voltage vs. Output Voltage





$V^+/V^- = \pm 5V$, $A_v = 0dB$, $R_L = 10k\Omega$

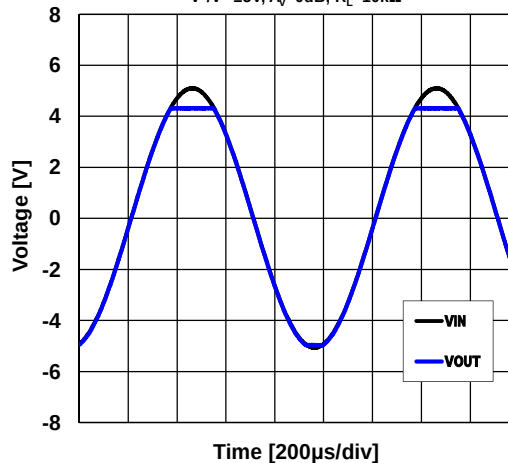



Short Circuit Output Current

$V^+/V^- = \pm 15V$, $V_{IN} = 0V$, $V_O = 0V$, $T_a = 25^\circ C$

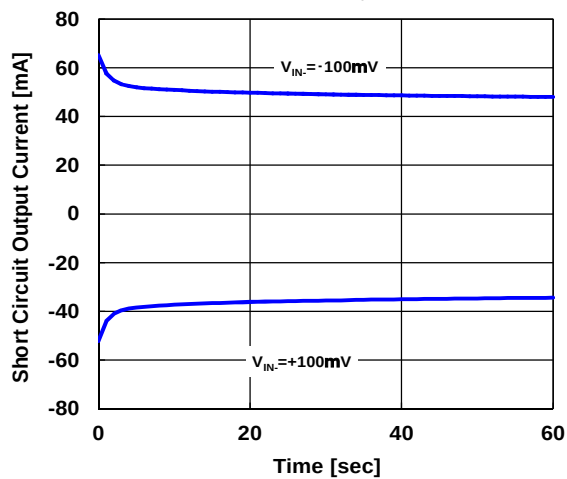

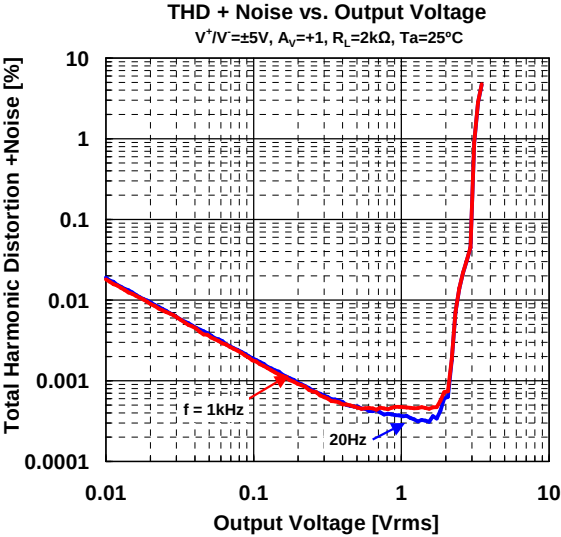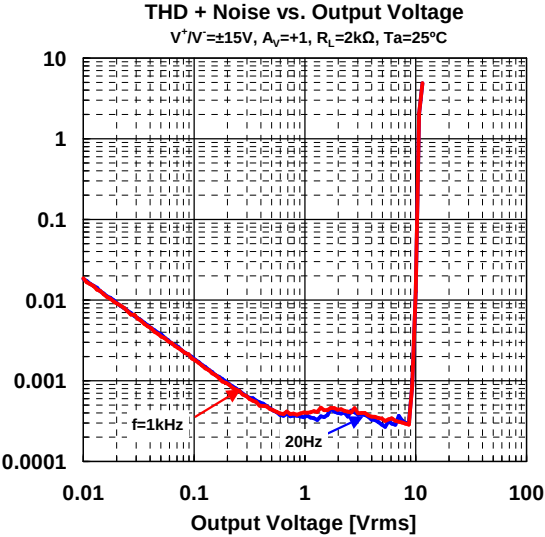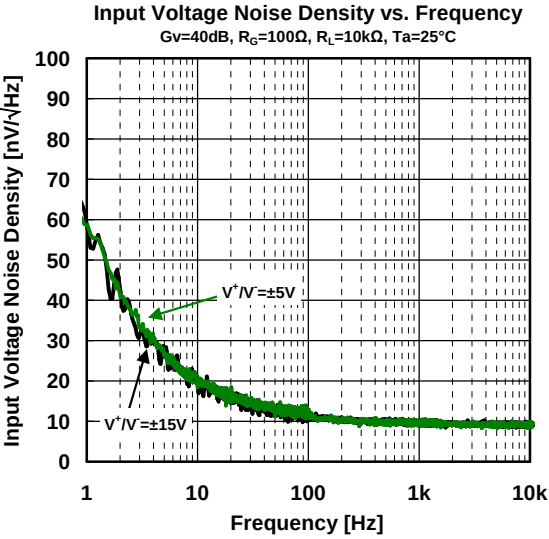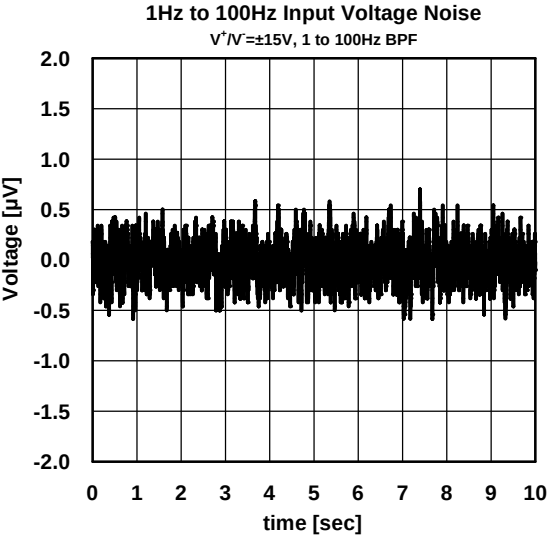

MSOP8(VSP8)

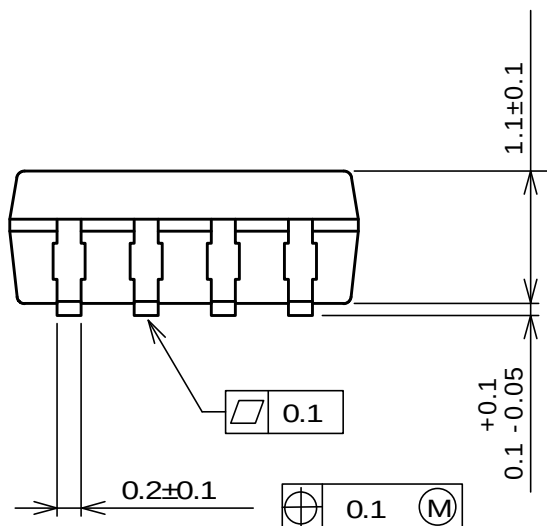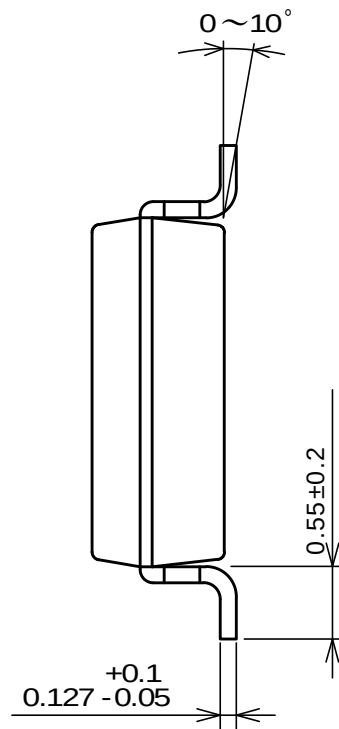


UNIT: mm

NJM8512

■PACKAGE DIMENSIONS

SOP8 JEDEC 150 mil

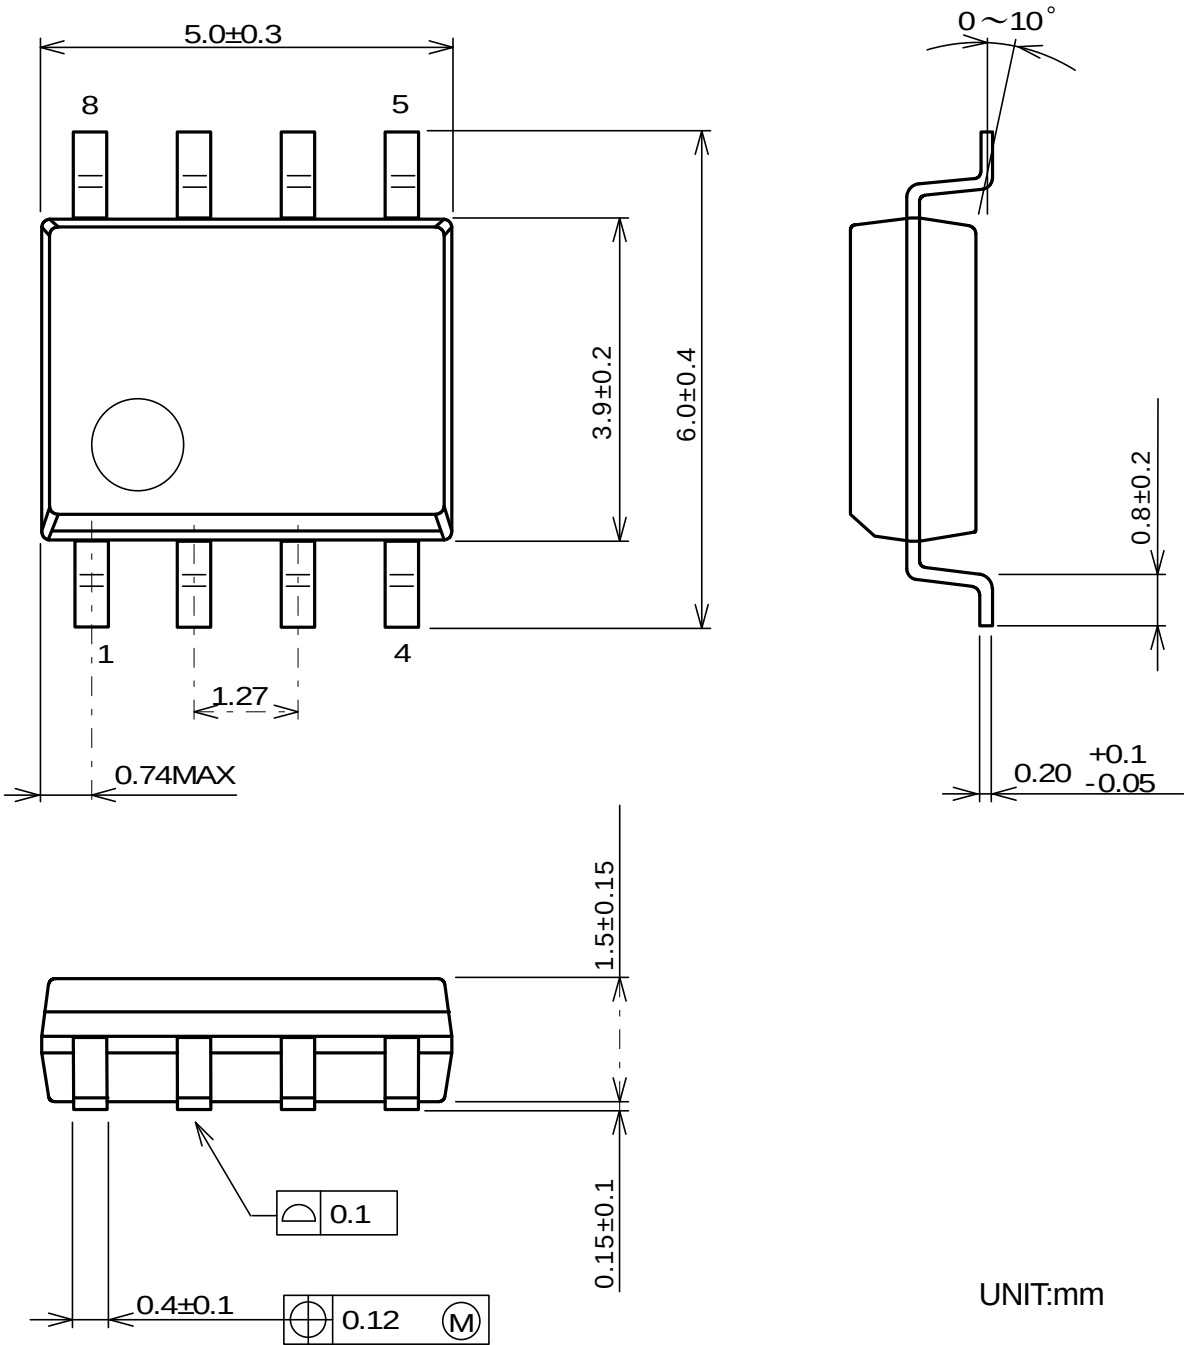

[CAUTION]
The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM8512AR-TE2](#) [NJM8512BR-TE2](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9