
Cumulative Trauma Disorders can result from the prolonged use of manually powered hand tools. Hand tools are intended for occasional use and low volume applications. A wide selection of powered application equipment for extended-use, production operations is available.



Tooling Assemblies 1901262-[] for FAKRA□ SMB Gen-4 Connectors

□ DIN Standardization Committee Of Motor Vehicles (FAKRA) 70010

Figure 1

1. INTRODUCTION

This instruction sheet covers the application tooling for the ferrule crimps of FAKRA SMB Gen-4 (Generation 4) Connectors.

Tooling Assembly 1901262-1 is used to crimp 90 degree ferrules to coaxial cable; Tooling Assembly 1901262–2 is used to crimp straight (180 degree) ferrules to coaxial cable. See Figure 1.

The tooling is designed to allow the operator to hold the crimped wire and center contact in position in the subassembly while crimping the ferrule



Dimensions in this instruction sheet are in millimeters. Figures and illustrations are for reference only and are not drawn to scale.

The product information for these connectors can be found in Application Specification 114-13157.

Reason for revision is given in Section 5, REVISION SUMMARY.

2. DESCRIPTION

This tooling is for use in Manual Arbor Frame Assemblies that are capable of 3000 pounds of crimp force.

The "die set open" height for 1901262-[] is 123 mm; the "die set closed" height is 97 mm.

The approximate crimp force required to terminate the ferrules is 3000 pounds (based on the Snap-Lock 90 degree Ferrule for RG-71 wire).

The arbor frame assembly must be outfitted with stops. Otherwise the die set (tooling assembly) must be clamped in the arbor frame to prevent it from movement during operation. Place the appropriate die set in the arbor frame being sure to center the ram of the termination tool over the crimp tooling. Do not center the ram over the top of the die set. Proper centering is required to ensure that the tooling bottoms. See Figure 2.

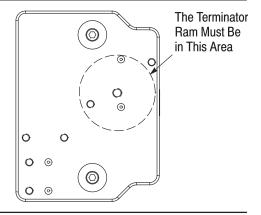


Figure 2

3. APPLICATION PROCEDURE

3.1. Stripping the Coaxial Cable

Slide the ferrule onto the cable (see Figure 3). Be careful to NOT nick or cut the center conductor or the cable braid.

3.2. Crimping the Plug Connector and Jack Connector



TOOLING ASSISTANCE CENTER 1-800-722-1111

For detailed application requirements, refer to Application Specification 114-13157.

^{©2007} Tyco Electronics Corporation, Harrisburg, PA All International Rights Reserved

TE logo and Tyco Electronics are trademarks.

PRODUCT INFORMATION 1-800-522-6752 *Trademark. Other products, logos, and company names used are the property of their respective owners.

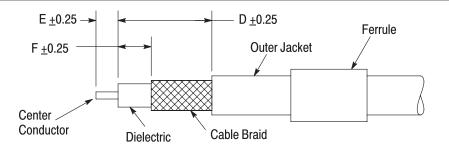


Figure 3

- 1. Crimp the pin contact (jack connector), or socket contact (plug connector), onto the coaxial cable center conductor using the specific tooling referenced in Application Specification 114–13157.
- 2. Insert the crimped pin or socket contact into the correct subassembly until it snaps in place. The contact will be held in place by the dielectric prior to crimping the ferrule.
- 3. Flare the cable braid.



Be certain that the cable braid is positioned over the tail end of the subassembly. Refer to Figure 4.

3.3. Crimping the Ferrule

1. Slide the ferrule over the the cable braid until the ferrule butts against the shoulder of the assembly. See Figure 5.

- 2. Crimp the ferrule onto the coaxial cable as follows:
 - a. Place the assembled wire and ferrule combination in the die set (tooling set).
 - b. Using the locating plate, place the plug or jack connector in the proper position. See Figure 6.



The ferrule should be located over the anvil.

- c. Cycle the Arbor Frame. As the frame closes, a cam will push the clamp assembly against the wire, then push the clamp arm until the assembly bottoms (approximately 0.89 mm).
- d. BE SURE the crimper bottoms on the anvil to achieve the correct crimp height. (The correct crimp height is 6.807 +/- 0.2032).

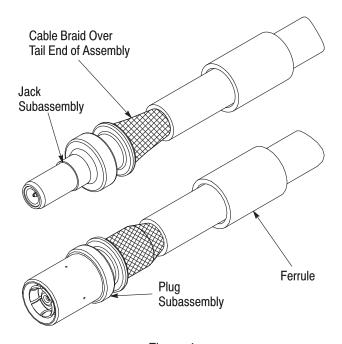


Figure 4

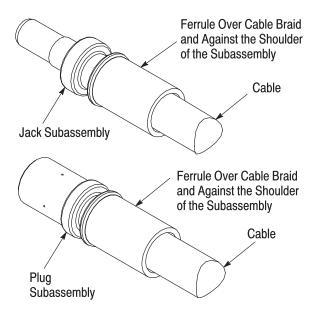


Figure 5

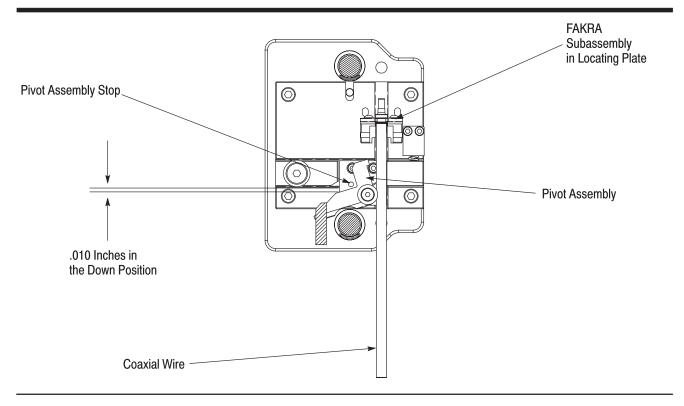


Figure 6

4. PREVENTIVE MAINTENANCE

4.1. Cleaning

Debris can build up around crimp area during normal use. After EACH use, wipe any dust or debris from the die sets.

4.2. Re-Alignment

- a. If crimp tooling is moved, it must be re-aligned before crimping. With tooling loose, carefully bring the upper tooling down to mate with the lower tooling. Align the crimper and anvil. Then tighten the securing screws.
- b. Adjust the cam. The cam should be adjusted to pivot the clamp assembly without binding. Loosen the cam mounting bolts and move the adjustment bolt until the cam positions the pivot assembly approximately .010 inches from the stop. Refer to Figure 6 and Figure 7.

Cam Adjustment Bolt Cam Mounting Bolt Cam Die Set Post

Figure 7

4.3. Lubrication

The die set post (Figure 7) should be coated with light oil before every usage to help prevent binding and wear.

5. REVISION SUMMARY

• Updated document to corporate requirements, including the new corporate logo

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9