



## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz

### Typical Applications


The HMC453QS16G / HMC453QS16GE is ideal for applications requiring a high dynamic range amplifier:

- GSM, GPRS & EDGE
- CDMA & W-CDMA
- CATV/Cable Modem
- Fixed Wireless & WLL

### Features

- Output IP3: +51 dBm
- 21.5 dB Gain @ 400 MHz
- 8 dB Gain @ 2100 MHz
- 45% PAE @ +32 dBm Pout
- +25 dBm CDMA2000 Channel Power@ -45 dBc ACP
- Single +5V Supply
- Integrated Power Control (VPD)
- QSOP16G SMT Package: 29.4 mm<sup>2</sup>

### Functional Diagram

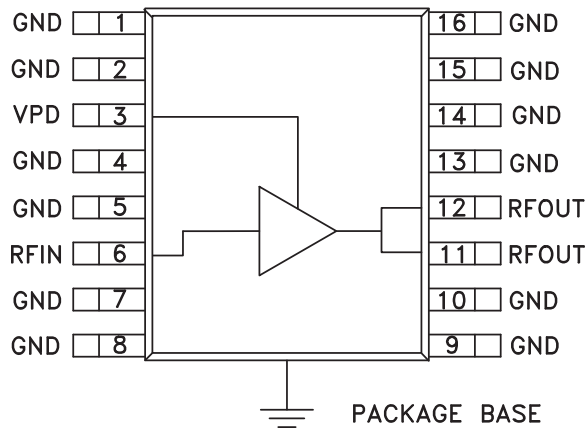

### General Description

The HMC453QS16G & HMC453QS16GE are high dynamic range GaAs InGaP Heterojunction Bipolar Transistor (HBT) 1.6 watt MMIC power amplifiers operating between 0.4 and 2.2 GHz. Packaged in a miniature 16 lead QSOP plastic package, the amplifier gain is typically 21.5 dB at 0.4 GHz and 8 dB at 2.1 GHz. Utilizing a minimum number of external components and a single +5V supply, the amplifier output IP3 can be optimized to +47 dBm at 0.4 GHz or +51 dBm at 2.1 GHz. The power control (VPD) can be used for full power down or RF output power/current control. The high output IP3 and PAE make the HMC453QS16G(E) ideal power amplifiers for Cellular/PCS/3G, WLL, ISM and Fixed Wireless applications.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_s = +5\text{V}$ , $VPD = +5\text{V}$ [1]


| Parameter                               | Min.      | Typ.  | Max. | Min.      | Typ.  | Max. | Min.      | Typ.  | Max. | Min.        | Typ.  | Max. | Min.        | Typ.  | Max. | Units   |
|---|-----------|-------|------|-----------|-------|------|-----------|-------|------|-------------|-------|------|-------------|-------|------|---------|
| Frequency Range                         | 400 - 410 |       |      | 450 - 496 |       |      | 810 - 960 |       |      | 1710 - 1990 |       |      | 2010 - 2170 |       |      | MHz     |
| Gain                                    | 19        | 21.5  |      | 18        | 20.5  |      | 12        | 15    |      | 6           | 9     |      | 6           | 8     |      | dB      |
| Gain Variation Over Temperature         |           | 0.012 | 0.02 |           | 0.012 | 0.02 |           | 0.012 | 0.02 |             | 0.012 | 0.02 |             | 0.012 | 0.02 | dB / °C |
| Input Return Loss                       |           | 12    |      |           | 15    |      |           | 12    |      |             | 10    |      |             | 15    |      | dB      |
| Output Return Loss                      |           | 10    |      |           | 10    |      |           | 15    |      |             | 13    |      |             | 18    |      | dB      |
| Output Power for 1dB Compression (P1dB) | 29        | 32    |      | 29        | 32    |      | 29        | 32    |      | 28.5        | 31.5  |      | 30          | 33    |      | dBm     |
| Saturated Output Power (Psat)           |           | 32.25 |      |           | 32.25 |      |           | 32.5  |      |             | 32    |      |             | 33.5  |      | dBm     |
| Output Third Order Intercept (IP3) [2]  | 44        | 47    |      | 47        | 50    |      | 46        | 49    |      | 44          | 50    |      | 48          | 51    |      | dBm     |
| Noise Figure                            |           | 7     |      |           | 8.5   |      |           | 7     |      |             | 7.5   |      |             | 6.5   |      | dB      |
| Supply Current (Icq)                    |           | 725   |      |           | 725   |      |           | 725   |      |             | 725   |      |             | 725   |      | mA      |
| Control Current (IPD)                   |           | 12    |      |           | 12    |      |           | 12    |      |             | 12    |      |             | 12    |      | mA      |

[1] Specifications and data reflect HMC453QS16G measured using the respective application circuits for each designated frequency band found herein. Contact the HMC Applications Group for assistance in optimizing performance for your application.


[2] Two-tone input power of -10 dBm per tone, 1 MHz spacing.




### Broadband Gain & Return Loss @ 400 MHz

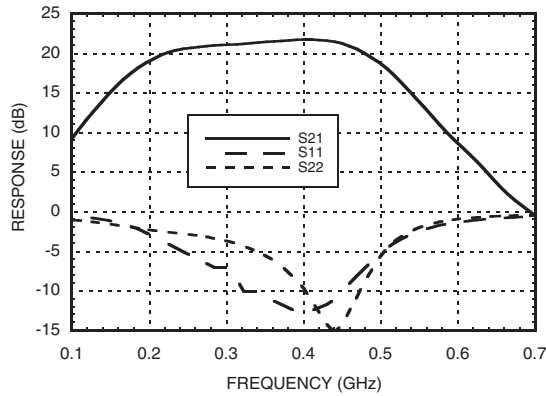


### Gain vs. Temperature @ 400 MHz

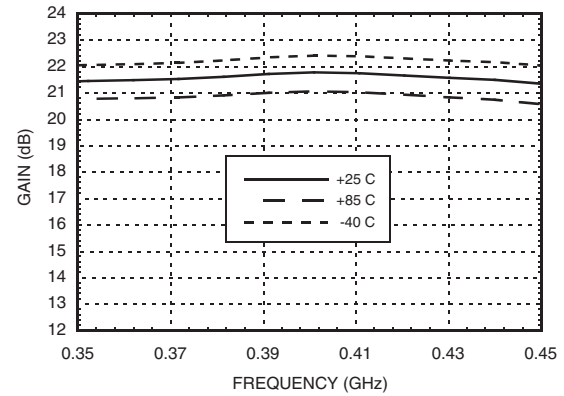


### Input Return Loss vs. Temperature @ 400 MHz

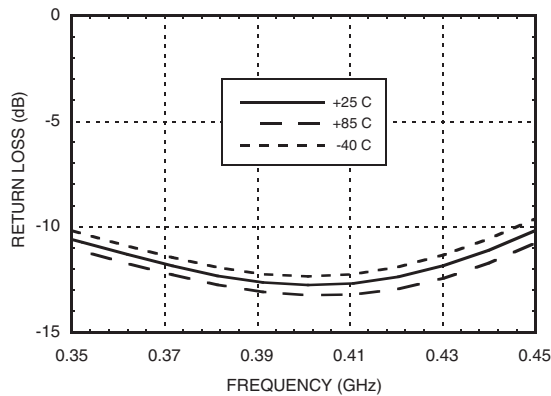


### Output Return Loss vs. Temperature @ 400 MHz

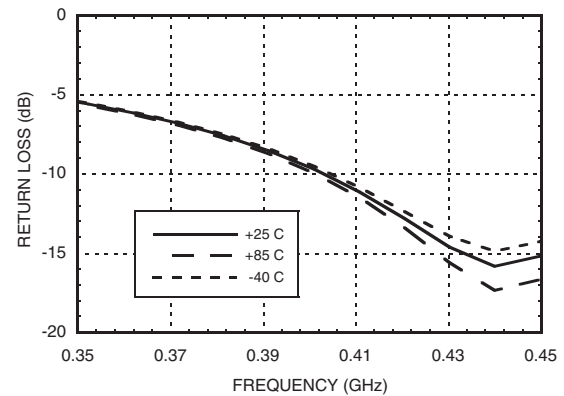

### P1dB vs. Temperature @ 400 MHz

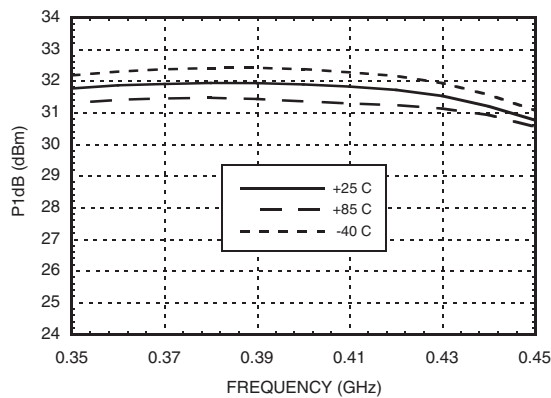

### Psat vs. Temperature @ 400 MHz

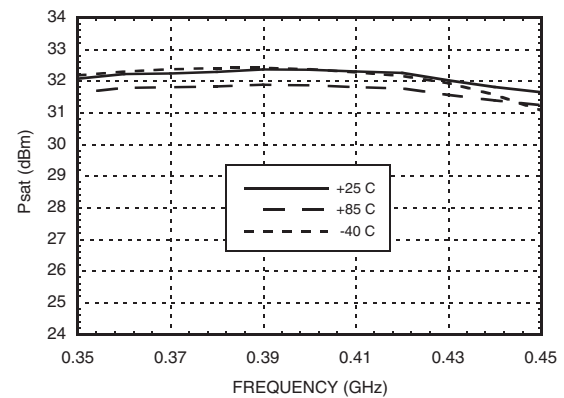

11

LINEAR & POWER AMPLIFIERS - SMT




v01.0205




# HMC453QS16G / 453QS16GE

## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


### Output IP3 vs. Temperature @ 400 MHz

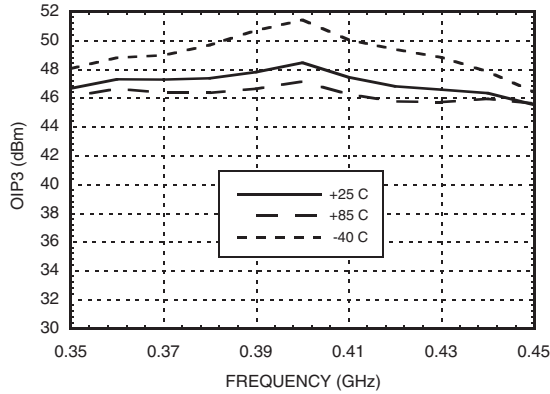


### Noise Figure vs. Temperature @ 400 MHz

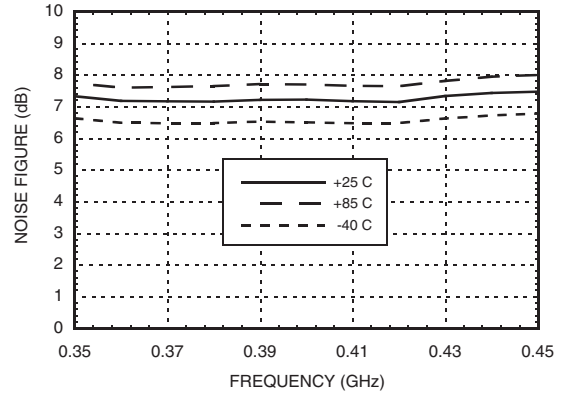


### Reverse Isolation vs. Temperature @ 400 MHz

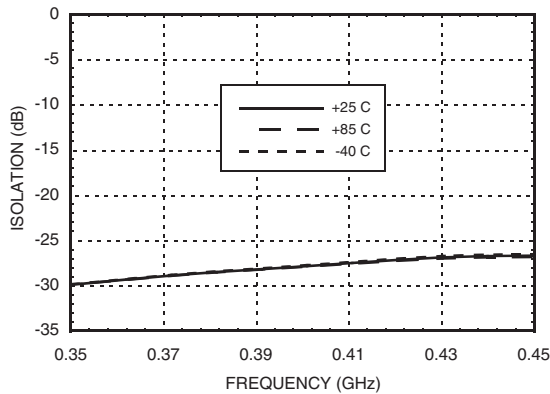


### Gain, Power & IP3 vs. Supply Voltage @ 400 MHz

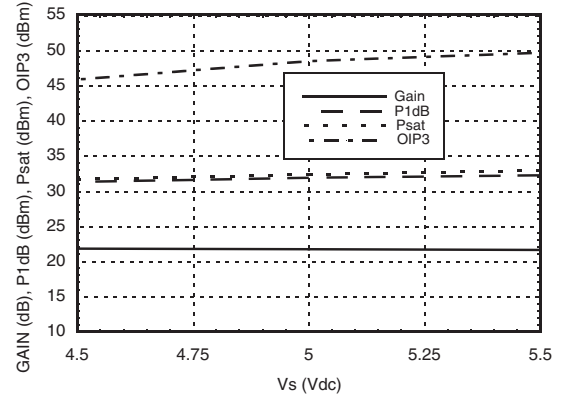

### Power Compression @ 400 MHz

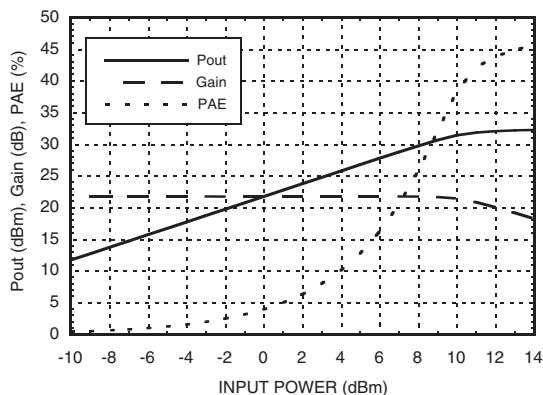

### ACPR vs. Supply Voltage @ 400 MHz W-CDMA, 64 DPCH

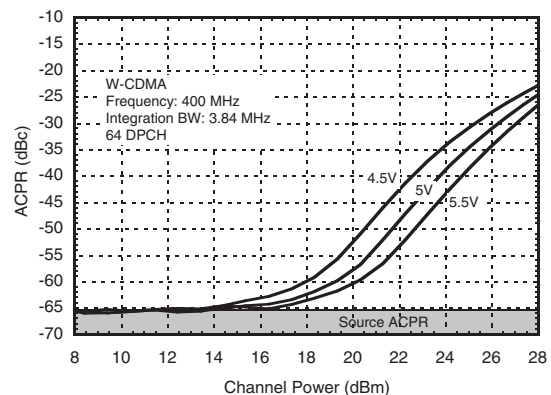

11

LINEAR & POWER AMPLIFIERS - SMT




MICROWAVE CORPORATION v01.0205




# HMC453QS16G / 453QS16GE

## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


### Broadband Gain & Return Loss @ 470 MHz

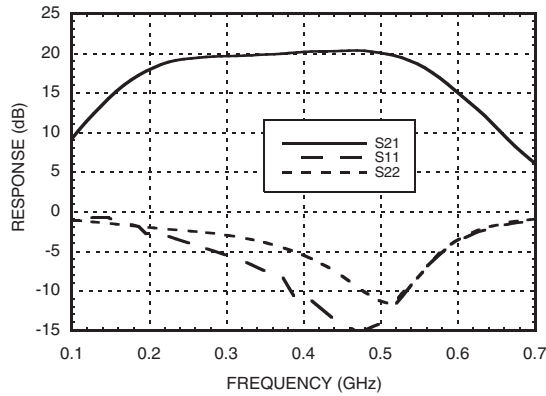


### Gain vs. Temperature @ 470 MHz

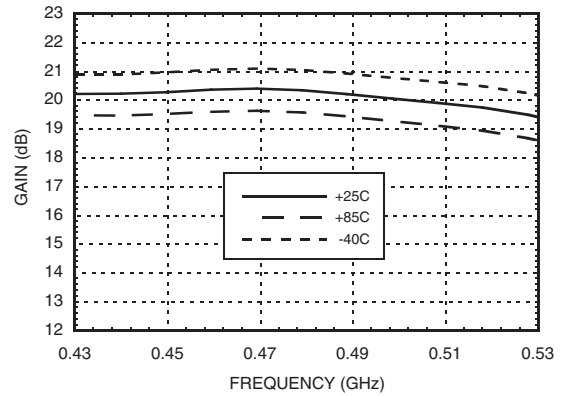


### Input Return Loss vs. Temperature @ 40 MHz

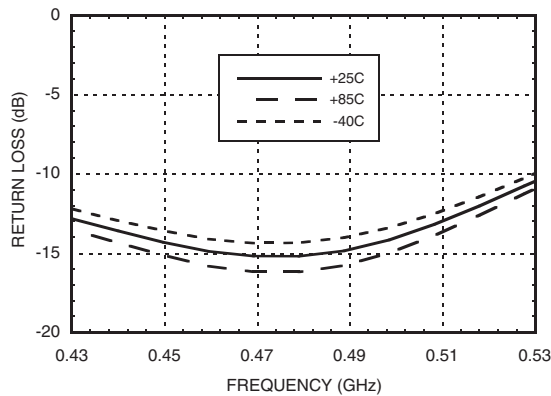


### Output Return Loss vs. Temperature @ 470 MHz

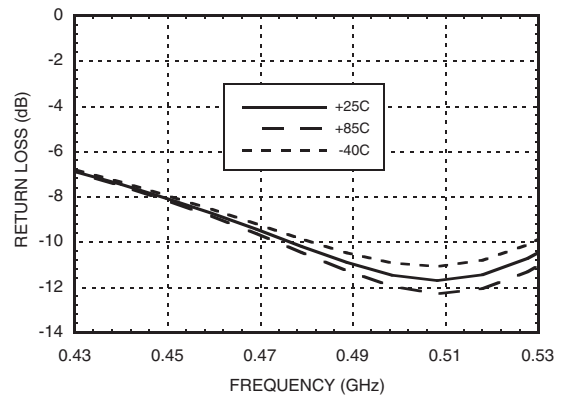

### P1dB vs. Temperature @ 470 MHz

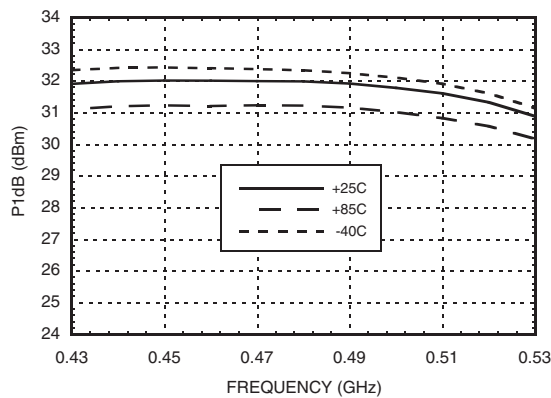

### Psat vs. Temperature @ 470 MHz

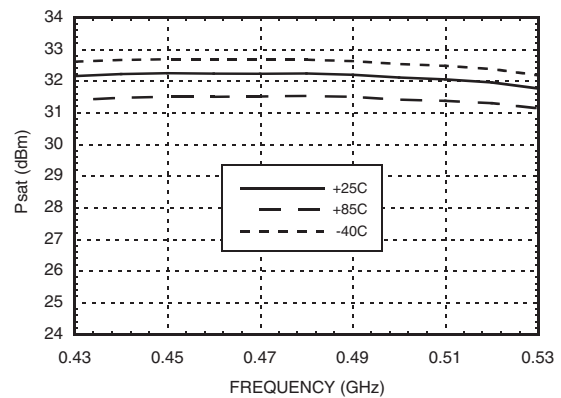

11

LINEAR & POWER AMPLIFIERS - SMT




MICROWAVE CORPORATION v01.0205




# HMC453QS16G / 453QS16GE

## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


### Output IP3 vs. Temperature @ 470 MHz

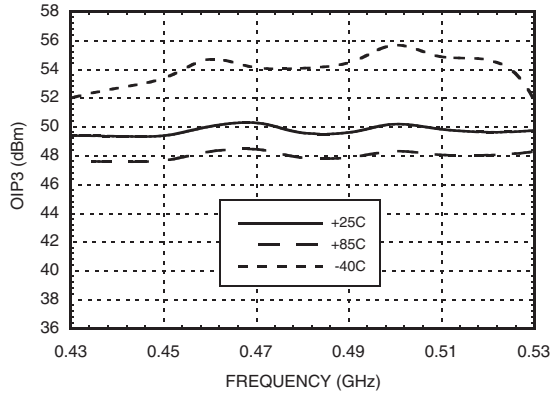


### Noise Figure vs. Temperature @ 470 MHz

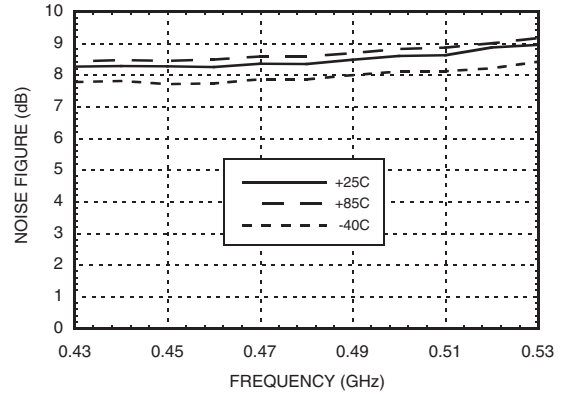


### Reverse Isolation vs. Temperature @ 470 MHz

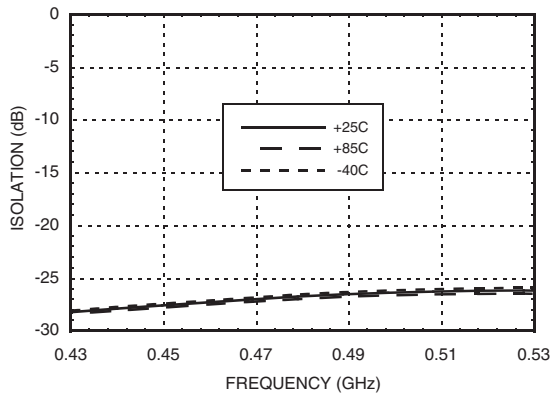


### Gain, Power & IP3 vs. Supply Voltage @ 470 MHz

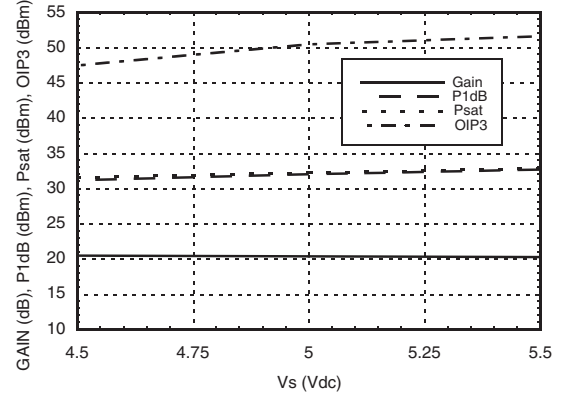

### Power Compression @ 470 MHz

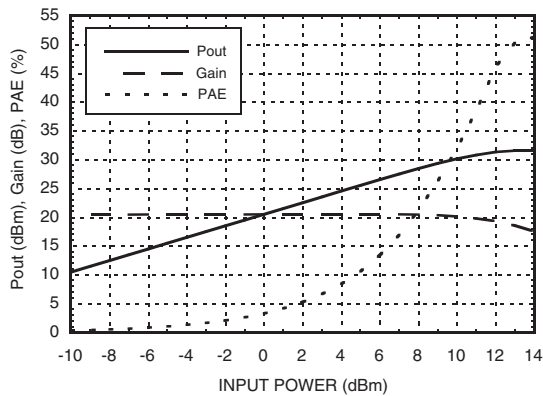


### ACPR vs. Supply Voltage @ 470 MHz W-CDMA, 64 DPCH

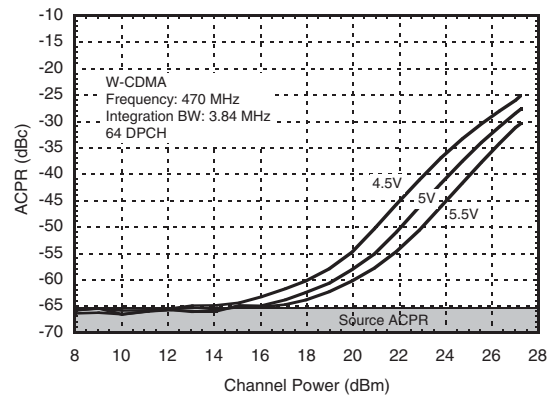


11

LINEAR & POWER AMPLIFIERS - SMT


### Broadband Gain & Return Loss @ 900 MHz

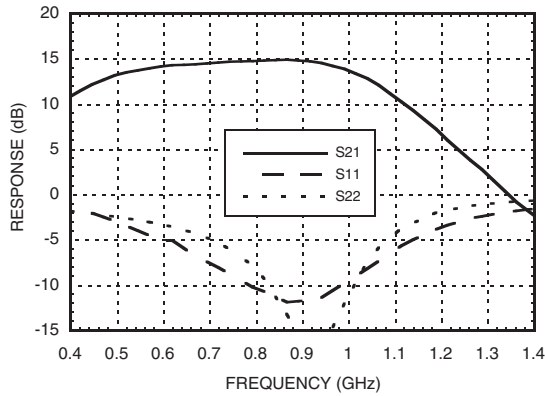


### Gain vs. Temperature @ 900 MHz

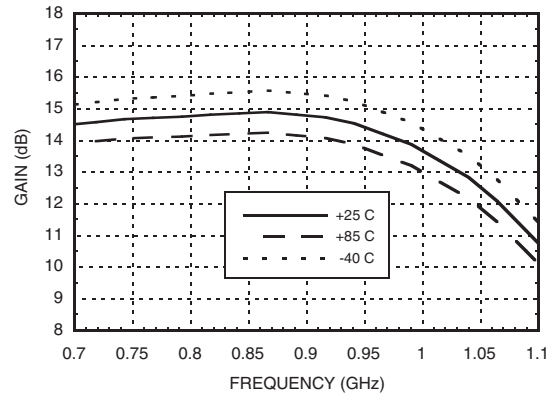


### Input Return Loss vs. Temperature @ 900 MHz

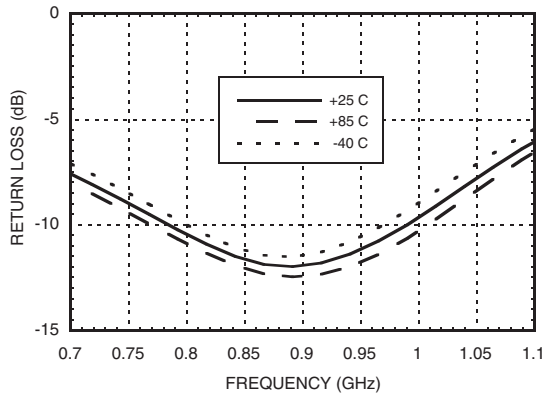


### Output Return Loss vs. Temperature @ 900 MHz

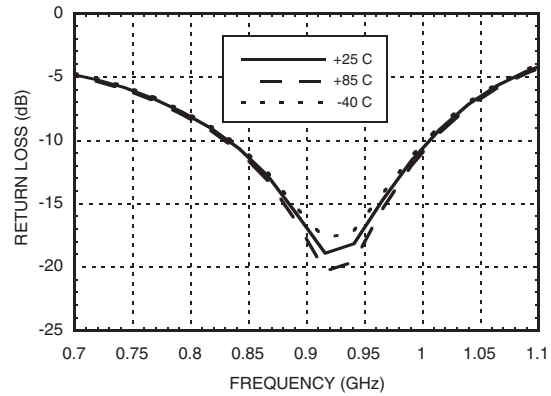

### P1dB vs. Temperature @ 900 MHz

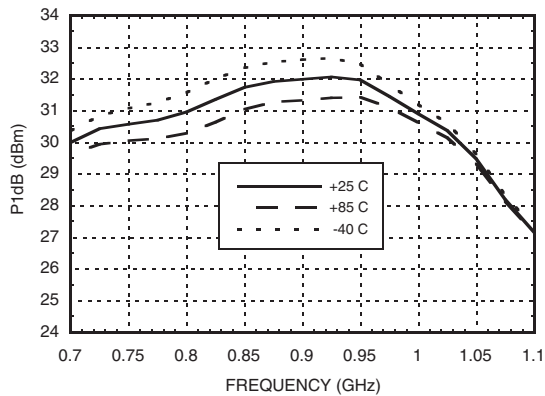

### Psat vs. Temperature @ 900 MHz

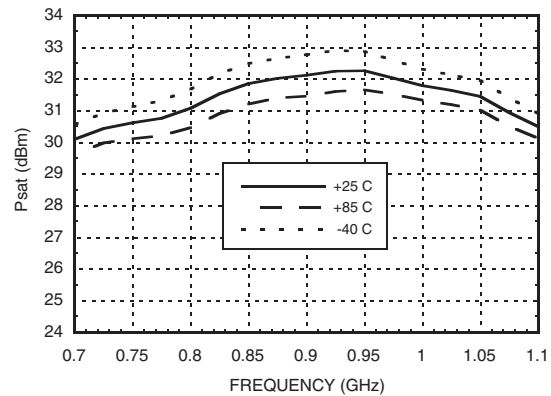

11


LINEAR & POWER AMPLIFIERS - SMT




# HMC453QS16G / 453QS16GE

## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


**Output IP3 vs. Temperature @ 900 MHz**

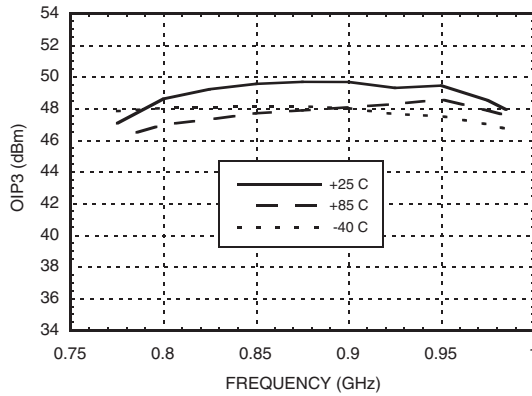


**Noise Figure vs. Temperature @ 900 MHz**

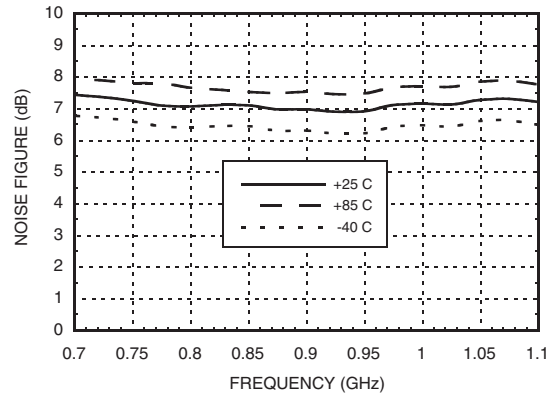


**Reverse Isolation vs. Temperature @ 900 MHz**

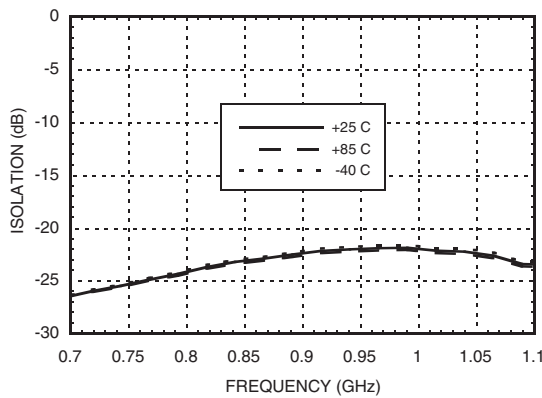


**Gain, Power & IP3 vs. Supply Voltage @ 900 MHz**

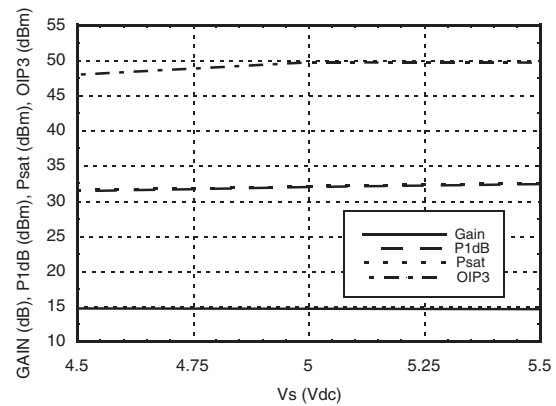

**Gain, Power & IP3 vs. Supply Current @ 900 MHz\***

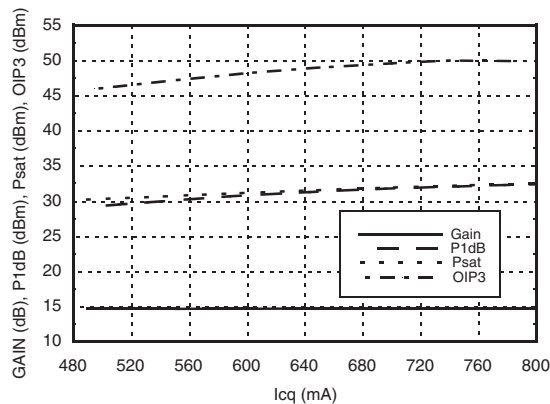


**ACPR vs. Supply Voltage @ 910 MHz CDMA IS95, 9 Channels Forward**

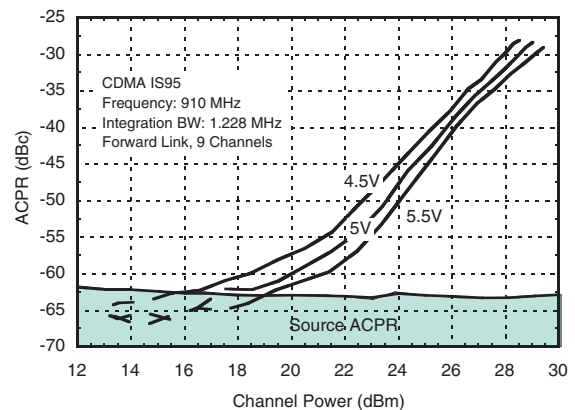


\* Icq is controlled by varying VPD.




### Broadband Gain & Return Loss @ 1900 MHz

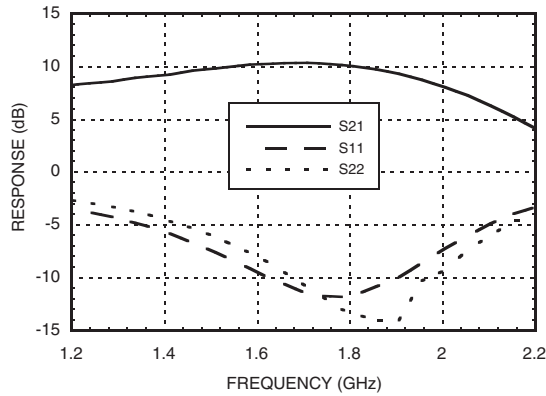


### Gain vs. Temperature @ 1900 MHz

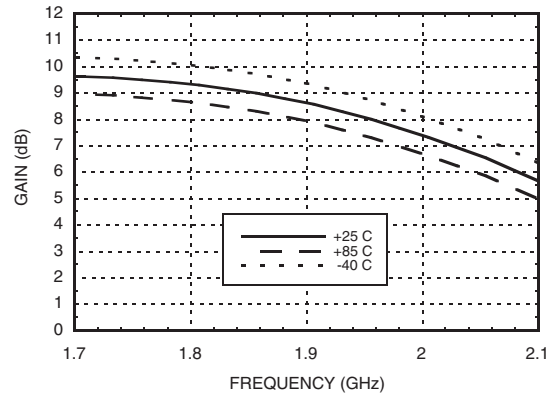


### Input Return Loss vs. Temperature @ 1900 MHz

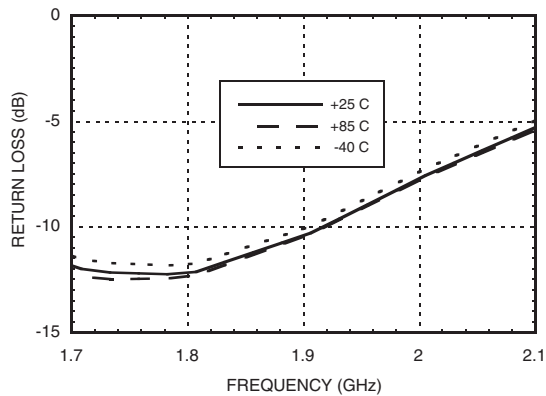


### Output Return Loss vs. Temperature @ 1900 MHz

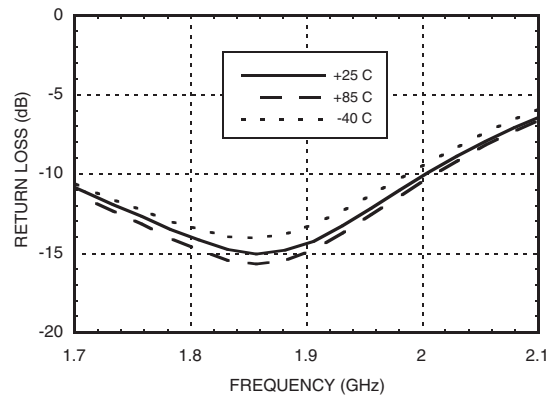

### P1dB vs. Temperature @ 1900 MHz

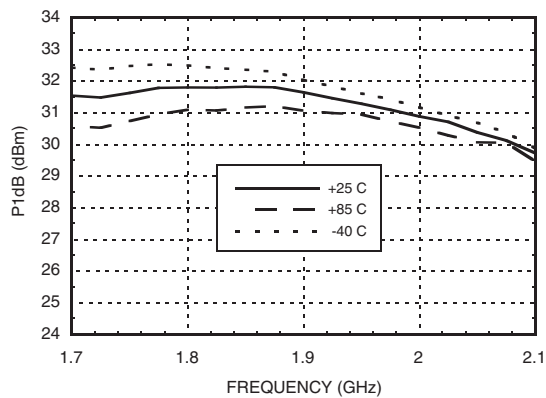

### Psat vs. Temperature @ 1900 MHz

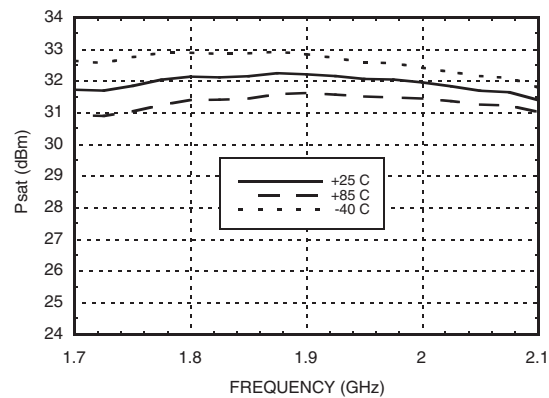







## InGaP HBT 1.6 WATT POWER AMPLIFIER, 0.4 - 2.2 GHz


**Output IP3 vs. Temperature @ 1900 MHz**

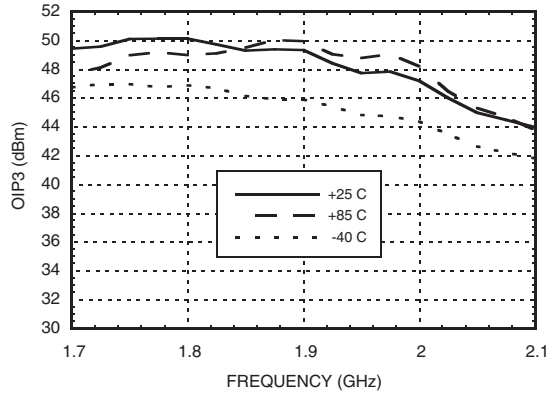


**Noise Figure vs. Temperature @ 1900 MHz**

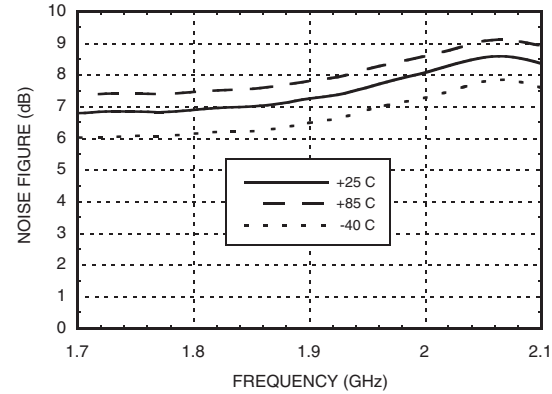


**Reverse Isolation vs. Temperature @ 1900 MHz**

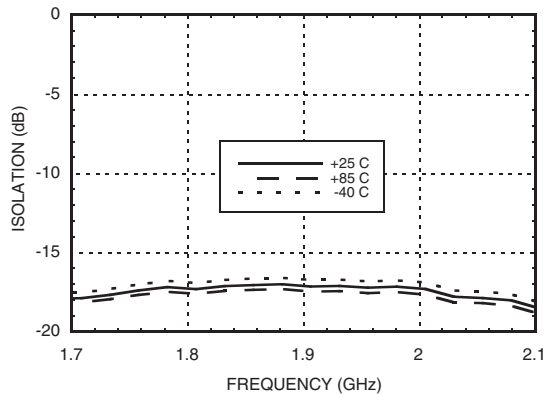


**Gain, Power & IP3 vs. Supply Voltage @ 1900 MHz**

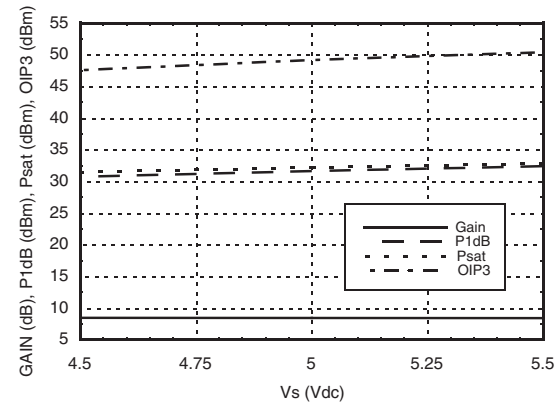

**Gain, Power & IP3 vs. Supply Current @ 1900 MHz\***

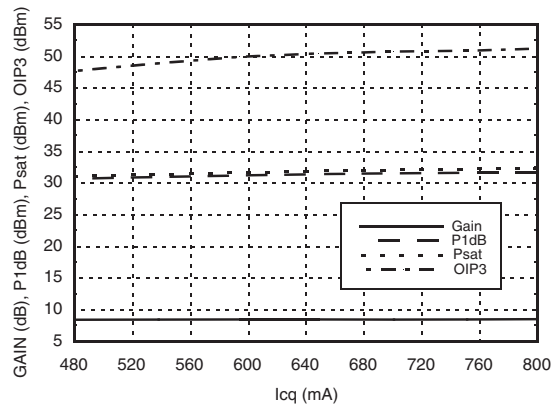


**ACPR vs. Supply Voltage @ 1960 MHz CDMA 2000, 9 Channels Forward**

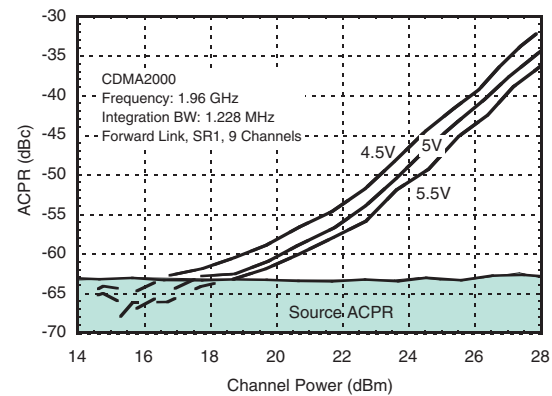


\* Icq is controlled by varying VPD.




### Broadband Gain & Return Loss @ 2100 MHz

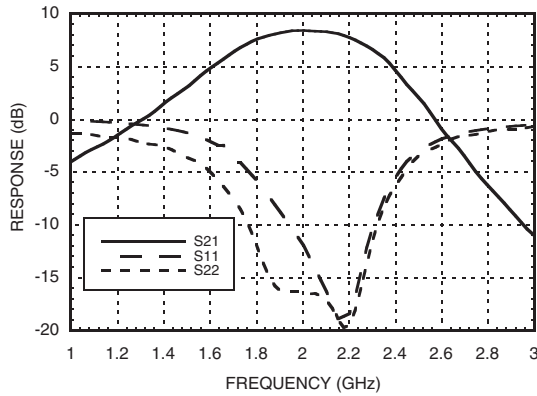


### Gain vs. Temperature @ 2100 MHz

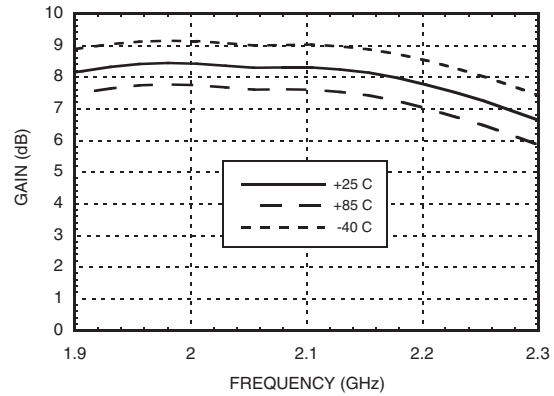


### Input Return Loss vs. Temperature @ 2100 MHz

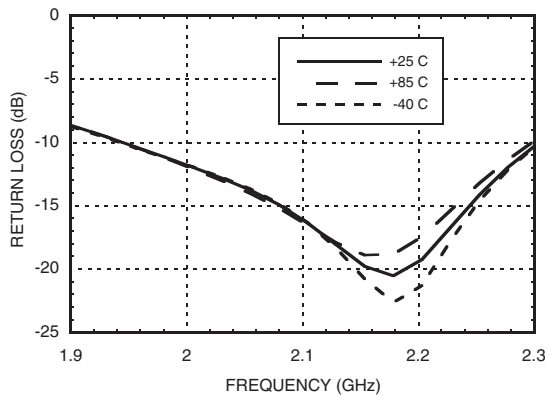


### Output Return Loss vs. Temperature @ 2100 MHz

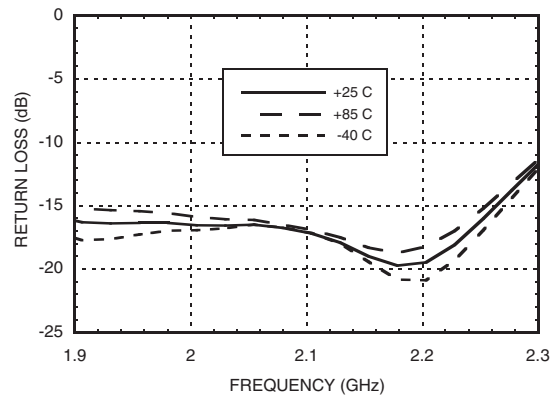

### P1dB vs. Temperature @ 2100 MHz

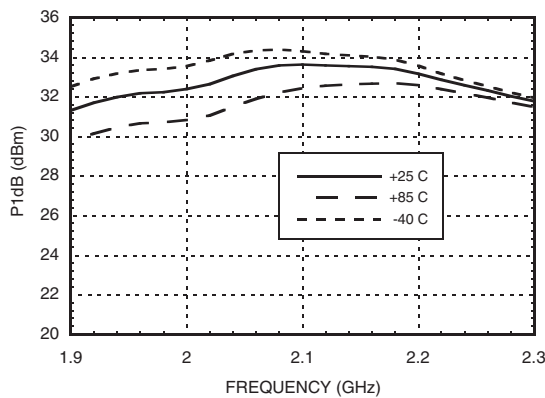


### Psat vs. Temperature @ 2100 MHz

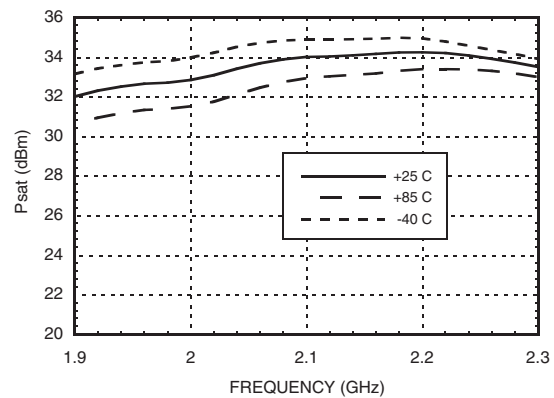


11

LINEAR & POWER AMPLIFIERS - SMT


**Output IP3 vs. Temperature @ 2100 MHz**

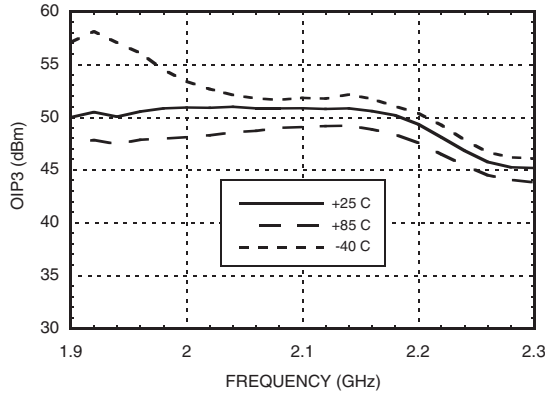


**Noise Figure vs. Temperature @ 2100 MHz**

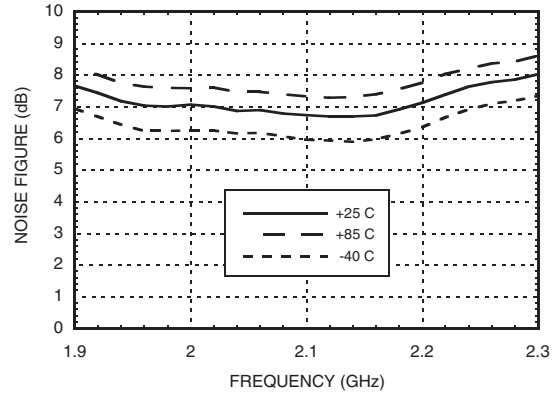


**Reverse Isolation vs. Temperature @ 2100 MHz**

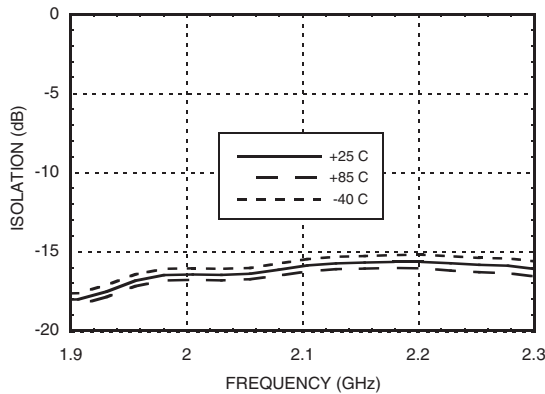


**Gain, Power & IP3 vs. Supply Voltage @ 2100 MHz**

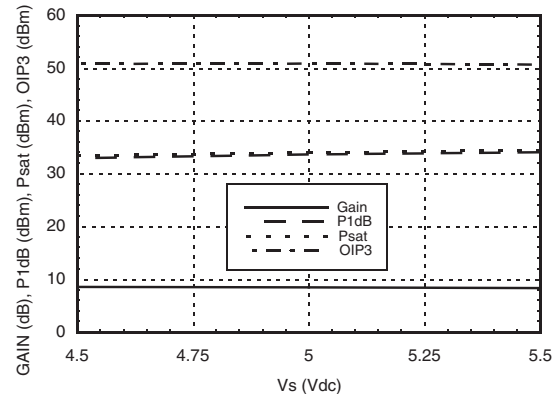


**Power Compression @ 2100 MHz**

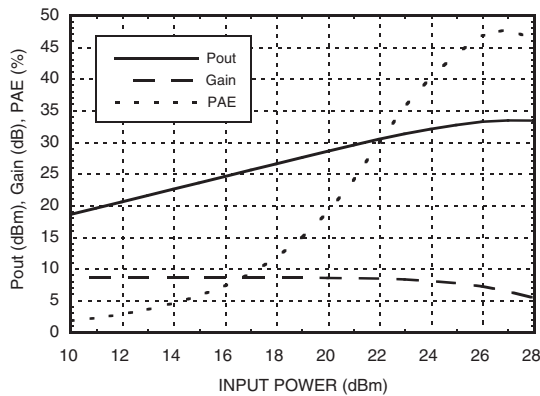

**ACPR vs. Supply Voltage @ 2140 MHz W-CDMA, 64 DPCH**

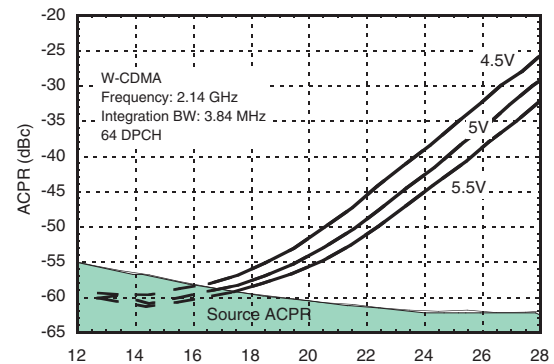

### Power Dissipation

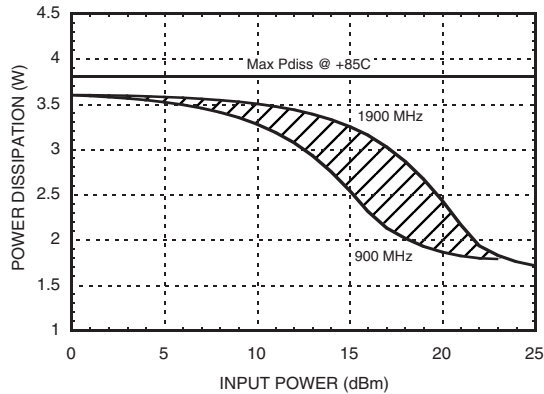


### Absolute Maximum Ratings

|   |                |
|---|----------------|
| Collector Bias Voltage (Vcc)                                    | +6.0 Vdc       |
| Control Voltage (Vpd)   | +5.4 Vdc       |
| RF Input Power (RFIN)(Vs = Vpd = +5Vdc)                         | +32 dBm        |
| Junction Temperature  | 150 °C         |
| Continuous Pdiss (T = 85 °C)<br>(derate 58.5 mW/°C above 85 °C) | 3.8 W          |
| Thermal Resistance<br>(junction to ground paddle)               | 17.1 °C/W      |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -40 to +85 °C  |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

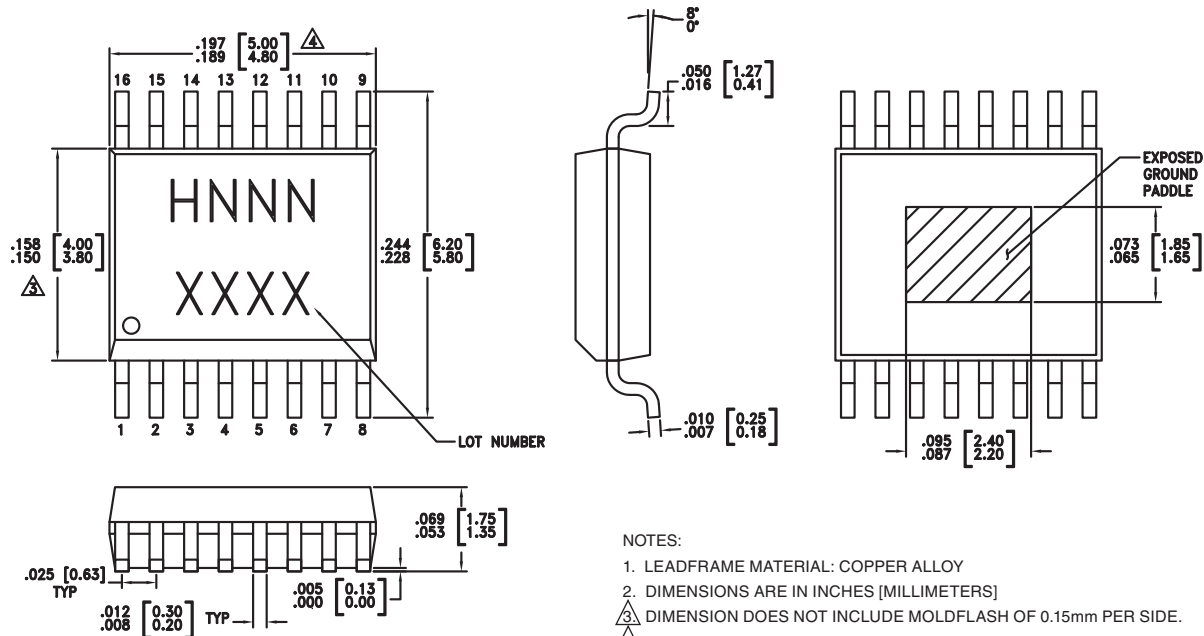

#### NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

### Package Information




| Part Number  | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|--------------|--|---------------|---------------------|--------------------------------|
| HMC453QS16G  | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H453<br>XXXX                   |
| HMC453QS16GE | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H453<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C


[3] 4-Digit lot number XXXX

### Pin Descriptions

| Pin Number              | Function | Description   | Interface Schematic   |
|-------------------------|----------|---|---|
| 1, 2, 4, 5, 7-10, 13-16 | GND      | These pins & package bottom must be connected to RF/DC ground.  |  |
| 3                       | VPD      | Power control pin. For maximum power, this pin should be connected to 5V. A higher voltage is not recommended. For lower idle current, this voltage can be reduced. |  |
| 6                       | RFIN     | This pin is DC coupled. Off chip matching components are required. See Application Circuit herein.  |  |
| 11, 12                  | RFOUT    | RF output and DC Bias input for the output amplifier stage. Off chip matching components are required. See Application Circuit herein.                              |   |

### 400 MHz Application Circuit

This circuit was used to specify the performance for 400-410 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

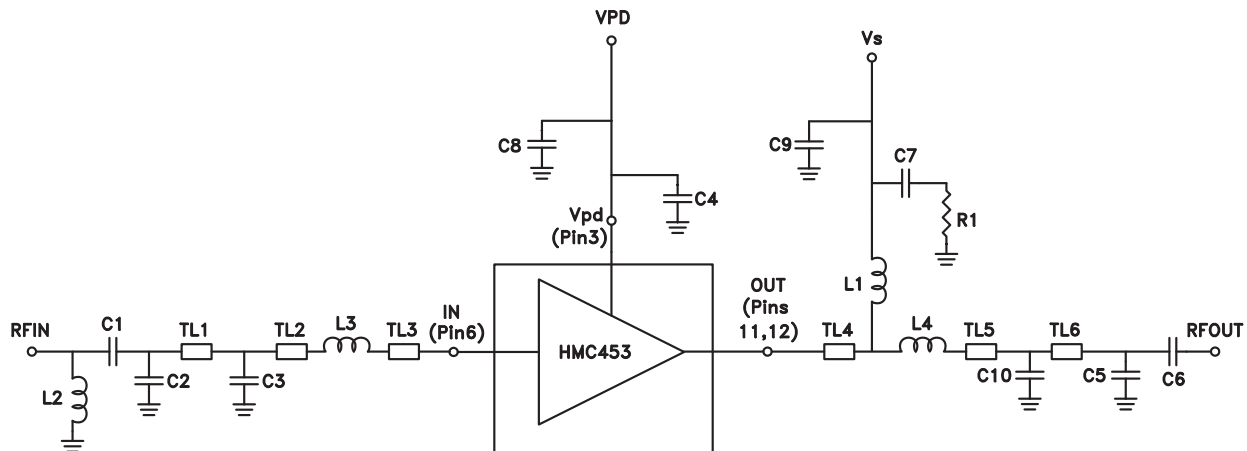


| Recommended Component Values |         |
|------------------------------|---------|
| C1, C5                       | 12 pF   |
| C2, C10                      | 8.2 pF  |
| C3                           | 6.8 pF  |
| C4, C7                       | 100 pF  |
| C6                           | 39 pF   |
| C8, C9                       | 2.2 μF  |
| L1                           | 47 nH   |
| L2                           | 40 nH   |
| L3, L4                       | 4.3 nH  |
| R1                           | 5.1 Ohm |

|   | TL1    | TL2    | TL3    | TL4    | TL5    | TL6    |
|---|--------|--------|--------|--------|--------|--------|
| Impedance                                   | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length                             | 0.22"  | 0.04"  | 0.04"  | 0.16"  | 0.04"  | 0.05"  |
| Electrical Length                           | 5°     | 1°     | 1°     | 4°     | 1°     | 1°     |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 |        |        |        |        |        |        |

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
 20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
 Order On-line at [www.hittite.com](http://www.hittite.com)

### 400 MHz Evaluation PCB

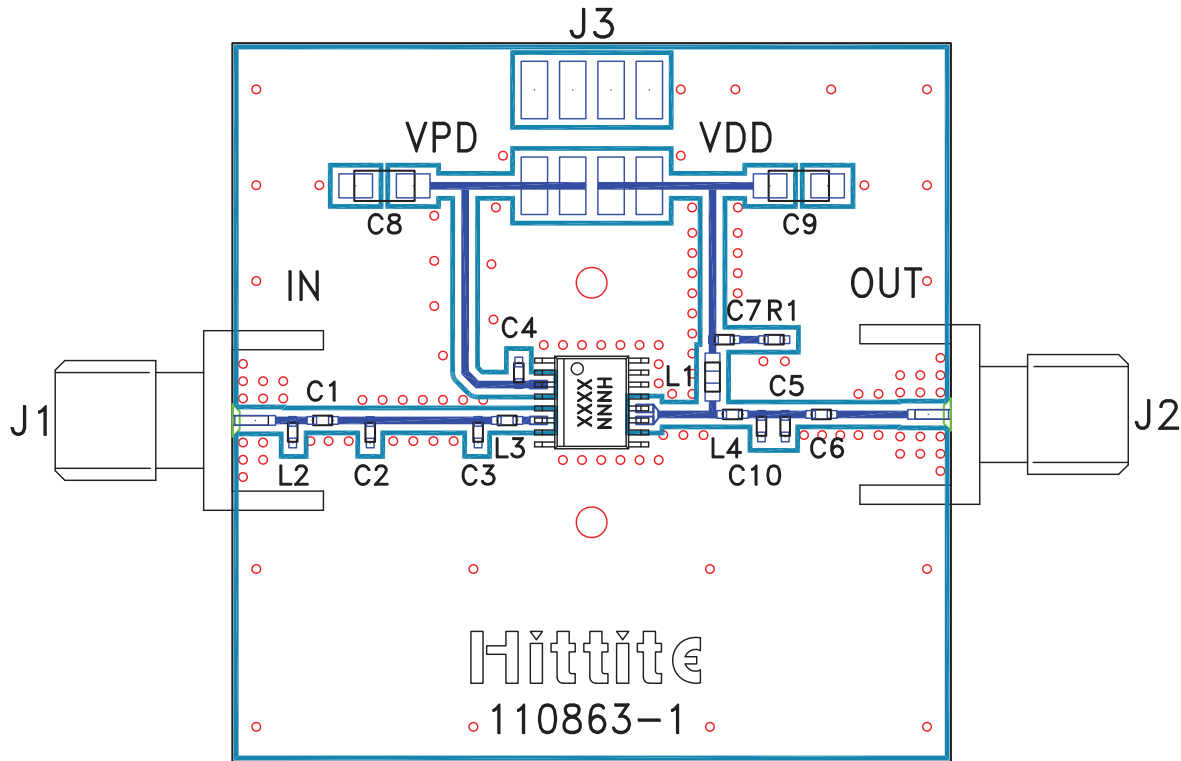

### List of Materials for Evaluation PCB 110865-400 <sup>[1]</sup>

| Item    | Description                              |
|---------|--|
| J1 - J2 | PCB Mount SMA Connector                  |
| J3      | 2 mm DC Header                           |
| C1, C5  | 12 pF Capacitor, 0402 Pkg.               |
| C2, C10 | 8.2 pF Capacitor, 0402 Pkg.              |
| C3      | 6.8 pF Capacitor, 0402 Pkg.              |
| C4, C7  | 100 pF Capacitor, 0402 Pkg.              |
| C6      | 39 pF Capacitor, 0402 Pkg.               |
| C8, C9  | 2.2 $\mu$ F Capacitor, Tantalum          |
| L1      | 47 nH Inductor, 0603 Pkg.                |
| L2      | 40 nH Inductor, 0402 Pkg.                |
| L3, L4  | 4.3 nH Inductor, 0402 Pkg.               |
| R1      | 5.1 Ohm Resistor, 0402 Pkg.              |
| U1      | HMC453QS16G / HMC453QS16GE<br>Linear Amp |
| PCB [2] | 110863 Evaluation PCB, 10 mils           |


[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of VIA holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

### 470 MHz Application Circuit


This circuit was used to specify the performance for 450-496 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

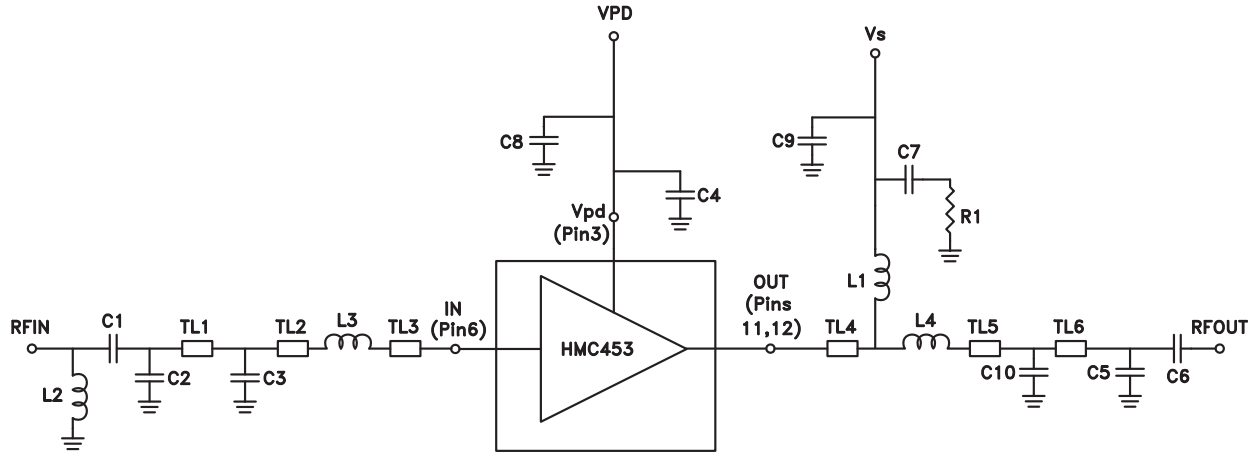

| Recommended Component Values |         |
|------------------------------|---------|
| C1                           | 12 pF   |
| C2                           | 8.2 pF  |
| C3                           | 6.8 pF  |
| C4, C7                       | 100 pF  |
| C5                           | 10 pF   |
| C6                           | 39 pF   |
| C8, C9                       | 2.2 μF  |
| C10                          | 5.6 pF  |
| L1                           | 47 nH   |
| L2                           | 40 nH   |
| L3, L4                       | 4.3 nH  |
| R1                           | 5.1 Ohm |

|   | TL1    | TL2    | TL3    | TL4    | TL5    | TL6    |
|---|--------|--------|--------|--------|--------|--------|
| Impedance                                   | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length                             | 0.22"  | 0.04"  | 0.04"  | 0.16"  | 0.04"  | 0.05"  |
| Electrical Length                           | 6°     | 1°     | 1°     | 4°     | 1°     | 1°     |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 |        |        |        |        |        |        |

### 470 MHz Evaluation PCB

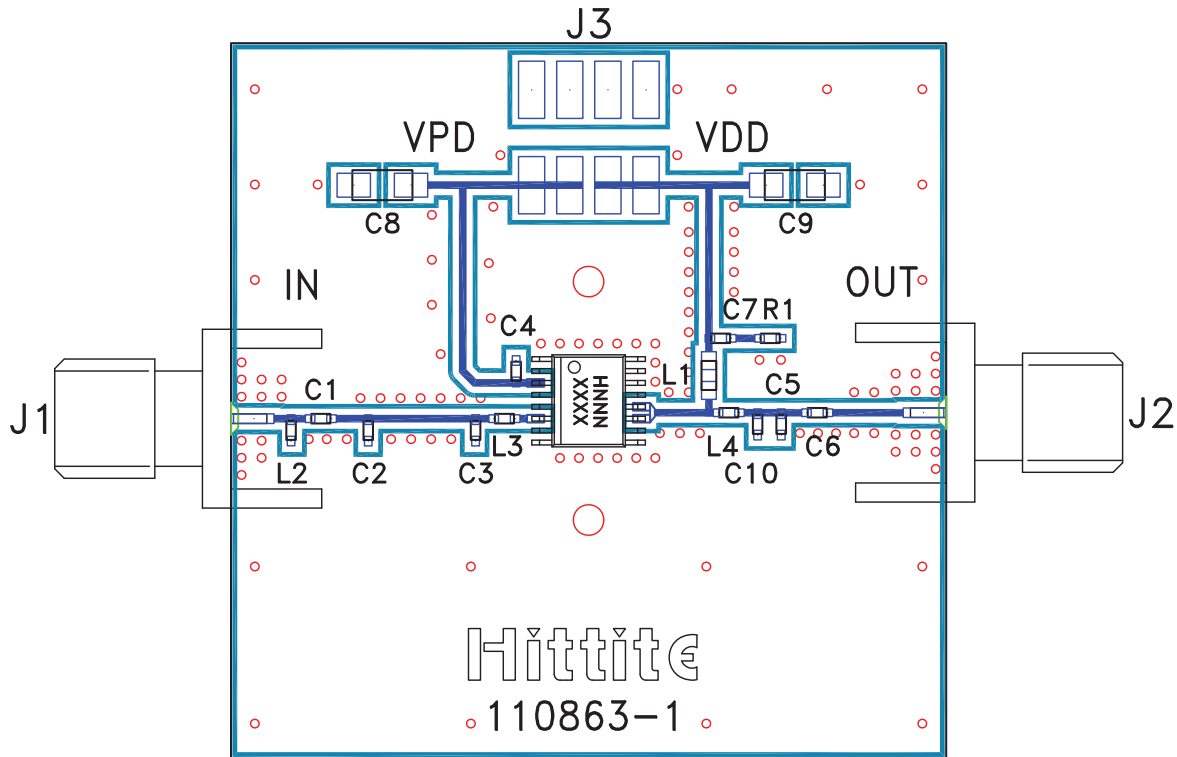

### List of Materials for Evaluation PCB 110976-470 [1]

| Item    | Description                           |
|---------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector               |
| J3      | 2 mm DC Header                        |
| C1      | 12 pF Capacitor, 0402 Pkg.            |
| C2      | 8.2 pF Capacitor, 0402 Pkg.           |
| C3      | 6.8 pF Capacitor, 0402 Pkg.           |
| C4, C7  | 100 pF Capacitor, 0402 Pkg.           |
| C5      | 10 pF Capacitor, 0402 Pkg.            |
| C6      | 39 pF Capacitor, 0402 Pkg.            |
| C8, C9  | 2.2 $\mu$ F Capacitor, Tantalum       |
| C10     | 5.6 pF Capacitor, 0402 Pkg.           |
| L1      | 47 nH Inductor, 0603 Pkg.             |
| L2      | 40 nH Inductor, 0402 Pkg.             |
| L3, L4  | 4.3 nH Inductor, 0402 Pkg.            |
| R1      | 5.1 Ohm Resistor, 0402 Pkg.           |
| U1      | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB [2] | 110863 Evaluation PCB, 10 mils        |

[1] Reference this number when ordering complete evaluation PCB


[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



### 900 MHz Application Circuit


This circuit was used to specify the performance for 810-960 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

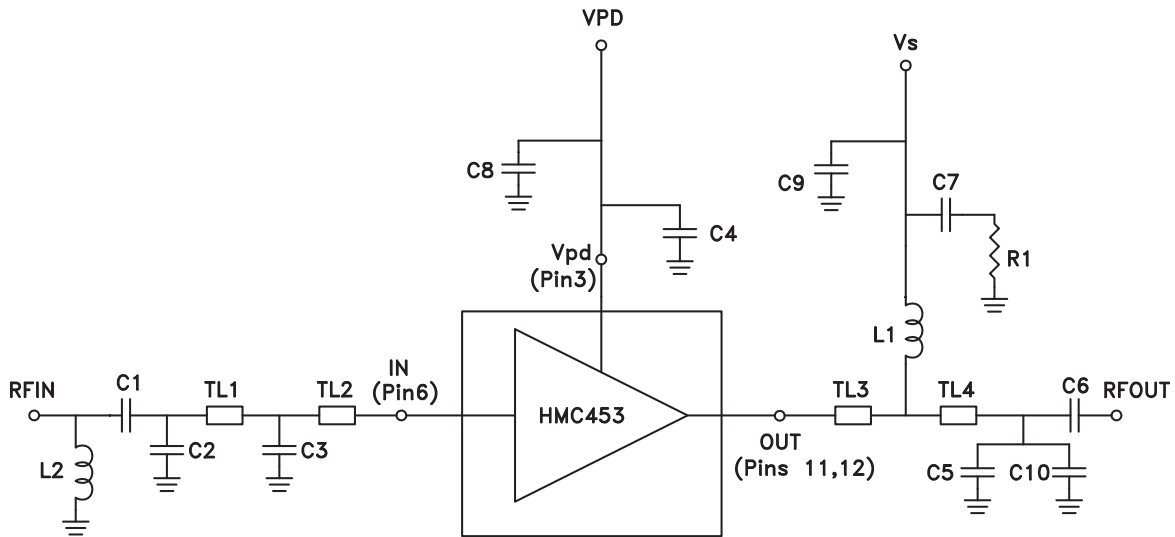

|   | TL1    | TL2    | TL3    | TL4    |
|---|--------|--------|--------|--------|
| Impedance                                   | 50 Ohm | 50 Ohm | 50 Ohm | 50 Ohm |
| Physical Length                             | 0.26"  | 0.08"  | 0.12"  | 0.15"  |
| Electrical Length                           | 14°    | 4°     | 6°     | 8°     |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 |        |        |        |        |

| Recommended Component Values |         |
|------------------------------|---------|
| C1                           | 5 pF    |
| C2, C3                       | 3.3 pF  |
| C4, C7                       | 100 pF  |
| C5                           | 8.2 pF  |
| C6                           | 56 pF   |
| C8, C9                       | 2.2 μF  |
| C10                          | 1 pF    |
| L1                           | 30 nH   |
| L2                           | 20 nH   |
| R1                           | 5.6 Ohm |

### 900 MHz Evaluation PCB

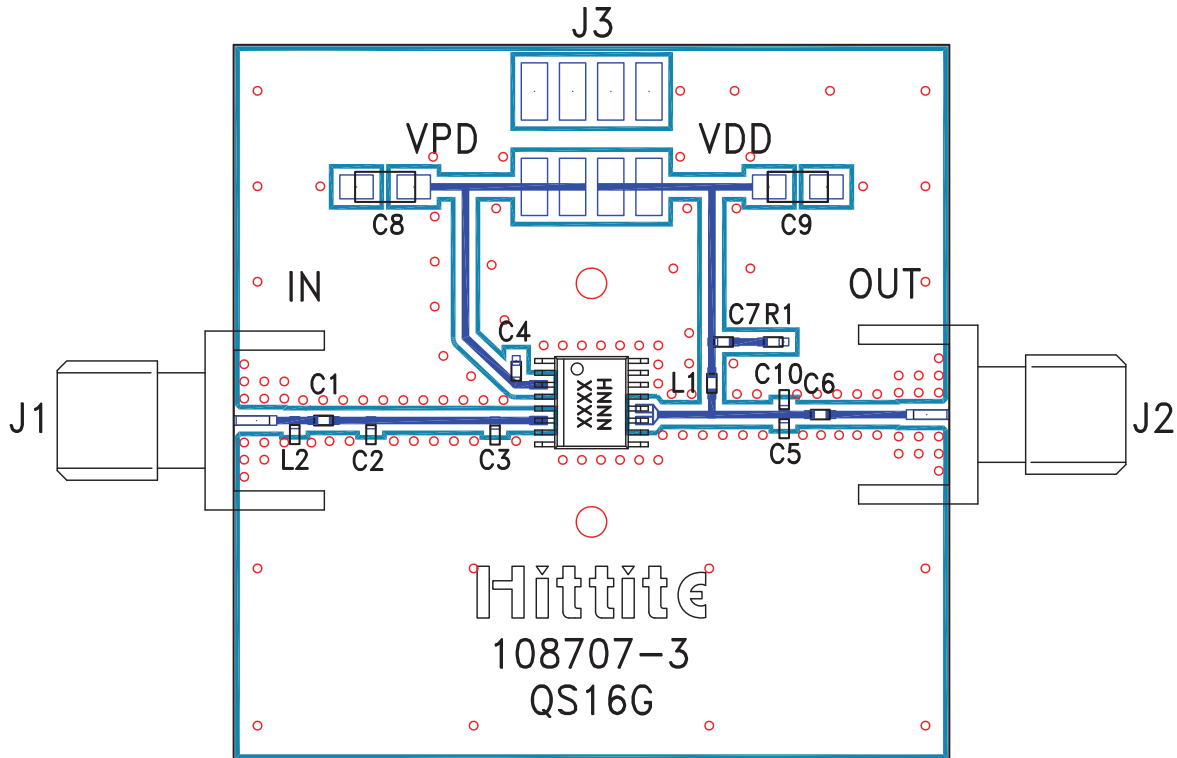

### List of Materials for Evaluation PCB 108709-900 [1]

| Item    | Description                           |
|---------|---------------------------------------|
| J1 - J2 | PCB Mount SMA Connector               |
| J3      | 2 mm DC Header                        |
| C1      | 5.0 pF Capacitor, 0402 Pkg.           |
| C2, C3  | 3.3 pF Capacitor, 0402 Pkg.           |
| C4, C7  | 100 pF Capacitor, 0402 Pkg.           |
| C5      | 8.2 pF Capacitor, 0402 Pkg.           |
| C6      | 56 pF Capacitor, 0402 Pkg.            |
| C8, C9  | 2.2 $\mu$ F Capacitor, Tantalum       |
| C10     | 1.0 pF Capacitor, 0402 Pkg.           |
| L1      | 30 nH Inductor, 0402 Pkg.             |
| L2      | 20 nH Inductor, 0402 Pkg.             |
| R1      | 5.6 Ohm Resistor, 0402 Pkg.           |
| U1      | HMC453QS16G / HMC453QS16GE Linear Amp |
| PCB [2] | 108707 Evaluation PCB, 10 mils        |


[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

### 1900 MHz Application Circuit


This circuit was used to specify the performance for 1710-1990 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

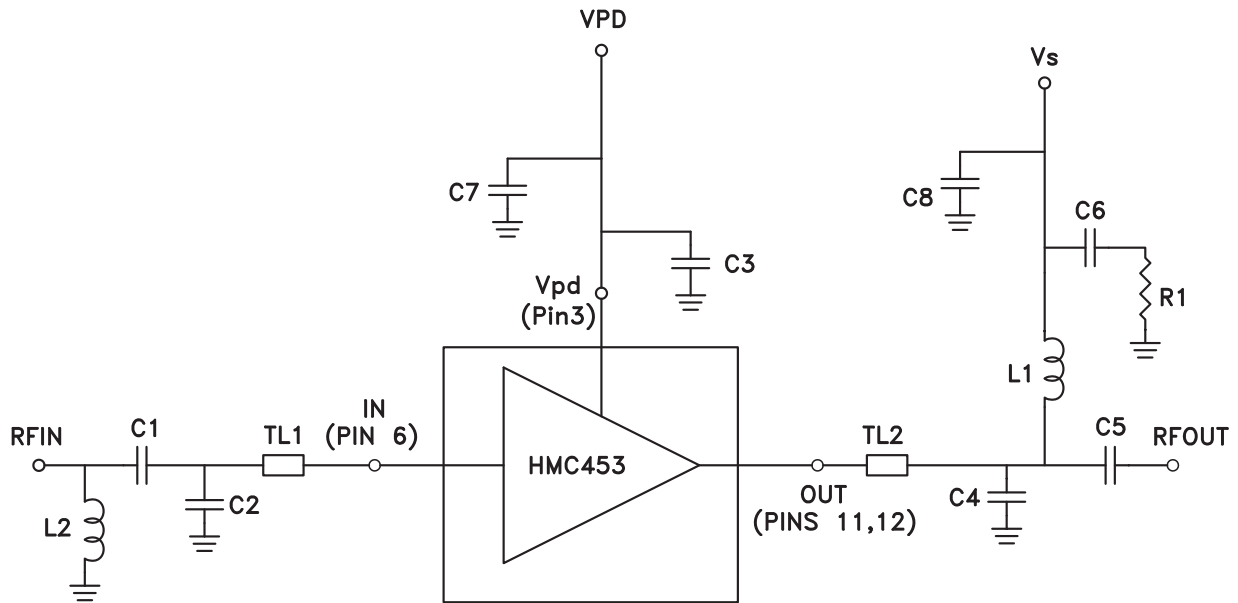

|   | TL1    | TL2    |
|---|--------|--------|
| Impedance                                   | 50 Ohm | 50 Ohm |
| Physical Length                             | 0.04"  | 0.04"  |
| Electrical Length                           | 4°     | 4°     |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 |        |        |

| Recommended Component Values |          |
|------------------------------|----------|
| C1                           | 0.8 pF   |
| C2                           | 1.2 pF   |
| C3, C6                       | 100 pF   |
| C4                           | 4.7 pF   |
| C5                           | 15 pF    |
| C7, C8                       | 2.2 μF   |
| L1                           | 18 nH    |
| L2                           | 20 nH    |
| R1                           | 5.6 Ohms |

### 1900 MHz Evaluation PCB

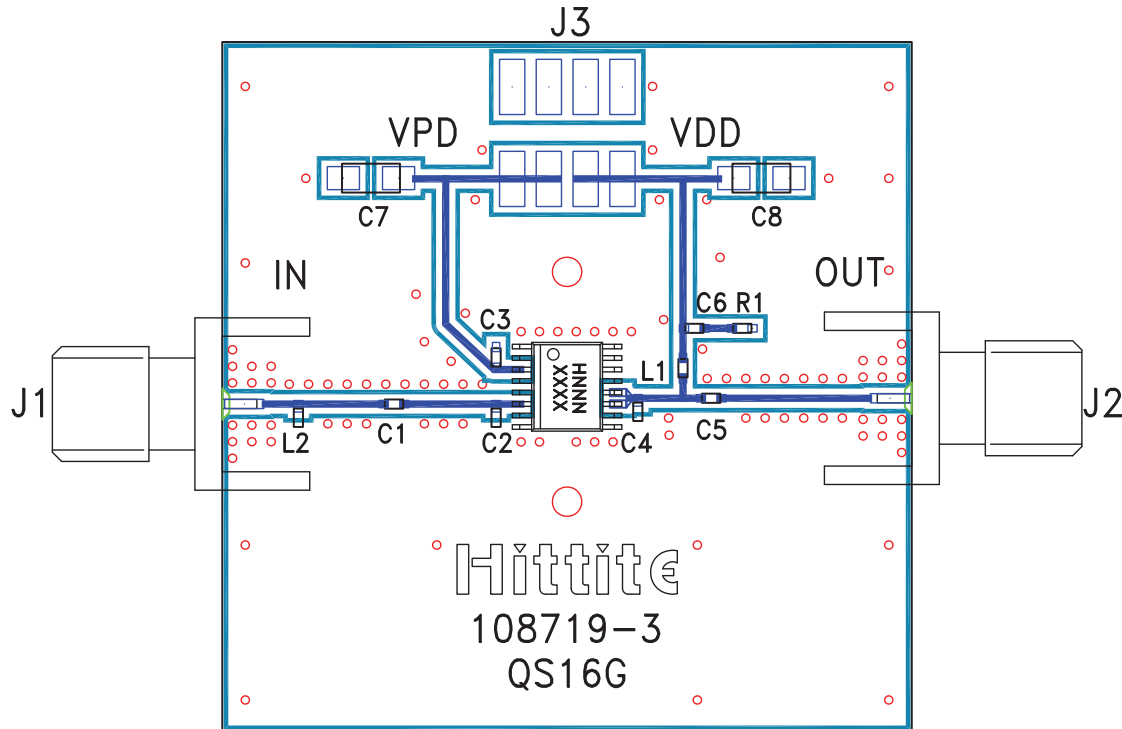

### List of Materials for Evaluation PCB 108721-1900 [1]

| Item    | Description                              |
|---------|--|
| J1 - J2 | PCB Mount SMA Connector                  |
| J3      | 2 mm DC Header                           |
| C1      | 0.8 pF Capacitor, 0402 Pkg.              |
| C2      | 1.2 pF Capacitor, 0402 Pkg.              |
| C3, C6  | 100 pF Capacitor, 0402 Pkg.              |
| C4      | 4.7 pF Capacitor, 0402 Pkg.              |
| C5      | 15 pF Capacitor, 0402 Pkg.               |
| C7, C8  | 2.2 $\mu$ F Capacitor, Tantalum          |
| L1      | 18 nH Inductor, 0402 Pkg.                |
| L2      | 20 nH Inductor, 0402 Pkg.                |
| R1      | 5.6 Ohm Resistor, 0402 Pkg.              |
| U1      | HMC453QS16G / HMC453QS16GE<br>Linear Amp |
| PCB [2] | 108719 Evaluation PCB, 10 mils           |


[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

### 2100 MHz Application Circuit


This circuit was used to specify the performance for 2100-2170 MHz operation. Contact the HMC Applications Group for assistance in optimizing performance for your application.

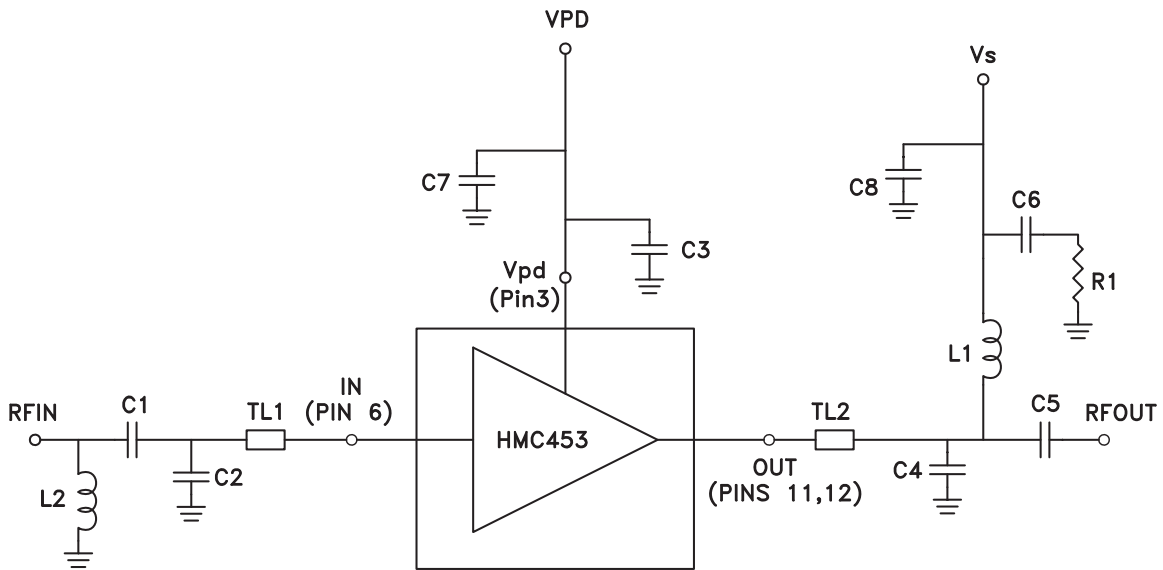

|   | TL1    | TL2    |
|---|--------|--------|
| Impedance                                   | 50 Ohm | 50 Ohm |
| Physical Length                             | 0.04"  | 0.04"  |
| Electrical Length                           | 5°     | 5°     |
| PCB Material: 10 mil Rogers 4350, Er = 3.48 |        |        |

| Recommended Component Values |         |
|------------------------------|---------|
| C1                           | 0.8 pF  |
| C2                           | 1 pF    |
| C3, C6                       | 100 pF  |
| C4                           | 3.9 pF  |
| C5                           | 15 pF   |
| C7, C8                       | 2.2 μF  |
| L1                           | 12 nH   |
| L2                           | 20 nH   |
| R1                           | 5.1 Ohm |

### 2100 MHz Evaluation PCB

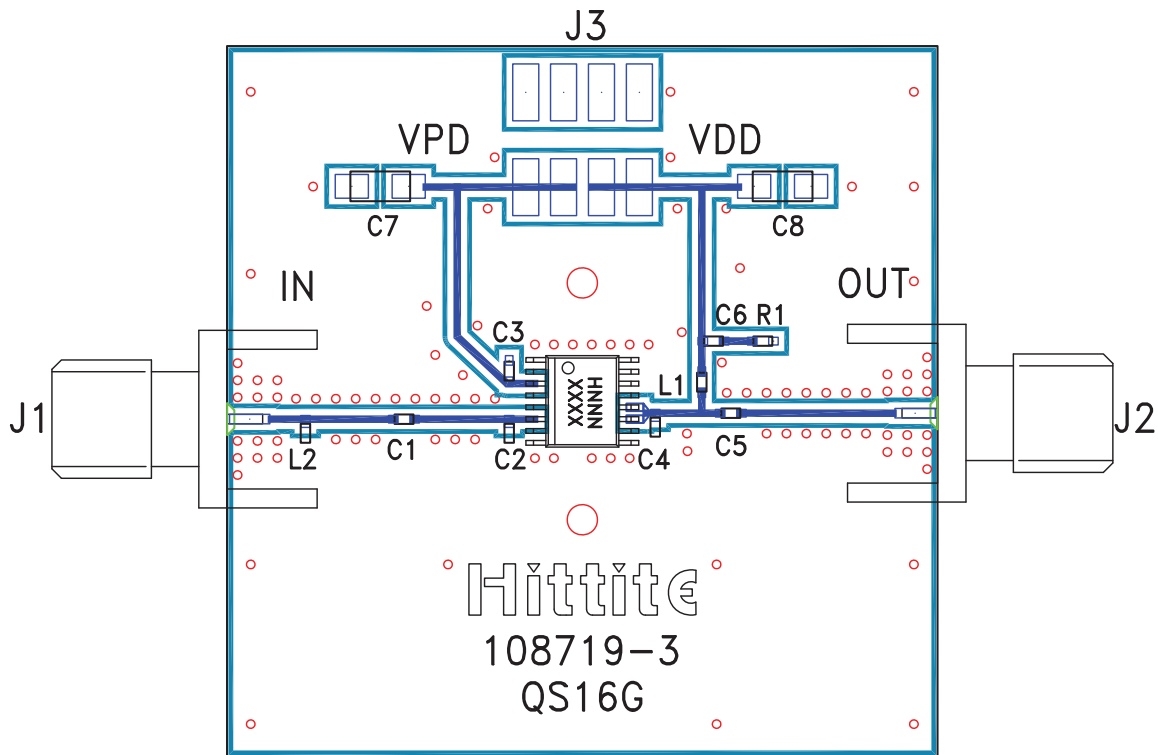

### List of Materials for Evaluation PCB 10994-2100 [1]

| Item    | Description                              |
|---------|--|
| J1 - J2 | PCB Mount SMA Connector                  |
| J3      | 2 mm DC Header                           |
| C1      | 0.8 pF Capacitor, 0402 Pkg.              |
| C2      | 1.0 pF Capacitor, 0402 Pkg.              |
| C3, C6  | 100 pF Capacitor, 0402 Pkg.              |
| C4      | 3.9 pF Capacitor, 0402 Pkg.              |
| C5      | 15 pF Capacitor, 0402 Pkg.               |
| C7, C8  | 2.2 $\mu$ F Capacitor, Tantalum          |
| L1      | 12 nH Inductor, 0402 Pkg.                |
| L2      | 20 nH Inductor, 0402 Pkg.                |
| R1      | 5.1 Ohm Resistor, 0402 Pkg.              |
| U1      | HMC453QS16G / HMC453QS16GE<br>Linear Amp |
| PCB [2] | 108719 Evaluation PCB, 10 mils           |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9