

### Programmable Output 6-Amp iLGA SMT PoLs

# inspectable LGA



# PRODUCT OVERVIEW

The OKL-T/6-W5 series are non-isolated Point-of-Load (PoL) DC/DC power converters for embedded applications. Featuring inspectable Land Grid Array (LGA) format, the OKL-T/6-W5 measures only 0.48 x 0.48 x 0.283 inches max. (12.2 x 12.2 x 7.2 mm max.).

The wide input range is 2.4 to 5.5 Volts DC. The maximum output current is 6 Amps. Based on fixed-frequency synchronous buck converter switching topology, the high power conversion


efficient Point of Load (PoL) module features programmable output voltage and On/Off control. These converters also include under voltage lock out (UVLO), output short circuit protection, overcurrent and over temperature protections.

An optional sequence/tracking feature allows power sequencing of PoL's. These units meet all standard UL/EN/IEC 60950-1 safety certifications (2nd Edition) and RoHS-6 hazardous substance compliance.

Contents	Page
Description, Connection Diagram, Photograph	1
Ordering Guide, Model Numbering, Product Label	2
Mechanical Specifications, Input/Output Pinout	3
Output Voltage Adustment, Application Notes	5
Soldering Guidelines	7
Performance Data and Oscillograms	8
Tape & Reel Information	15

#### **FEATURES**

- 2.4-5.5Vdc input voltage range
- Programmable output voltage from 0.6-3.3Vdc
- High power conversion efficiency at 93.5%
- Inspectable Land Grid Array
- Drives up to 300 µF ceramic capacitive loads
- On/Off control
- Optional Sequence/Tracking operation
- Outstanding thermal derating performance
- Over temperature and over current protection
- Meets UL/EN/IEC 60950-1 safety, 2nd Edition
- RoHS-6 hazardous substance compliance

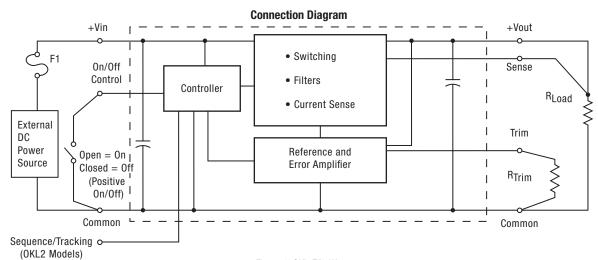












Note: Murata Power Solutions strongly recommends an external input fuse, F1. See specifications.

#### **Performance Specifications and Ordering Guide**

ORDERING GUIDE																
			0υ	tput					Input		- Efficiency		Efficiency			Package-Pinout P83
Model Number	Vout	lout (Amps,	Power	R/N (mV p-p)	Regulation	on (max.)	Vin nom.	Range	lin, no load	lin, full load					On/Off Polarity	Seq/ Track
	(Volts) ①	max.)	(Watts)	Max. ④	Line	Load	(Volts)	(Volts)	(mA) ⑤	(Amps) ②	Min.	Тур.		, index	inches (mm)	
OKL-T/6-W5P-C	0.6-3.3	6	19.8	25	±0.35%	±0.35%	5	2.4-5.5	25	4.24	91.5%	93.5%	Pos.	no	0.48x0.48x0.283 max (12.2x12.2x7.2) max	
OKL-T/6-W5N-C	0.6-3.3	6	19.8	25	±0.35%	±0.35%	5	2.4-5.5	25	4.24	91.5%	93.5%	Neg.	no	0.48x0.48x0.283 max (12.2x12.2x7.2) max	
OKL2-T/6-W5P-C	0.6-3.3	6	19.8	25	±0.35%	±0.35%	5	2.4-5.5	25	4.24	91.5%	93.5%	Pos.	yes	0.48x0.48x0.283 max (12.2x12.2x7.2) max	
OKL2-T/6-W5N-C	0.6-3.3	6	19.8	25	±0.35%	±0.35%	5	2.4-5.5	25	4.24	91.5%	93.5%	Neg.	yes	0.48x0.48x0.283 max (12.2x12.2x7.2) max	

- $\ \, \textcircled{1}$  The output range (50% load) is limited by Vin. See detailed specs for full conditions.
- ② All specifications are at nominal line voltage, Vout=nominal (3.3V for W5 models) and full load, +25 deg.C. unless otherwise noted.
  - Output capacitors are 10  $\mu$ F ceramic. Input cap is 22  $\mu$ F. See detailed specifications. I/O caps are necessary for our test equipment and may not be needed for your application.
- ③ Use adequate ground plane and copper thickness adjacent to the converter.
- A Ripple and Noise (R/N) are shown at Vout=1V. See specs for details.
- No load input current is shown at Vout = 3.3V.

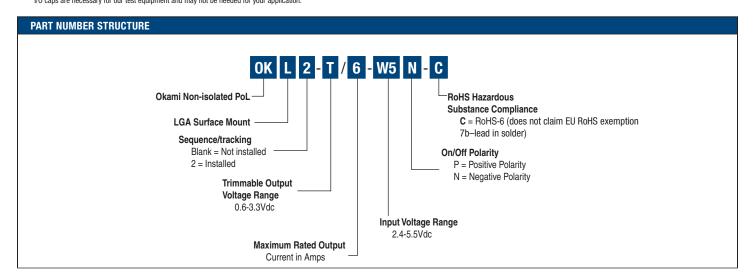

#### **Product Label**

Because of the small size of these products, the product label contains a character-reduced code to indicate the model number and manufacturing date code. Not all items on the label are always used. Please note that the label differs from the product photograph. Here is the layout of the label:




Figure 2. Label Artwork Layout

The label contains three rows of information:

First row – Murata Power Solutions logo Second row – Model number product code (see table) Third row – Manufacturing date code and revision level

Model Number	Product Code
OKL-T/6-W5P-C	L01006
OKL-T/6-W5N-C	L00006
OKL2-T/6-W5P-C	L21006
OKL2-T/6-W5N-C	L20006

The manufacturing date code is four characters:

First character – Last digit of manufacturing year, example  $200\underline{9}$  Second character – Month code (1 through 9 and 0 through D) Third character – Day code (1 through 9 = 1 to 9, 10=0 and 11 through 31 = A through Z) Fourth character – Manufacturing information





#### **MECHANICAL SPECIFICATIONS** Top View INPUT/OUTPUT CONNECTIONS 0.043 (1.09) 0.48 NOM. PCB Pin **Function** (12.19)THK On/Off Control\* **Bottom View** 2 VIN 3 Ground 4 Vout 5 Sense 6 Trim 0.48 7 Ground (12.19)8 No Connection ( 9 Sequence/Tracking 10 No Connection 11 No Connection Side View 12 No Connection \*The Remote On/Off can be provided with either positive (P suffix) or negative (N suffix) polarity 0.283 (7.2)max. **End View** Recommended Footprint **Bottom View** -through the Board-0.480 (12.19) 0.375 (9.53) 0.060 (1.52) 0.195(4.95)0.135 0.180\_ (3.43)(4.57)0.045 (1.14)0.070 x 0.160 x3 (1.77 x 4.07) 2 3 2 Vin Gnd 0.420 (10.67) (+) 0.375 (9.53) Gnd Vin 0.180 (4.57) 0.135 (3.43) 0.480 REF (12.19) On/Off Sense On/Off 0.240 (6.10) 0.090 (2.29)10 NC (+) NC (+) 0.150 (3.81) 11 10 0.180 (4.57) Seq NC + Gnd Trim 6 0.060 (1.52) 9 9 NC NC ์ Gndั Trim Dimensions are in inches (mm shown for ref. only). 0.090 0.150(3.81)0.240 (6.10) 0.330 (8.38) 0.420 (10.67) 7(2.29) 0.180 0.090 (4.57)(2.29)0.040 x 0.040 (9 places) (1.01 x 1.01) Tolerances (unless otherwise specified): .XX ± 0.02 (0.5) .XXX ± 0.010 (0.25) Angles ± 1° Figure 3. OKL-T/6-W5 Mechanical Outline Components are shown for reference only.



### Programmable Output 6-Amp iLGA SMT PoLs

#### **Performance and Functional Specifications**

See Note 1

Input				
Input Voltage Range	See Ordering Guide and Note 7.			
Isolation	Not isolated			
Start-Up Voltage	2.05 V			
Undervoltage Shutdown (see Note 15)	1.92 V			
Overvoltage Shutdown	None			
Reflected (Back) Ripple Current (Note 2)	TBD mA pk-pk			
Internal Input Filter Type	Capacitive			
Recommended External Fuse	TBD			
Reverse Polarity Protection	None, Install external fuse			
Input Current: Full Load Conditions	Coo Ordoring Cuido			
Inrush Transient	See Ordering Guide TRD A <sup>2</sup> Sec.			
Shutdown Mode (Off, UV, OT)	1 mA			
Output in Short Circuit	10 mA			
Low Line (Vin=Vmin)	4.68 A (Vout = 3.3V)			
Remote On/Off Control (Note 5)				
Negative Logic	ON = Open pin or -0.2V to Vin -1.6V max.			
Positive Logic	OFF = Vin -0.8V min. to +Vin max.  ON = Open pin (internally pulled up) or +1.2V to +Vin max.  OFF = -0.3V to +0.3V max. or ground			
Current	TBD			
Tracking/Sequencing (optional)				
Slew Rate	2 Volts per millisecond, max.			
Tracking accuracy, rising input	Vout = $\pm 100$ mV of Sequence In			
Tracking accuracy, falling input	Vout = $\pm 100$ mV of Sequence In			
Output				

Tracking accuracy, falling input	Vout = $\pm 100$ mV of Sequence In
Ou	tput
Output Power	19.8W max.
Output Voltage Range	See Ordering Guide
Minimum Loading	No minimum load
Accuracy (50% load, untrimmed)	±2 % of Vnominal
Voltage Output Range (Note 13)	See Ordering Guide
Overvoltage Protection (Note 16)	None
Temperature Coefficient	TBD
Ripple/Noise (20 MHz bandwidth)	See Ordering Guide and note 8
Line/Load Regulation	See Ordering Guide and note 10
Efficiency	See Ordering Guide
Maximum Capacitive Loading (Note 14)	
Cap-ESR=0.001 to 0.01 Ohms	300 μF
Cap-ESR >0.01 Ohms	TBD
Current Limit Inception (Note 6)	
(98% of Vout setting, after warm up)	12 Amps
Short Circuit Mode	
Short Circuit Current Output	10 mA
Protection Method	Hiccup autorecovery upon overload
	removal. (Note 17)
Short Circuit Duration	Continuous, no damage
Prebias Startup	(output shorted to ground) Converter will start up if the external output voltage is less than Vnominal.

Dynamic Characteristics					
Dynamic Load Response	$50\mu Sec$ max. to within $\pm 2\%$ of final value				
(50-100% load step, di/dt=1A/µSec) Peak Deviation	(Note 1) ±350 mV				
Start-Up Time (Vin on or On/Off to Vout regulated)	6 mSec for Vout=nominal (Vin On) 6 mSec for Vout=nominal (Remote On/Off)				
Switching Frequency	600 KHz ± 100 kHz				

Environmental						
Calculated MTBF (hours)	OKL Models	OKL2 Models				
Telecordia method (4a)	5,573,000	5,341,000				
Calculated MTBF (hours)						
MIL-HDBK-217N2 method (4b)	5,999,000	5,176,000				
Operating Temperature Range (Ambient, all output ranges)						
See derating curves	-40 to +85 °C.	with derating (Note 9)				
Storage Temperature Range	-55 to +125 °C	).				
Thermal Protection/Shutdown	Included in PW	M				
Relative Humidity	To 85%/+85 °C	., non-condensing				

Physical			
Outline Dimensions	See Mechanical Specifications		
Weight	0.06 ounces (1.6 grams)		
Safety	Meets UL/cUL 60950-1, CSA- C22.2 No. 60950-1, IEC/EN 60950-1, 2nd Edition		
Restriction of Hazardous Substances	RoHS-6 (does not claim EU RoHS exemption 7b–lead in solder)		

Absolute Maximum Ratings				
Input Voltage (Continuous or transient) On/Off Control	0 V. to +6 Volts max. 0 V. min. to +Vin max.			
Input Reverse Polarity Protection	None, Install external fuse			
Output Current (Note 7)	Current-limited. Devices can withstand a sustained short circuit without damage. The outputs are not intended to accept appreciable reverse current.			
Storage Temperature	-55 to +125 °C.			
Lead Temperature	See soldering specifications			
Absolute maximums are stress ratings.	Exposure of devices to greater than any of			

Absolute maximums are stress ratings. Exposure of devices to greater than any of any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied nor recommended.

#### **Specification Notes:**

- (1) Specifications are typical at +25 °C, Vin=nominal (+5V), Vout=nominal (+3.3V), full load, external caps and natural convection unless otherwise indicated. Extended tests at full power must supply substantial forced airflow. All models are tested and specified with external 10μF ceramic output capacitors and a 22 μF external input capacitor. All capacitors are low ESR types. These capacitors are necessary to accommodate our test equipment and may not be required to achieve specified performance in your applications. However, Murata Power Solutions recommends installation of these capacitors. All models are stable and regulate within spec under no-load conditions.
- (2) Input Back Ripple Current is tested and specified over a 5 Hz to 20 MHz bandwidth. Input filtering is Cin=2 x 100 μF ceramic, Cbus=1000 μF electrolytic, Lbus=1 μH.
- (3) Note that Maximum Power Derating curves indicate an average current at nominal input voltage. At higher temperatures and/or lower airflow, the DC/DC converter will tolerate brief full current outputs if the total RMS current over time does not exceed the Derating curve.
- (4a) Mean Time Before Failure is calculated using the Telcordia (Belcore) SR-332 Method 1, Case 3, ground fixed conditions, Tpcboard=+25 °C, full output load, natural air convection.
- (4b) Mean Time Before Failure is calculated using the MIL-HDBK-217N2 method, ground benign, +25°C., full output load, natural convection.
- (5) The On/Off Control Input should use either a switch or an open collector/open drain transistor referenced to -Input Common. A logic gate may also be used by applying appropriate external voltages which do not exceed +Vin.
- (6) Short circuit shutdown begins when the output voltage degrades approximately 2% from the selected setting.



#### **Specification Notes, Cont.:**

- (7) Please observe the voltage input and output specifications in the Voltage Range Graph on page 7.
- (8) Output noise may be further reduced by adding an external filter. At zero output current, the output may contain low frequency components which exceed the ripple specification. The output may be operated indefinitely with no load.
- (9) All models are fully operational and meet published specifications, including "cold start" at  $-40^{\circ}$  C.
- (10) Regulation specifications describe the deviation as the line input voltage or output load current is varied from a nominal midpoint value to either extreme.
- (11) Other input or output voltage ranges will be reviewed under scheduled quantity special order.
- (12) Maximum PC board temperature is measured with the sensor in the center of the converter.
- (13) Do not exceed maximum power specifications when adjusting the output trim.
- (14) The maximum output capacitive loads depend on the the Equivalent Series Resistance (ESR) of the external output capacitor and, to a lesser extent, the distance and series impedance to the load. Larger caps will reduce output noise but may change the transient response. Newer ceramic caps with very low ESR may require lower capacitor values to avoid instability. Thoroughly test your capacitors in the application. Please refer to the Output Capacitive Load Application Note.
- (15) Do not allow the input voltage to degrade lower than the input undervoltage shutdown voltage at all times. Otherwise, you risk having the converter turn off. The undervoltage shutdown is not latching and will attempt to recover when the input is brought back into normal operating range.
- (16) The outputs are not intended to sink appreciable reverse current.
- (17) "Hiccup" overcurrent operation repeatedly attempts to restart the converter with a brief, full-current output. If the overcurrent condition still exists, the restart current will be removed and then tried again. This short current pulse prevents overheating and damaging the converter. Once the fault is removed, the converter immediately recovers normal operation.

#### **Output Voltage Adustment**

The output voltage may be adjusted over a limited range by connecting an external trim resistor (Rtrim) between the Trim pin and Ground. The Rtrim resistor must be a 1/10 Watt precision metal film type,  $\pm 0.5\%$  accuracy or better with low temperature coefficient,  $\pm 100$  ppm/°C. or better. Mount the resistor close to the converter with very short leads or use a surface mount trim resistor.

In the table below, the calculated resistance is given. Do not exceed the specified limits of the output voltage or the converter's maximum power rating when applying these resistors. Also, avoid high noise at the Trim input. However, to prevent instability, you should never connect any capacitors to Trim.

#### **Resistor Trim Equation, OKL-T/6-W5 models:**

RTRIM 
$$(K\Omega) = \frac{1.2}{V_{OUT} - 0.6}$$

Output Voltage	Calculated Rtrim (KΩ)
3.3 V.	0.444
2.5 V.	0.632
1.8 V.	1.0
1.5 V.	1.333
1.2 V.	2.0
1.0 V.	3.0
0.6 V.	∞ (open)

#### APPLICATION NOTES

#### **Input Fusing**

Certain applications and/or safety agencies may require fuses at the inputs of power conversion components. Fuses should also be used when there is the possibility of sustained input voltage reversal which is not current-limited. For greatest safety, we recommend a fast blow fuse installed in the ungrounded input supply line.

The installer must observe all relevant safety standards and regulations. For safety agency approvals, install the converter in compliance with the end-user safety standard.

#### Input Under-Voltage Shutdown and Start-Up Threshold

Under normal start-up conditions, converters will not begin to regulate properly until the rising input voltage exceeds and remains at the Start-Up Threshold Voltage (see Specifications). Once operating, converters will not turn off until the input voltage drops below the Under-Voltage Shutdown Limit. Subsequent restart will not occur until the input voltage rises again above the Start-Up Threshold. This built-in hysteresis prevents any unstable on/off operation at a single input voltage.

Users should be aware however of input sources near the Under-Voltage Shutdown whose voltage decays as input current is consumed (such as capacitor inputs), the converter shuts off and then restarts as the external capacitor recharges. Such situations could oscillate. To prevent this, make sure the operating input voltage is well above the UV Shutdown voltage AT ALL TIMES.

#### Start-Up Delay

Assuming that the output current is set at the rated maximum, the Vin to Vout Start-Up Delay (see Specifications) is the time interval between the point when the rising input voltage crosses the Start-Up Threshold and the fully loaded regulated output voltage enters and remains within its specified regulation band. Actual measured times will vary with input source impedance, external input capacitance, input voltage slew rate and final value of the input voltage as it appears at the converter.

These converters include a soft start circuit to moderate the duty cycle of the PWM controller at power up, thereby limiting the input inrush current.

The On/Off Remote Control interval from inception to Vout regulated assumes that the converter already has its input voltage stabilized above the Start-Up Threshold before the On command. The interval is measured from the On command until the output enters and remains within its specified accuracy band. The specification assumes that the output is fully loaded at maximum rated current.

#### **Recommended Input Filtering**

The user must assure that the input source has low AC impedance to provide dynamic stability and that the input supply has little or no inductive content, including long distributed wiring to a remote power supply. The converter will operate with no additional external capacitance if these conditions are met.



### Programmable Output 6-Amp iLGA SMT PoLs

For best performance, we recommend installing a low-ESR capacitor immediately adjacent to the converter's input terminals. The capacitor should be a ceramic type such as the Murata GRM32 series or a polymer type. Initial suggested capacitor values are 10 to 22  $\mu\text{F}$ , rated at twice the expected maximum input voltage. Make sure that the input terminals do not go below the undervoltage shutdown voltage at all times. More input bulk capacitance may be added in parallel (either electrolytic or tantalum) if needed.

#### **Recommended Output Filtering**

The converter will achieve its rated output ripple and noise with no additional external capacitor. However, the user may install more external output capacitance to reduce the ripple even further or for improved dynamic response. Again, use low-ESR ceramic (Murata GRM32 series) or polymer capacitors. Initial values of 10 to 47  $\mu F$  may be tried, either single or multiple capacitors in parallel. Mount these close to the converter. Measure the output ripple under your load conditions.

Use only as much capacitance as required to achieve your ripple and noise objectives. Excessive capacitance can make step load recovery sluggish or possibly introduce instability. Do not exceed the maximum rated output capacitance listed in the specifications.

#### **Input Ripple Current and Output Noise**

All models in this converter series are tested and specified for input reflected ripple current and output noise using designated external input/ output components, circuits and layout as shown in the figures below. The Cbus and Lbus components simulate a typical DC voltage bus. Please note that the values of Cin, Lbus and Cbus will vary according to the specific converter model.

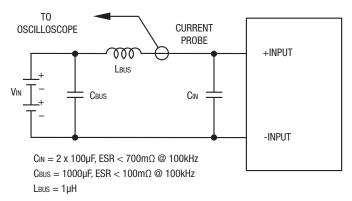


Figure 4: Measuring Input Ripple Current

In figure 5, the two copper strips simulate real-world printed circuit impedances between the power supply and its load. In order to minimize circuit errors and standardize tests between units, scope measurements should be made using BNC connectors or the probe ground should not exceed one half inch and soldered directly to the test circuit.

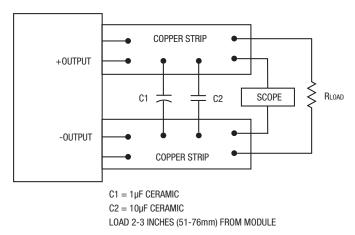


Figure 5: Measuring Output Ripple and Noise (PARD)

#### **Minimum Output Loading Requirements**

All models regulate within specification and are stable under no load to full load conditions. Operation under no load might however slightly increase output ripple and noise.

#### **Temperature Derating Curves**

The graphs in the next section illustrate typical operation under a variety of conditions. The Derating curves show the maximum continuous ambient air temperature and decreasing maximum output current which is acceptable under increasing forced airflow measured in Linear Feet per Minute ("LFM"). Note that these are AVERAGE measurements. The converter will accept brief increases in current or reduced airflow as long as the average is not exceeded.

Note that the temperatures are of the ambient airflow, not the converter itself which is obviously running at higher temperature than the outside air. Also note that very low flow rates (below about 25 LFM) are similar to "natural convection", that is, not using fan-forced airflow.

Murata Power Solutions makes Characterization measurements in a closed cycle wind tunnel with calibrated airflow. We use both thermocouples and an infrared camera system to observe thermal performance.



### Programmable Output 6-Amp iLGA SMT PoLs

#### **Output Current Limiting**

Current limiting inception is defined as the point at which full power falls below the rated tolerance. See the Performance/Functional Specifications. Note particularly that the output current may briefly rise above its rated value in normal operation as long as the average output power is not exceeded. This enhances reliability and continued operation of your application. If the output current is too high, the converter will enter the short circuit condition.

#### **Output Short Circuit Condition**

When a converter is in current-limit mode, the output voltage will drop as the output current demand increases. If the output voltage drops too low (approximately 98% of nominal output voltage for most models), the magnetically coupled voltage used to develop PWM bias voltage will also drop, thereby shutting down the PWM controller. Following a time-out period, the PWM will restart, causing the output voltage to begin rising to its appropriate value. If the short-circuit condition persists, another shutdown cycle will initiate. This rapid on/off cycling is called "hiccup mode". The hiccup cycling reduces the average output current, thereby preventing excessive internal temperatures and/or component damage.

The "hiccup" system differs from older latching short circuit systems because you do not have to power down the converter to make it restart. The system will automatically restore operation as soon as the short circuit condition is removed.

#### **Remote On/Off Control**

The remote On/Off Control can be specified with either positive or negative logic polarity. Please refer to the Connection Diagram on page 1 for On/Off connections.

<u>Positive</u> polarity models are enabled when the On/Off pin is left open or is pulled high to +Vin with respect to -Vin. An internal bias current causes the open pin to rise to +Vin. Positive-polarity devices are disabled when the On/Off is grounded or brought to within a low voltage (see Specifications) with respect to -Vin.

<u>Negative</u> polarity devices are on (enabled) when the On/Off is open or brought to within a low voltage (see Specifications) with respect to –Vin. The device is off (disabled) when the On/Off is pulled high with respect to –Vin (see specifications).


Dynamic control of the On/Off function should be able to sink the specified signal current when brought low and withstand appropriate voltage when brought high. Be aware too that there is a finite time in milliseconds (see Specifications) between the time of On/Off Control activation and stable, regulated output. This time will vary slightly with output load type and current and input conditions.

#### **Output Capacitive Load**

These converters do not require external capacitance added to achieve rated specifications. Users should only consider adding capacitance to reduce switching noise and/or to handle spike current load steps. Install only enough capacitance to achieve noise objectives. Excess external capacitance may cause regulation problems, degraded transient response and possible oscillation or instability.

#### **Voltage Range Graph**

Please observe the limits below for voltage input and output ranges. These limits apply at all output currents.




#### **Soldering Guidelines**

Murata Power Solutions recommends the specifications below when installing these converters. These specifications vary depending on the solder type. Exceeding these specifications may cause damage to the product. Your production environment may differ therefore please thoroughly review these quidelines with your process engineers.

Reflow Solder Operations for surface-mount products (SMT)				
For Sn/Ag/Cu based solders:				
Preheat Temperature	Less than 1 °C. per second			
Time over Liquidus	45 to 75 seconds			
Maximum Peak Temperature	260 °C.			
Cooling Rate	Less than 3 °C. per second			
For Sn/Pb based solders:				
Preheat Temperature	Less than 1 °C. per second			
Time over Liquidus	60 to 75 seconds			
Maximum Peak Temperature	235 ℃.			
Cooling Rate	Less than 3 °C. per second			

#### **Recommended Lead-free Solder Reflow Profile**

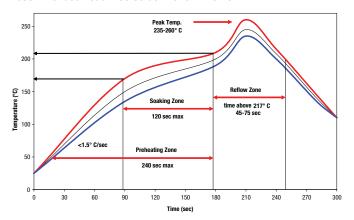


High trace = normal upper limit


Low trace - normal lower limit






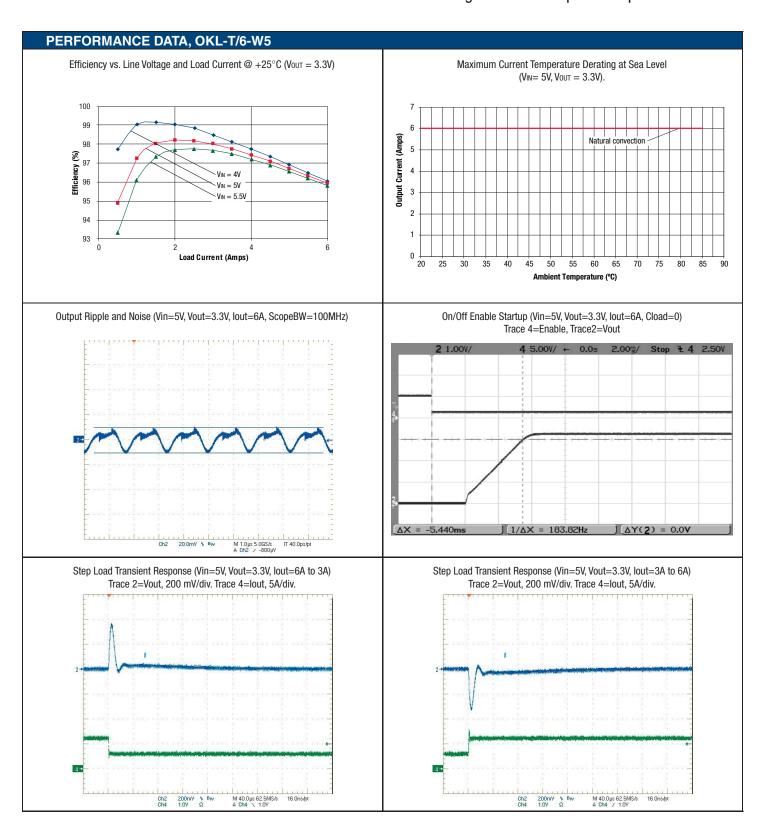




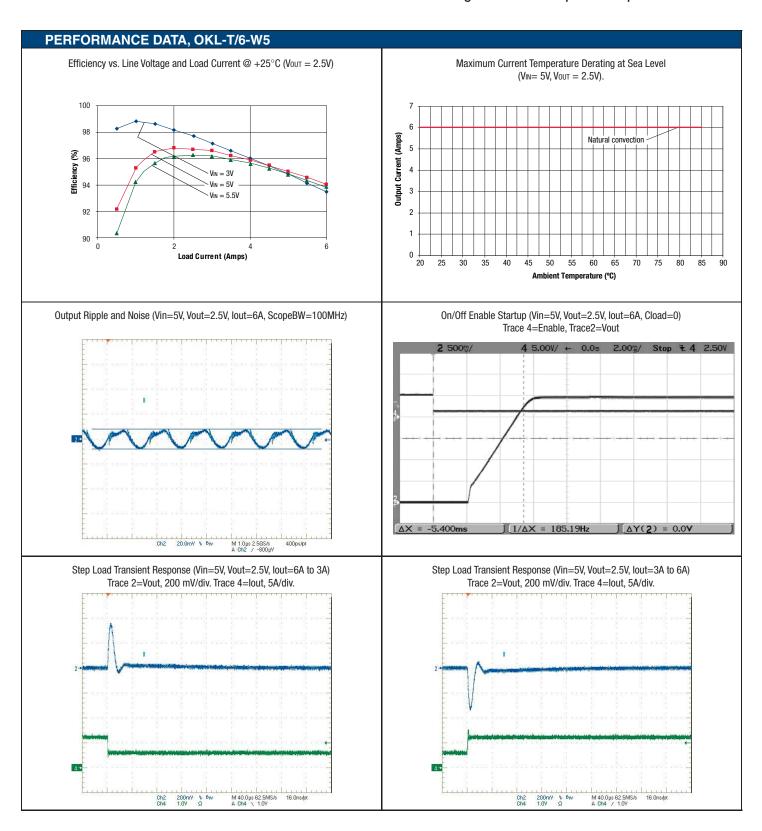




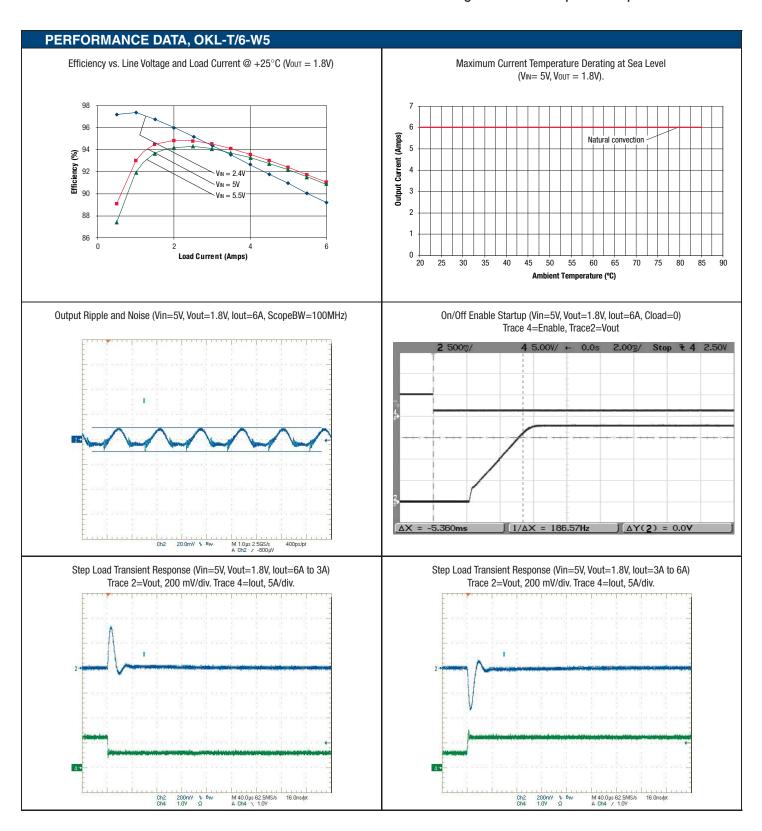




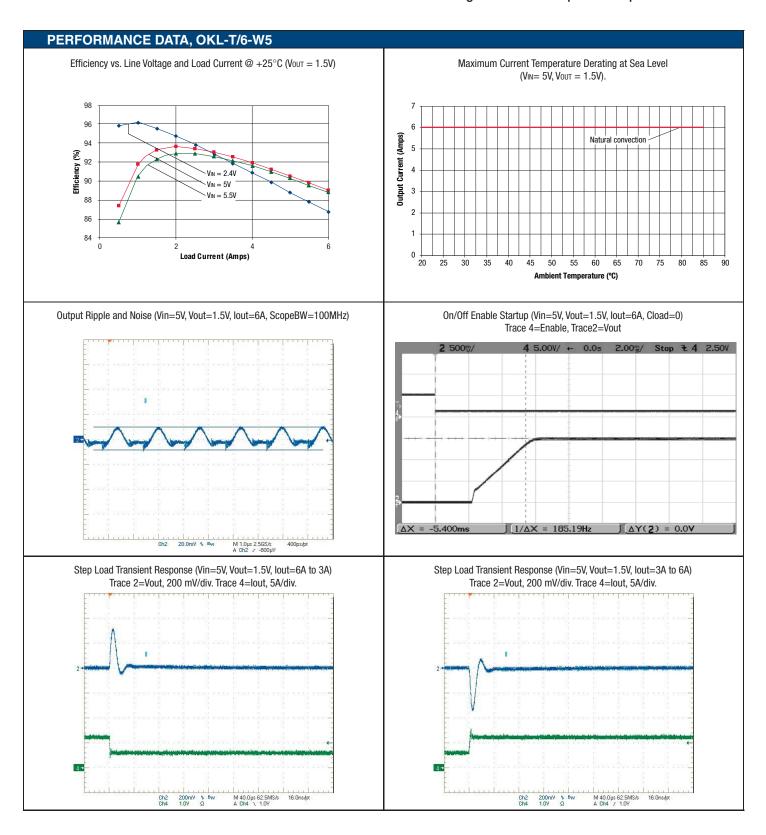




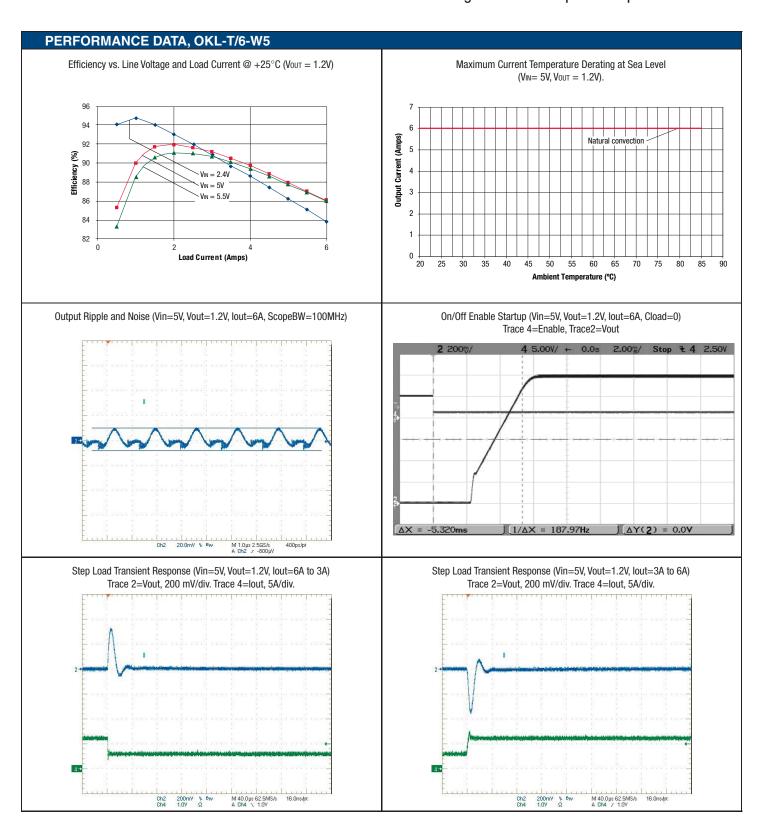



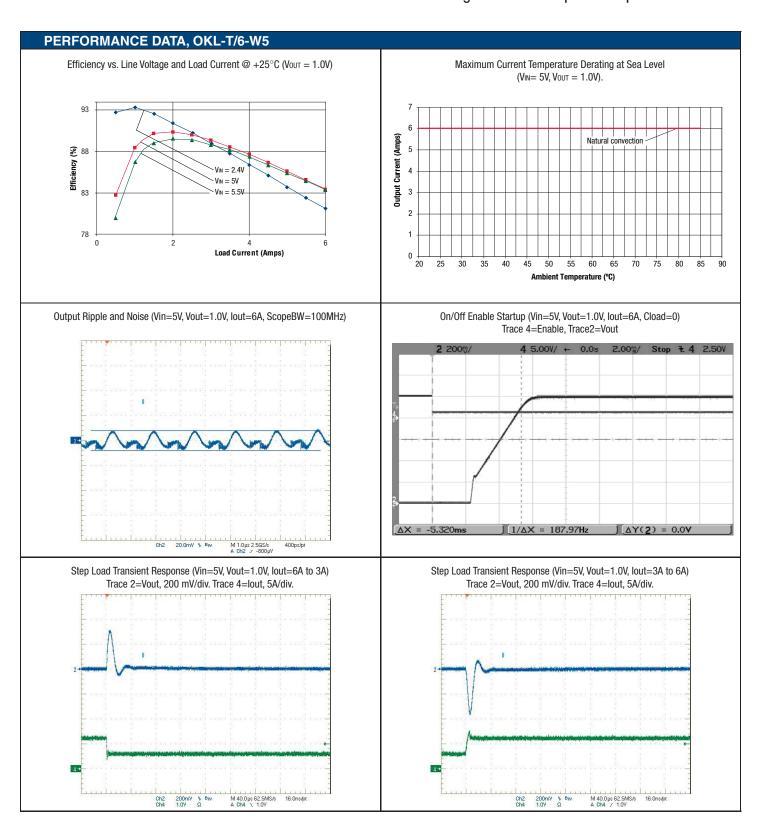




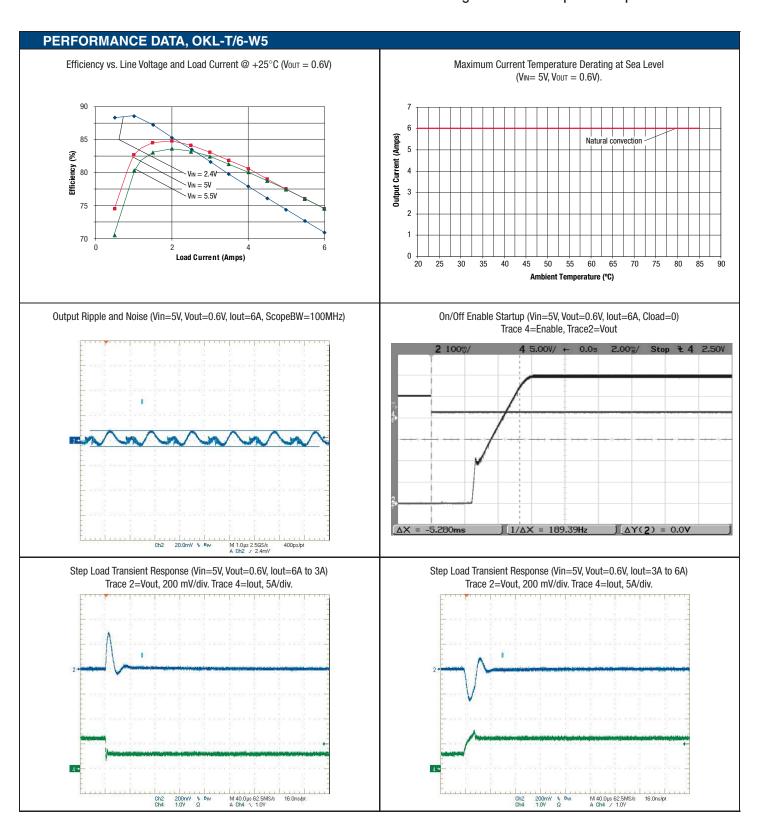




#### TAPE AND REEL INFORMATION

# **Tape Detail**

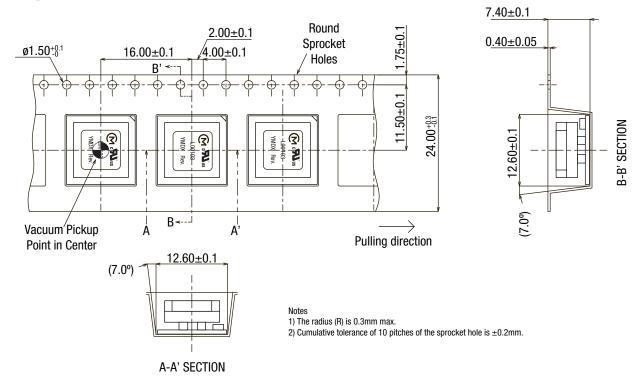

# **Reel Detail**

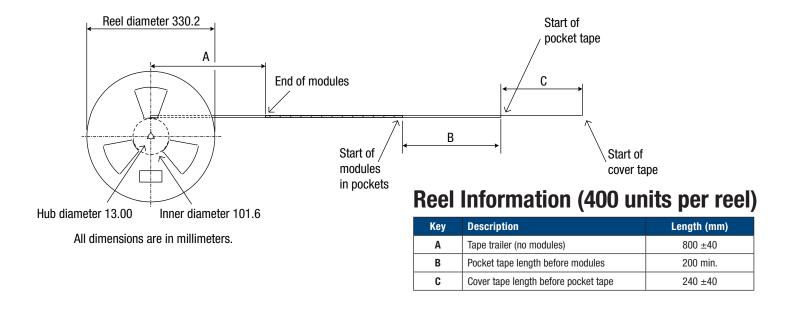

### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9