

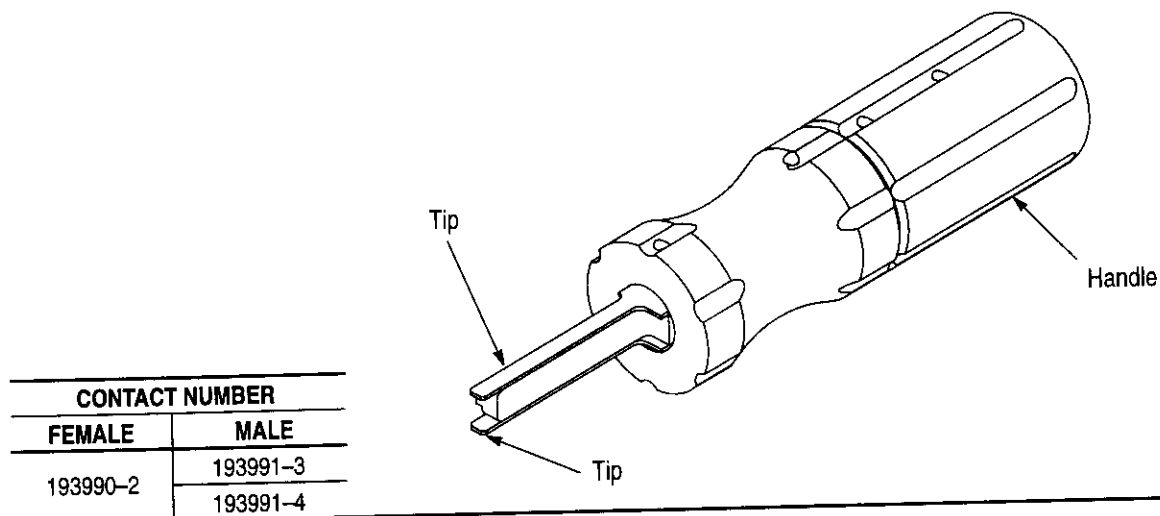


Figure 1

1. INTRODUCTION

AMP Extraction Tool 224155-1 is designed to remove both male and female AMP High Current Type XII contacts from their housings. A list of contacts is provided in Figure 1. Read these instructions thoroughly before attempting to remove any contacts.


2. DESCRIPTION

The extraction tool consists of a plastic handle with two metal tool tips. When correctly inserted in the offsets in the housing cavity, the tool tips depress the contact locking lance, permitting the contact to be removed from the back of the housing.

3. EXTRACTION PROCEDURE

3.1. Male Contact (Figure 2)

1. Pull rear section of handle back.
2. Keeping sections of handle separated, slide tool tips over male contact and into offsets in cavity.
3. Push tips of tool into housing until they bottom in cavity.
4. Keeping tool bottomed in cavity, push rear section of handle toward housing.
5. Remove contact by pulling it out of rear of cavity.

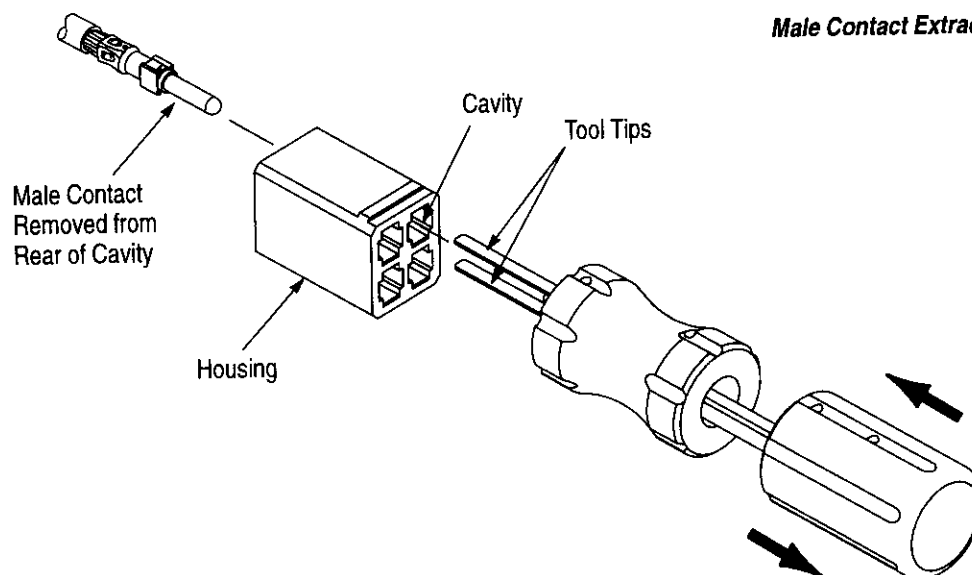

Male Contact Extraction Procedure

Figure 2

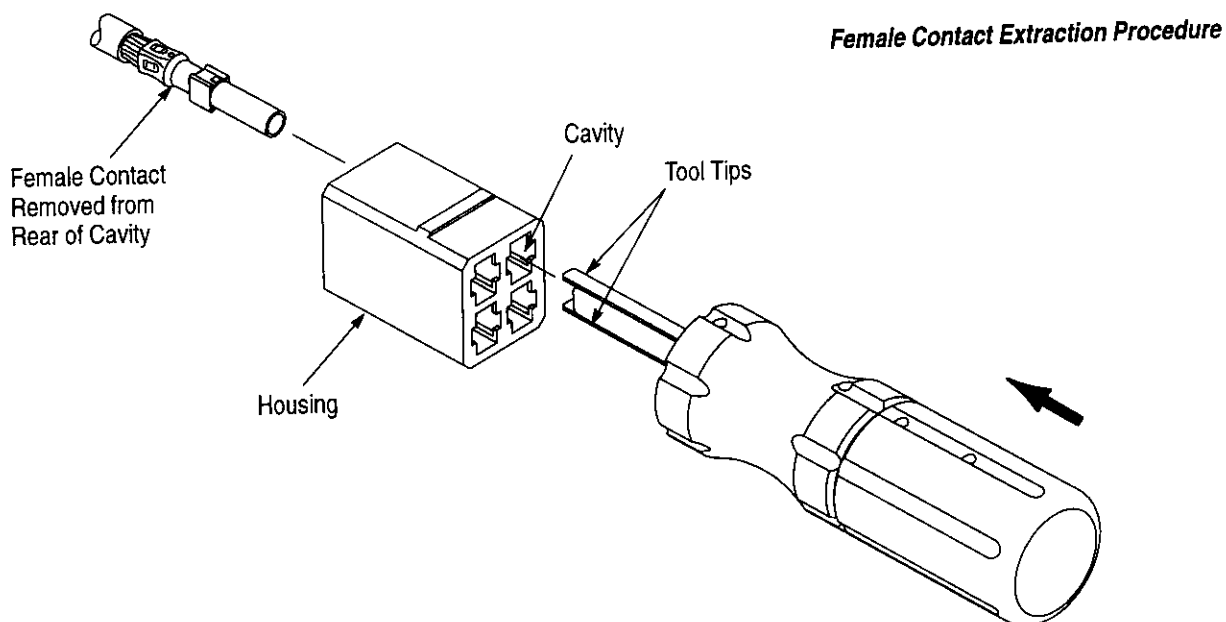


Figure 3

3.2. Female Contact (Figure 3)

1. Insert tool tips into offsets in cavity.
2. Push tool into housing until it bottoms in cavity.

NOTE

Rear section of the handle will back out of tool.

3. Keeping tool bottomed in cavity, push rear section of handle toward housing.
4. Remove contact by pulling it out of rear of cavity.

4. TOOL MAINTENANCE

It is recommended that the tool be inspected when you receive it and at regularly scheduled intervals. The tool is not repairable, and it should be replaced when it is worn or damaged. Store the extraction tool in a clean, dry place and clean the extraction tool with a soft, lint-free cloth.

Additional tools can be purchased from:

CUSTOMER SERVICE (38-35)
AMP INCORPORATED
P.O. BOX 3608
HARRISBURG, PA 17105-3608

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9