

# Low Noise, Picoampere Bias Current, JFET Input Op Amp

## FEATURES

- **Input Bias Current, Warmed Up: 10pA Max**
- **100% Tested Low Voltage Noise:  $8\text{nV}/\sqrt{\text{Hz}}$  Max**
- **A Grade 100% Temperature Tested**
- Offset Voltage Over Temp: 1mV Max
- Input Resistance:  $10^{13}\Omega$
- Very Low Input Capacitance: 1.5pF
- Voltage Gain: 1 Million Min
- Gain-Bandwidth Product: 4.2MHz Typ
- Guaranteed Specifications with  $\pm 5\text{V}$  Supplies

## APPLICATIONS

- Photocurrent Amplifiers
- Hydrophone Amplifiers
- High Sensitivity Piezoelectric Accelerometers
- Low Voltage and Current Noise Instrumentation Amplifier Front Ends
- Two and Three Op Amp Instrumentation Amplifiers
- Active Filters

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## DESCRIPTION


The LT<sup>®</sup>1793 achieves a new standard of excellence in noise performance for a JFET op amp. For the first time low voltage noise ( $6\text{nV}/\sqrt{\text{Hz}}$ ) is simultaneously offered with extremely low current noise ( $0.8\text{fA}/\sqrt{\text{Hz}}$ ), providing the lowest total noise for high impedance transducer applications. Unlike most JFET op amps, the very low input bias current (3pA typ) is maintained over the entire common mode range which results in an extremely high input resistance ( $10^{13}\Omega$ ). When combined with a very low input capacitance (1.5pF) an extremely high input impedance results, making the LT1793 the first choice for amplifying low level signals from high impedance transducers. The low input capacitance also assures high gain linearity when buffering AC signals from high impedance transducers.

The LT1793 is unconditionally stable for gains of 1 or more, even with 1000pF capacitive loads. Other key features are  $250\mu\text{V}$   $V_{OS}$  and a voltage gain over 4 million. Each individual amplifier is 100% tested for voltage noise, slew rate ( $3.4\text{V}/\mu\text{s}$ ) and gain-bandwidth product (4.2MHz).


Specifications at  $\pm 5\text{V}$  supply operation are also provided. For an even lower voltage noise please see the LT1792 data sheet.

## TYPICAL APPLICATION

**Low Noise Light Sensor with DC Servo**

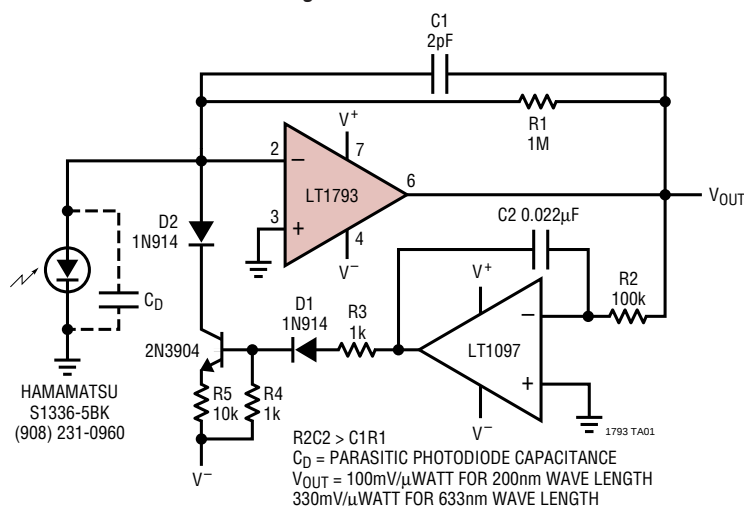

**1kHz Output Voltage Noise  
Density vs Source Resistance**


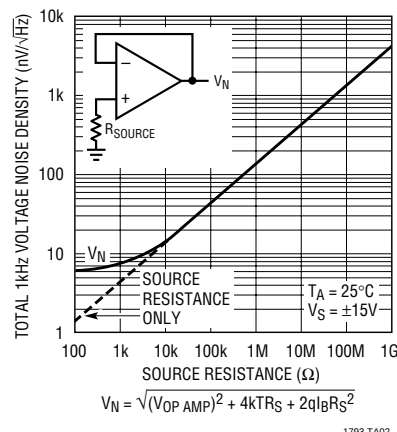


## ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage .....  $\pm 20\text{V}$   
 Differential Input Voltage .....  $\pm 40\text{V}$   
 Input Voltage (Equal to Supply Voltage) .....  $\pm 20\text{V}$   
 Output Short-Circuit Duration ..... Indefinite  
 Operating Temperature Range .....  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

Specified Temperature Range  
 Commercial (Note 8) .....  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$   
 Industrial .....  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$   
 Storage Temperature Range .....  $-65^{\circ}\text{C}$  to  $150^{\circ}\text{C}$   
 Lead Temperature (Soldering, 10 sec) .....  $300^{\circ}\text{C}$

## PACKAGE/ORDER INFORMATION

|  <p>N8 PACKAGE<br/>8-LEAD PDIP<br/><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math></p> | ORDER PART<br>NUMBER                               |  <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 160^{\circ}\text{C}</math>, <math>\theta_{JA} = 190^{\circ}\text{C/W}</math></p> | ORDER PART<br>NUMBER                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
|                                                                                                                                                                                                                      | LT1793ACN8<br>LT1793CN8<br>LT1793AIN8<br>LT1793IN8 |                                                                                                                                                                                                                              | LT1793ACS8<br>LT1793CS8<br>LT1793AIS8<br>LT1793IS8 |
|                                                                                                                                                                                                                      |                                                    | S8 PART MARKING                                                                                                                                                                                                              |                                                    |
|                                                                                                                                                                                                                      |                                                    | 1793A 1793AI<br>1793 1793I                                                                                                                                                                                                   |                                                    |

Consult factory for Military grade parts.

## ELECTRICAL CHARACTERISTICS $T_A = 25^{\circ}\text{C}$ , $V_S = \pm 15\text{V}$ , $V_{CM} = 0\text{V}$ , unless otherwise noted.

| SYMBOL   | PARAMETER                                            | CONDITIONS (Note 2)                                       | LT1793AC/LT1793AI |                        |            | LT1793C/LT1793I |                        |            | UNITS                                                        |
|----------|------------------------------------------------------|-----------------------------------------------------------|-------------------|------------------------|------------|-----------------|------------------------|------------|--------------------------------------------------------------|
|          |                                                      |                                                           | MIN               | TYP                    | MAX        | MIN             | TYP                    | MAX        |                                                              |
| $V_{OS}$ | Input Offset Voltage                                 | $V_S = \pm 5\text{V}$                                     |                   | 0.25<br>0.45           | 0.8<br>1.4 |                 | 0.25<br>0.45           | 0.9<br>1.6 | mV<br>mV                                                     |
| $I_{OS}$ | Input Offset Current                                 | Warmed Up (Note 3)<br>$T_J = 25^{\circ}\text{C}$ (Note 6) |                   | 1.5<br>0.5             | 7<br>2     |                 | 2.5<br>0.7             | 15<br>4    | pA<br>pA                                                     |
| $I_B$    | Input Bias Current                                   | Warmed Up (Note 3)<br>$T_J = 25^{\circ}\text{C}$ (Note 6) |                   | 3<br>1                 | 10<br>3    |                 | 4.0<br>1.5             | 20<br>5    | pA<br>pA                                                     |
| $e_n$    | Input Noise Voltage                                  | 0.1Hz to 10Hz                                             |                   | 2.4                    |            |                 | 2.4                    |            | $\mu\text{V}_{P-P}$                                          |
|          | Input Noise Voltage Density                          | $f_0 = 10\text{Hz}$<br>$f_0 = 1000\text{Hz}$              |                   | 11.5<br>6              |            |                 | 11.5<br>6              |            | $\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$    | Input Noise Current Density                          | $f_0 = 10\text{Hz}$ , $f_0 = 1\text{kHz}$ (Note 4)        |                   | 0.8                    |            |                 | 1                      |            | $\text{fA}/\sqrt{\text{Hz}}$                                 |
| $R_{IN}$ | Input Resistance<br>Differential Mode<br>Common Mode | $V_{CM} = -10\text{V}$ to $13\text{V}$                    |                   | $10^{14}$<br>$10^{13}$ |            |                 | $10^{14}$<br>$10^{13}$ |            | $\Omega$<br>$\Omega$                                         |
| $C_{IN}$ | Input Capacitance                                    | $V_S = \pm 5\text{V}$                                     |                   | 1.5<br>2.0             |            |                 | 1.5<br>2.0             |            | pF<br>pF                                                     |
| $V_{CM}$ | Input Voltage Range (Note 5)                         |                                                           | 13.0<br>-10.5     | 13.5<br>-11.0          |            | 13.0<br>-10.5   | 13.5<br>-11.0          |            | V<br>V                                                       |
| CMRR     | Common Mode Rejection Ratio                          | $V_{CM} = -10\text{V}$ to $13\text{V}$                    | 83                | 102                    |            | 81              | 96                     |            | dB                                                           |
| PSRR     | Power Supply Rejection Ratio                         | $V_S = \pm 4.5\text{V}$ to $\pm 20\text{V}$               | 85                | 98                     |            | 83              | 95                     |            | dB                                                           |

# ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$ , $V_{CM} = 0\text{V}$ , unless otherwise noted.

| SYMBOL    | PARAMETER                       | CONDITIONS (Note 2)                                                                       | LT1793AC/LT1793AI        |                          |              | LT1793C/LT1793I          |                          |              | UNITS            |
|-----------|---------------------------------|-------------------------------------------------------------------------------------------|--------------------------|--------------------------|--------------|--------------------------|--------------------------|--------------|------------------|
|           |                                 |                                                                                           | MIN                      | TYP                      | MAX          | MIN                      | TYP                      | MAX          |                  |
| $A_{VOL}$ | Large-Signal Voltage Gain       | $V_O = \pm 12\text{V}$ , $R_L = 10\text{k}$<br>$V_O = \pm 10\text{V}$ , $R_L = 1\text{k}$ | 1000<br>500              | 4500<br>3500             |              | 900<br>400               | 4400<br>3000             |              | V/mV<br>V/mV     |
| $V_{OUT}$ | Output Voltage Swing            | $R_L = 10\text{k}$<br>$R_L = 1\text{k}$                                                   | $\pm 13.0$<br>$\pm 12.0$ | $\pm 13.2$<br>$\pm 12.3$ |              | $\pm 13.0$<br>$\pm 12.0$ | $\pm 13.2$<br>$\pm 12.3$ |              | V<br>V           |
| SR        | Slew Rate                       | $R_L \geq 2\text{k}$ (Note 7)                                                             | 2.3                      | 3.4                      |              | 2.3                      | 3.4                      |              | V/ $\mu\text{s}$ |
| GBW       | Gain-Bandwidth Product          | $f_0 = 100\text{kHz}$                                                                     | 2.5                      | 4.2                      |              | 2.5                      | 4.2                      |              | MHz              |
| $I_S$     | Supply Current                  | $V_S = \pm 5\text{V}$                                                                     |                          | 4.2<br>4.2               | 5.20<br>5.15 |                          | 4.2<br>4.2               | 5.20<br>5.15 | mA<br>mA         |
|           | Offset Voltage Adjustment Range | $R_{POT}$ (to $V_{EE}$ ) = 10k                                                            |                          | 13                       |              |                          | 13                       |              | mV               |

The ● denotes specifications which apply over the temperature range  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ , otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  
 $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted. (Note 9)

| SYMBOL                                     | PARAMETER                          | CONDITIONS (Note 2)                                                                       |        | LT1793AC                 |                           |              | LT1793C                  |                           |              | UNITS                        |
|--------------------------------------------|------------------------------------|-------------------------------------------------------------------------------------------|--------|--------------------------|---------------------------|--------------|--------------------------|---------------------------|--------------|------------------------------|
|                                            |                                    |                                                                                           |        | MIN                      | TYP                       | MAX          | MIN                      | TYP                       | MAX          |                              |
| $V_{OS}$                                   | Input Offset Voltage               | $V_S = \pm 5\text{V}$                                                                     | ●<br>● |                          | 0.50<br>0.75              | 1.0<br>1.6   |                          | 1.0<br>1.6                | 3.5<br>4.2   | mV<br>mV                     |
| $\frac{\Delta V_{OS}}{\Delta \text{Temp}}$ | Average Input Offset Voltage Drift | (Note 6)                                                                                  | ●      |                          | 5                         | 13           |                          | 8                         | 50           | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$                                   | Input Offset Current               |                                                                                           | ●      |                          | 15                        | 100          |                          | 20                        | 130          | pA                           |
| $I_B$                                      | Input Bias Current                 |                                                                                           | ●      |                          | 130                       | 400          |                          | 150                       | 500          | pA                           |
| $V_{CM}$                                   | Input Voltage Range (Note 5)       |                                                                                           | ●<br>● | 12.9<br>-10.0            | 13.4<br>-10.8             |              | 12.9<br>-10.0            | 13.4<br>-10.8             |              | V<br>V                       |
| CMRR                                       | Common Mode Rejection Ratio        | $V_{CM} = -10\text{V}$ to $12.9\text{V}$                                                  | ●      | 79                       | 100                       |              | 77                       | 95                        |              | dB                           |
| PSRR                                       | Power Supply Rejection Ratio       | $V_S = \pm 4.5\text{V}$ to $\pm 20\text{V}$                                               | ●      | 83                       | 97                        |              | 81                       | 94                        |              | dB                           |
| $A_{VOL}$                                  | Large-Signal Voltage Gain          | $V_O = \pm 12\text{V}$ , $R_L = 10\text{k}$<br>$V_O = \pm 10\text{V}$ , $R_L = 1\text{k}$ | ●<br>● | 900<br>500               | 3600<br>2600              |              | 800<br>400               | 3400<br>2400              |              | V/mV<br>V/mV                 |
| $V_{OUT}$                                  | Output Voltage Swing               | $R_L = 10\text{k}$<br>$R_L = 1\text{k}$                                                   | ●<br>● | $\pm 12.9$<br>$\pm 11.9$ | $\pm 13.2$<br>$\pm 12.15$ |              | $\pm 12.9$<br>$\pm 11.9$ | $\pm 13.2$<br>$\pm 12.15$ |              | V<br>V                       |
| SR                                         | Slew Rate                          | $R_L \geq 2\text{k}$ (Note 7)                                                             | ●      | 2.2                      | 3.3                       |              | 2.2                      | 3.3                       |              | V/ $\mu\text{s}$             |
| GBW                                        | Gain-Bandwidth Product             | $f_0 = 100\text{kHz}$                                                                     | ●      | 2.2                      | 3.3                       |              | 2.2                      | 3.3                       |              | MHz                          |
| $I_S$                                      | Supply Current                     | $V_S = \pm 5\text{V}$                                                                     | ●<br>● |                          | 4.2<br>4.2                | 5.30<br>5.25 |                          | 4.2<br>4.2                | 5.30<br>5.25 | mA<br>mA                     |

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the temperature range  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted. (Notes 8, 9)

| SYMBOL                                     | PARAMETER                          | CONDITIONS (Note 2)                                                                       |   | LT1793AC/LT1793AI |            |     | LT1793C/LT1793I |            |     | UNITS                          |
|--------------------------------------------|------------------------------------|-------------------------------------------------------------------------------------------|---|-------------------|------------|-----|-----------------|------------|-----|--------------------------------|
|                                            |                                    |                                                                                           |   | MIN               | TYP        | MAX | MIN             | TYP        | MAX |                                |
| $V_{OS}$                                   | Input Offset Voltage               | $V_S = \pm 5\text{V}$                                                                     | ● | 0.65              | 1.3        |     | 1.6             | 4.8        |     | mV                             |
|                                            |                                    |                                                                                           | ● | 1.00              | 1.9        |     | 2.0             | 5.5        |     | mV                             |
| $\frac{\Delta V_{OS}}{\Delta \text{Temp}}$ | Average Input Offset Voltage Drift | (Note 6)                                                                                  | ● | 5                 | 13         |     | 9               | 50         |     | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$                                   | Input Offset Current               |                                                                                           | ● | 80                | 300        |     | 100             | 400        |     | pA                             |
| $I_B$                                      | Input Bias Current                 |                                                                                           | ● | 700               | 2400       |     | 800             | 3000       |     | pA                             |
| $V_{CM}$                                   | Input Voltage Range (Note 5)       |                                                                                           | ● | 12.6              | 13.0       |     | 12.6            | 13.0       |     | V                              |
|                                            |                                    |                                                                                           | ● | -10.0             | -10.5      |     | -10.0           | -10.5      |     | V                              |
| CMRR                                       | Common Mode Rejection Ratio        | $V_{CM} = -10\text{V}$ to $12.6\text{V}$                                                  | ● | 78                | 99         |     | 76              | 94         |     | dB                             |
| PSRR                                       | Power Supply Rejection Ratio       | $V_S = \pm 4.5\text{V}$ to $\pm 20\text{V}$                                               | ● | 81                | 96         |     | 79              | 93         |     | dB                             |
| $A_{VOL}$                                  | Large-Signal Voltage Gain          | $V_O = \pm 12\text{V}$ , $R_L = 10\text{k}$<br>$V_O = \pm 10\text{V}$ , $R_L = 1\text{k}$ | ● | 850               | 3300       |     | 750             | 3000       |     | V/mV                           |
|                                            |                                    |                                                                                           | ● | 400               | 2200       |     | 300             | 2000       |     | V/mV                           |
| $V_{OUT}$                                  | Output Voltage Swing               | $R_L = 10\text{k}$<br>$R_L = 1\text{k}$                                                   | ● | $\pm 12.8$        | $\pm 13.1$ |     | $\pm 12.8$      | $\pm 13.1$ |     | V                              |
|                                            |                                    |                                                                                           | ● | $\pm 11.8$        | $\pm 12.1$ |     | $\pm 11.8$      | $\pm 12.1$ |     | V                              |
| SR                                         | Slew Rate                          | $R_L \geq 2\text{k}$                                                                      | ● | 2.1               | 3.2        |     | 2.1             | 3.2        |     | V/ $\mu\text{s}$               |
| GBW                                        | Gain-Bandwidth Product             | $f_0 = 100\text{kHz}$                                                                     | ● | 2                 | 3.1        |     | 2               | 3.1        |     | MHz                            |
| $I_S$                                      | Supply Current                     | $V_S = \pm 5\text{V}$                                                                     | ● | 4.2               | 5.40       |     | 4.2             | 5.40       |     | mA                             |
|                                            |                                    |                                                                                           | ● | 4.2               | 5.35       |     | 4.2             | 5.35       |     | mA                             |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** Typical parameters are defined as the 60% yield of parameter distributions of individual amplifiers.

**Note 3:**  $I_B$  and  $I_{OS}$  readings are extrapolated to a warmed-up temperature from  $25^{\circ}\text{C}$  measurements and  $32^{\circ}\text{C}$  characterization data.

**Note 4:** Current noise is calculated from the formula:

$$i_n = (2qI_B)^{1/2}$$

where  $q = 1.6 \cdot 10^{-19}$  coulomb. The noise of source resistors up to 200M swamps the contribution of current noise.

**Note 5:** Input voltage range functionality is assured by testing offset voltage at the input voltage range limits to a maximum of 2.3mV (A grade) to 2.8mV (C grade).

**Note 6:** This parameter is not 100% tested.


**Note 7:** Slew rate is measured in  $A_V = -1$ ; input signal is  $\pm 7.5\text{V}$ , output measured at  $\pm 2.5\text{V}$ .

**Note 8:** The LT1793AC and LT1793C are guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  and are designed, characterized and expected to meet these extended temperature limits, but are not tested at  $-40^{\circ}\text{C}$  and  $85^{\circ}\text{C}$ . The LT1793I is guaranteed to meet the extended temperature limits. The LT1793AC and LT1793AI grade are 100% temperature tested for the specified temperature range.

**Note 9:** The LT1793 is measured in an automated tester in less than one second after application of power. Depending on the package used, power dissipation, heat sinking, and air flow conditions, the fully warmed-up chip temperature can be  $10^{\circ}\text{C}$  to  $50^{\circ}\text{C}$  higher than the ambient temperature.


# TYPICAL PERFORMANCE CHARACTERISTICS

0.1Hz to 10Hz Voltage Noise

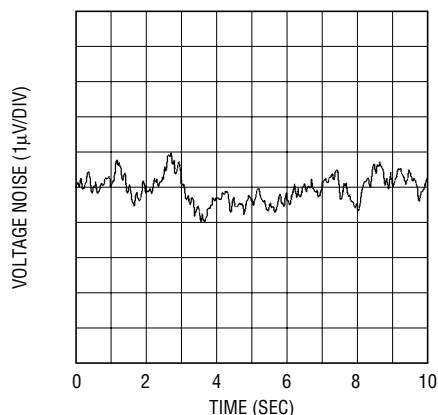


1793 G01

1kHz Input Noise Voltage Distribution

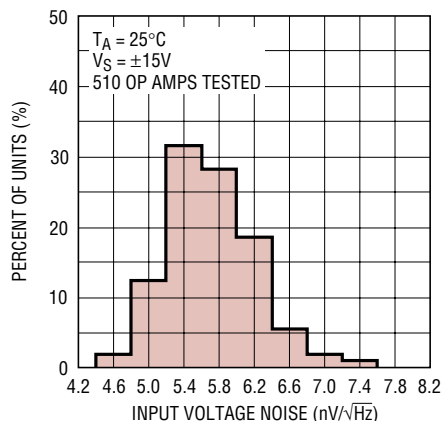


1793 G02

Voltage Noise vs Frequency

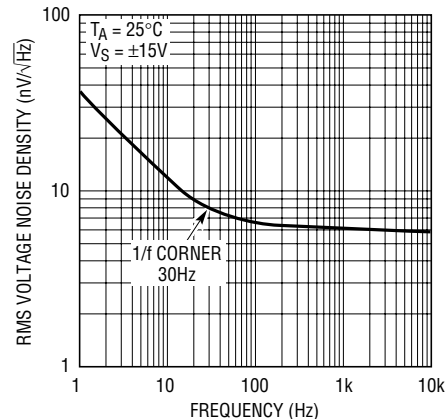


1793 G03

Voltage Noise vs Chip Temperature

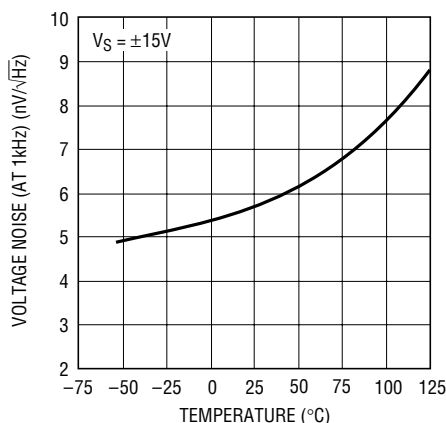


1793 G04

Common Mode Limit vs Temperature

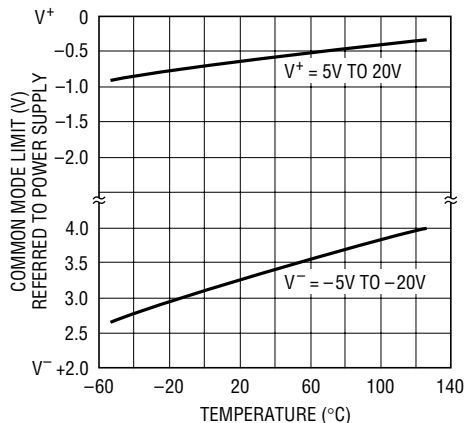


1793 G05

Common Mode Rejection Ratio vs Frequency

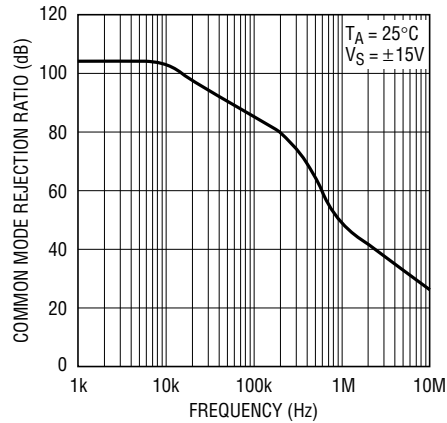


1793 G06

Power Supply Rejection Ratio vs Frequency

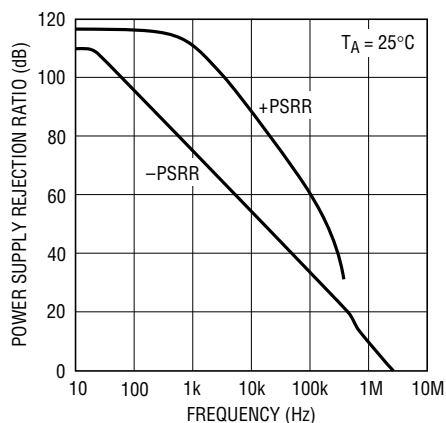


1793 G07

Voltage Gain vs Frequency

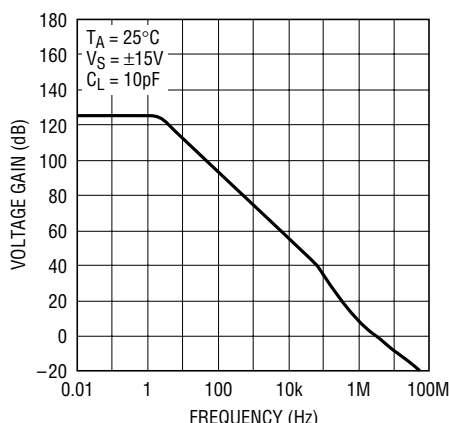

1793 G08


Gain and Phase Shift vs Frequency

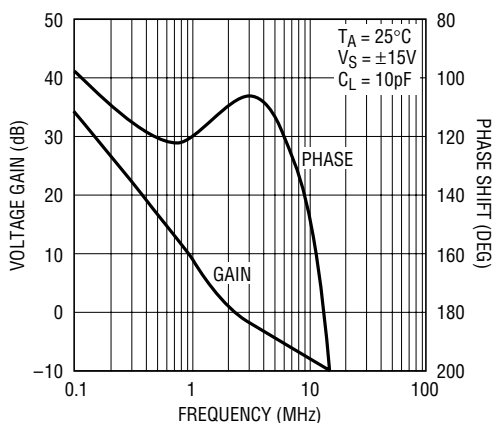


1793 G09

# TYPICAL PERFORMANCE CHARACTERISTICS


Small-Signal Transient Response

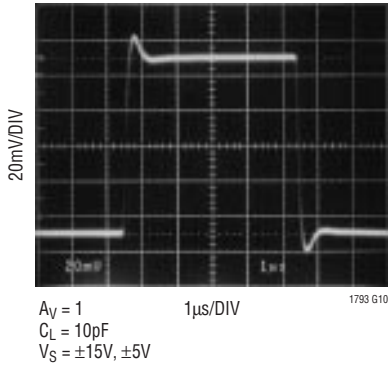


Large-Signal Transient Response

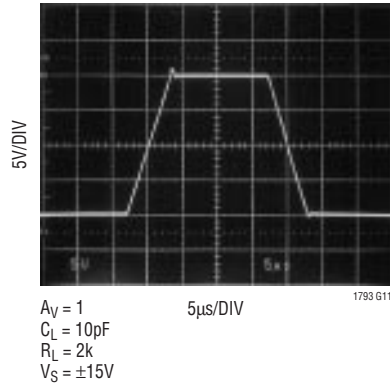


Output Voltage Swing vs Load Current

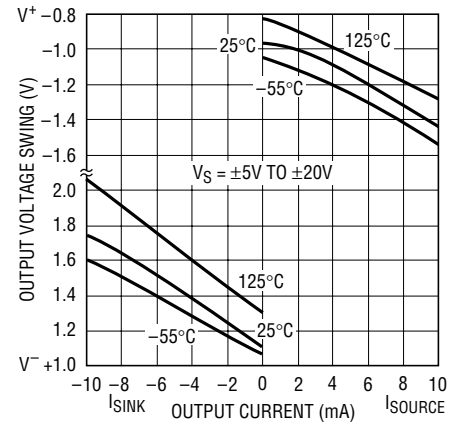


Capacitive Load Handling

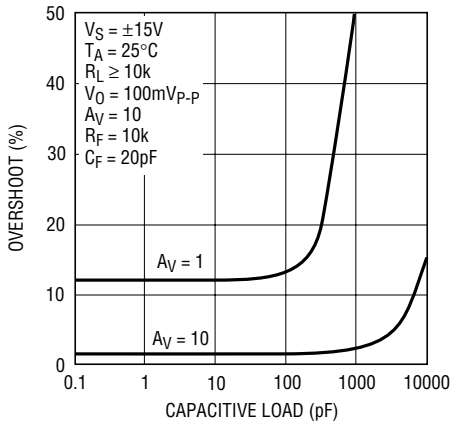


Warm-Up Drift

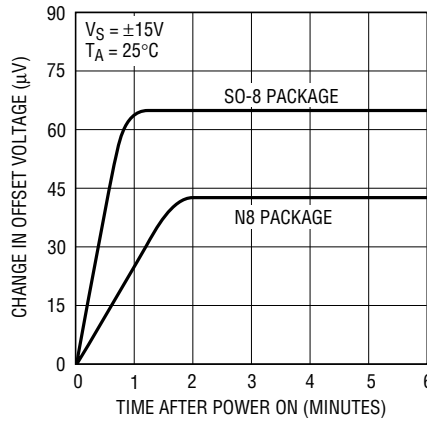


THD and Noise Frequency for Noninverting Gain

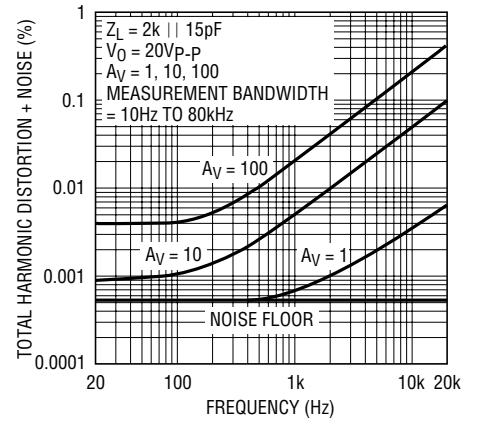


THD and Noise vs Frequency for Inverting Gain

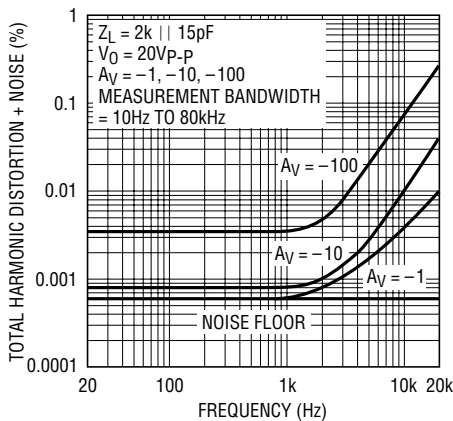

THD and Noise vs Output Amplitude for Inverting Gain

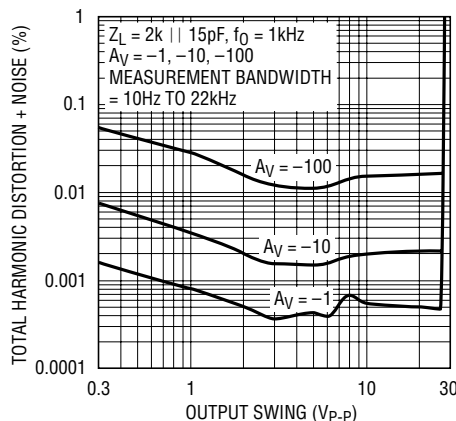


THD and Noise vs Output Amplitude for Noninverting Gain

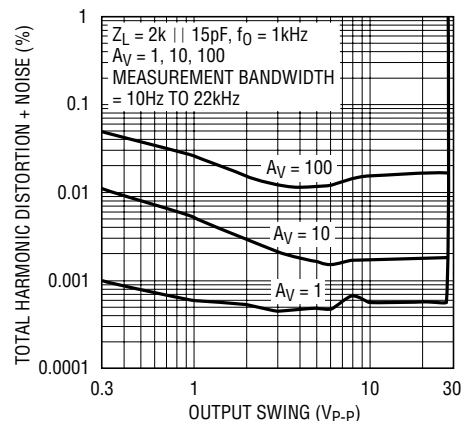


## TYPICAL PERFORMANCE CHARACTERISTICS


Short-Circuit Output Current  
vs Temperature

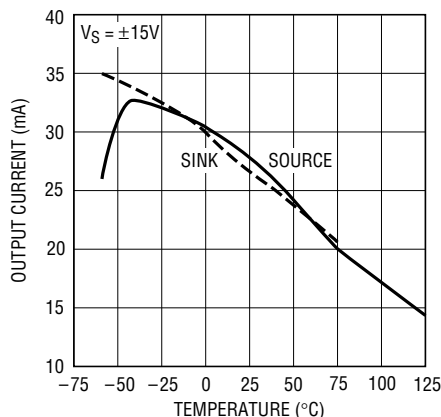

Supply Current vs Temperature

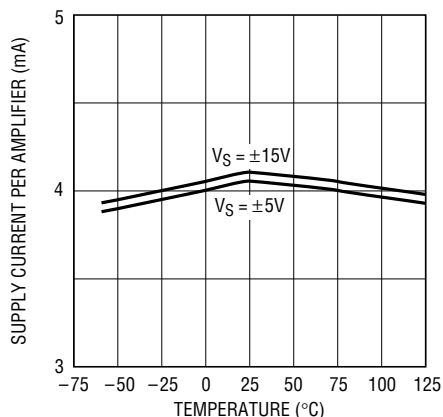

Input Bias and Offset Currents  
vs Chip Temperature

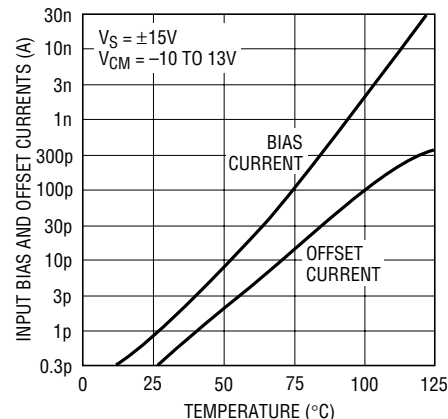

## APPLICATIONS INFORMATION

### LT1793 vs the Competition

With improved noise performance, the LT1793 in the PDIP directly replaces such JFET op amps as the OPA111 and the AD645. The combination of low current and voltage noise of the LT1793 allows it to surpass most dual and single JFET op amps. The LT1793 can replace many of the lowest noise bipolar amps that are used in amplifying low level signals from high impedance transducers. The best bipolar op amps (with higher current noise) will eventually lose out to the LT1793 when transducer impedance increases.

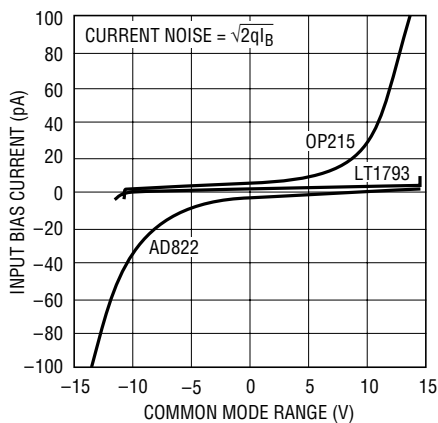


Figure 1. Comparison of LT1793, OP215, and AD822  
Input Bias Current vs Common Mode Range

The extremely high input impedance ( $10^{13}\Omega$ ) assures that the input bias current is almost constant over the entire common mode range. Figure 1 shows how the LT1793 stands up to the competition. Unlike the competition, as the input voltage is swept across the entire common mode range the input bias current of the LT1793 hardly changes. As a result the current noise does not degrade. This makes the LT1793 the best choice in applications where an amplifier has to buffer signals from a high impedance transducer.

Offset nulling will be compatible with these devices with the wiper of the potentiometer tied to the negative supply (Figure 2a). No appreciable change in offset voltage drift

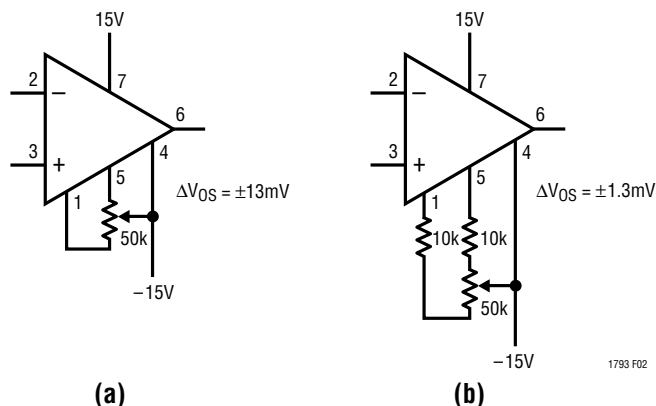



Figure 2

## APPLICATIONS INFORMATION

with temperature will occur when the device is nulled with a potentiometer ranging from 10k to 200k. Finer adjustments can be made with resistors in series with the potentiometer (Figure 2b).

### Amplifying Signals from High Impedance Transducers

The low voltage and current noise offered by the LT1793 makes it useful in a wide range of applications, especially where high impedance, capacitive transducers are used such as hydrophones, precision accelerometers and photodiodes. The total output noise in such a system is the gain times the RMS sum of the op amp's input referred

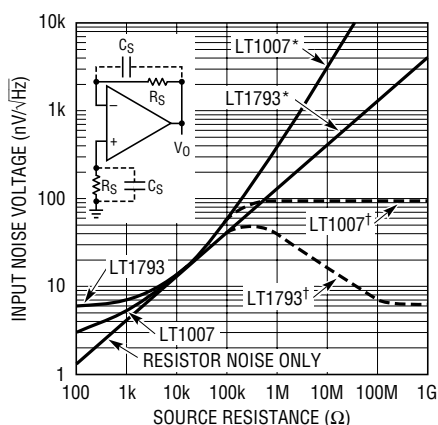


SOURCE RESISTANCE =  $2R_S = R$

\* PLUS RESISTOR

† PLUS RESISTOR || 1000pF CAPACITOR

$$V_n = A_V \sqrt{V_n^2(\text{OP AMP}) + 4kTR + 2qI_B R^2}$$

**Figure 3. Comparison of LT1793 and LT1007 Total Output 1kHz Voltage Noise vs Source Resistance**

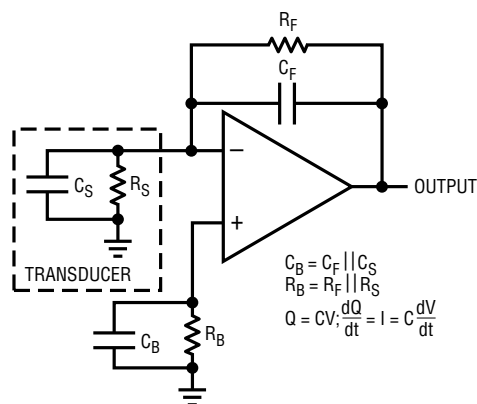

$$C_B = C_F || C_S$$


$$R_B = R_F || R_S$$

$$Q = CV; \frac{dQ}{dt} = I = C \frac{dV}{dt}$$

voltage noise, the thermal noise of the transducer, and the op amp's input bias current noise times the transducer impedance. Figure 3 shows total input voltage noise versus source resistance. In a low source resistance (<5k) application the op amp voltage noise will dominate the total noise. This means the LT1793 is superior to most JFET op amps. Only the lowest noise bipolar op amps have the advantage at low source resistances. As the source resistance increases from 5k to 50k, the LT1793 will match the best bipolar op amps for noise performance, since the thermal noise of the transducer ( $4kTR$ ) begins to dominate the total noise. A further increase in source resistance, above 50k, is where the op amp's current noise component ( $2qI_B R^2$ ) will eventually dominate the total noise. At these high source resistances, the LT1793 will out perform the lowest noise bipolar op amps due to the inherently low current noise of FET input op amps. Clearly, the LT1793 will extend the range of high impedance transducers that can be used for high signal-to-noise ratios. This makes the LT1793 the best choice for high impedance, capacitive transducers.

### Optimization Techniques for Charge Amplifiers

The high input impedance JFET front end makes the LT1793 suitable in applications where very high charge sensitivity is required. Figure 4 illustrates the LT1793 in its inverting and noninverting modes of operation. A charge amplifier is shown in the inverting mode example; the gain depends on the principle of charge conservation at the input of the LT1793. The charge across the transducer capacitance  $C_S$  is transferred to the feedback capacitor  $C_F$

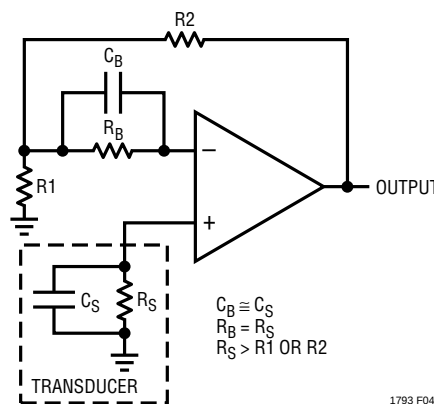

$$C_B \equiv C_S$$

$$R_B = R_S$$

$$R_S > R1 \text{ OR } R2$$

**Figure 4. Inverting and Noninverting Gain Configurations**

## APPLICATIONS INFORMATION

resulting in a change in voltage  $dV$ , which is equal to  $dQ/C_F$ . The gain therefore is  $C_F/C_S$ . For unity-gain, the  $C_F$  should equal the transducer capacitance plus the input capacitance of the LT1793 and  $R_F$  should equal  $R_S$ .

In the noninverting mode example, the transducer current is converted to a change in voltage by the transducer capacitance,  $C_S$ . This voltage is then buffered by the LT1793 with a gain of  $1 + R_1/R_2$ . A DC path is provided by  $R_S$ , which is either the transducer impedance or an external resistor. Since  $R_S$  is usually several orders of magnitude greater than the parallel combination of  $R_1$  and  $R_2$ ,  $R_B$  is added to balance the DC offset caused by the noninverting input bias current and  $R_S$ . The input bias currents, although small at room temperature, can create significant errors at higher temperature, especially with transducer resistances of up to 1000M or more. The optimum value

for  $R_B$  is determined by equating the thermal noise ( $4kTR_S$ ) to the current noise ( $2qI_B$ ) times  $R_S^2$ . Solving for  $R_S$  results in  $R_B = R_S = 2V_T/I_B$  ( $V_T = 26\text{mV}$  at  $25^\circ\text{C}$ ). A parallel capacitor  $C_B$ , is used to cancel the phase shift caused by the op amp input capacitance and  $R_B$ .

### Reduced Power Supply Operation

To take full advantage of a wide input common mode range, the LT1793 was designed to eliminate phase reversal. Referring to the photographs in Figure 5, the LT1793 is shown operating in the follower mode ( $A_V = 1$ ) at  $\pm 5\text{V}$  supplies with the input swinging  $\pm 5.2\text{V}$ . The output of the LT1793 clips cleanly and recovers with no phase reversal. This has the benefit of preventing lockup in servo systems and minimizing distortion components.



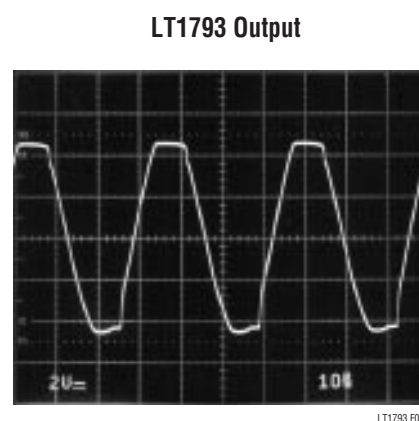


Figure 5. Voltage Follower with Input Exceeding the Common Mode Range ( $V_S = \pm 5\text{V}$ )

**PACKAGE DESCRIPTION**

Dimensions in inches (millimeters) unless otherwise noted.

**N8 Package**  
**8-Lead PDIP (Narrow 0.300)**  
 (LTC DWG # 05-08-1510)

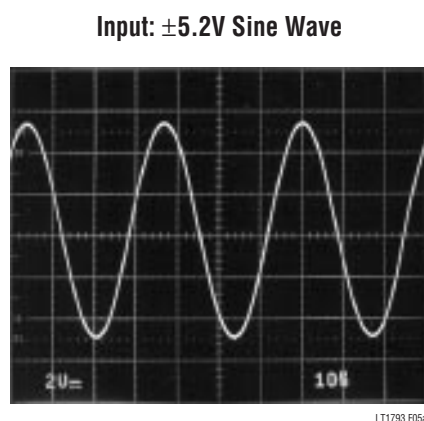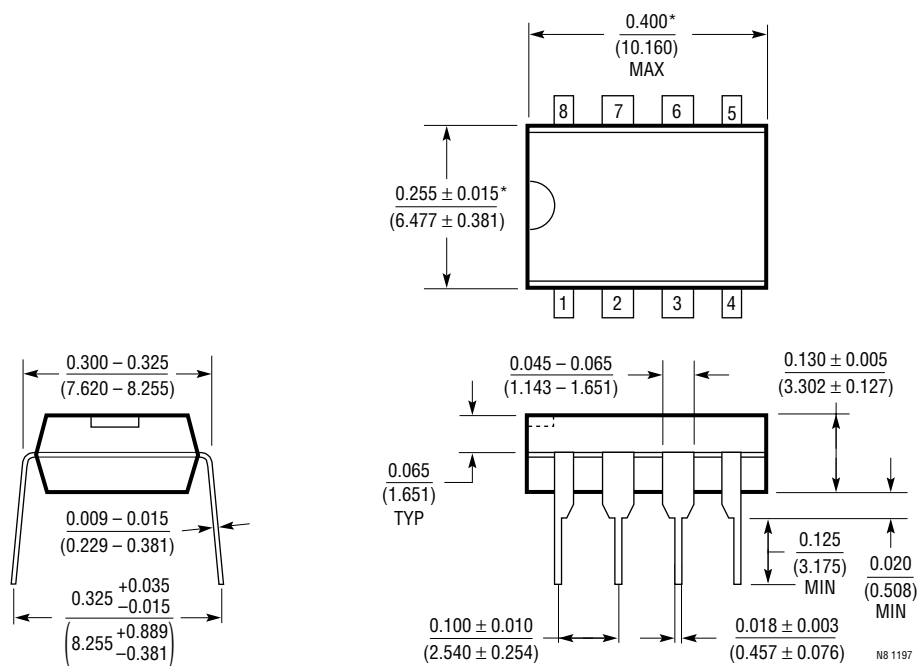


\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

# PACKAGE DESCRIPTION

Dimensions in inches (millimeters) unless otherwise noted.

## S8 Package 8-Lead Plastic Small Outline (Narrow 0.150) (LTC DWG # 05-08-1610)

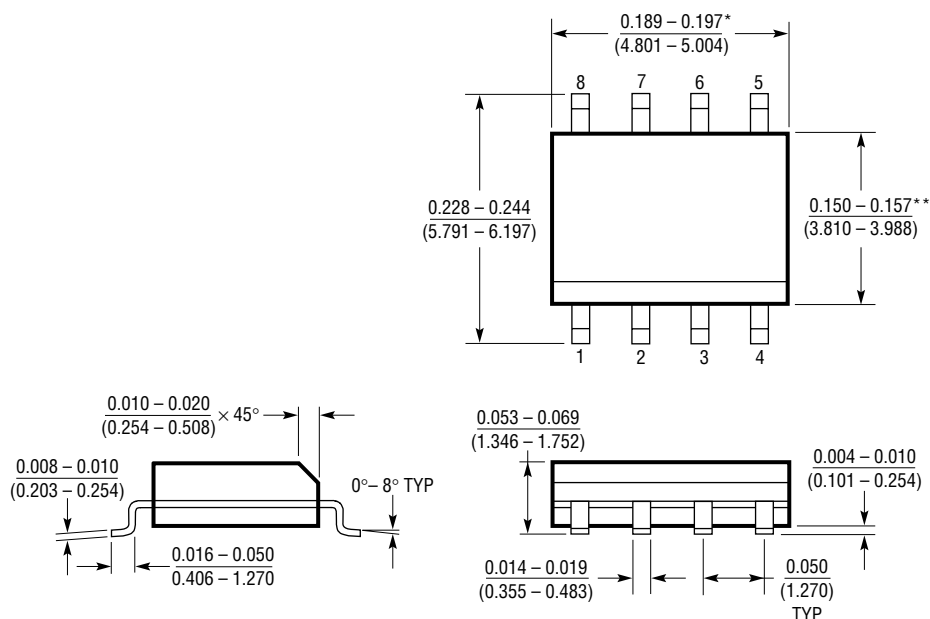


\*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

\*\*DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

S08 0996


TYPICAL APPLICATIONS

10Hz Fourth Order Chebyshev Lowpass Filter (0.01dB Ripple)

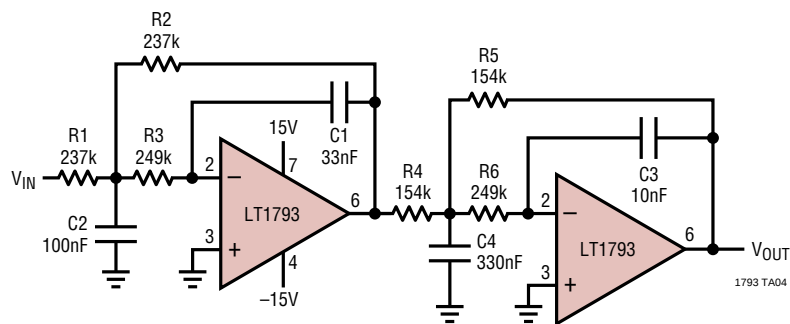

TYPICAL OFFSET  $\approx 0.8\text{mV}$   
1% TOLERANCES  
FOR  $V_{IN} = 10\text{V}_{P-P}$ ,  $V_{OUT} = -121\text{dB}$  AT  $f > 330\text{Hz}$   
 $= -6\text{dB}$  AT  $f = 16.3\text{Hz}$   
LOWER RESISTOR VALUES WILL RESULT IN LOWER THERMAL NOISE AND LARGER CAPACITORS

Accelerometer Amplifier with DC Servo

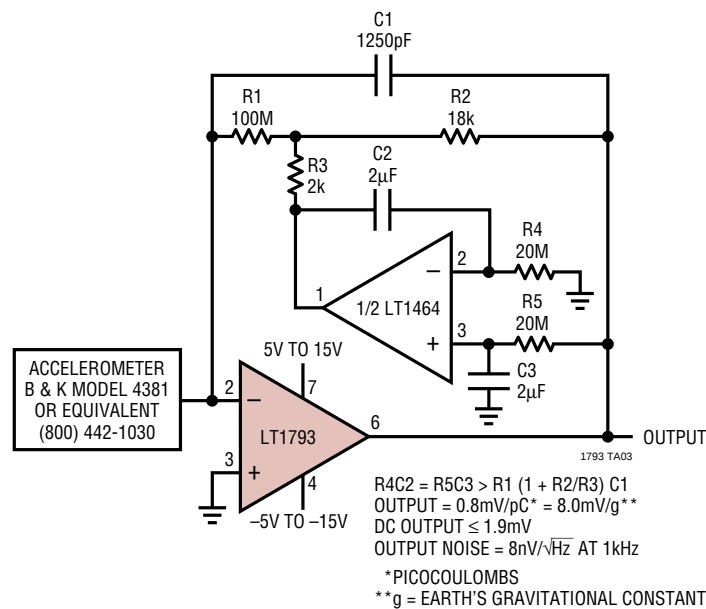

RELATED PARTS

| PART NUMBER | DESCRIPTION                   | COMMENTS                                                                                       |
|-------------|-------------------------------|------------------------------------------------------------------------------------------------|
| LT1113      | Low Noise, Dual JFET Op Amp   | Dual Version of LT1792, $V_{\text{NOISE}} = 4.5\text{nV}/\sqrt{\text{Hz}}$                     |
| LT1169      | Low Noise, Dual JFET Op Amp   | Dual Version of LT1793, $V_{\text{NOISE}} = 6\text{nV}/\sqrt{\text{Hz}}$ , $I_B = 10\text{pA}$ |
| LT1467      | Micropower Dual JFET Op Amp   | 1MHz, 2pA Max $I_B$ , 200uA Max $I_S$                                                          |
| LT1792      | Low Noise, Single JFET Op Amp | Lower $V_{\text{NOISE}}$ Version of LT1793, $V_{\text{NOISE}} = 4.2\text{nV}/\sqrt{\text{Hz}}$ |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9