



**RF Power Field-Effect Transistor**  
**150W, 50V, 175MHz N-Channel Broadband MOSFET**

M/A-COM Products  
RoHS Compliant

**Features**

- Enhanced thermal performance
  - Higher power dissipation
- Guaranteed Performance at 30 MHz, 50 V:
- Output Power — 150 W
  - Gain — 18 dB (22 dB Typ)
  - Efficiency — 40%
- Typical Performance at 175 MHz, 50 V:
- Output Power — 150 W
  - Gain — 13 dB
  - Low Thermal Resistance
  - Ruggedness Tested at Rated Output Power
  - Nitride Passivated Die for Enhanced Reliability

**Package Outline**



CASE P-244

**Description and Applications**

Designed for broadband commercial and military applications at frequencies to 175 MHz. The high power, high gain and broadband performance of this device makes possible solid state transmitters for FM broadcast or TV channel frequency bands.

**MAXIMUM RATINGS**

| Rating   | Symbol    | Value       | Unit                         |
|--|-----------|-------------|------------------------------|
| Drain-Source Voltage   | $V_{DS}$  | 125         | Vdc                          |
| Drain-Gate Voltage   | $V_{DGO}$ | 125         | Vdc                          |
| Gate-Source Voltage  | $V_{GS}$  | $\pm 40$    | Vdc                          |
| Drain Current — Continuous   | $I_D$     | 16          | Adc                          |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$     | 416<br>2.38 | Watts<br>W/ $^\circ\text{C}$ |
| Storage Temperature Range  | $T_{slg}$ | -65 to +150 | $^\circ\text{C}$             |
| Operating Junction Temperature   | $T_J$     | 200         | $^\circ\text{C}$             |

**THERMAL CHARACTERISTICS**

| Characteristic                       | Symbol          | Max  | Unit               |
|--------------------------------------|-----------------|------|--------------------|
| Thermal Resistance, Junction to Case | $R_{\theta jc}$ | 0.42 | $^\circ\text{C/W}$ |

**NOTE — CAUTION —** MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

# RF Power Field-Effect Transistor

## 150W, 50V, 175MHz N-Channel Broadband MOSFET

M/A-COM Products  
RoHS Compliant

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

#### OFF CHARACTERISTICS

|   |               |     |   |     |                             |
|---|---------------|-----|---|-----|-----------------------------|
| Drain-Source Breakdown Voltage ( $V_{GS} = 0$ , $I_D = 100$ mA)   | $V_{(BR)DSS}$ | 125 | — | —   | Vdc                         |
| Zero Gate Voltage Drain Current ( $V_{DS} = 50$ V, $V_{GS} = 0$ ) | $I_{DSS}$     | —   | — | 5.0 | mA <sub>dc</sub>            |
| Gate-Body Leakage Current ( $V_{GS} = 20$ V, $V_{DS} = 0$ )       | $I_{GSS}$     | —   | — | 1.0 | $\mu\text{A}$ <sub>dc</sub> |

#### ON CHARACTERISTICS

|  |              |     |     |     |      |
|--|--------------|-----|-----|-----|------|
| Gate Threshold Voltage ( $V_{DS} = 10$ V, $I_D = 100$ mA)  | $V_{GS(th)}$ | 1.0 | 3.0 | 5.0 | Vdc  |
| Drain-Source On-Voltage ( $V_{GS} = 10$ V, $I_D = 10$ A)   | $V_{DS(on)}$ | 1.0 | 3.0 | 5.0 | Vdc  |
| Forward Transconductance ( $V_{DS} = 10$ V, $I_D = 5.0$ A) | $g_{fs}$     | 5.0 | 7.0 | —   | mhos |

#### DYNAMIC CHARACTERISTICS

|   |           |   |     |   |    |
|---|-----------|---|-----|---|----|
| Input Capacitance ( $V_{DS} = 50$ V, $V_{GS} = 0$ , $f = 1.0$ MHz)            | $C_{iss}$ | — | 350 | — | pF |
| Output Capacitance ( $V_{DS} = 50$ V, $V_{GS} = 0$ , $f = 1.0$ MHz)           | $C_{oss}$ | — | 220 | — | pF |
| Reverse Transfer Capacitance ( $V_{DS} = 50$ V, $V_{GS} = 0$ , $f = 1.0$ MHz) | $C_{rss}$ | — | 15  | — | pF |

#### FUNCTIONAL TESTS


|  |                               |                                |            |          |    |
|--|-------------------------------|--------------------------------|------------|----------|----|
| Common Source Amplifier Power Gain, $f = 30$ ; 30.001 MHz<br>( $V_{DD} = 50$ V, $P_{out} = 150$ W (PEP), $I_{DQ} = 250$ mA) $f = 175$ MHz  | $G_{ps}$                      | 18                             | 22         | —        | dB |
| Drain Efficiency<br>( $V_{DD} = 50$ V, $P_{out} = 150$ W (PEP), $f = 30$ ; 30.001 MHz,<br>$I_D$ (Max) = 3.75 A)                            | $\eta$                        | 40                             | 45         | —        | %  |
| Intermodulation Distortion (1)<br>( $V_{DD} = 50$ V, $P_{out} = 150$ W (PEP), $f = 30$ MHz,<br>$f_2 = 30.001$ MHz, $I_{DQ} = 250$ mA)      | $IMD_{(d3)}$<br>$IMD_{(d11)}$ | —                              | -32<br>-60 | -30<br>— | dB |
| Load Mismatch<br>( $V_{DD} = 50$ V, $P_{out} = 150$ W (PEP), $f_1 = 30$ ; 30.001 MHz,<br>$I_{DQ} = 250$ mA, VSWR 30:1 at all Phase Angles) | $\psi$                        | No Degradation in Output Power |            |          |    |

#### CLASS A PERFORMANCE

|  |   |             |                  |             |    |
|--|---|-------------|------------------|-------------|----|
| Intermodulation Distortion (1) and Power Gain<br>( $V_{DD} = 50$ V, $P_{out} = 50$ W (PEP), $f_1 = 30$ MHz,<br>$f_2 = 30.001$ MHz, $I_{DQ} = 3.0$ A) | $G_{ps}$<br>$IMD_{(d3)}$<br>$IMD_{(d9-13)}$ | —<br>—<br>— | 23<br>-50<br>-75 | —<br>—<br>— | dB |
|--|---|-------------|------------------|-------------|----|

#### NOTE:

- To MIL-STD-1311 Version A, Test Method 2204B, Two Tone, Reference Each Tone.

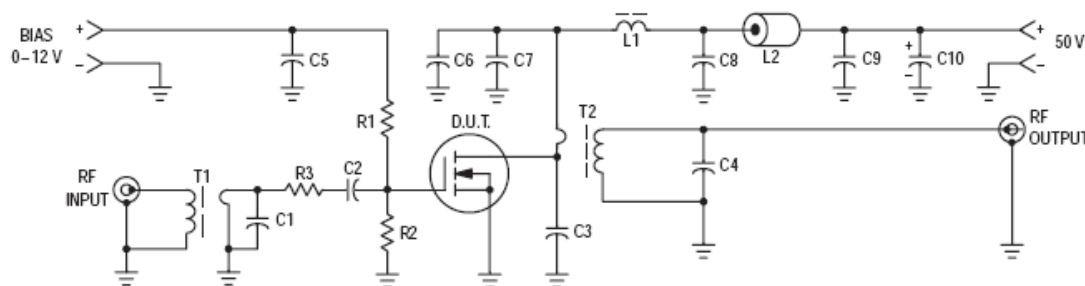

- C1 — 470 pF Dipped Mica  
C2, C5, C6, C7, C8, C9 — 0.1  $\mu$  F Ceramic Chip or Monolithic with Short Leads  
C3 — 200 pF Unencapsulated Mica or Dipped Mica with Short Leads  
C4 — 15 pF Unencapsulated Mica or Dipped Mica with Short Leads  
C10 — 10  $\mu$  F/100 V Electrolytic
- L1 — VK200/4B Ferrite Choke or Equivalent, 3.0  $\mu$  H  
L2 — Ferrite Bead(s), 2.0  $\mu$  H  
R1, R2 — 51  $\Omega$  /1.0 W Carbon  
R3 — 3.3  $\Omega$  /1.0 W Carbon (or 2.0 x 6.8  $\Omega$  /1/2 W in Parallel)  
T1 — 9:1 Broadband Transformer Communication Concepts, Inc. RF800-9 material 43 or equiv.  
T2 — 1:9 Broadband Transformer  
Board Material — 0.062" Fiberglass (G10), 1 oz. Copper Clad, 2 Sides,  $\epsilon_r = 5$

Figure 1. 30 MHz Test Circuit

**RF Power Field-Effect Transistor**  
**150W, 50V, 175MHz N-Channel Broadband MOSFET**

M/A-COM Products  
RoHS Compliant

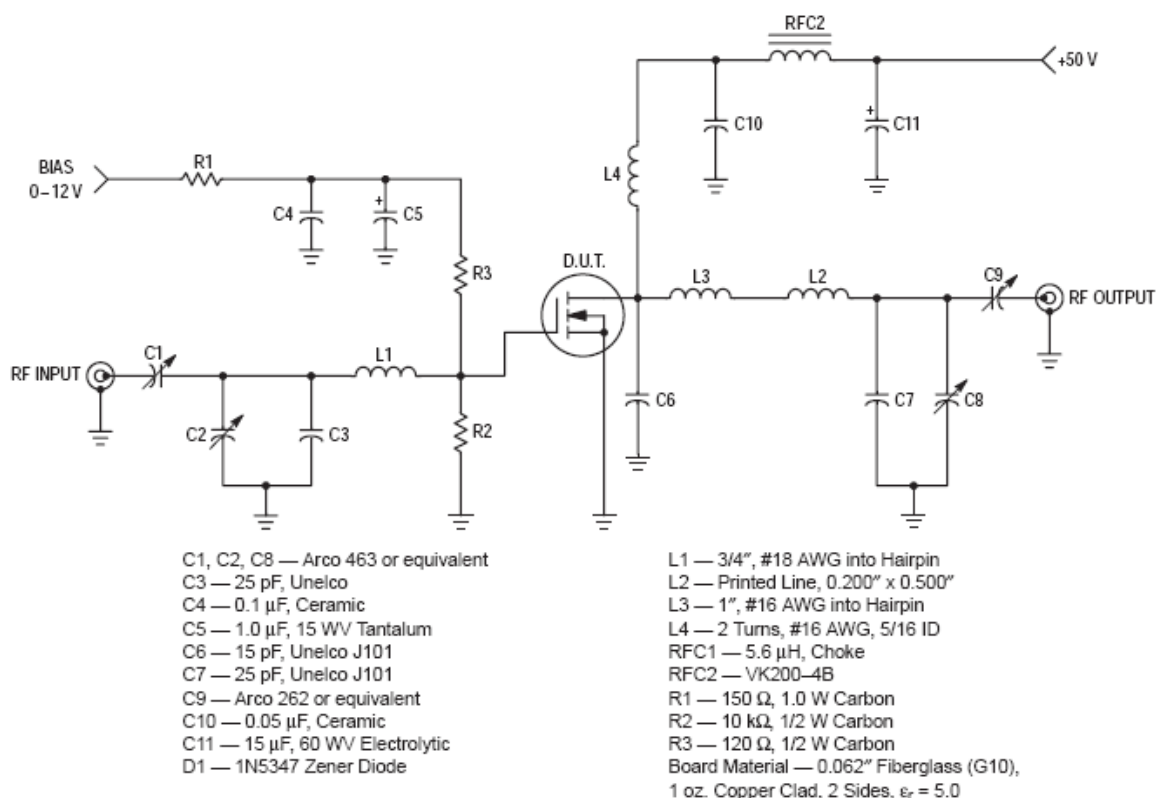


Figure 2. 175 MHz Test Circuit

**TYPICAL CHARACTERISTICS**

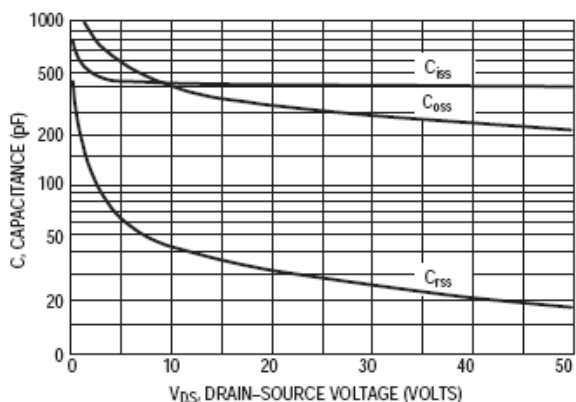


Figure 3. Capacitance versus  
Drain-Source Voltage

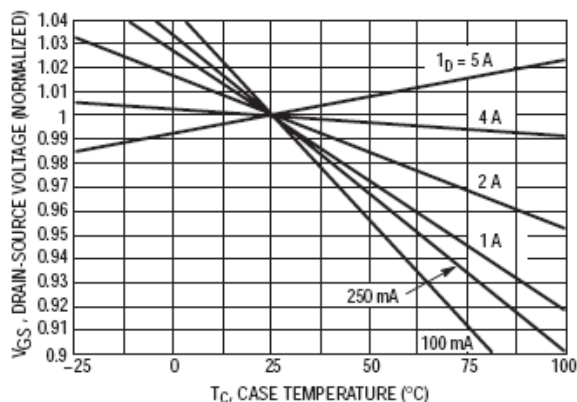


Figure 4. Gate-Source Voltage versus  
Case Temperature

**RF Power Field-Effect Transistor**  
**150W, 50V, 175MHz N-Channel Broadband MOSFET**

M/A-COM Products  
RoHS Compliant

**TYPICAL CHARACTERISTICS**

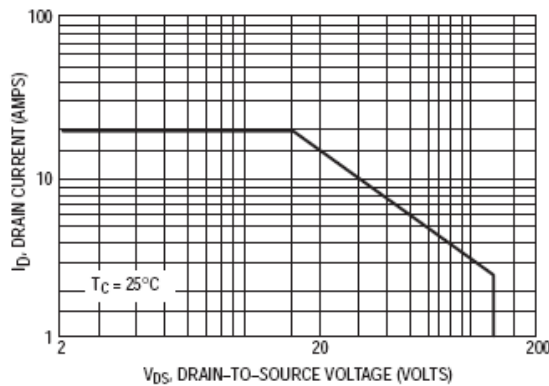


Figure 5. DC Safe Operating Area

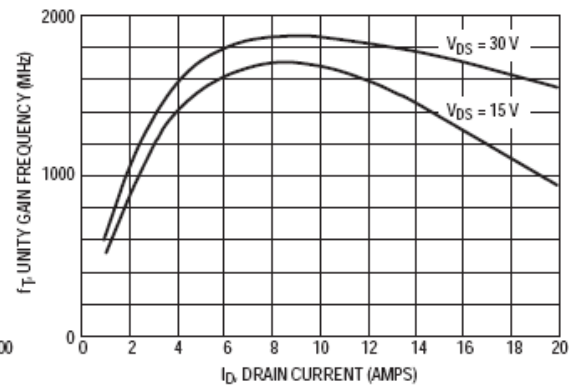


Figure 6. Common Source Unity Gain Frequency versus Drain Current

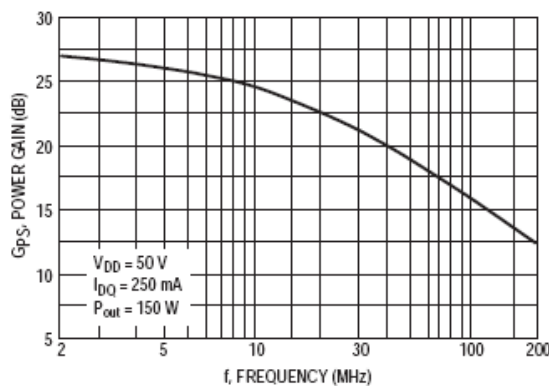


Figure 7. Power Gain versus Frequency

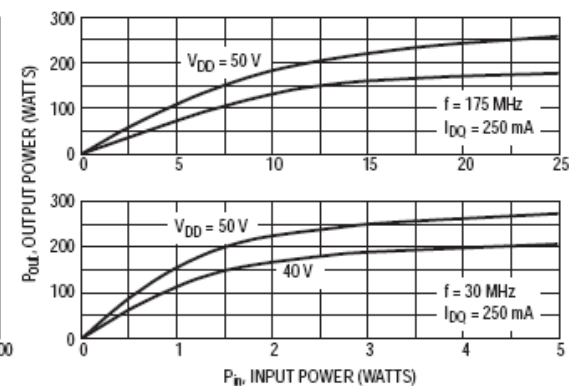


Figure 8. Output Power versus Input Power

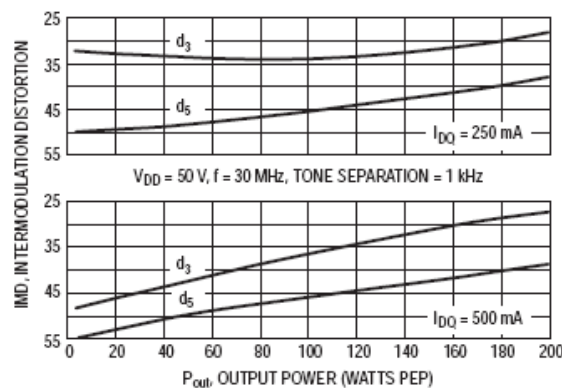


Figure 9. IMD versus  $P_{out}$

**RF Power Field-Effect Transistor**  
**150W, 50V, 175MHz N-Channel Broadband MOSFET**

M/A-COM Products  
RoHS Compliant

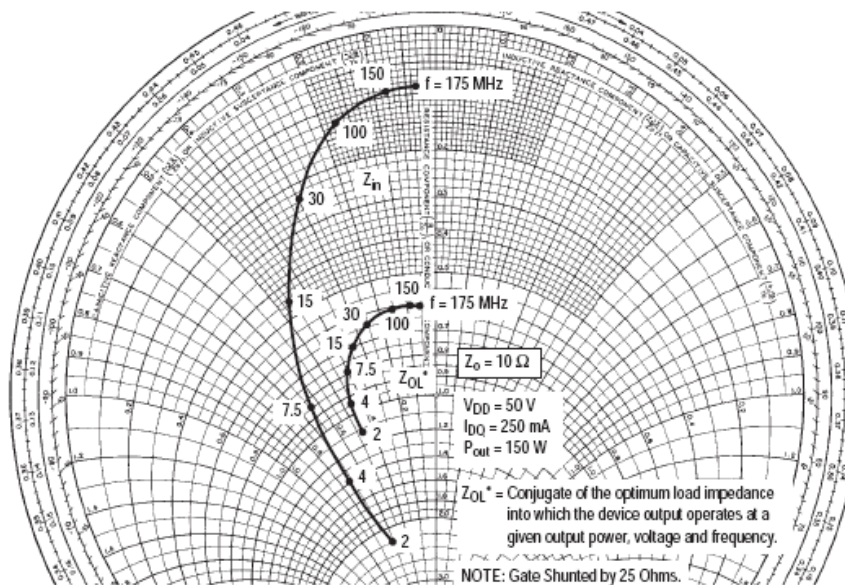


Figure 10. Series Equivalent Impedance

Table 1. Common Source S-Parameters ( $V_{DS} = 50$  V,  $I_D = 2$  A)

| f<br>MHz | $S_{11}$   |        | $S_{21}$   |        | $S_{12}$   |        | $S_{22}$   |        |
|----------|------------|--------|------------|--------|------------|--------|------------|--------|
|          | $ S_{11} $ | $\phi$ | $ S_{21} $ | $\phi$ | $ S_{12} $ | $\phi$ | $ S_{22} $ | $\phi$ |
| 30       | 0.877      | -174   | 10.10      | 77     | 0.008      | 19     | 0.707      | -169   |
| 40       | 0.886      | -175   | 7.47       | 69     | 0.009      | 24     | 0.715      | -172   |
| 50       | 0.895      | -175   | 5.76       | 63     | 0.008      | 33     | 0.756      | -171   |
| 60       | 0.902      | -176   | 4.73       | 58     | 0.009      | 39     | 0.764      | -171   |
| 70       | 0.912      | -176   | 3.86       | 52     | 0.009      | 46     | 0.784      | -172   |
| 80       | 0.918      | -177   | 3.19       | 48     | 0.010      | 54     | 0.802      | -171   |
| 90       | 0.925      | -177   | 2.69       | 45     | 0.011      | 62     | 0.808      | -171   |
| 100      | 0.932      | -177   | 2.34       | 40     | 0.013      | 67     | 0.850      | -173   |
| 110      | 0.936      | -178   | 2.06       | 37     | 0.014      | 72     | 0.865      | -175   |
| 120      | 0.942      | -178   | 1.77       | 35     | 0.015      | 76     | 0.875      | -173   |
| 130      | 0.946      | -179   | 1.55       | 32     | 0.017      | 77     | 0.874      | -172   |
| 140      | 0.950      | -179   | 1.39       | 30     | 0.019      | 77     | 0.884      | -174   |
| 150      | 0.954      | -180   | 1.23       | 27     | 0.021      | 78     | 0.909      | -175   |
| 160      | 0.957      | -180   | 1.13       | 24     | 0.023      | 79     | 0.911      | -176   |
| 170      | 0.960      | 180    | 1.01       | 22     | 0.024      | 82     | 0.904      | -177   |
| 180      | 0.962      | 179    | 0.90       | 20     | 0.026      | 82     | 0.931      | -176   |
| 190      | 0.964      | 179    | 0.84       | 19     | 0.028      | 80     | 0.929      | -178   |
| 200      | 0.967      | 179    | 0.75       | 18     | 0.030      | 79     | 0.922      | -179   |
| 210      | 0.967      | 178    | 0.71       | 16     | 0.032      | 80     | 0.937      | -180   |
| 220      | 0.969      | 178    | 0.67       | 14     | 0.035      | 82     | 0.949      | 180    |
| 230      | 0.971      | 178    | 0.60       | 12     | 0.038      | 81     | 0.950      | 179    |
| 240      | 0.970      | 177    | 0.57       | 12     | 0.037      | 80     | 0.950      | 179    |



**RF Power Field-Effect Transistor**  
**150W, 50V, 175MHz N-Channel Broadband MOSFET**

M/A-COM Products  
RoHS Compliant

Table 1. Common Source S-Parameters ( $V_{DS} = 50\text{ V}$ ,  $I_D = 2\text{ A}$ ) continued

| f<br>MHz | S <sub>11</sub> |     | S <sub>21</sub> |    | S <sub>12</sub> |    | S <sub>22</sub> |     |
|----------|-----------------|-----|-----------------|----|-----------------|----|-----------------|-----|
|          | S <sub>11</sub> | φ   | S <sub>21</sub> | φ  | S <sub>12</sub> | φ  | S <sub>22</sub> | φ   |
| 250      | 0.972           | 177 | 0.51            | 12 | 0.039           | 80 | 0.935           | 179 |
| 260      | 0.973           | 177 | 0.47            | 11 | 0.041           | 79 | 0.954           | 178 |
| 270      | 0.972           | 176 | 0.45            | 9  | 0.044           | 80 | 0.953           | 176 |
| 280      | 0.974           | 176 | 0.41            | 9  | 0.046           | 80 | 0.965           | 175 |
| 290      | 0.974           | 176 | 0.40            | 6  | 0.046           | 79 | 0.944           | 175 |
| 300      | 0.975           | 176 | 0.39            | 10 | 0.048           | 82 | 0.929           | 176 |
| 310      | 0.976           | 175 | 0.36            | 9  | 0.049           | 82 | 0.943           | 176 |
| 320      | 0.974           | 175 | 0.33            | 7  | 0.053           | 78 | 0.954           | 173 |
| 330      | 0.975           | 174 | 0.31            | 4  | 0.056           | 78 | 0.935           | 172 |
| 340      | 0.976           | 174 | 0.30            | 10 | 0.056           | 77 | 0.948           | 172 |
| 350      | 0.975           | 174 | 0.29            | 7  | 0.058           | 80 | 0.950           | 174 |
| 360      | 0.977           | 174 | 0.28            | 8  | 0.059           | 79 | 0.978           | 172 |
| 370      | 0.976           | 173 | 0.26            | 8  | 0.061           | 76 | 0.981           | 170 |
| 380      | 0.976           | 173 | 0.26            | 7  | 0.065           | 75 | 0.944           | 171 |
| 390      | 0.977           | 173 | 0.24            | 10 | 0.066           | 76 | 0.960           | 171 |
| 400      | 0.976           | 172 | 0.23            | 7  | 0.068           | 80 | 0.955           | 173 |
| 410      | 0.976           | 172 | 0.22            | 9  | 0.071           | 77 | 0.999           | 170 |
| 420      | 0.977           | 172 | 0.21            | 9  | 0.071           | 76 | 0.962           | 168 |
| 430      | 0.976           | 171 | 0.19            | 10 | 0.073           | 76 | 0.950           | 168 |
| 440      | 0.976           | 171 | 0.20            | 12 | 0.075           | 75 | 0.953           | 168 |
| 450      | 0.978           | 171 | 0.19            | 10 | 0.080           | 77 | 0.982           | 168 |
| 460      | 0.978           | 170 | 0.18            | 13 | 0.082           | 74 | 0.990           | 165 |
| 470      | 0.978           | 170 | 0.18            | 10 | 0.081           | 77 | 0.953           | 168 |
| 480      | 0.974           | 170 | 0.18            | 13 | 0.085           | 78 | 0.944           | 167 |
| 490      | 0.973           | 169 | 0.17            | 13 | 0.086           | 75 | 0.966           | 165 |
| 500      | 0.972           | 169 | 0.17            | 14 | 0.089           | 73 | 0.980           | 165 |

## RF Power Field-Effect Transistor 150W, 50V, 175MHz N-Channel Broadband MOSFET

M/A-COM Products  
RoHS Compliant


### RF POWER MOSFET CONSIDERATIONS

#### MOSFET CAPACITANCES

The physical structure of a MOSFET results in capacitors between the terminals. The metal anode gate structure determines the capacitors from gate-to-drain ( $C_{gd}$ ), and gate-to-source ( $C_{gs}$ ). The PN junction formed during the fabrication of the MOSFET results in a junction capacitance from drain-to-source ( $C_{ds}$ ).

These capacitances are characterized as input ( $C_{iss}$ ), output ( $C_{oss}$ ) and reverse transfer ( $C_{rss}$ ) capacitances on data sheets. The relationships between the inter-terminal capacitances and those given on data sheets are shown below. The  $C_{iss}$  can be specified in two ways:

1. Drain shorted to source and positive voltage at the gate.
2. Positive voltage of the drain in respect to source and zero volts at the gate. In the latter case the numbers are lower. However, neither method represents the actual operating conditions in RF applications.

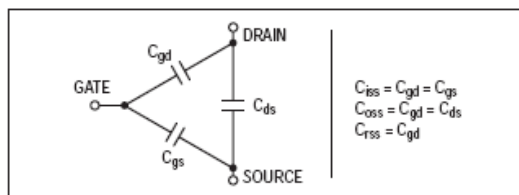

#### LINEARITY AND GAIN CHARACTERISTICS

In addition to the typical IMD and power gain data presented, Figure 6 may give the designer additional information on the capabilities of this device. The graph represents the small signal unity current gain frequency at a given drain current level. This is equivalent to  $f_T$  for bipolar transistors. Since this test is performed at a fast sweep speed, heating of the device does not occur. Thus, in normal use, the higher temperatures may degrade these characteristics to some extent.

#### DRAIN CHARACTERISTICS

One figure of merit for a FET is its static resistance in the full-on condition. This on-resistance,  $V_{DS(on)}$ , occurs in the linear region of the output characteristic and is specified under specific test conditions for gate-source voltage and drain current. For MOSFETs,  $V_{DS(on)}$  has a positive temperature coefficient and constitutes an important design consideration at high temperatures, because it contributes to the power dissipation within the device.

#### GATE CHARACTERISTICS

The gate of the MOSFET is a polysilicon material, and is electrically isolated from the source by a layer of oxide. The input resistance is very high — on the order of  $10^9$  ohms — resulting in a leakage current of a few nanoamperes.

Gate control is achieved by applying a positive voltage in excess of the gate-to-source threshold voltage,  $V_{GS(th)}$ .

**Gate Voltage Rating** — Never exceed the gate voltage rating. Exceeding the rated  $V_{GS}$  can result in permanent damage to the oxide layer in the gate region.

**Gate Termination** — The gate of this device is essentially a capacitor. Circuits that leave the gate open-circuited or float-

ing should be avoided. These conditions can result in turn-on of the device due to voltage build-up on the input capacitor due to leakage currents or pickup.

**Gate Protection** — This device does not have an internal monolithic zener diode from gate-to-source. If gate protection is required, an external zener diode is recommended.

Using a resistor to keep the gate-to-source impedance low also helps damp transients and serves another important function. Voltage transients on the drain can be coupled to the gate through the parasitic gate-drain capacitance. If the gate-to-source impedance and the rate of voltage change on the drain are both high, then the signal coupled to the gate may be large enough to exceed the gate-threshold voltage and turn the device on.

#### HANDLING CONSIDERATIONS

When shipping, the devices should be transported only in antistatic bags or conductive foam. Upon removal from the packaging, careful handling procedures should be adhered to. Those handling the devices should wear grounding straps and devices not in the antistatic packaging should be kept in metal tote bins. MOSFETs should be handled by the case and not by the leads, and when testing the device, all leads should make good electrical contact before voltage is applied. As a final note, when placing the FET into the system it is designed for, soldering should be done with a grounded iron.

#### DESIGN CONSIDERATIONS

The MRF151A is an RF Power, MOS, N-channel enhancement mode field-effect transistor (FET) designed for HF and VHF power amplifier applications.

M/A-COM Application Note AN211A, FETs in Theory and Practice, is suggested reading for those not familiar with the construction and characteristics of FETs.

The major advantages of RF power MOSFETs include high gain, low noise, simple bias systems, relative immunity from thermal runaway, and the ability to withstand severely mismatched loads without suffering damage. Power output can be varied over a wide range with a low power dc control signal.

#### DC BIAS

The MRF151A is an enhancement mode FET and, therefore, does not conduct when drain voltage is applied. Drain current flows when a positive voltage is applied to the gate. RF power FETs require forward bias for optimum performance. The value of quiescent drain current ( $I_{DQ}$ ) is not critical for many applications. The MRF151A was characterized at  $I_{DQ} = 250$  mA, each side, which is the suggested minimum value of  $I_{DQ}$ . For special applications such as linear amplification,  $I_{DQ}$  may have to be selected to optimize the critical parameters.

The gate is a dc open circuit and draws no current. Therefore, the gate bias circuit may be just a simple resistive divider network. Some applications may require a more elaborate bias system.


#### GAIN CONTROL

Power output of the MRF151A may be controlled from its rated value down to zero (negative gain) by varying the dc gate voltage. This feature facilitates the design of manual gain control, AGC/ALC and modulation systems.

RF Power Field-Effect Transistor  
150W, 50V, 175MHz N-Channel Broadband MOSFET

M/A-COM Products  
RoHS Compliant

PACKAGE DIMENSIONS

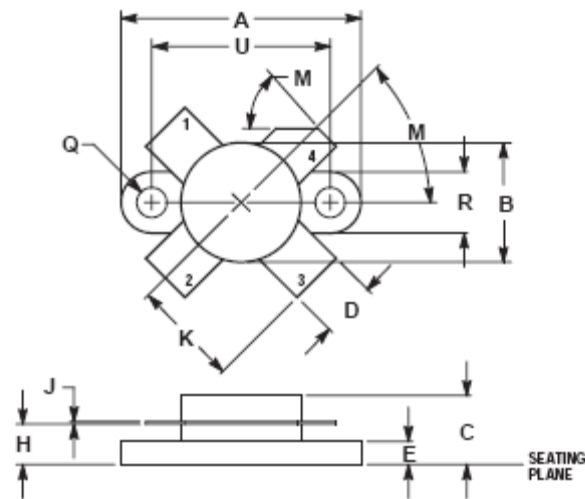

- NOTES:  
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES  |       | MILLIMETERS |       |
|-----|---------|-------|-------------|-------|
|     | MIN     | MAX   | MIN         | MAX   |
| A   | 0.960   | 0.990 | 24.39       | 25.14 |
| B   | 0.465   | 0.510 | 11.82       | 12.95 |
| C   | 0.229   | 0.275 | 5.82        | 6.98  |
| D   | 0.216   | 0.235 | 5.49        | 5.96  |
| E   | 0.084   | 0.110 | 2.14        | 2.79  |
| H   | 0.144   | 0.178 | 3.66        | 4.52  |
| J   | 0.008   | 0.007 | 0.08        | 0.17  |
| K   | 0.435   | ---   | 11.05       | ---   |
| M   | 45° NOM |       | 45° NOM     |       |
| Q   | 0.115   | 0.130 | 2.93        | 3.30  |
| R   | 0.246   | 0.255 | 6.25        | 6.47  |
| U   | 0.720   | 0.730 | 18.29       | 18.54 |

STYLE 2:  
PIN 1. SOURCE  
2. GATE  
3. SOURCE  
4. DRAIN

CASE P-244

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.  
M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9