


SYMBOL DEFINITION			MISSING SYMBOLS	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL □ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.			NO MISSING SYMBOL NUMBER	
TOTAL NO OF INSPECTIONS REQUIRED			35	
LAST NO. USED			29	

DWS STATUS					ZONE	REVISION HISTORY					AUTH		DR	AP/D	AP/D	
DATE	STG	REV	N/P	CHG												
16JL01	R	01	-	-		CREATED PD					203721	ESF	ESF	B6		
13SE04	R	02	-	-		ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES					257886	ESF	ESF	B6	M	
12FE07	R	03	-	-		12065940, 12065950-51 & 12077946 - OBSOLETE; 12077945 - RESTRICTED; 12065892-94, 12089236 & 12103948 - MAT'L SPEC WAS P3604					400499	JBD	FRG	BDO		
27FE07	R	04	-	-		ALL ACTIVE PARTS - MATERIAL SPEC WAS M3606404					400643	MM	MM	BDO		


STAMP "PXX" ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS PER NOTE #12. CHARACTERS MUST BE POSITIONED IN DIRECTION SHOWN, OR AT 180° TO DIRECTION SHOWN

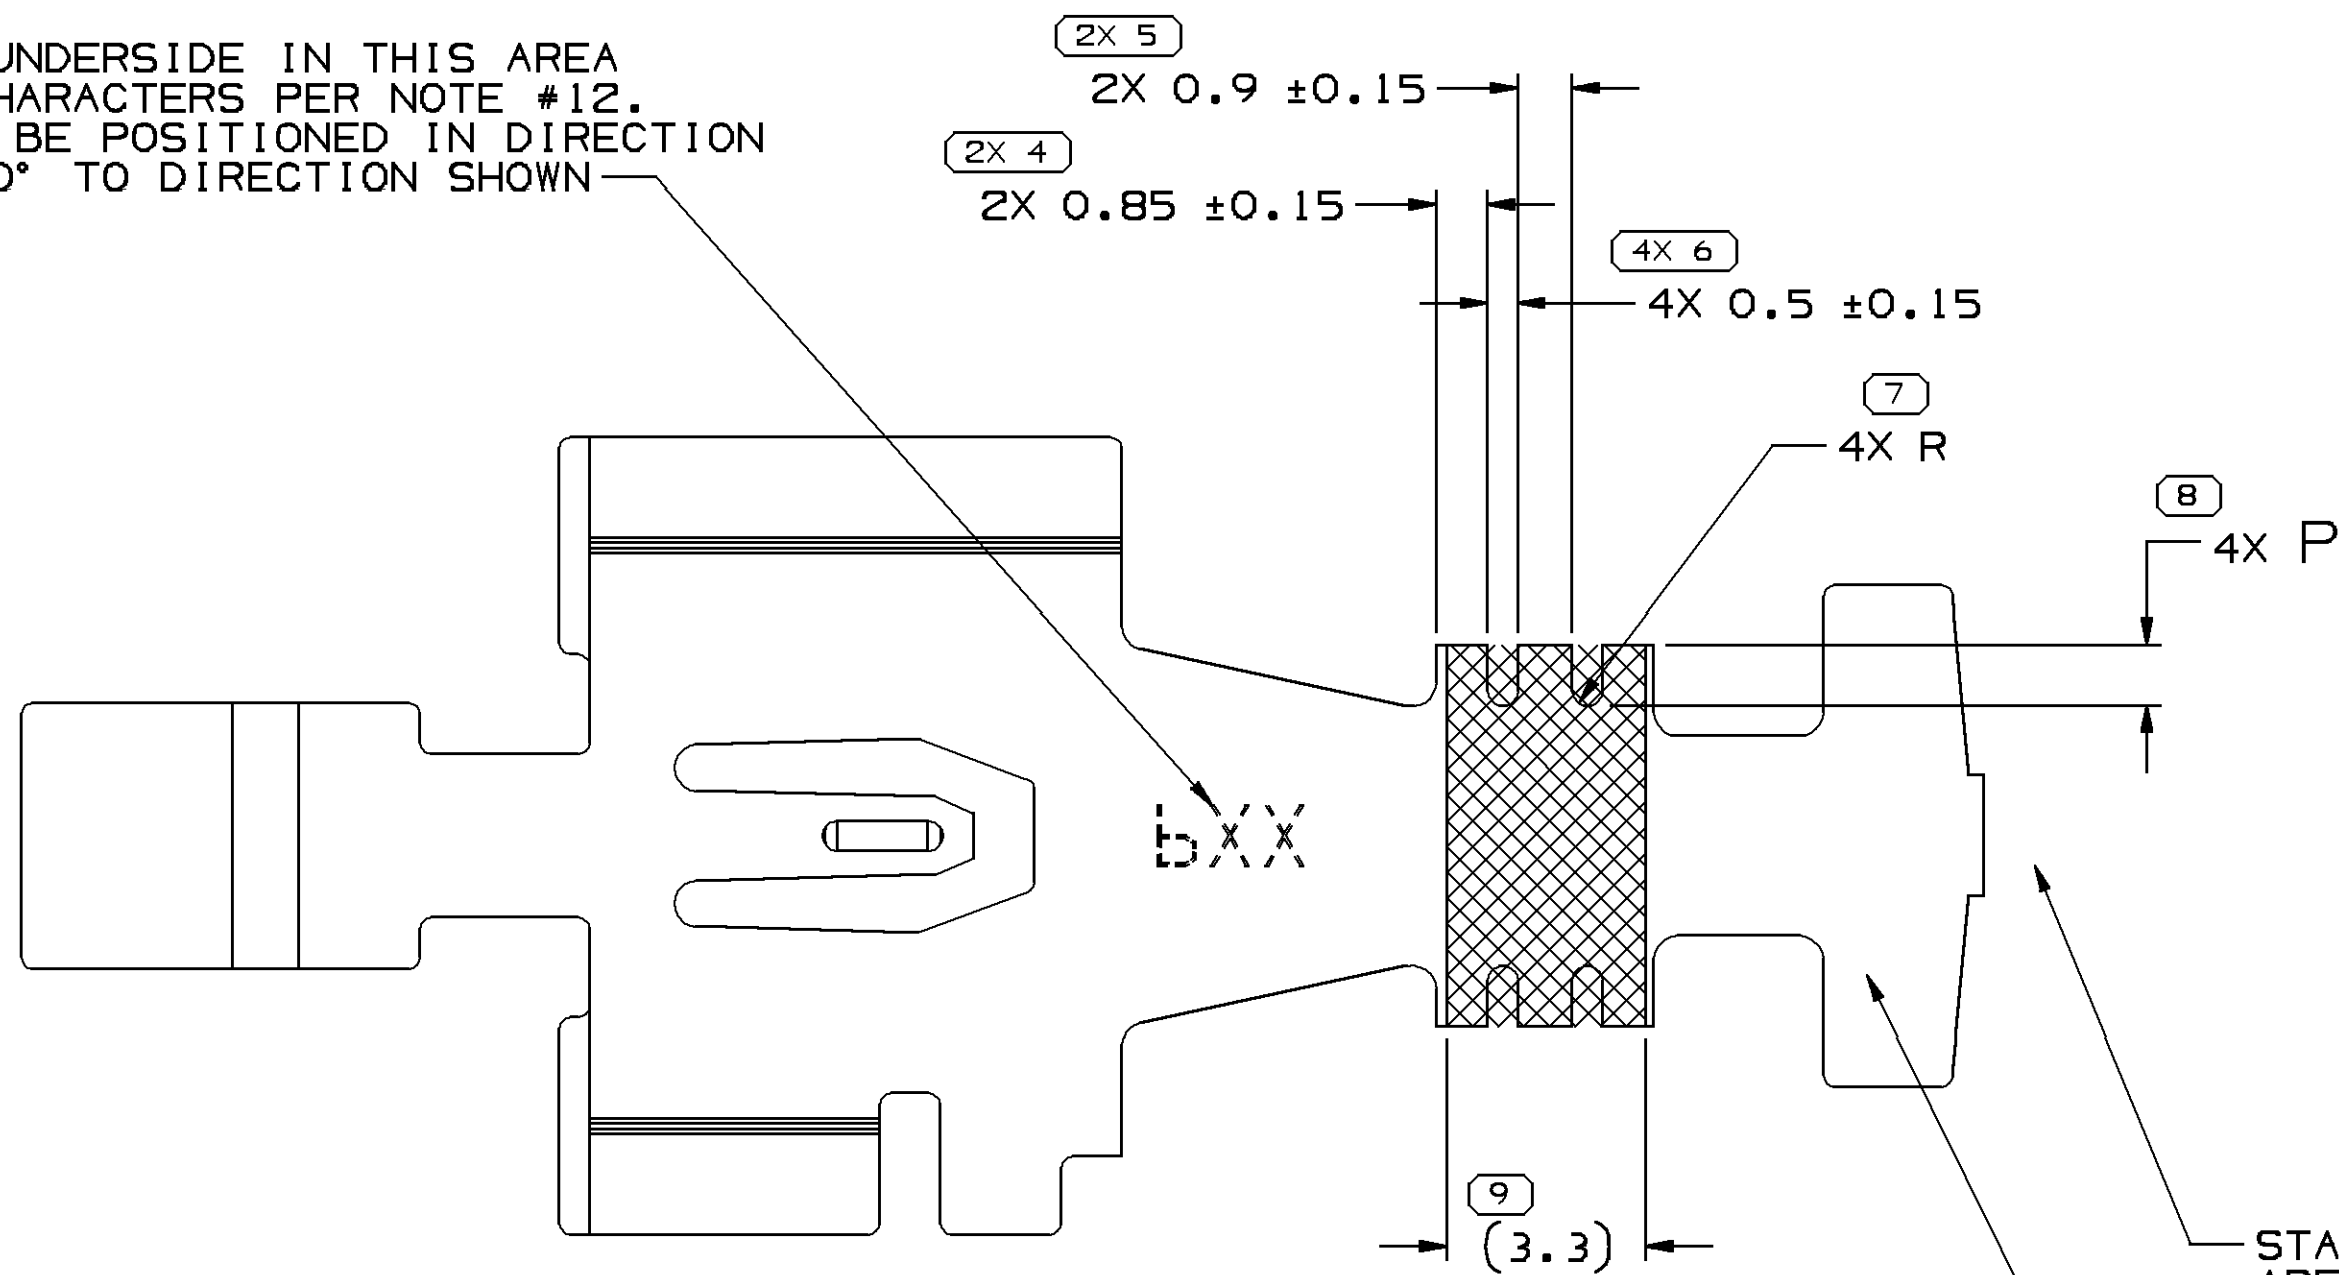






BLANK VIEW - APPROXIMATE
TYPE 101

STAMP CABLE I.D. NO. ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS SHOWN IN CHART. CHARACTERS MUST BE POSITIONED PERPENDICULAR TO CENTRELINE.

STAMPED KNURL PATTERN

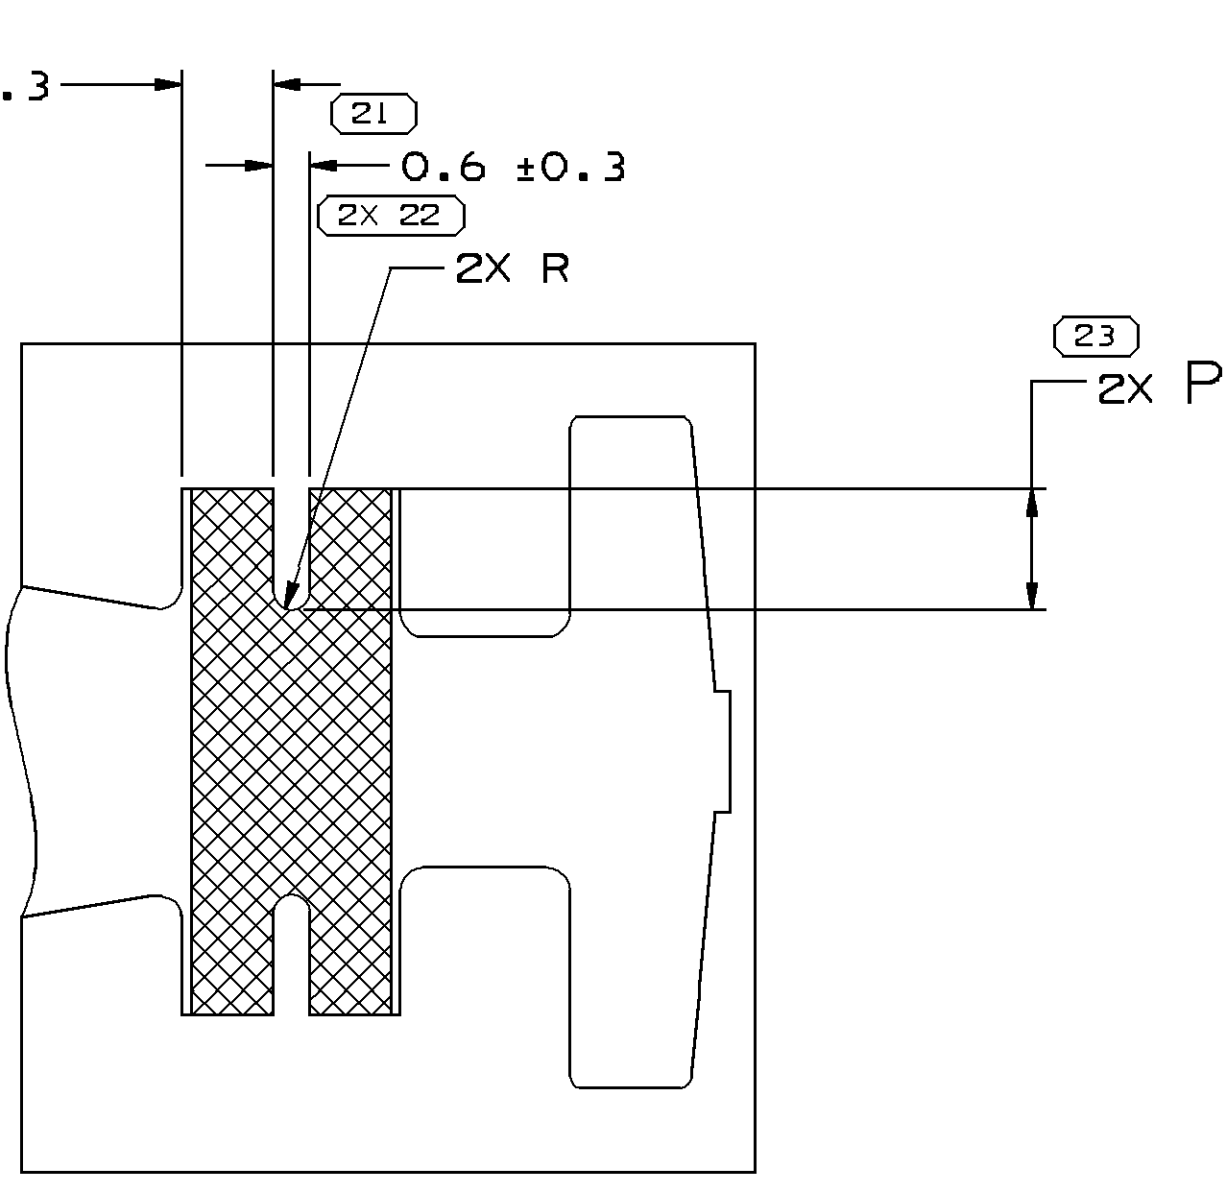


BLANK TYPE 102
SAME AS TYPE 101 EXCEPT
AS SHOWN

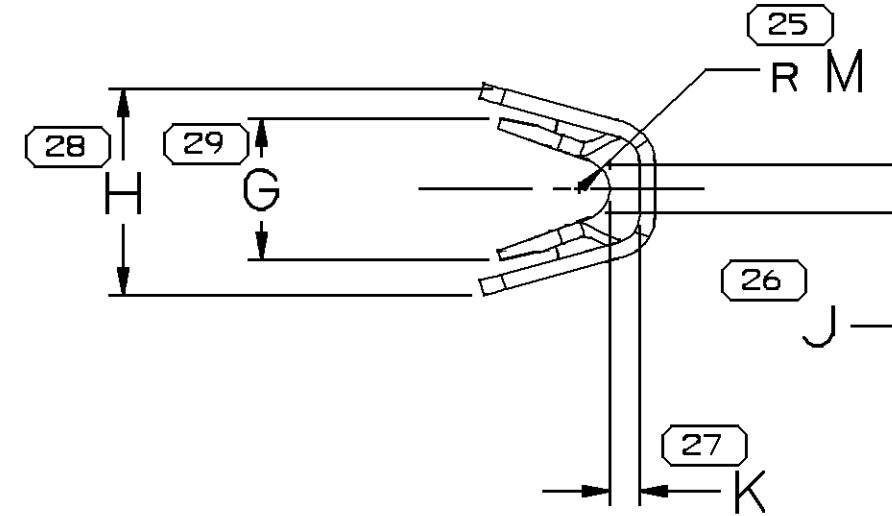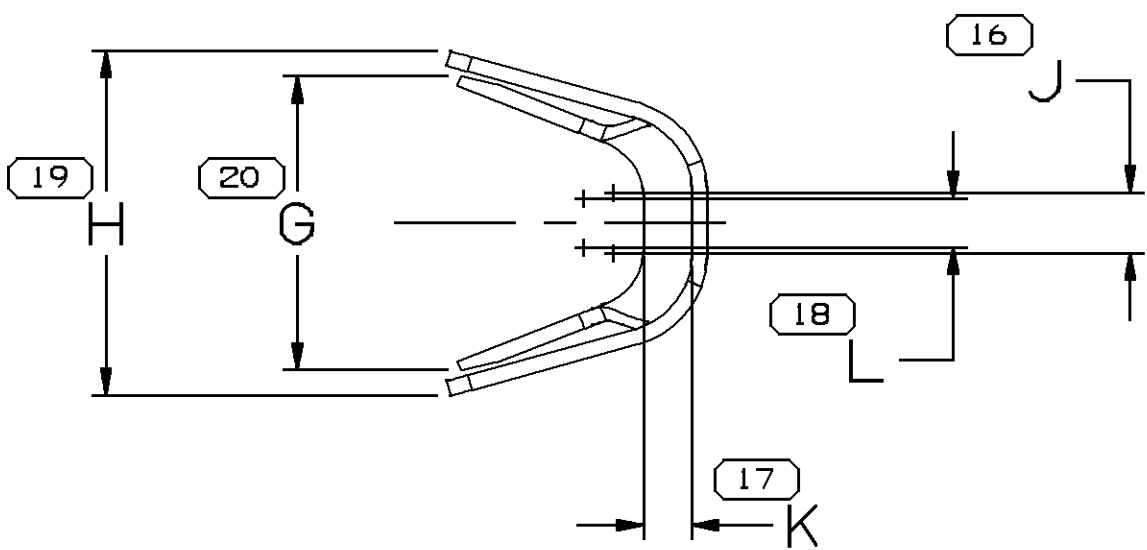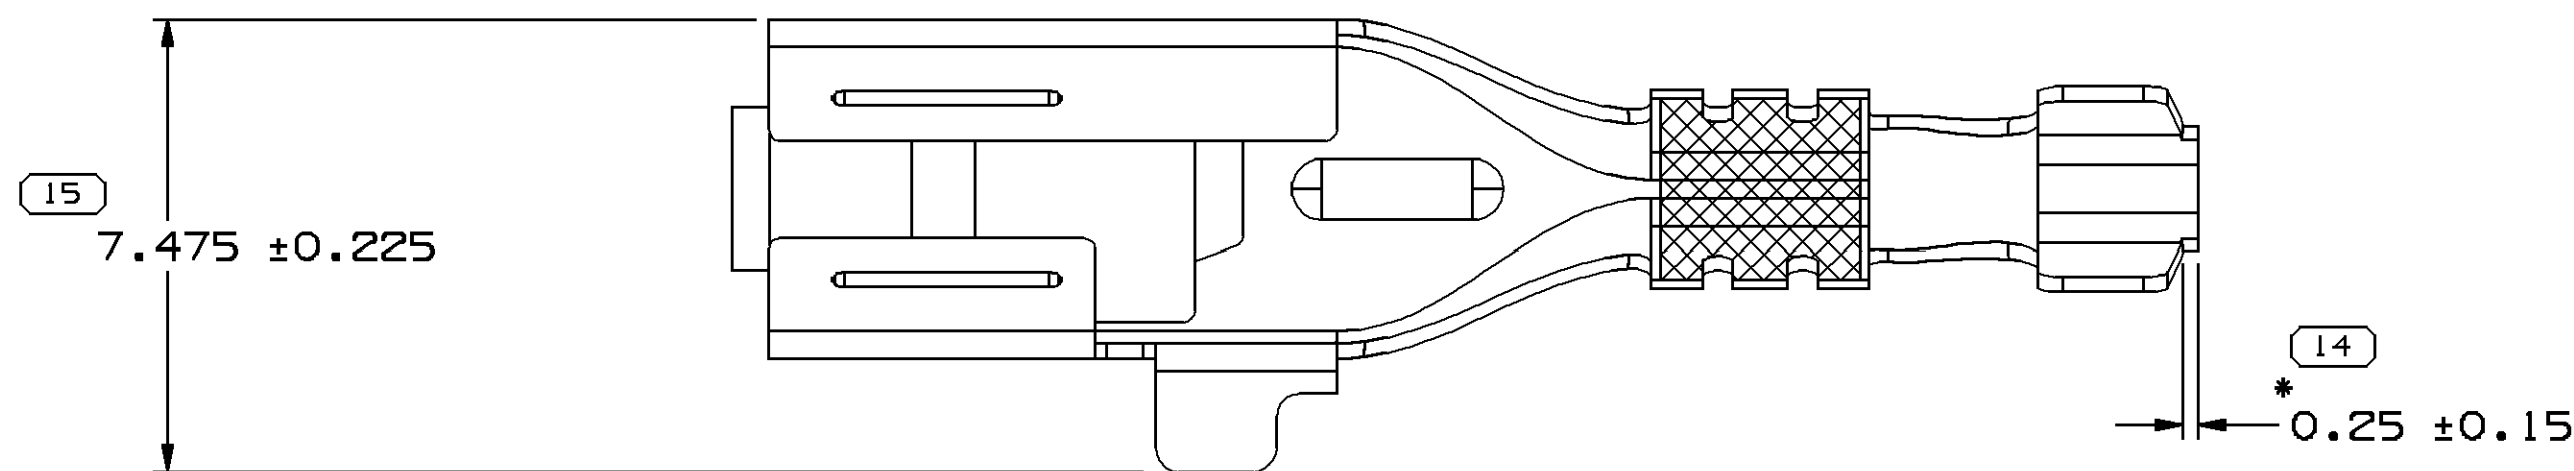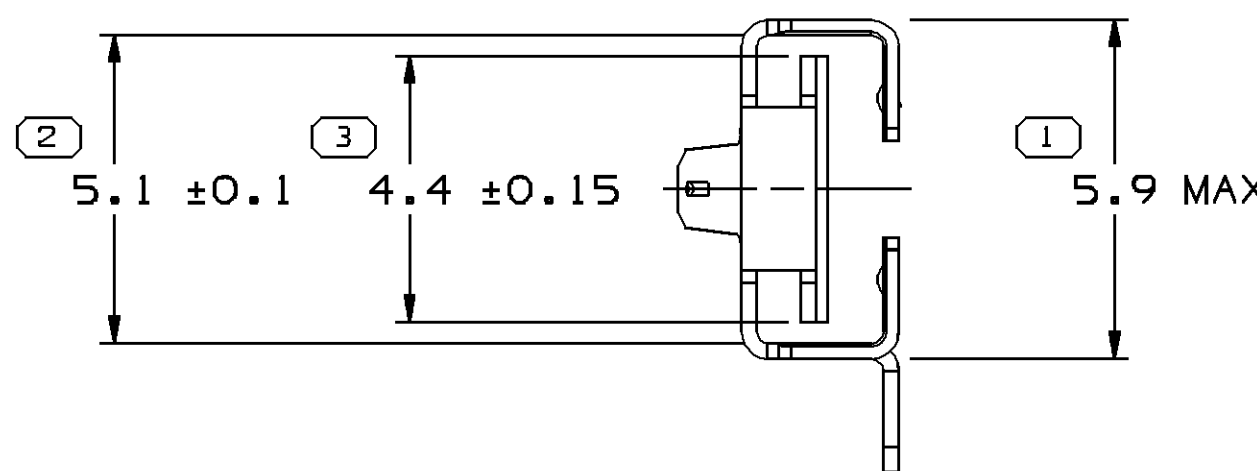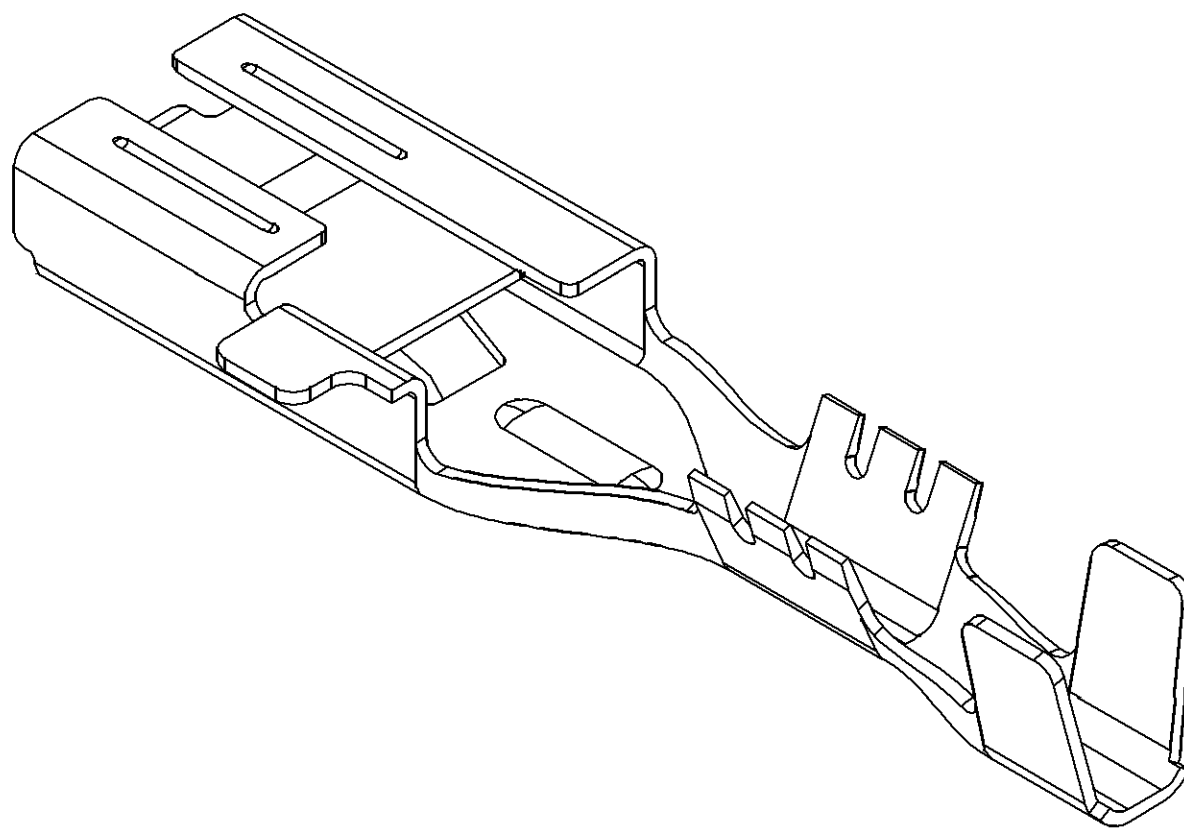

WING CONST. I

WING CONST. II

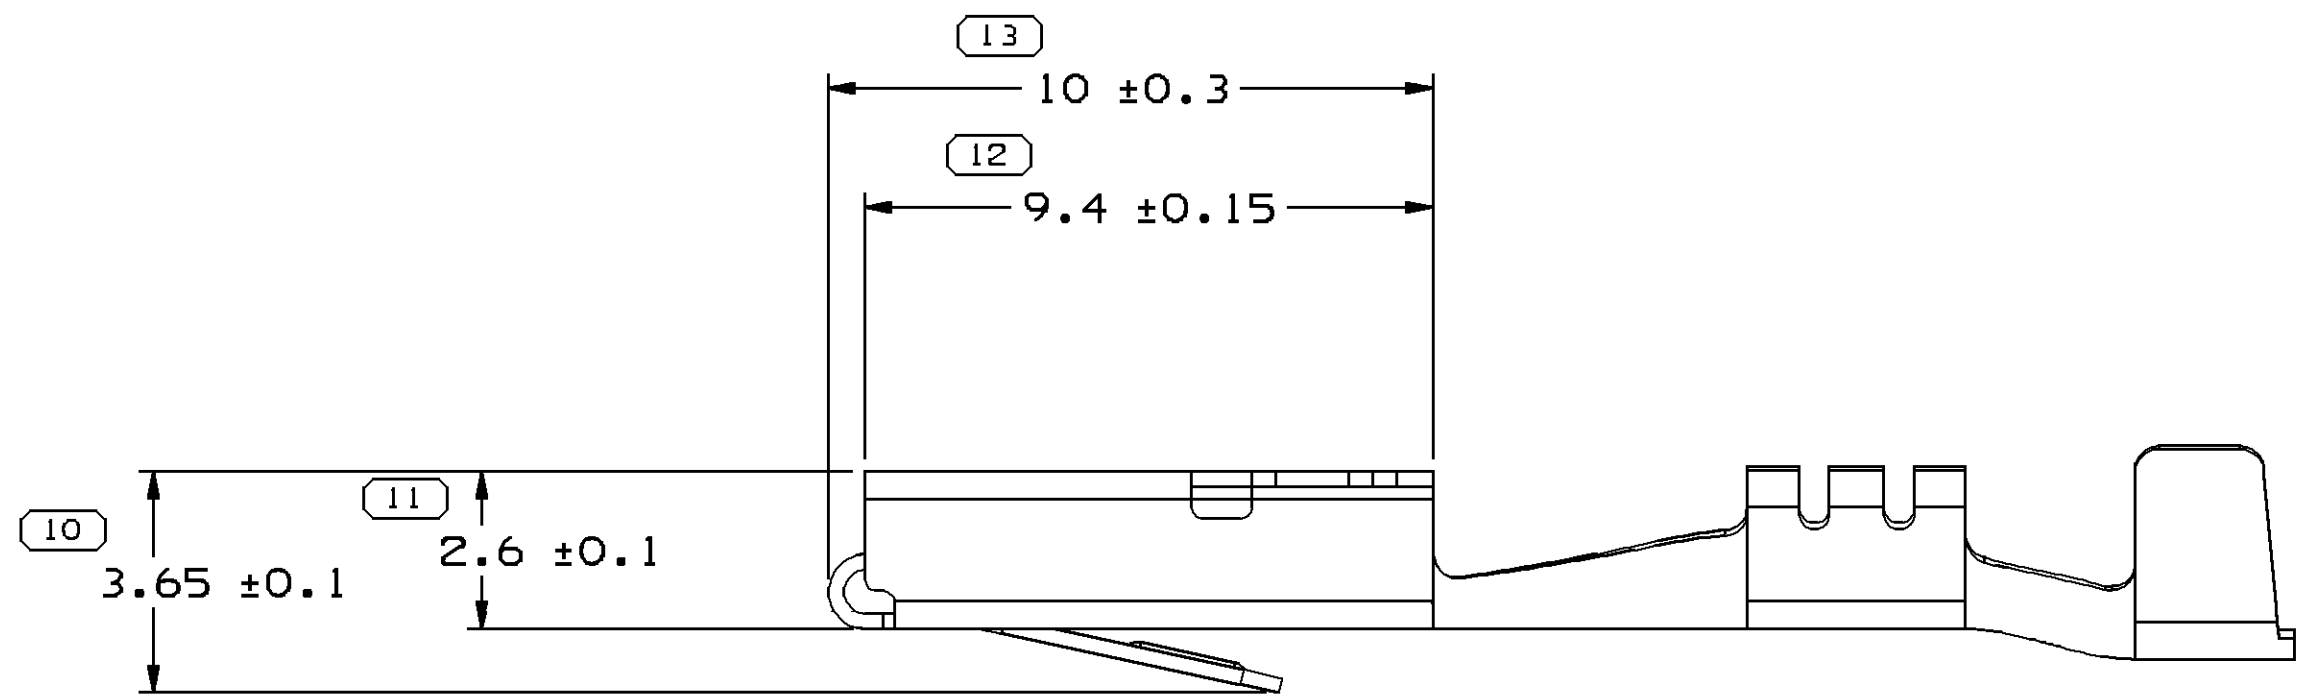

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA. ALL RADII 0.2
- R 0.4 MAX PERMISSIBLE ON ALL "SHARP" CORNERS. ALL LOCKING FEATURES MUST HAVE "SHARP" CORNERS.
- "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE SERIES NUMBER (P01, P02, P03, ETC).
- * DENOTES DIMENSION MADE AT CUT-OFF AND CRIMP DIE.
- MAXIMUM CURRENT CAPABILITY IS 24 AMPS.
- TERMINAL ENGAGE 6N TO 27N TERMINAL DISENGAGE 2N TO 15N WHEN MATED TO A 0.81 THICK X 4.8 WIDE HARDENED STEEL BLADE.
- "▲" INDICATES MATERIAL TIN PLATE OVER COPPER PLATE.
- RECOMMENDED MATING BLADE - WIDTH: 4.8 ± 0.1 THICKNESS: 0.825 ± 0.035 LENGTH: 7 ± 0.1

DWS TYPE		PART DRAWING	
STYLE			
VOLUME 10/1		DISTR CODE	
		D	
UNLESS OTHERWISE SPECIFIED			
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS SHOWN BY THE DIMENSIONING AND TOLERANCING PRACTICES AND RELATED DATUMS APPLY HERE. RULE #10 PERFECT FORM AT ALL TIMES DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE SHOWN SEPARATELY, REGARDLESS OF DATUM REFERENCE. ALL DIMENSIONS ARE IN MILLIMETERS			
REFERENCE			
THIRD ANGLE PROJECTION		DO NOT SCALE	
USE MATH DATA		NX	

DELPHI	
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE	
WYOMING, OH	
DATE	
DR	
AP/D1	E. SALAZAR
AP/D2	E. SALAZAR
AP/D3	B. GROUBERT
AP/D4	
AP/D5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
SEE CHART	
DRAWING NAME	
TAXI TERM M/P 480 SPL	
DRAWING NUMBER	
12065899	
SIZE	SCALE
A0	B:1
FRAME NO	1 OF 1
SHEET NO	1 OF 1
STG	REV
	04

(11) PROCESS SENSITIVE DIMENSION	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART D
FROM 0 TO 12	>12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
±0.1	±0.2
ANGULAR TOLERANCE 22°	

PART NO	REV	STATUS	MAT'L SIZE	MAT'L SPEC	PART NO	REV	STATUS	MAT'L SPEC	SIZE (MM²)	DIA	ID	BLANK TYPE	WING CONST.	G	H	J	K	L	M	P
12077946	D4	OBSOLETE	0.254 X 36.5	M3604	12089236	B5	-	M3606440	(2) 0.35	2-1.05	222	101	11	2.4	5.1	1.3	0.5	-	0.5	1
12077945	C4	RESTRICTED	0.254 X 36.5	M3604	12103948	A5	-	M3606440	(2) 1-0.8	3.15-1.4	217	102	11	4.9	6.4	1.8	0.7	-	1.15±0.15	1.5
12077944	C2	OBSOLETE	0.254 X 36.5	M3604	-	-	-	-	(2) 0.5	2.4-2.2	220	102	11	3.6	5.9	1.3	0.7	-	0.9	1.5
12065951	E4	OBSOLETE	0.254 X 36.5	M3604	12065893	E5	-	M3606440	0.5-0.35	2.4-1.05	21	101	11	2.1±0.2	3.5±0.3	0.8	0.5	-	0.5	1
12065950	G4	OBSOLETE	0.254 X 36.5	M3604	12065894	G5	-	M3606440	1-8	3.15-1.4	17	101	1	3	3.4	0.8	0.5	0.3	0.5	1
12065940	E4	OBSOLETE	0.254 X 36.5	M3604	12065892	E5	-	M3606440	3-2	3.4-3	13	102	1	4.6	5.7	1	0.8	0.8	0.5	2
12065949	C1	INACTIVE	0.254 X 36.5	M3604	12065891	C1	INACTIVE	P3604	2-1	3.1-1.5	15	101	1	3.6	4.4	0.8	0.7	0.8	0.5	1.7
UNPLATED														G	H	J	K	L	M	P
PLATED														±0.4	±0.4	±0.3	±0.3	±0.3	±0.3	±0.15

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9