

D/A Converter Series for Electronic Adjustment

10bit 4ch/6ch D/A Converters

BU2507FV BU2508FV

General Description

The BU2507FV and BU2508FV ICs are 10bit R-2R type D/A converters with 6ch and 4ch outputs, respectively. Each channel incorporates a full swing output-type buffer amplifier with high speed output response characteristics, resulting in a greatly shortened D/A output settling time. The ICs also have digital input pins compatible with TTL levels, and the maximum value of the data transfer frequency is 10MHz. With the variable output range function, the upper and lower limits of the output voltage can be set separately from the power supply voltage.

Features

- Built-in Multi-channel R-2R Type 10bit D/A Converter (BU2508FV: 4 Channels, BU2507FV: 6 Channels)
- Built-in Full Swing Output Buffer Amplifier for All Channels
- RESET Terminal to fix the Output Voltage to the Lower Reference Level for All Channels
- Digital Inputs Compatible with TTL Levels
- 3-wire Serial Interface and RESET Signal to send a 14bit Format Word (4bit Address and 10bit Data)

Applications

 Control of the Various Types of Consumer and Industrial Equipment

Typical Application Circuit

Key Specifications

■ Operating Supply Voltage Range : 4.5V to 5.5V

■ Number of Channels :

BU2507FV: 6ch
BU2508FV: 4ch

■ Differential Non Linearity Error: ±1.0LSB(Max)


■ Integral Non Linearity Error: ±3.5LSB(Max)

■ Data Transfer Frequency: 10MHz(Max)


 Packages
 W(Typ) x D(Typ) x H(Max)

 SSOP-B14
 5.00mm x 6.40mm x 1.35mm



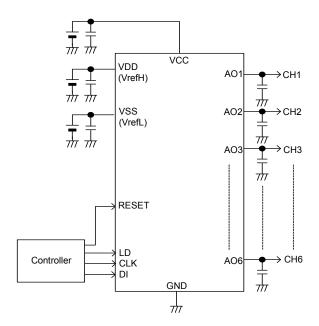

Pin Configurations

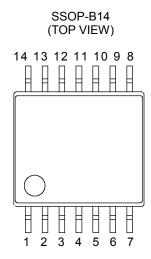

Pin Descriptions


	Terminal	Analog /		Description	Equivalent				
No.	name	Digital	I/O	BU2507FV	BU2508FV	circuit No.			
1	VSS	Analog	-	D/A converter lower side reference	D/A converter lower side reference voltage (V _{refL}) input terminal				
2	AO2	Analog	0	10bit D/A output (CH2)	0bit D/A output (CH2)				
3	AO3(TEST1)	Analog	0	10bit D/A output (CH3)	test terminal (Note 1)	3			
4	RESET	Digital	ı	Fixes the output voltage to the lo channels.	ixes the output voltage to the lower reference level for all hannels.				
5	AO4(TEST2)	Digital	_	10bit D/A output (CH4)	test terminal (Note 1)	3			
6	AO5 (AO3)	Analog	0	10bit D/A output (CH5) 10bit D/A output (CH3)		3			
7	VDD	Analog	-	D/A converter upper reference vo	4				
8	VCC	-	-	Power supply		-			
9	AO6 (AO4)	Analog	0	10bit D/A output (CH6)	10bit D/A output (CH4)	3			
10	LD	Digital	I		When the LD terminal is set to the high level voltage, 14bit data in the shift register is loaded on to the address decoder and a specified D/A output register.				
11	CLK	Digital	ı	Shift clock input terminal. At the r input value on the DI terminal is i	1				
12	DI	Digital	I	Serial data input terminal. Serial and 10bit data).	1				
13	AO1	Analog	0	10bit D/A output (CH1)	3				
14	GND	-	-	GND terminal	-				


(Note 1) The TEST1 and TEST2 terminals of the BU2508FV should be left open. These terminals are used for testing.

Block Diagrams

BU2507FV

BU2508FV

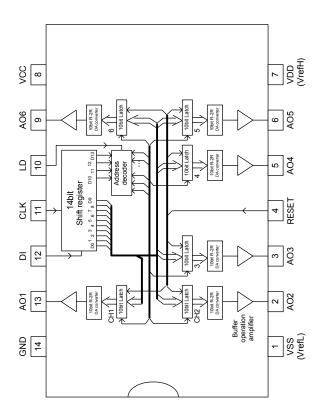

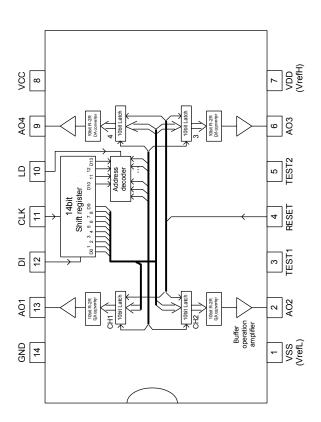

Absolute Maximum Ratings(T_A=25°C)

Parameter	Symbol	Rating	Unit	
Supply voltage	Vcc	6.0	V	
D/A converter upper reference voltage	V _{DD}	6.0	V	
Input voltage	V _{IN}	6.0	V	
Output voltage	V _{OUT}	6.0	V	
Power dissipation	P _D	0.70 ^(Note 2)	W	
Storage temperature range	Tstg	-55 to +125	°C	

(Note 2) Derate by 7.0mW/°C when operating above T_A =25°C (when mounted on ROHM's standard board). Mounted on a FR4 glass epoxy PCB 70mm x 70mm x 1.6mm (copper foil area less than 3%).

Caution: Operating the IC over the absolute maximum ratings may damage the IC. The damage can either be a short circuit between pins or an open circuit between pins and the internal circuitry. Therefore, it is important to consider circuit protection measures, such as adding a fuse, in case the IC is operated over the absolute maximum ratings.

Recommended Operating Conditions

Parameter	Symbol	Limit	Unit
Power supply voltage range	V _{CC}	4.5 to 5.5	V
Operating temperature range	T _{opr}	-30 to +85	°C

Electrical Characteristics (Unless otherwise specified, V_{CC}=5V, V_{refH}=5V, V_{refL}=0V, T_A=25°C)

lectrical Characteristics (Unless otherwi		SC SPCCIII	cu, v	Limit	retH-5 v	v reft_Ov,	20 0)	
	Parameter	Symbol	Min	Тур	Max	Unit	Conditions	
<digital unit=""></digital>	•		IVIIII	ТУР	IVIAX		<u> </u>	
Supply current		I _{CC}	-	0.85	2.8	mA	At CLK=10MHz, I _{AO} =0μA	
Input leak co	urrent	I _{ILK}	-5	-	+5	μA	V _{IN} =0V to V _{CC}	
Input voltage	e L	V _{IL}	-	-	0.8	V	-	
Input voltage	e H	V _{IH}	2.0	-	-	V	-	
Output volta	ge L	V _{OL}	0	-	0.4	٧	I _{OL} =+2.5mA	
Output volta	ge H	V _{OH}	4.6	-	5	V	I _{OH} =-2.5mA	
<analog td="" unit<=""><td>></td><td>1</td><td></td><td></td><td></td><td>I</td><td></td></analog>	>	1				I		
0			-	4.5	7.5	mA	Data condition : at maximum current	
Consumptio	n current	I _{refH}	-	2.0	3.4	mA	(Note 3)	
D/A converte setting range	er upper reference voltage e	V_{refH}	3.0	-	5	V		
D/A converte setting range	er lower reference voltage e	V _{refL}	0	-	1.5	V	-	
Duffer empli	fior output voltage range	.,	0.1	-	4.9	V	I _O =±100μA	
bullet ampli	fier output voltage range	Vo	0.2	-	4.75	V	I _O =±1.0mA	
Buffer amplifier output drive range		lo	-2	-	+2	mA	High side saturation voltage =0.35V (on full scale setting, current sourcing) Low side saturation voltage =0.23V (on zero scale setting, current sinking)	
	Differential non-linearity error	DNL	-1.0	-	+1.0	LSB	V _{refH} =4.796V	
Drocision	Integral non-linearity error	INL	-3.5	-	+3.5	LOD	V _{refL} =0.7V	
Precision	Zero point error	S _{ZERO}	-25	-	+25	mV	V _{CC} =5.5V (4mV/LSB)	
Full scale error		S _{FULL}	-25	-	+25	IIIV	At no load (I_0 =+0mA)	
Buffer amplifier output impedance		Ro	-	5	15	Ω	-	
Pull-up I/O internal resistance value (Note 4)		R _{up}	12.5	25	37.5	kΩ	Input voltage = 0V (The resistance value has input voltage dependence)	


⁽Note 3) Under the condition that CH1 to CH4 are set to maximum current

⁽Note 4) The specification is applied to pin 4 (RESET)

 $\textbf{Timing Characteristics} (\textbf{Unless otherwise specified}, \textbf{V}_{\text{CC}} = 5 \textbf{V}, \textbf{V}_{\text{reft}} = 5 \textbf{V}, \textbf{V}_{\text{reft}} = 6 \textbf{V}, \textbf{T}_{\text{A}} = 25 ^{\circ} \textbf{C})$

			Limits			Conditions
Parameter	Symbol	Min	Тур	Max	Unit	The voltage levels of the measured time points are 20% or 80% of V _{CC} .
Reset L pulse width	t _{RTL}	50	-	-		-
Clock L pulse width	t _{CKL}	50	-	-		-
Clock H pulse width	t _{CKH}	50	-	-		-
Clock rise time	t _{cr}	-	-	50		-
Clock fall time	t _{cf}	-	-	50		-
Data setup time	t _{DCH}	20	-	-	ns	-
Data hold time	t _{CHD}	40	-	-		-
Load setup time	t _{CHL}	50	-	-		-
Load hold time	t _{LDC}	50	-	-		-
Load H pulse width	t _{LDH}	50	-	-		-
D/A output settling time	t _{LDD}	-	7	20	μs	C _L ≤100pF ^(Note 5) , V _O : 0.5V ↔ 4.5V The time interval from the start time to change an output voltage to the time at which the output voltage reaches to its final value within 1/2 LSB.

(Note 5) A capacitor should be placed between the analog output and ground in order to eliminate noise. A capacitance up to 100pF is recommended (including the capacitance of the wire).

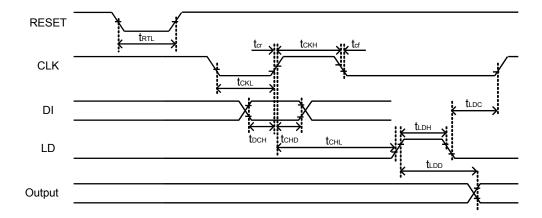

Applicational information

LD input

The LD input is a level trigger signal. When LD=H, an internal shift register value is loaded into a latch. It doesn't have to be cared whether CLK is H or L when LD changes to H. However CLK must not be changed while LD is H. The shift register values pass through the latches if LD=H and CLK is toggled.

Power-on operation

The BU2507FV and the BU2508FV does not have a power-on reset function. Therefore, after power-on, data in the internal registers are unknown. When RESET changes from H to L, all latch outputs turn into L, although the shift registers are not reset.

Pull-down resister


Pin 4 is pulled up internally. If putting the external pull-down resister on it, the recommended value is less than $1k\Omega$.

Truth Table

	L	Н
Pin 4: RESET	Reset	Normal

D/A Converter Variable Output Range Function

BU2507FV and BU2508FV have terminals with which the upper and lower limits of the output voltage range can be changed separately. The upper limit of the output voltage range is set with the V_{refl} terminal and the lower limit is set with V_{refl} terminal. In general usage, the V_{refl} terminal is connected to the VCC terminal and the V_{refl} terminal is connected to the GND terminal. When the power supply voltage on the VCC terminal is 5V, 1LSB is almost 5mV. In other cases, it is possible to achieve a finer resolution. For example, if $V_{refl} = 3.5V$ and $V_{refl} = 1.5V$, then 1LSB is almost 2mV.

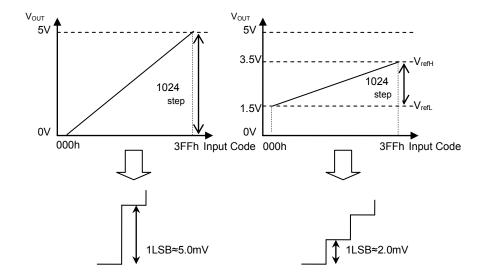


Command Transmission

1) In the case of BU2507FV

(1) Data format [data : LSB first]



(2) Data timing diagram

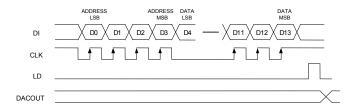

D3	D2	D1	D0	Address selection
0	0	0	0	n/a
0	0	0	1	n/a
0	0	1	0	AO1
0	0	1	1	AO2
0	1	0	0	n/a
0	1	0	1	AO3
0	1	1	0	AO4
0	1	1	1	n/a
1	0	0	0	AO5
1	0	0	1	AO6
1	0	1	0	n/a
1	0	1	1	n/a
1	1	0	0	n/a
1	1	0	1	n/a
1	1	1	0	n/a
1	1	1	1	n/a


D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D/A output (V _{refH} =V _{DD} , V _{refL} =V _{SS})
0	0	0	0	0	0	0	0	0	0	V_{refL}
0	0	0	0	0	0	0	0	0	1	(V _{refH} -V _{refL})/1024×1+V _{refL}
0	0	0	0	0	0	0	0	1	0	(V _{refH} -V _{refL})/1024×2+V _{refL}
0	0	0	0	0	0	0	0	1	1	(V _{refH} -V _{refL})/1024×3+V _{refL}
:	:	:	:	:	:	:	:	:	:	:
1	1	1	1	1	1	1	1	1	0	$(V_{refH}-V_{refL})/1024\times1022+V_{refL}$
1	1	1	1	1	1	1	1	1	1	(V _{refH} -V _{refL})/1024×1023+V _{refL}

2) In the case of BU2508FV

(1) Data format [Data: LSB first]



(2) Data timing diagram

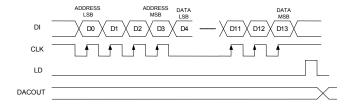

	1			T
D3	D2	D1	D0	Address selection
0	0	0	0	n/a
0	0	0	1	n/a
0	0	1	0	AO1
0	0	1	1	AO2
0	1	0	0	n/a
0	1	0	1	n/a
0	1	1	0	n/a
0	1	1	1	n/a
1	0	0	0	AO3
1	0	0	1	AO4
1	0	1	0	n/a
1	0	1	1	n/a
1	1	0	0	n/a
1	1	0	1	n/a
1	1	1	0	n/a
1	1	1	1	n/a

D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D/A output (V _{refH} =V _{DD} , V _{refL} =V _{SS})
0	0	0	0	0	0	0	0	0	0	V _{refL}
0	0	0	0	0	0	0	0	0	1	(V _{refH} -V _{refL})/1024×1+V _{refL}
0	0	0	0	0	0	0	0	1	0	(V _{refH} -V _{refL})/1024×2+V _{refL}
0	0	0	0	0	0	0	0	1	1	(V _{refH} -V _{refL})/1024×3+V _{refL}
:	:	:	:	:	:	:	:	:	:	:
1	1	1	1	1	1	1	1	1	0	(V _{refH} -V _{refL})/1024×1022+V _{refL}
1	1	1	1	1	1	1	1	1	1	(V _{refH} -V _{refL})/1024×1023+V _{refL}

Typical Performance Curves (reference data)

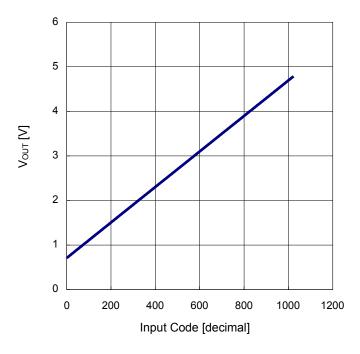


Figure 1. V_{OUT} vs Input Code (Output voltage linearity, T_A =-30°C)

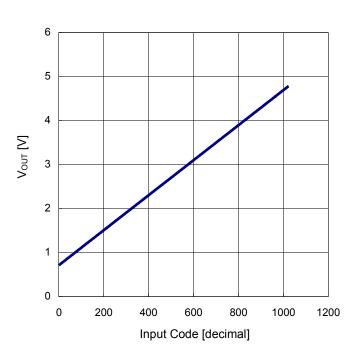


Figure 2. V_{OUT} vs Input Code (Output voltage linearity, T_A =+25°C)

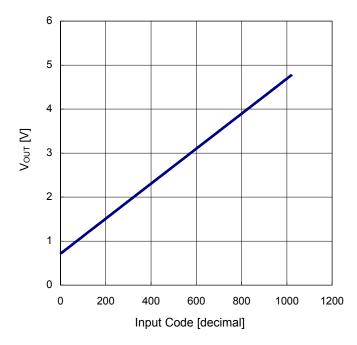
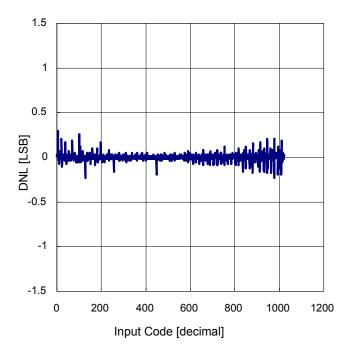


Figure 3. V_{OUT} vs Input Code (Output voltage linearity, T_A=+85°C)

Typical Performance Curves(reference data) - continued



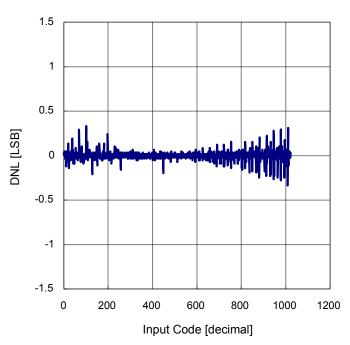



Figure 4. DNL vs Input Code (Differential linearity error, T_A=-30°C)



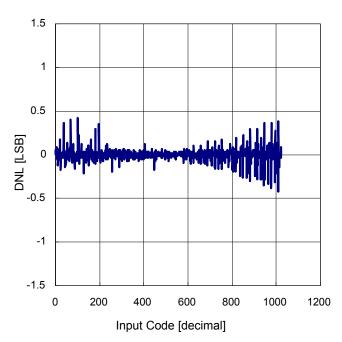


Figure 6. DNL vs Input Code (Differential linearity error, T_A=+85°C)

Typical Performance Curves(reference data) - continued

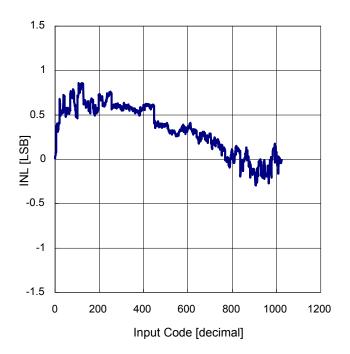


Figure 7. INL vs Input Code (Integral linearity error, T_A=-30°C)

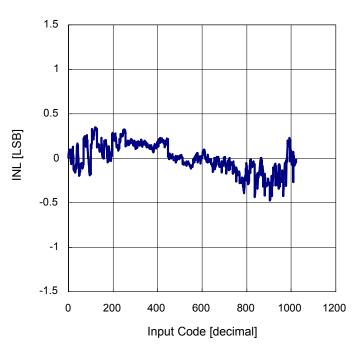


Figure 8. INL vs Input Code (Integral linearity error, T_A =+25°C)

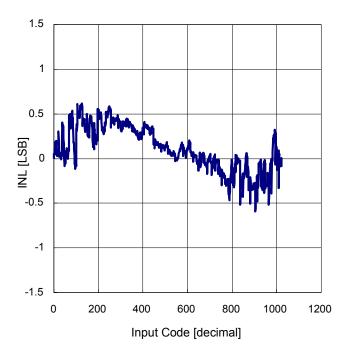


Figure 9. INL vs Input Code (Integral linearity error, T_A=+85°C)

Typical Performance Curves(reference data) - continued



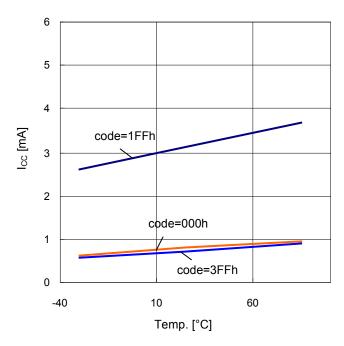


Figure 10. I_{CC} vs Temp (Circuit current temperature characteristic)

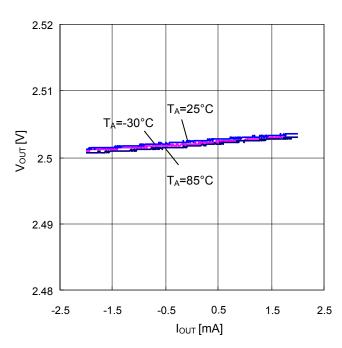

 $\label{eq:figure 11.} Figure 11. \ V_{OUT} \ vs \ I_{OUT} \\ (Output load fluctuation characteristic(input code: 1FFh))$

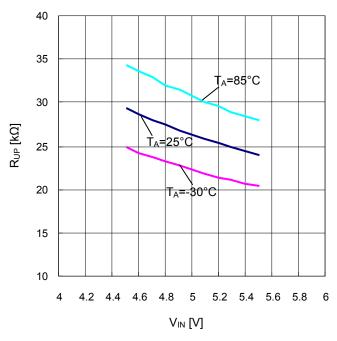

 $Figure\ 12.\ R_{UP}\ vs\ V_{IN} \\ (Built-in\ Pull-up\ resistance\ characteristic)$

Power Dissipation

Power dissipation(total loss) indicates the power that can be consumed by IC at T_A =25°C (normal temperature).IC is heated when it consumed power, and the temperature of IC chip becomes higher than ambient temperature. The temperature that can be accepted by IC chip depends on circuit configuration, manufacturing process, and consumable power is limited. Power dissipation is determined by the temperature allowed in IC chip (maximum junction temperature) and thermal resistance of package (heat dissipation capability). The maximum junction temperature is typically equal to the maximum value in the storage temperature range. Heat generated by consumed power of IC radiates from the mold resin or lead frame of the package. The parameter which indicates this heat dissipation capability(hardness of heat release)is called thermal resistance, represented by the symbol θ_{JA} °C/W. The temperature of IC inside the package can be estimated by this thermal resistance. Figure 13(a) shows the model of thermal resistance of the package. Thermal resistance θ_{JA} , ambient temperature T_{A} , junction temperature T_{Jmax} , and power dissipation P_D can be calculated by the equation below $\theta_{JA} = (T_{Jmax} - T_A) / P_D$ °C /W

Derating curve in Figure 13(b) indicates power that can be consumed by IC with reference to ambient temperature. Power that can be consumed by IC begins to attenuate at certain ambient temperature. This gradient is determined by thermal resistance θ_{JA} . Thermal resistance θ_{JA} depends on chip size, power consumption, package, ambient temperature, package condition, wind velocity, etc even when the same of package is used. Thermal reduction curve indicates a reference value measured at a specified condition. Figure 14(a) show a derating curve for an example of BU2507FV and BU2508FV.


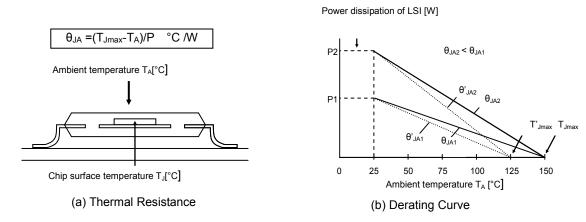


Figure 13. Thermal resistance and derating

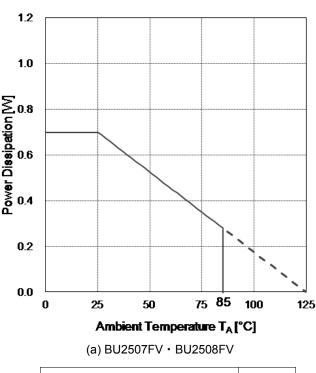


Derating curve UNIT
7.0 mW/°C

When using the IC above T_A =25°C, subtract the value above per °C Mounted on a FR4 glass epoxy board 70mm x 70mm x 1.6mm (cooper foil area less than 3%).

Figure 14. Derating curve

I/O Equivalent Circuit

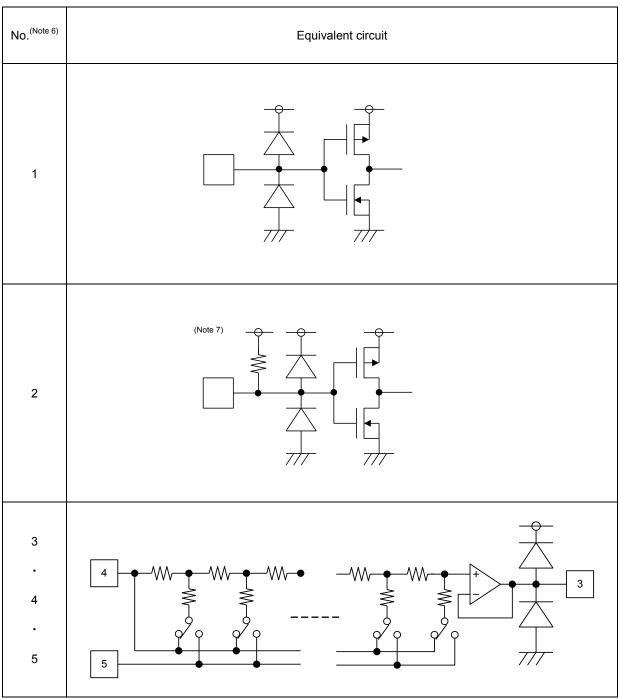

(Note 6) Please refer to the equivalent circuit number in the Pin Descriptions table. (Note 7) 25k Ω at V_{CC} = 5.0V (changes according to the applied voltage)

Operational Notes

1. Reverse Connection of Power Supply

Connecting the power supply in reverse polarity can damage the IC. Take precautions against reverse polarity when connecting the power supply, such as mounting an external diode between the power supply and the IC's power supply pins.

2. Power Supply Lines

Design the PCB layout pattern to provide low impedance supply lines. Separate the ground and supply lines of the digital and analog blocks to prevent noise in the ground and supply lines of the digital block from affecting the analog block. Furthermore, connect a capacitor to ground at all power supply pins. Consider the effect of temperature and aging on the capacitance value when using electrolytic capacitors.

3. Ground Voltage

Ensure that no pins are at a voltage below that of the ground pin at any time, even during transient condition.

4. Ground Wiring Pattern

When using both small-signal and large-current ground traces, the two ground traces should be routed separately but connected to a single ground at the reference point of the application board to avoid fluctuations in the small-signal ground caused by large currents. Also ensure that the ground traces of external components do not cause variations on the ground voltage. The ground lines must be as short and thick as possible to reduce line impedance.

5. Thermal Consideration

Should by any chance the power dissipation rating be exceeded the rise in temperature of the chip may result in deterioration of the properties of the chip. In case of exceeding this absolute maximum rating, increase the board size and copper area to prevent exceeding the Pd rating.

6. Recommended Operating Conditions

These conditions represent a range within which the expected characteristics of the IC can be approximately obtained. The electrical characteristics are guaranteed under the conditions of each parameter.

7. Inrush Current

When power is first supplied to the IC, it is possible that the internal logic may be unstable and inrush current may flow instantaneously due to the internal powering sequence and delays, especially if the IC has more than one power supply. Therefore, give special consideration to power coupling capacitance, power wiring, width of ground wiring, and routing of connections.

8. Operation Under Strong Electromagnetic Field

Operating the IC in the presence of a strong electromagnetic field may cause the IC to malfunction.

9. Testing on Application Boards

When testing the IC on an application board, connecting a capacitor directly to a low-impedance output pin may subject the IC to stress. Always discharge capacitors completely after each process or step. The IC's power supply should always be turned off completely before connecting or removing it from the test setup during the inspection process. To prevent damage from static discharge, ground the IC during assembly and use similar precautions during transport and storage.

10. Inter-pin Short and Mounting Errors

Ensure that the direction and position are correct when mounting the IC on the PCB. Incorrect mounting may result in damaging the IC. Avoid nearby pins being shorted to each other especially to ground, power supply and output pin. Inter-pin shorts could be due to many reasons such as metal particles, water droplets (in very humid environment) and unintentional solder bridge deposited in between pins during assembly to name a few.

11. Unused Input Pins

Input pins of an IC are often connected to the gate of a MOS transistor. The gate has extremely high impedance and extremely low capacitance. If left unconnected, the electric field from the outside can easily charge it. The small charge acquired in this way is enough to produce a significant effect on the conduction through the transistor and cause unexpected operation of the IC. So unless otherwise specified, unused input pins should be connected to the power supply or ground line.

Operational Notes - continued

12. Regarding the Input Pin of the IC

In the construction of this IC, P-N junctions are inevitably formed creating parasitic diodes or transistors. The operation of these parasitic elements can result in mutual interference among circuits, operational faults, or physical damage. Therefore, conditions which cause these parasitic elements to operate, such as applying a voltage to an input pin lower than the ground voltage should be avoided. Furthermore, do not apply a voltage to the input pins when no power supply voltage is applied to the IC. Even if the power supply voltage is applied, make sure that the input pins have voltages within the values specified in the electrical characteristics of this IC.


13. Ceramic Capacitor

When using a ceramic capacitor, determine the dielectric constant considering the change of capacitance with temperature and the decrease in nominal capacitance due to DC bias and others.


14. Area of Safe Operation (ASO)

Operate the IC such that the output voltage, output current, and power dissipation are all within the Area of Safe Operation (ASO).

Ordering Information

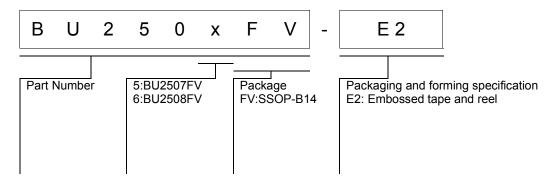

Marking Diagrams

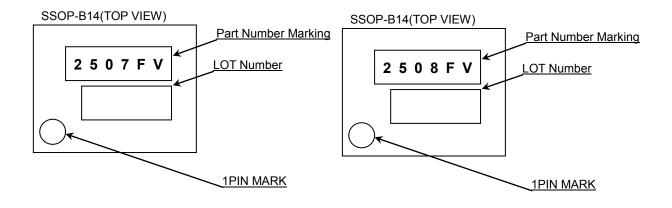

Physical Dimension, Tape and Reel Information Package Name SSOP-B14 5. 0±0. 2 (Max 5. 35 (include. BURR) 4 ± 0 . 9 o. 0. 15 ± 0.1 15 ± 0 . (UNIT:mm) ö 0.65 0. $22\pm0.\ 1 \oplus 0.\ 08 \%$ PKG:SSOP-B14 Drawing No. EX152-5002 0. 1 <Tape and Reel information> Embossed carrier tape Tape Quantity 2500pcs Direction The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand of feed Direction of feed 1pin *Order quantity needs to be multiple of the minimum quantity

Revision History

Date	Revision	Changes
11.Dec.2015	001	New Release

Notice

Precaution on using ROHM Products

Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASSⅢ	CLACCIII	CLASSIIb	CI VCCIII
CLASSIV	CLASSⅢ	CLASSⅢ	CLASSⅢ

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- 9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- 2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

QR code printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PGA-E Rev.001

General Precaution

- 1. Before you use our Products, you are requested to care fully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this docume nt is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sale s representative.
- 3. The information contained in this doc ument is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Notice – WE © 2015 ROHM Co., Ltd. All rights reserved. Rev.001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor: BU2507FV-E2 BU2508FV-E2

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9