Catalog: 1654001



#### **Slim Power Entry Module Family with Multiple Options**


### **M** Series




UL Recognized CSA Certified VDE Approved



#### **Ordering Information**

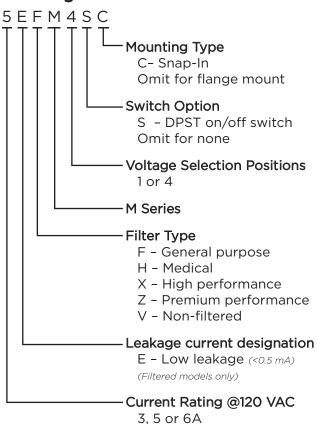

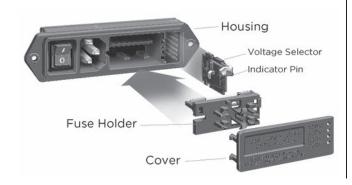

#### **M Series**

- Family of slim power entry modules that consume minimal depth behind panel
- Four compact modules each provide a different option combination
- Available non-filtered or with one of four filter circuits designed to meet a wide variety of applications
- Optional voltage selector configured for either 2 or 4 voltage selection
- Optional DPST on/off switch
- Included fuseholder accepts either single 3AG fuse or dual metric fuses
- Snap-in or flange mounting styles

#### **Filter Types**

**H Models** provide a basic performance dual element circuit EMI filter with minimal leakage current, suitable for medical applications, with attenuation similar to the EAH Series power inlet filter.

**F Models** provide a basic performance dual element circuit EMI filter, with attenuation similar to the EEA Series Power Inlet Filter.

X Models provide a high performance three element differential circuit filter, with extended EMI attenuation similar to the X Series chassis filter, suitable for bringing most digital equipment (including switching power supplies) into compliance with FCC Part 15J, Class B conducted emissions limits.

Z Models provide a premium performance three element differential circuit filter, with enhanced EMI low frequency attenuation similar to the P Series Z models, suitable for bringing most digital equipment (including switching power supplies) into compliance with EN55022 Level B as well as FCC Part 15J. For minimum panel footprint, see the P series on page 192.



#### Slim Power Entry Module Family with Multiple Options (continued)

### **M** Series

#### **Specifications**

Maximum leakage current each Line to Ground:

 HM
 FM
 XM/ZM

 @ 120 VAC 60 Hz:
 2 μA
 .25 mA
 .30 mA

 @ 250 VAC 50 Hz:
 5 μA
 .50 mA
 .50 mA

Hipot rating (one minute):

Line to Ground: 2250 VDC
Line to Line: 1450 VDC
Line to Load (switch off) non-filtered: 2500 VAC

Rated Voltage (max.): 250VAC

Operating Frequency: 50/60 Hz

Rated Current @ 120 VAC: 3 to 6A

Rated Current @ 250 VAC:

3A models:

5A models:

6A Switched models:

Required Fuse(s): Reversible fuseholder accepts

one .25 x 1.25" (not included) or two 5 x 20mm (not included)

2A

4A

5A

Switch: DPS1

100,000 operations at 70A max. inrush


#### **Available Part Numbers**

6A non-switched models:


	Noi	n-Filtered I	Models						
Voltage Selections	Flange	Mount	Snap-In						
1	6VM1	6VM1S	6VM1C	6VM1SC					
2	6VM2	6VM2S							
4	6VM4	6VM4S	6VM4C	6VM4SC					
General Purpose Filters									
1	5EFM1	5EFM1S	5EFM1SC						
4	5EFM4	5EFM4S	5EFM4C	5EFM4SC					
Medical Filters									
1	5EHM1	5EHM1S							
4	5EHM4	5EHM4S							
	High Performance - FCC-B								
1		3EXM1S							
4	3EXM4	3EXM4S							
Premium Performance - EN55022-B									
1		3EZM1S							
4	3EZM4	3EZM4S							

#### **Accessories**

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



**MA100**: Power interconnect assembly For voltage select models. 8.5" wire leads



MA101: Plug only


MA102: Strip of 100 pins for use with MA101 MA104: Individual pins for use with MA101

MA302: Two Voltage Selection Card

Marked 120V/240V. One card comes standard with every 2 voltage M series module

MA304: Four Voltage Selection Card

Marked 100V/120V/230V/240V. One card comes standard with every 4 voltage M series module



MA400: Medical safety bracket assembly
Prevents inadvertent removal of fuse(s)



MA401: Bracket only MA402: Standoff only

Catalog: 1654001

Issue Date: 06.2011




#### Slim Power Entry Module Family with Multiple Options (continued)

### **M** Series

#### Accessories (continued)

MA601 - 604: Insulating Boot


Plastic shroud for back of M series to prevent inadvertent access to connections

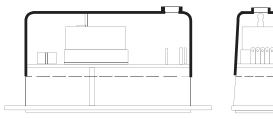


MA601: Fits M4S versions MA602: Fits M1S versions MA603: Fits M4 versions MA604: First M1 versions

#### **Voltage Selection**


- Open cover, using small blade screwdriver or similar tool (see illustration on right)
- 2. Set aside cover/fuse block assembly
- 3. Pull voltage selector card straight out of housing, using indicator pin
- 4. Orient selector card so that desired voltage is readable at the bottom
- 5. Orient indicator pin to point up when desired voltage is readable at bottom (note that when indicator pin is fixed, successive voltages are selected by rotating the card 90° clockwise)
- 6. Insert voltage selector card into housing, printed side of card facing forward toward IEC connector and edge containing the desired voltage first
- 7. Replace cover, and verify that indicator pin shows the desired voltage




#### **Fuse Installation Instructions**

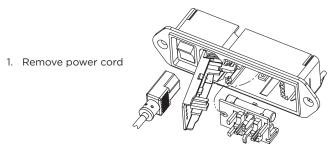


2. Insert a pocket screwdriver at point "X" as shown



Gently lift the entire door UP approximately 1/4" (minimum) Once lifted, the door will pivot on it's hinges to expose the fuse holder




 When the fuse holder is installed in the single fuse position, apply the screwdriver as shown and gently lift up Use screwdriver as shown, do not use fingers





When the fuse holder is installed in the dual fuse position, it will normally release as soon as the door is opened

- 5. Install one (1) AG fuse or two (2) metric fuses (see below)
- 6. Replace fuse holder into housing
- 7. Swing and push to snap door back in place

#### **Fuse Options**







Metric dual fuse installation


Install fuses on one side only, do not install both AG and metric fuses at the same time




#### Slim Power Entry Module Family with Multiple Options (continued)

## **M** Series


# Electrical Schematics Non-Filtered Models VM1

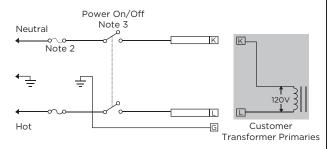

#### VM<sub>2</sub>

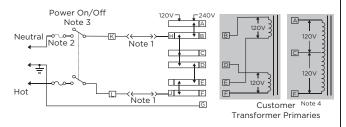

#### VM4

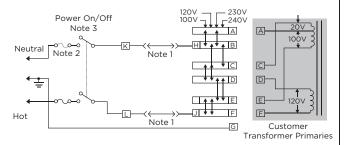

Note 1: Jumper required if no input filter is used

Note 2: Provision for dual Metric style fusing


Note 3: On/off switch present only in "S" suffix models

Note 4: When using a center-tapped transformer, the C-F winding should be the


low voltage (high current) winding and must be capable of handling the full

primary current in the 120V position


## Filtered Models FM1 & HM1

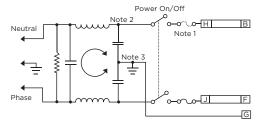


#### **FM4 & HM4**

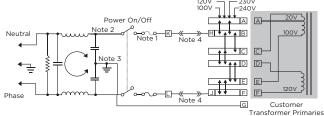

#### **XM1 & ZM1**

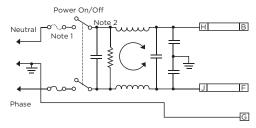

#### **XM4 & ZM4**

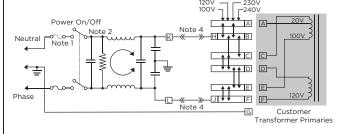

Note 1: Provision for dual Metric style fusing

Note 2: On/off switch present only in "S" suffix models

Note 3: Line to ground capacitor not present on HM models

Note 4: Models HM4, FM4, XM4 and ZM4 have added terminals K and L.


External switch or jumper must be placed from K to H and L to J



#### Slim Power Entry Module Family with Multiple Options (continued)

### **M** Series

#### **Case Styles - Non-filtered Models** 6VM1

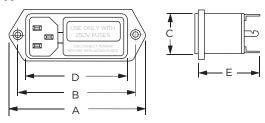

Typical Dimensions:


Line Inlet (1): Backplate Terminals:

Mounting holes (2):

IEC 60320-1 C14 .110 [2.79]

.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw


#### 6VM1C

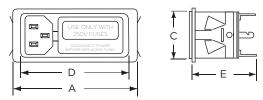

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14 Backplate Terminals: .110 [2.79]

#### **6VM1S**

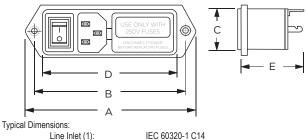


Line Inlet (1): Backplate Terminals:

Mounting holes (2):

.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw


#### 6VM1SC

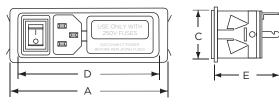

Typical Dimensions:

IEC 60320-1 C14 Line Inlet (1): Backplate Terminals: .110 [2.79]

#### 6VM2 & 6VM4

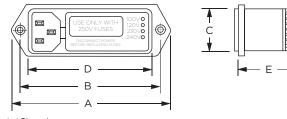

Typical Dimensions:

Line Inlet (1): Backplate Terminals: IEC 60320-1 C14 .110 [2.79]


Mounting holes (2):

.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

Catalog: 1654001

Issue Date: 06.2011


#### 6VM4C

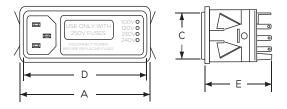

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14 Backplate Terminals: .110 [2.79]

#### **6VM2S & 6VM4S**




Typical Dimensions:

Line Inlet (1): Backplate Terminals: IEC 60320-1 C14 .110 [2.79]

Mounting holes (2):

.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

#### 6VM4SC





Typical Dimensions:


IEC 60320-1 C14 Line Inlet (1): Backplate Terminals: .110 [2.79]



#### **Slim Power Entry Module Family with Multiple Options** (continued)

## **M** Series

## Case Styles - Filtered Models 3EXM1S & 3EZM1S

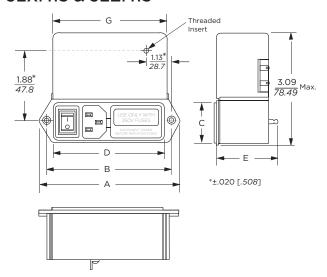


Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
Backplate Terminals: .110 [2.79]
Threaded insert: 6-32 x .25

Mounting holes (2): .155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw


#### 3EXM4 & 3EZM4

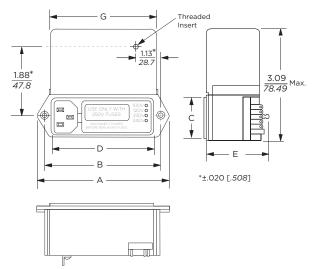

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
Backplate Terminals: .110 [2.79]
Threaded insert: 6-32 x .25

#### **3EXM4S & 3EZM4S**

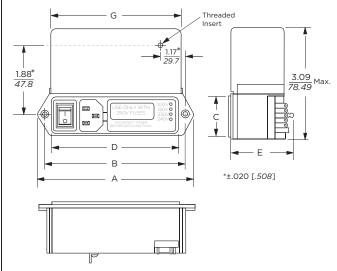

Typical Dimensions:


 Line Inlet (1):
 IEC 60320-1 C14

 Backplate Terminals:
 .110 [2.79]

 Threaded insert:
 6-32 x .25

Mounting holes (2): .155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

#### 5EHM1 & 5EFM1

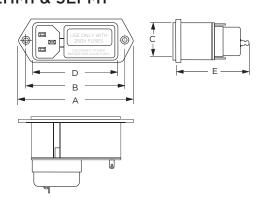

Typical Dimensions:


Line Inlet (1): IEC 60320-1 C14
Backplate Terminals: .110 [2.79]

Mounting holes (2): .155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

#### Slim Power Entry Module Family with Multiple Options (continued)

## **M** Series


## Case Styles - Filtered Models (continued) 5EFM1C



Typical Dimensions:

Line Inlet (1): Backplate Terminals: IEC 60320-1 C14 .110 [2.79]

#### **5EHM1S & 5EFM1S**

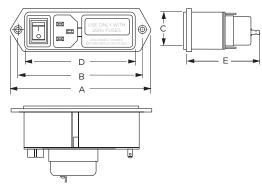


Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
Backplate Terminals: .110 [2.79]

Mounting holes (2):

.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw


#### 5EFM1SC



Typical Dimensions:

Line Inlet (1): Backplate Terminals: IEC 60320-1 C14 .110 [2.79]

#### **5EHM4 & 5EFM4**

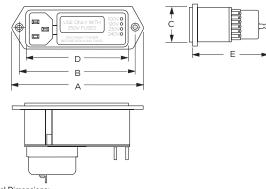

Typical Dimensions:

Line Inlet (1):


IEC 60320-1 C14 .110 [2.79]

Backplate Terminals: Mounting holes (2):

.155 [3.94] Dia. with .279 [7.08] Dia. x 82°

countersink for #6 flathead screw


#### 5EFM4C

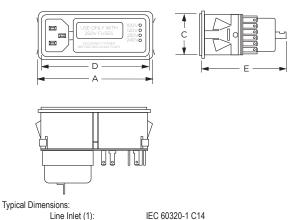

.110 [2.79]

#### **5EHM4S & 5EFM4S**

Backplate Terminals:

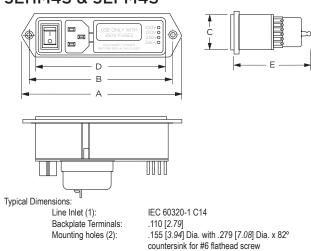





#### Slim Power Entry Module Family with Multiple Options (continued)

## **M** Series

## **Case Styles - Filtered Models** (continued) **5EFM4SC**

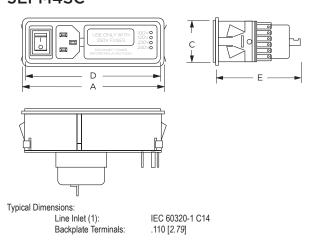

#### **Recommended Panel Cutouts**

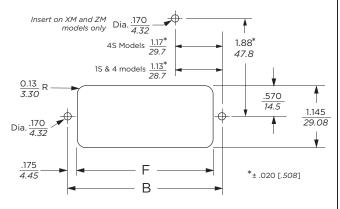

Note: XM and ZM models allow back mount only
FM and HM models allow front or back mounting
Mounting holes on flange mount models only
Snap-In models allow front mounting only
Snap-In models panel thickness: .06 - .09 [1.53 - 2.29]

#### **Case Dimensions**

Part No.	Α	В	С	D	Ε	F	G
Tart IVO.	(max.)	(max.)	(max.)	± .015 ± .38	(max.)	(ref.)	(ref.)
6VM1	3.39	2.84	1.14	2.44	1.45	2.5	_
OVIVII	86.1	72.1	29.0	62.0	36.8	63.5	
6VM1C	2.56	_	1.14	2.44	1.45	2.5	_
OVIMIC	86.1		29.0         62.0         36.8         63.5           1.14         2.44         1.45         2.5           29.0         62.0         36.8         63.2           1.14         3.22         1.45         3.28           29.0         81.8         36.8         83.3           1.14         3.27         1.45         3.27           29.0         83.1         36.8         83.1           1.14         2.92         1.45         2.98           29.0         74.2         36.8         75.7           29.0         74.2         36.8         75.4           1.14         3.72         1.45         3.76           29.0         94.5         36.8         95.5           1.14         3.7         1.45         3.75           29.0         94.0         36.8         95.3           1.14         3.2         1.72         3.28           29.0         81.8         43.7         83.8           1.14         2.92         1.72         3.28           29.0         74.2         43.7         75.7           1.14         3.72         1.72         3.76				
6VM1S	4.17	3.62	1.14	3.22	1.45	3.28	_
0 11113	105.9	91.9		81.8	36.8	83.3	
6VM1SC	3.34	_	1.14		1.45	3.27	_
OVINISC	84.8		29.0	83.1	36.8	83.1	
6VM2	3.88	3.32	1.14	2.92	1.45	2.98	_
6VM4	98.6	84.3	29.0	74.2	36.8	75.7	
6\/M4C	3.04	_	1.14	2.92	1.45	2.97	_
6VM4C	98.6	_	29.0	74.2	36.8	75.4	_
6VM2S	4.65	4.1	1.14	3.72	1.45	3.76	
6VM4S	118.1	104.1	29.0	94.5	36.8	95.5	-
0.0.1.0.0	3.82		1.14	3.7	1.45	3.75	
6VM4SC	97.0	-					-
3EXM1S	4.17	3.62					3.3
3EZM1S	105.9	91.9	29.0	81.8	43.7	83.8	83.8
3EXM4	3.88	3.32					2.99
3EZM4	98.6	84.3	29.0	74.2	43.7	75.7	75.9
3EXM4S	4.65	4.1					3.8
3EZM4S	118.1	104.1					96.8
5EHM1	3.39	2.84					
5EFM1	86.1	72.1	29.0	62.0	55.6	63.5	-
	2.56		1.14	2.44	2.19	2.49	
5EFM1C	65.0	-	29.0	62.0	55.6	63.2	-
5EHM1S	4.17	3.62	1.14	3.22	2.19	3.28	
5EFM1S	105.9	91.9	29.0	81.8	55.6	83.3	-
	3.34	00	1.14	3.27	2.19	3.27	
5EFM1SC	84.8	-	29.0	83.1	55.6	83.1	-
5EHM4	3.88	3.32	1.14	2.92	2.19	2.98	
5EFM4	98.6	84.3	29.0	74.2	55.6	75.7	-
	3.04	07.0	1.14	2.92	2.19	2.97	
5EFM4C	77.2	-	29.0	74.2	55.6	74.4	-
5EHM4S	4.65	4.1	1.14	3.7	2.19	3.76	
SEFM4S							-
JLI 11143	118.1	104.1	29.0	94.0	55.6	95.5	
5EFM4SC	3.82	-	1.14	3.7	2.19	3.75	-
	97.0		29.0	94.0	55.6	95.3	




#### Slim Power Entry Module Family with Multiple Options (continued)


## **M** Series


#### **Performance Data**


#### **Typical Insertion Loss**

Measured in closed 50 Ohm system









Catalog: 1654001

Issue Date: 06.2011

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

#### **Minimum Insertion Loss**

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz							
Part No.	.01	.05	.15	.5	1	5	10	30
5EHM Models	-	-	14	18	19	22	22	17
5EFM Models	-	-	14	21	26	40	45	40
3EXM Models	2	13	23	40	46	44	44	44
3EZM Models	15	29	39	46	43	40	40	40

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz									
Part No.	.02	.03	.05	.07	.15	.5	1	5	10	30
3EXM Models	-	-	-	5	34	62	68	60	50	40
3EZM Models	5	13	28	37	55	75	75	62	54	44

#### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

## Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9