

Datasheet



CW Series LTE Band 8 Single-Band Connectorized Monopole Antenna

CW Series antennas are rugged, low-cost and easy to install. The single frequency band of CW antennas makes the job of antenna selection simple, with better performance in the target frequency band than in multiband antennas and rejection of signals from unwanted frequencies.

The CW LTE Band 8 antenna targets 870 MHz to 960 MHz with excellent VSWR, gain and efficiency for cellular IoT (LTE-M, NB-IoT) and traditional LTE Band 8, as well as GSM and UMTS applications.

This rugged 1/4-wave monopole antenna may be used with plastic or metal enclosures and supports weather-resistant applications.



Features

- Outperforms similar multiband solutions
- Durable, flexible main shaft
- Wide bandwidth
- Weather resistant for IP-rated applications¹
- O-ring compatible base
- Compatible with plastic² and metal enclosures
- High gain (1.0 dBi at 870 MHz, 0.4 dBi at 920 MHz and 0.4 dBi at 960 MHz)
- High efficiency (60% at 870 MHz, 64% at 920 MHz and 49% at 960 MHz)

Applications

- LTE Band 8
- LTE-M (Cat-M1) and NB-IoT cellular IoT
- GSM: P-GSM-900, E-GSM-900, R-GSM-900, T-GSM-900
- UMTS: E-GSM
- Sensing and remote monitoring
- Hand-held devices
- Internet of Things (IoT) devices
- Low-power, wide-area (LPWA) networks

Ordering Information

Part Number	Description
ANT-B8-CW-QW-SMA	LTE Band 8 CW Series antenna with SMA plug (male pin)

Available from Linx Technologies and select distributors and representatives.

Notes

- 1 Use of an O-ring is recommended, IP-ratings cannot be guaranteed
- 2 With appropriate counterpoise

Electrical Specifications

	ANT-B8-CW-QW-SMA
Frequency Range	870 MHz to 960 MHz
Center Frequency	920 MHz
VSWR (max)	2.0
Peak Gain (dBi)	1.6
Polarization	Linear
Radiation	Omnidirectional
Max Power	10 W
Wavelength	1/4-wave
Impedance	50 Ω
Connection	SMA plug (male pin)
Height	80.5 mm (3.17 in)
Weight	12.6 g (0.44 oz)
Operating Temperature	-40 °C to +90 °C

Electrical specifications and plots measured with a 102 mm x 102 mm (4 in x 4 in) reference ground plane.

VSWR

Figure 1 and Figure 2 provide the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

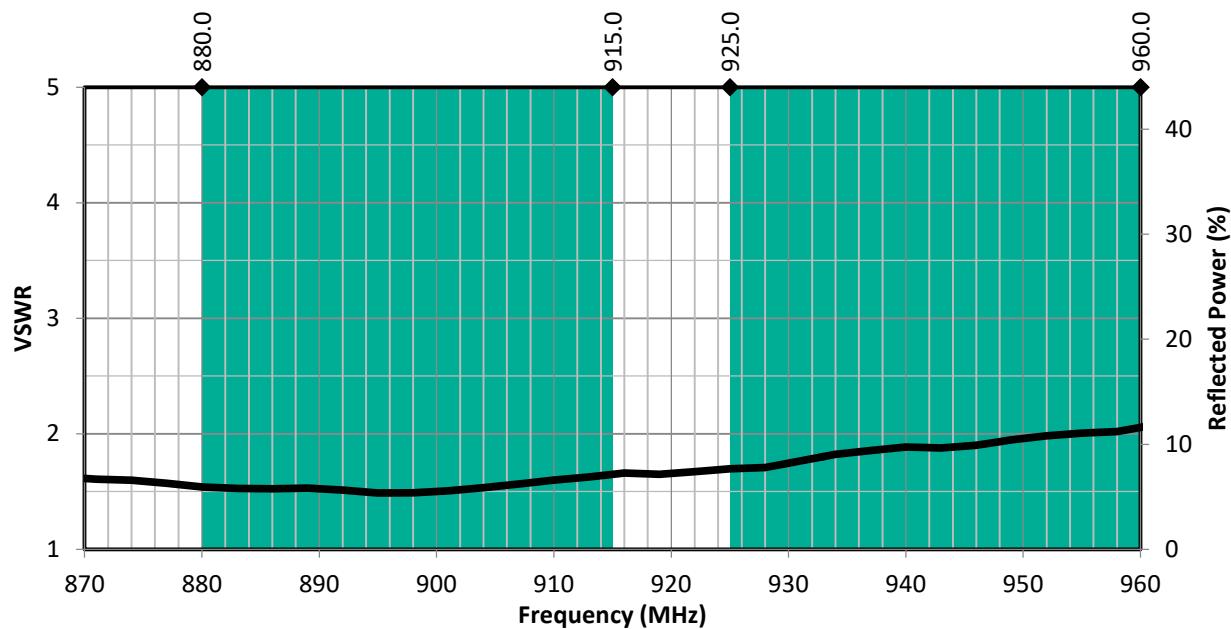


Figure 1. CW LTE Band 8 Antenna VSWR with Band 8 Uplink/Downlink Highlights

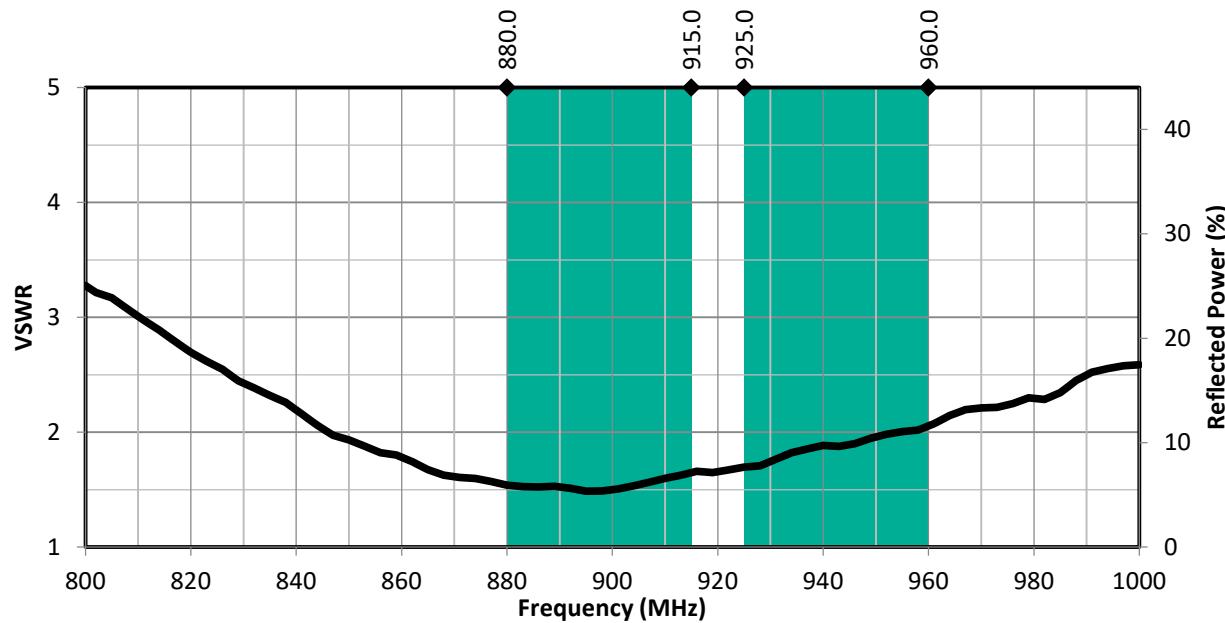


Figure 2. CW LTE Band 8 Antenna Full Bandwidth VSWR

Return Loss

Return loss (Figure 3), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

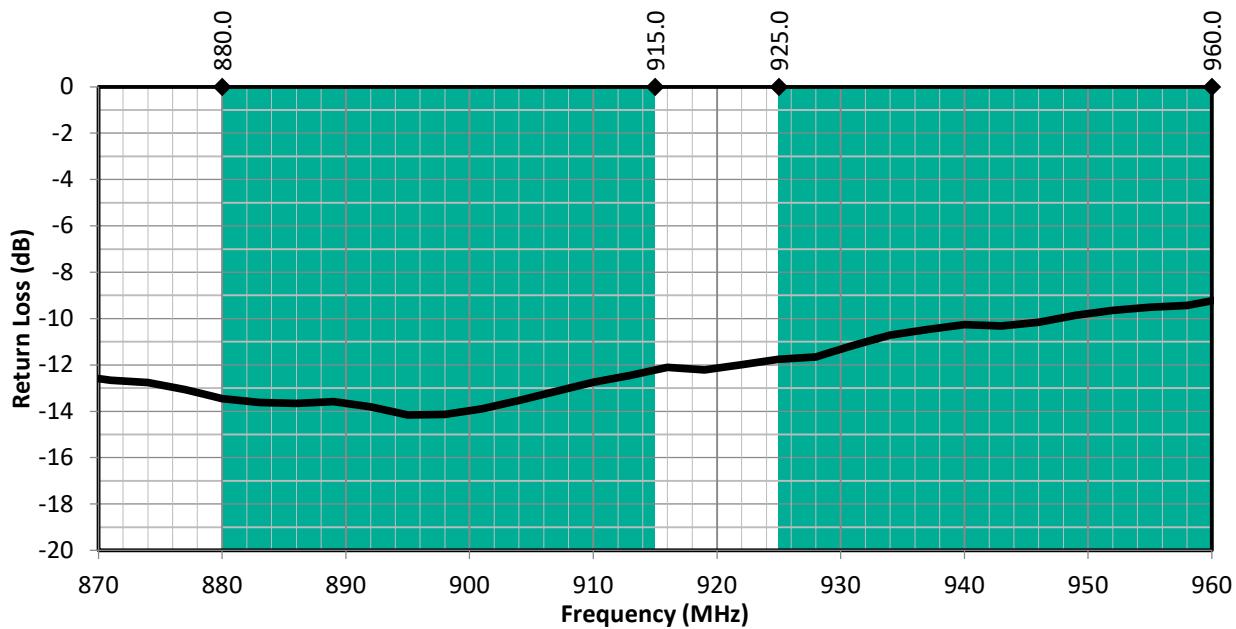


Figure 3. CW LTE Band 8 Antenna Return Loss with Band 8 Uplink/Downlink Highlights

Peak Gain

The peak gain across the antenna bandwidth is shown in Figure 4. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance, at a given frequency, but does not consider any directionality in the gain pattern.

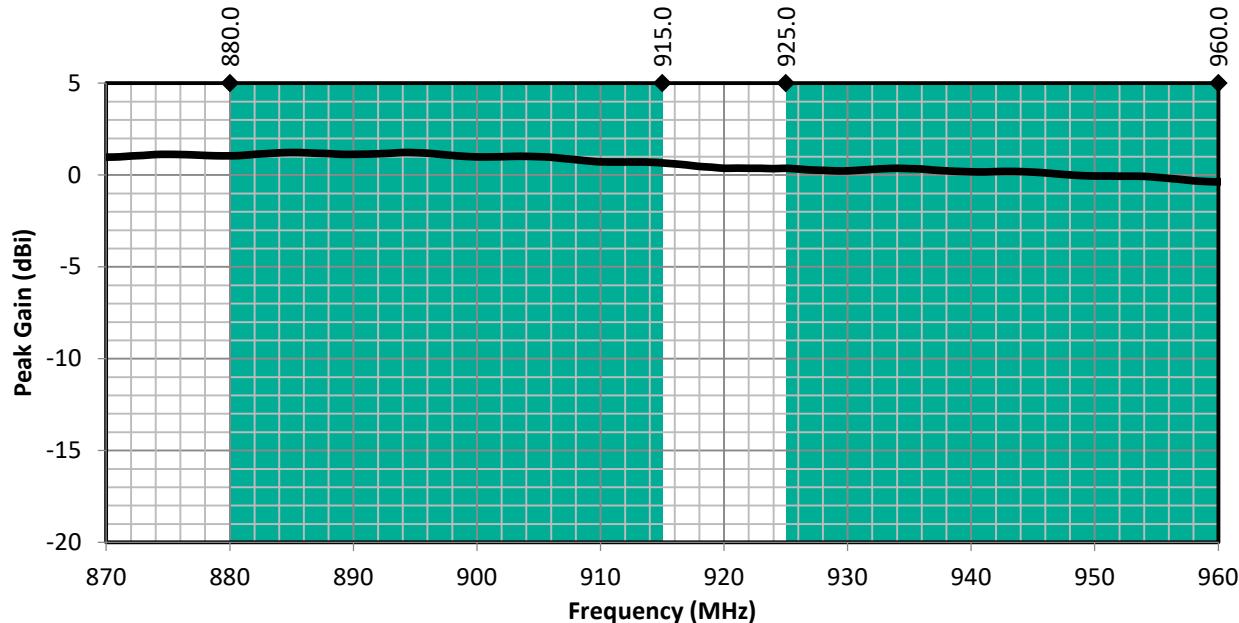


Figure 4. CW LTE Band 8 Antenna Peak Gain with Band 8 Uplink/Downlink Highlights

Average Gain

Average gain (Figure 5), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

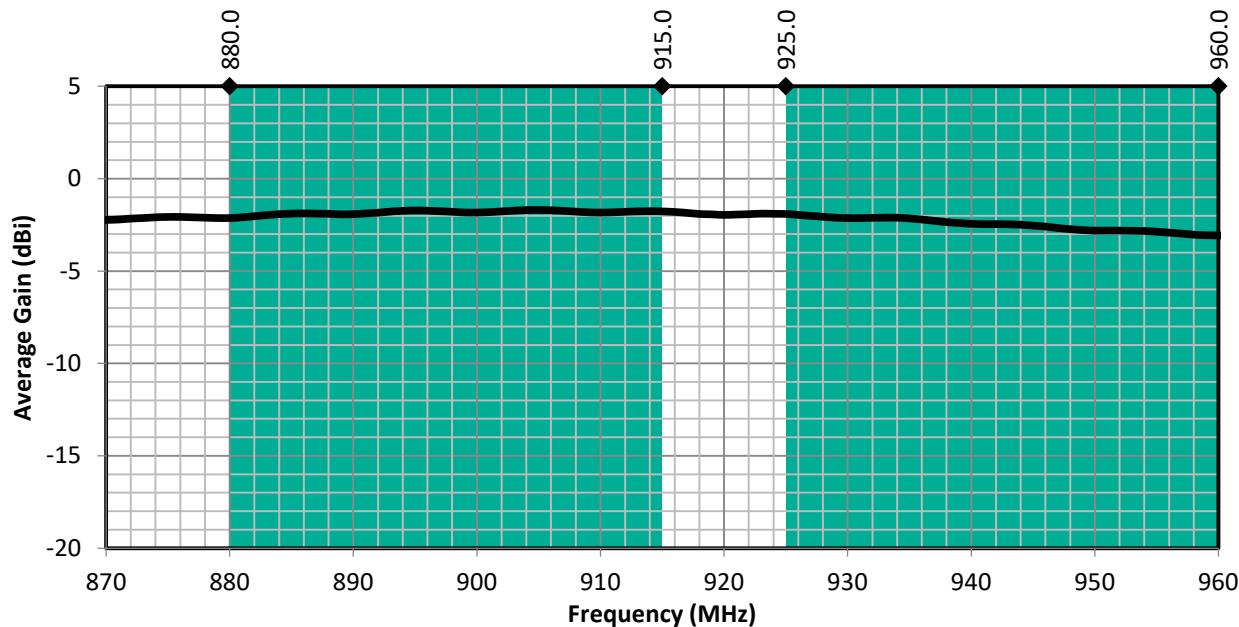


Figure 5. CW LTE Band 8 Antenna Average Gain with Band 8 Uplink/Downlink Highlights

Radiation Efficiency

Radiation efficiency (Figure 6), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

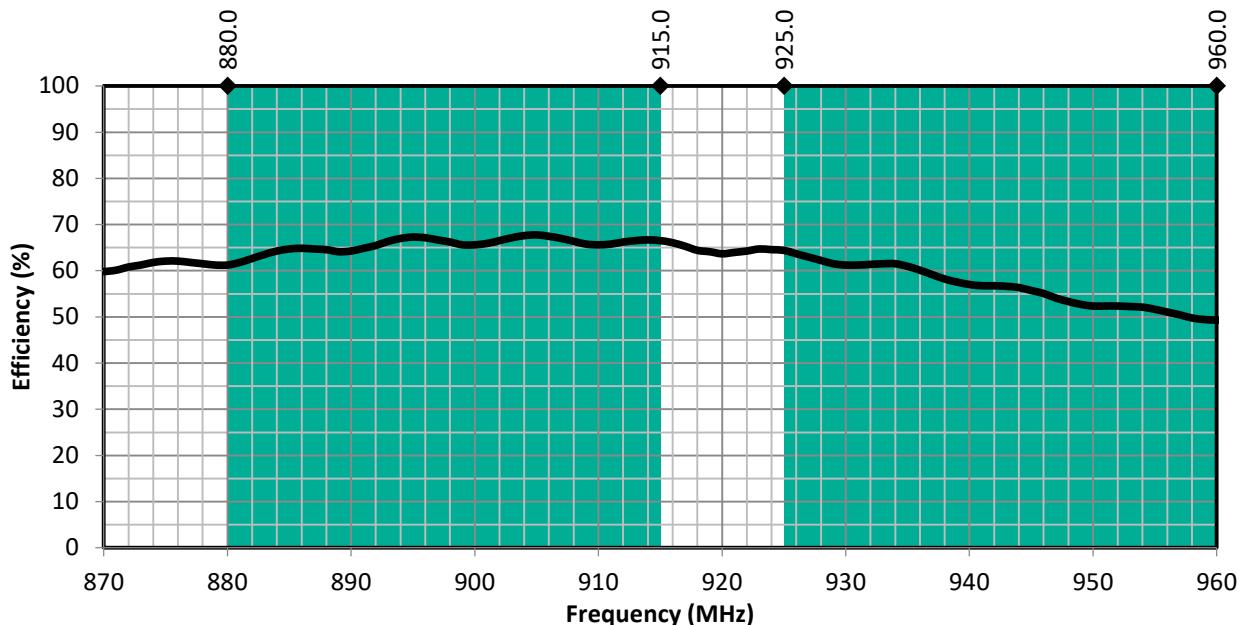


Figure 6. CW LTE Band 8 Antenna Radiation Efficiency with Band 8 Uplink/Downlink Highlights

Product Dimensions

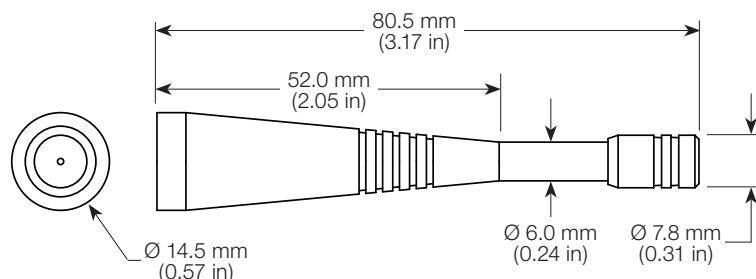


Figure 7. CW LTE Band 8 Antenna Dimensions

Counterpoise

Quarter-wave or monopole antennas require an associated ground plane counterpoise for proper operation. The size and location of the ground plane relative to the antenna will affect the overall performance of the antenna in the final design. When used in conjunction with a ground plane smaller than that used to tune the antenna, the center frequency typically will shift higher in frequency and the bandwidth will decrease. The proximity of other circuit elements and packaging near the antenna will also affect the final performance.

For further discussion and guidance on the importance of the ground plane counterpoise, please refer to Linx Application Note, AN-00501: *Understanding Antenna Specifications and Operation*.

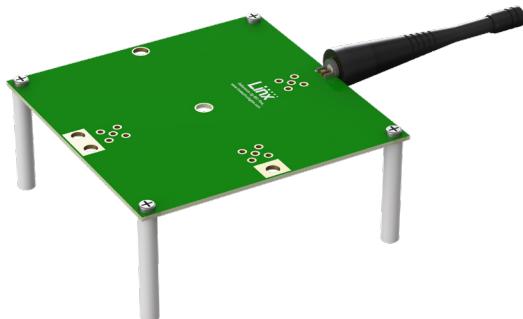


Figure 8. CW LTE Band 8 Antenna Shown On Edge of Evaluation Board

Radiation Patterns

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns (Figure 9), are shown using polar plots covering 360 degrees. The antenna graphic above the plots provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.



880 MHz to 960 MHz (916 MHz)

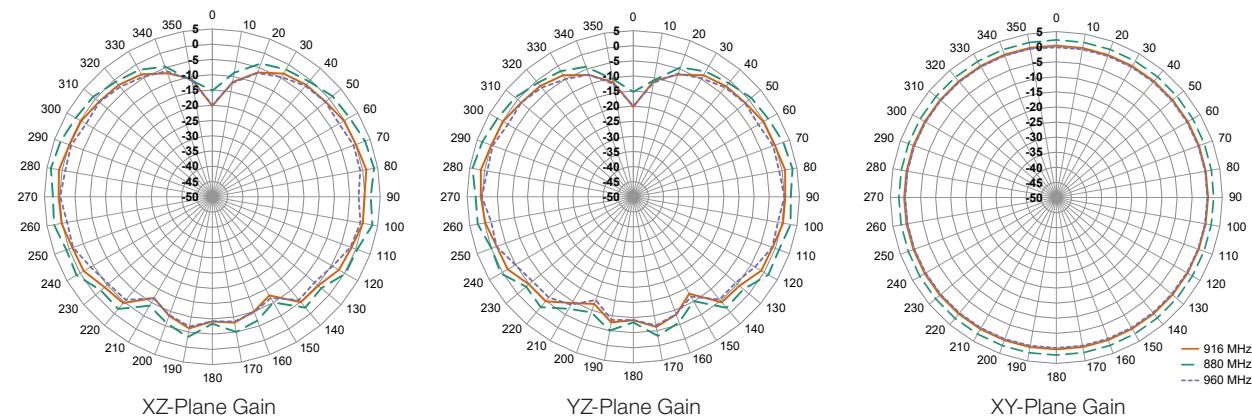


Figure 9. Radiation Patterns for CW LTE Band 8 Antenna

Website: <http://linxtechnologies.com>
Linx Offices: 159 Ort Lane, Merlin, OR, US 97532
Phone: +1 (541) 471-6256
E-MAIL: info@linxtechnologies.com

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies

All Rights Reserved

Doc # PB20023-07ANT Replaces (PB19168-07ANT)



Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9