

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor

## Applications


- Military radar
- Civilian radar
- Professional and military radio communications
- Test instrumentation
- Wideband or narrowband amplifiers
- Jammers



## Product Features

- Frequency: DC to 6 GHz
- Output Power (P<sub>3dB</sub>): 30 W at 6 GHz
- Linear Gain: >14 dB at 6 GHz
- Operating Voltage: 28 V
- Low thermal resistance package

## Functional Block Diagram

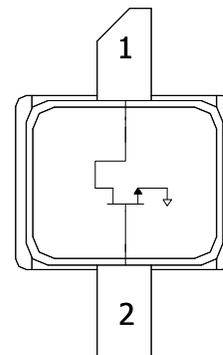

## General Description

The TriQuint T1G6003028-FS is a 30 W (P<sub>3dB</sub>) discrete GaN on SiC HEMT which operates from DC to 6 GHz. The device is constructed with TriQuint's proven 0.25  $\mu$ m process, which features advanced field plate techniques to optimize power and efficiency at high drain bias operating conditions. This optimization can potentially lower system costs in terms of fewer amplifier line-ups and lower thermal management costs.

Lead-free and RoHS compliant

Evaluation Boards are available upon request.

## Pin Configuration

Pin #	Symbol
1	Vd/RF OUT
2	Vg/RF IN
Flange	Source

## Ordering Information

Material No.	Part No.	Description	ECCN
1080206	T1G6003028-FS	Packaged part: Flangeless	EAR99
1093989	T1G6003028-FS- EVB1	5.4-5.9 GHz Eval. Board	EAR99

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor



## Specifications

### Absolute Maximum Ratings

Parameter	Rating
Drain Voltage, Vd	+40 V
Gate Voltage, Vg	-50 to 0 V
Drain to Gate Voltage, Vd – Vg	80 V
Drain Current, Id	2.5 A
Gate Current, Ig	-25 to 25 mA
Power Dissipation, P <sub>diss</sub> (CW)	30 W
Power Dissipation, P <sub>diss</sub> (Pulse)	40 W
RF Input Power, CW, T = 25°C at 5.6 GHz	33.15 dBm
Channel Temperature, T <sub>ch</sub>	205 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating Conditions

Parameter	Min	Typical	Max	Units
Vd		28	30	V
Idq		200		mA
Id (Peak Current)		2500		mA
Vg		-3.6		V
Channel Temperature, T <sub>ch</sub>			205	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

## Electrical Specifications

Recommended operating conditions apply unless otherwise specified: T<sub>A</sub> = 25 °C, Vd = 28 V, Idq = 200 mA, Vg = -3.6 V

### RF Characteristics

Characteristics	Symbol	Min	Typ	Max	Units
<b>Load Pull Performance at 3.0 GHz (V<sub>DS</sub> = 28 V, I<sub>DQ</sub> = 200 mA; Pulse: 100µs, 20%)</b>					
Linear Gain	G <sub>LIN</sub>		15.2		dB
Output Power at 3 dB Gain Compression	P <sub>3dB</sub>		33.5		W
Drain Efficiency at 3 dB Gain Compression	DE <sub>3dB</sub>		68.2		%
Power-Added Efficiency at 3 dB Gain Compression	PAE <sub>3dB</sub>		64.1		%
Gain at 3 dB Compression	G <sub>3dB</sub>		12.2		dB
<b>Load Pull Performance at 6.0 GHz (V<sub>DS</sub> = 28 V, I<sub>DQ</sub> = 200 mA; Pulse: 100µs, 20%)</b>					
Linear Gain	G <sub>LIN</sub>		14.5		dB
Output Power at 3 dB Gain Compression	P <sub>3dB</sub>		33.0		W
Drain Efficiency at 3 dB Gain Compression	DE <sub>3dB</sub>		50.0		%
Power-Added Efficiency at 3 dB Gain Compression	PAE <sub>3dB</sub>		46.5		%
Gain at 3 dB Compression	G <sub>3dB</sub>		11.5		dB
<b>Performance at 5.60 GHz in the 5.4 to 5.9 GHz Eval. Board (V<sub>DS</sub> = 28 V, I<sub>DQ</sub> = 200 mA; Pulse: 100µs, 20%)</b>					
Linear Gain	G <sub>LIN</sub>	12.0	14.0		dB
Output Power at 3 dB Gain Compression	P <sub>3dB</sub>	22.5	32.5		W
Drain Efficiency at 3 dB Gain Compression	DE <sub>3dB</sub>	45.0	50.0		%
Gain at 3 dB Compression	G <sub>3dB</sub>	9.0	11.0		dB
<b>Narrow Band Performance at 5.60 GHz (V<sub>DS</sub> = 28 V, I<sub>DQ</sub> = 200 mA, CW at P1dB)</b>					
Impedance Mismatch Ruggedness	VSWR			10:1	

Note: VSWR testing performed with increasing real impedance value only from reference Z to 10 times reference Z.

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor




## Specifications (cont.)

### Thermal and Reliability Information

Test Conditions	T <sub>CH</sub> (°C)	Θ <sub>JC</sub> (°C/W)
DC at 85 °C	205	4.0

Note: Thermal resistance, Θ<sub>JC</sub>, measured to bottom of package

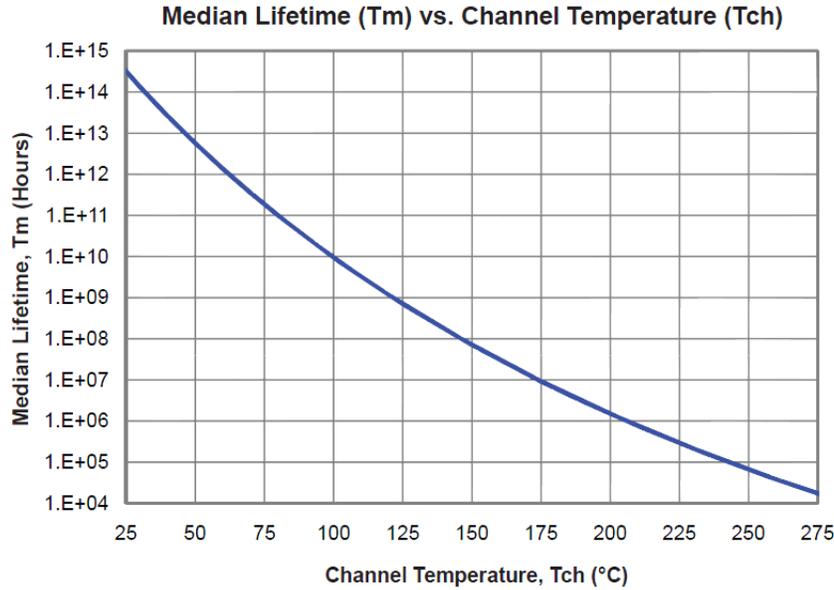

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor




## Load Pull Smith Chart

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.


**Test Conditions:**  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$

**Test Signal:** Pulse Width = 100  $\mu\text{sec}$ , Duty Cycle = 20%


**Load-Pull Data at 3 GHz**

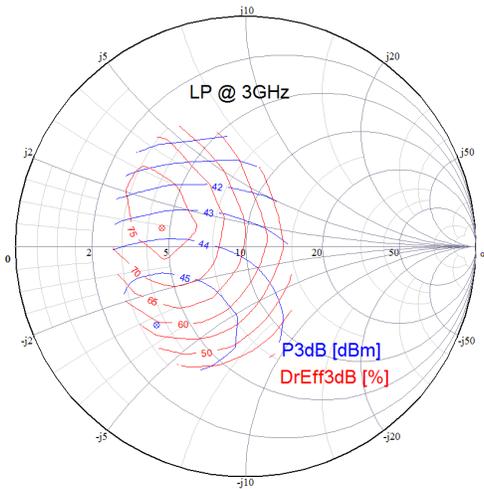


**Load-Pull Data at 4 GHz**

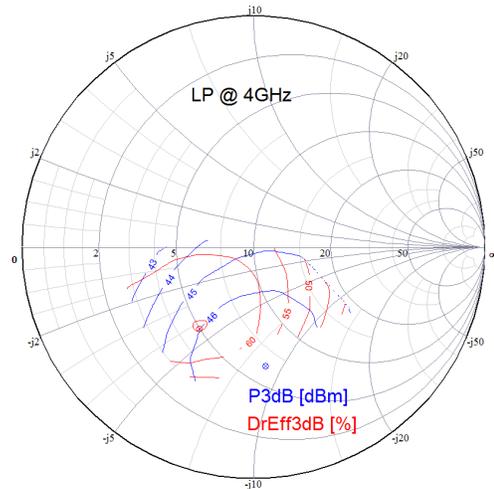

**Load-Pull Data at 5 GHz**

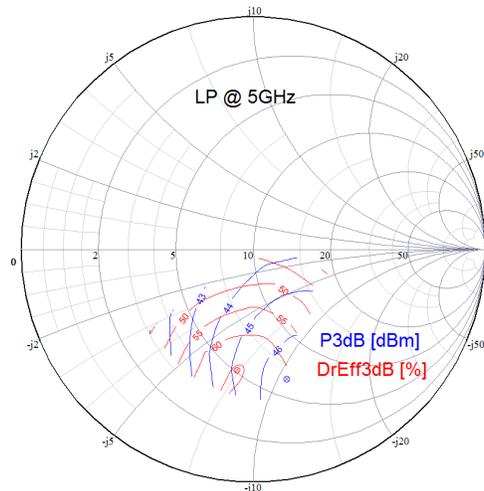

**Load-Pull Data at 6 GHz**

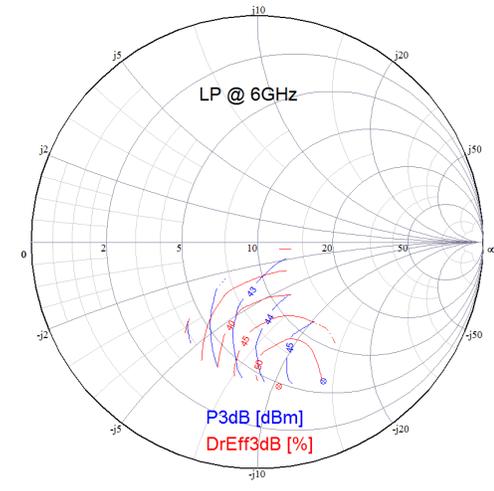







# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor



## Typical Performance (cont.)

Performance is measured at DUT reference plane

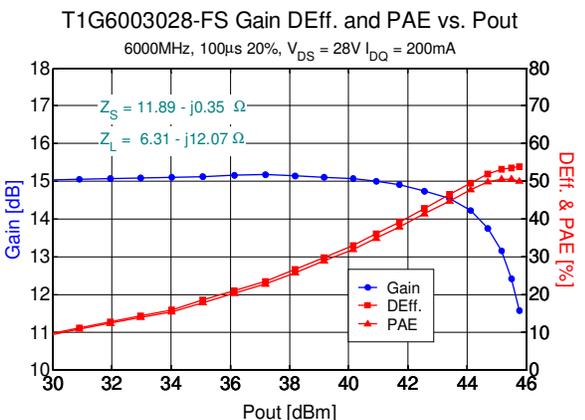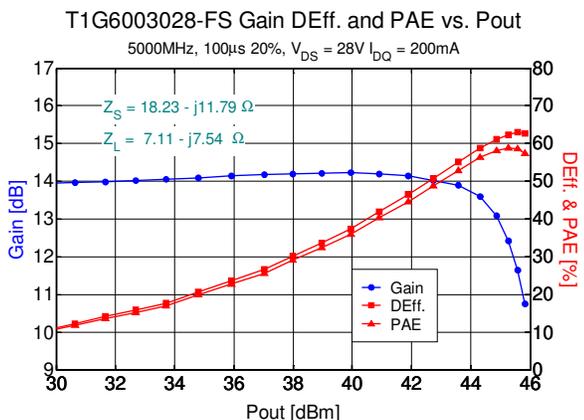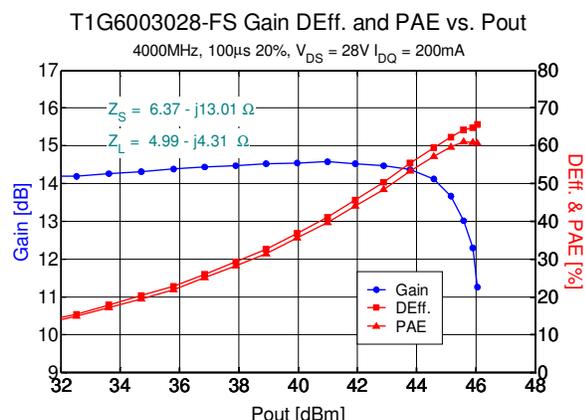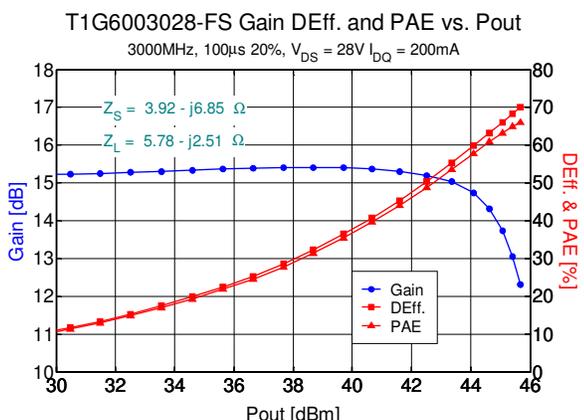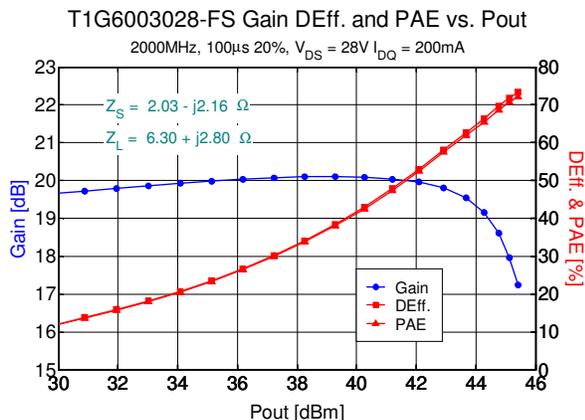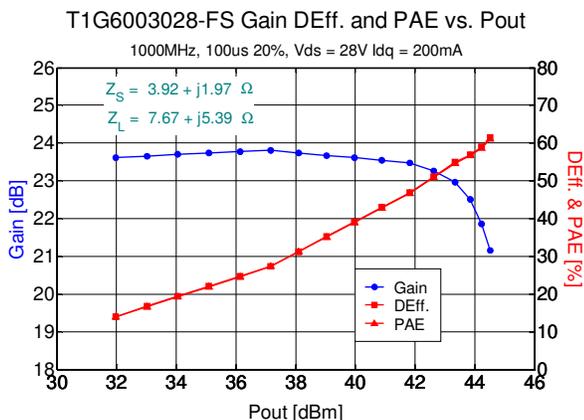

# T1G6003028-FS


30W, 28V, DC – 6 GHz, GaN RF Power Transistor




## Performance over Temperature: Gain, Efficiency and Output Power

Performance measured in TriQuint's 5.4 GHz to 5.9 GHz Evaluation Board at 3 dB compression.


**T1G6003028-FS Gain vs. Temp.**  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{s}$ , 20%

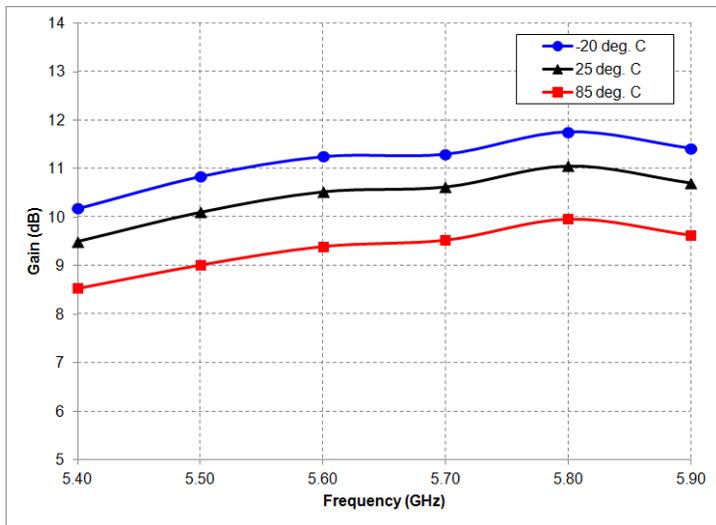


**T1G6003028-FS Power vs. Temp.**  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{s}$ , 20%

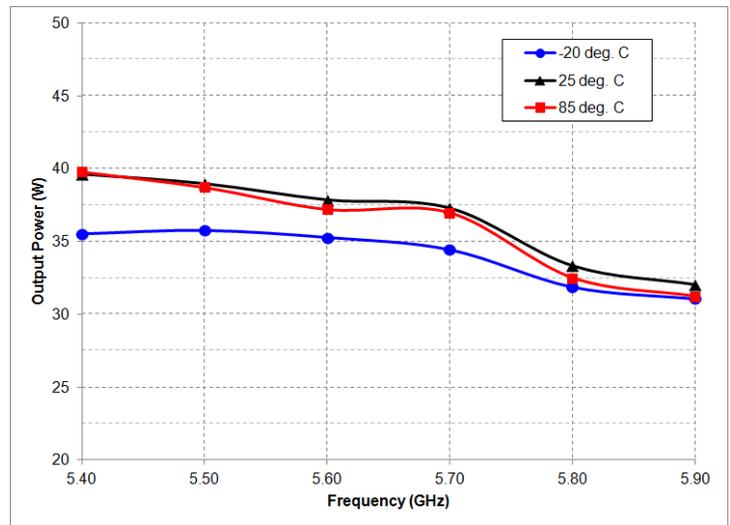

**T1G6003028-FS Drain Eff. vs. Temp.**  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{s}$ , 20%

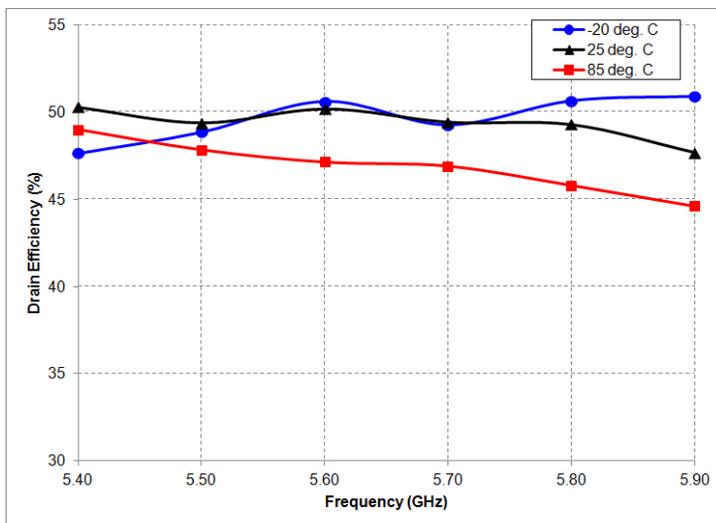

**T1G6003028-FS PAE vs. Temp.**  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{s}$ , 20%

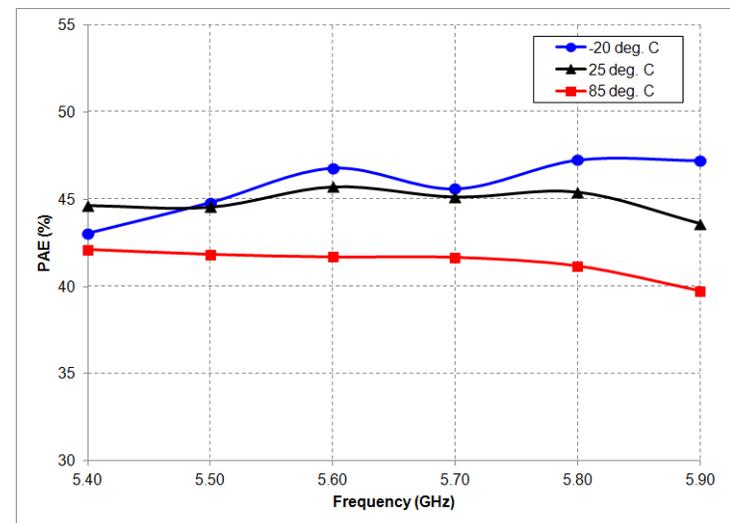


# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor




## Evaluation Board Performance: 5.4 to 5.9 GHz

Output Power and Gain at 3 dB Compression  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{sec}$ , 20%

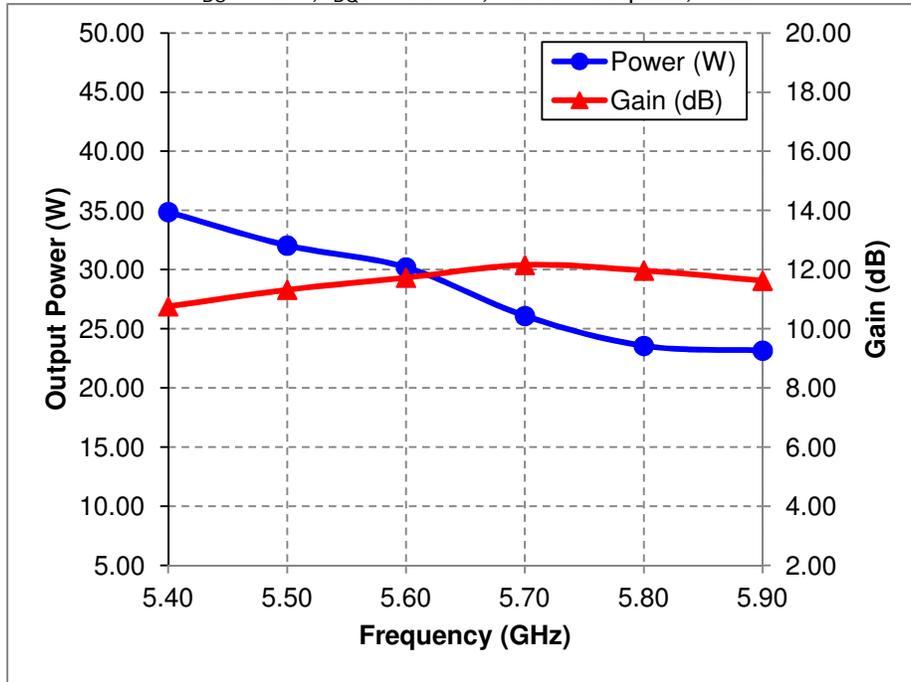

Drain Efficiency and Power Added Efficiency at 3 dB Compression  
 $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 200\text{ mA}$ ; Pulse: 100  $\mu\text{sec}$ , 20%

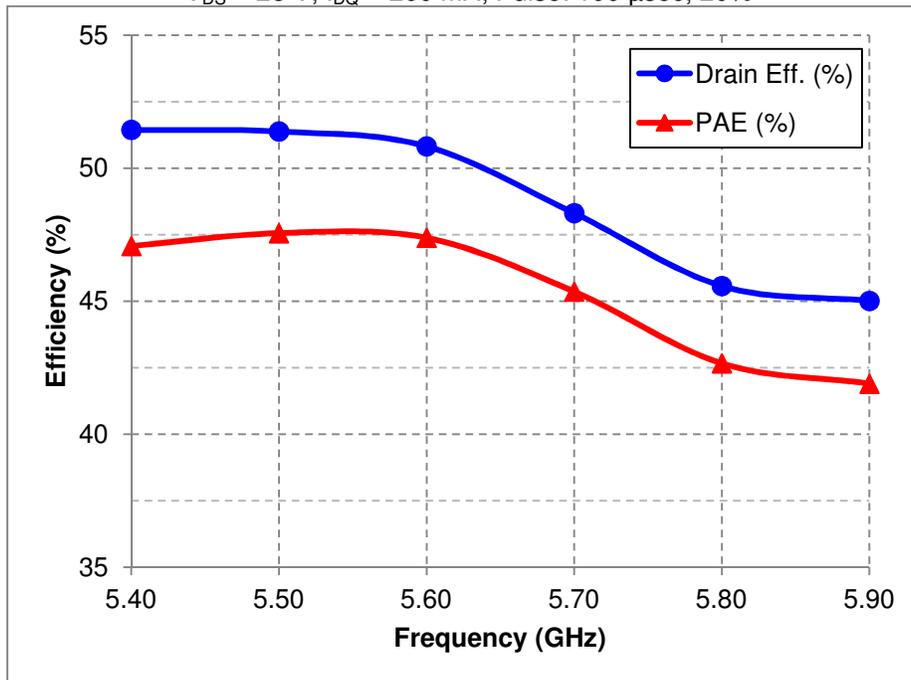


# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor



## Application Circuit

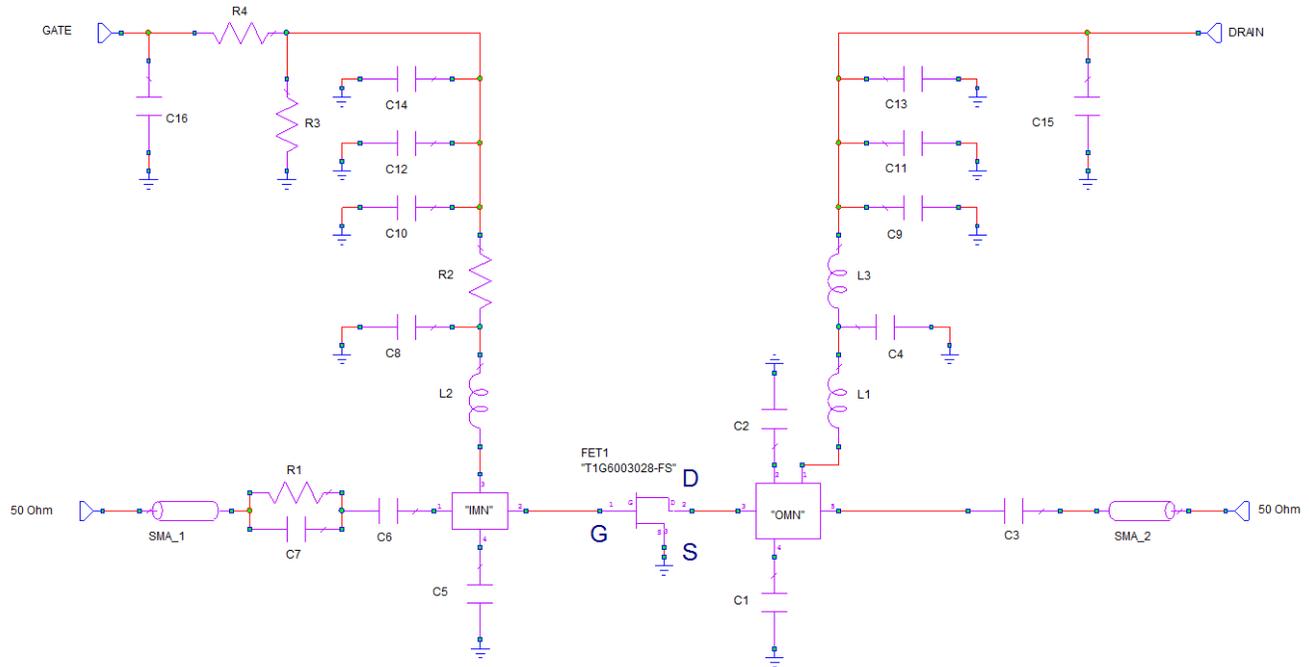

### Bias-up Procedure

Vg set to -5.0V

Vd set to 28 V

Adjust Vg more positive until quiescent Id is 200 mA.  
This will be ~ Vg = -3.6 V typical

Apply RF signal

### Bias-down Procedure

Turn off RF signal

Turn off Vd and wait 1 second to allow drain capacitor dissipation

Turn off Vg

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor




## Applications Information

### Evaluation Board Layout

Top RF layer is 0.020" thick Rogers RO4350B,  $\epsilon_r = 3.48$ .

The pad pattern shown has been developed and tested for optimized assembly at TriQuint Semiconductor. The PCB land pattern has been developed to accommodate lead and package tolerances.

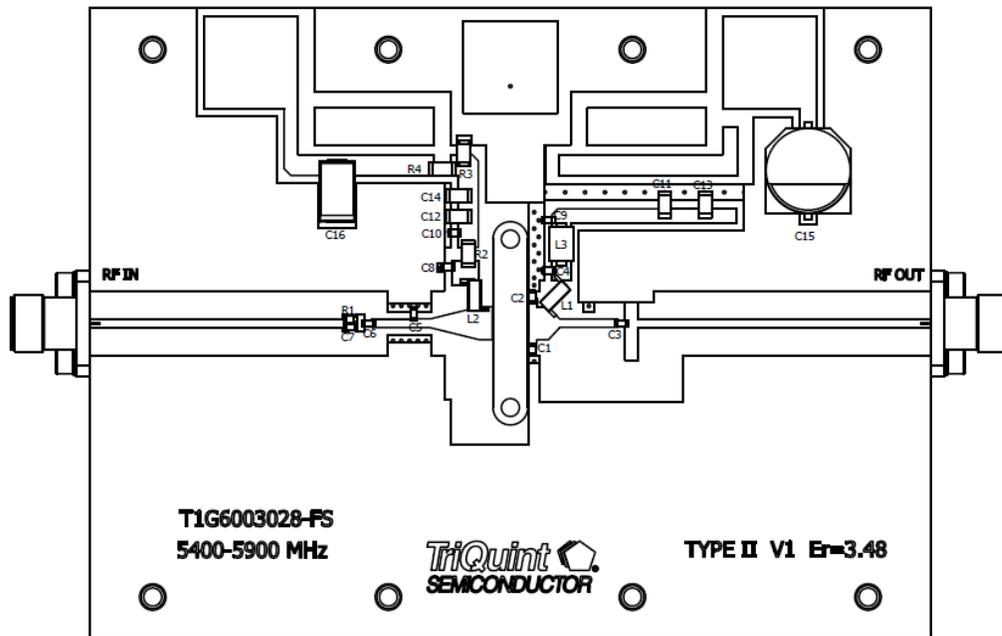


### Bill of Materials

Reference Des.	Value	Qty	Manufacturer	Part Number
C1	0.3 pF	1	ATC	ATC600S0R3
C2	0.2 pF	1	ATC	ATC600S0R2
L1, L2	8.8 NH	2	COILCRAFT	1606-8
C3, C4, C6, C7, C8	3 pF	5	ATC	ATC600S3R0
C5	0.4 pF	1	ATC	ATC600S0R5
R1	97.6 Ohms	1	Venkel	CR0604-16w-97R6FT
R2	4.7 Ohms	1	Newark	37C0064
R3	330 Ohms	1	Newark	TNPW1206330RBT9ET1-E3
R4	50 Ohms	1	ATC	CRCW120651R0FKEA
C9, C10	220 pF	2	AVX	AVX06035C22KAT2A
C11, C12	2200 pF	2	Vitramon	VJ1206Y222KXA
C13, C14	22000 pF	2	Vitramon	VJ1206Y223KXA
C15	220 uF	1	United Chemi-Con	EMVY500ADA221MJA0G
C16	1.0 uF	1	Allied	541-1231
L3	48 Ohm	1	Ferrite, Laird Tech.	28F0121-0SR-10


# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor

## PIN Description

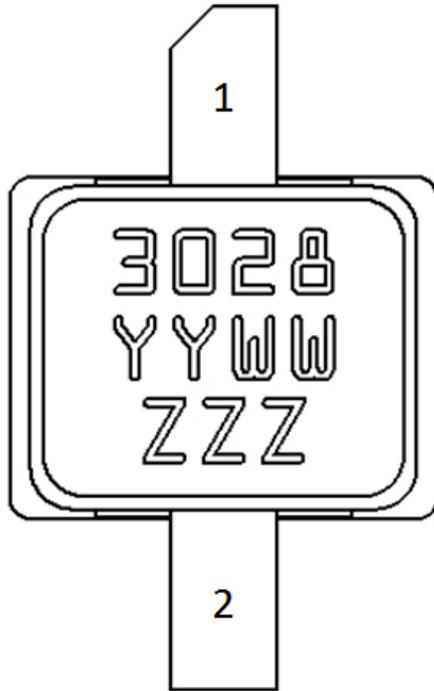

TOP VIEW

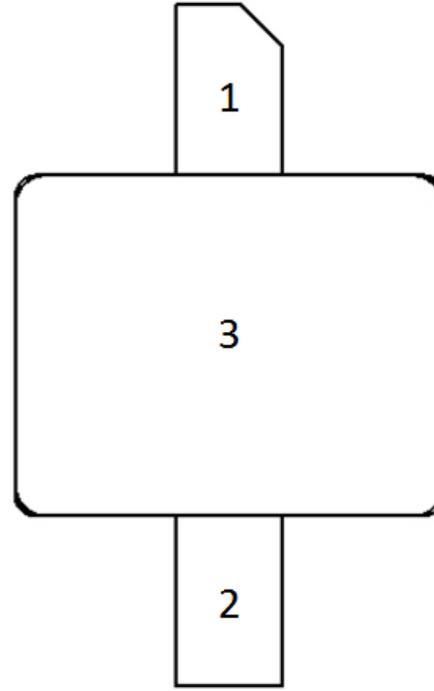

BOTTOM VIEW

Pin	Symbol	Description
1	Vd/ RF OUT	Drain voltage/ RF Output matched to 50 ohms; see Application Circuit on page 8 as an example.
2	Vg/RF IN	Gate voltage/ RF Input matched to 50 ohms; see Application Circuit on page 8 as an example
3	Flange	Source connected to ground; see Application Circuit on page 8 as an example.

The T1G6003028-FS will be marked with the “3028” designator and a lot code marked below the part designator. The “YY” represents the last two digits of the year the part was manufactured, the “WW” is the work week, and the “ZZZ” is an auto-generated number.

# T1G6003028-FS


30W, 28V, DC – 6 GHz, GaN RF Power Transistor



## Mechanical Information

### Package Information and Dimensions

All dimensions are in millimeters.

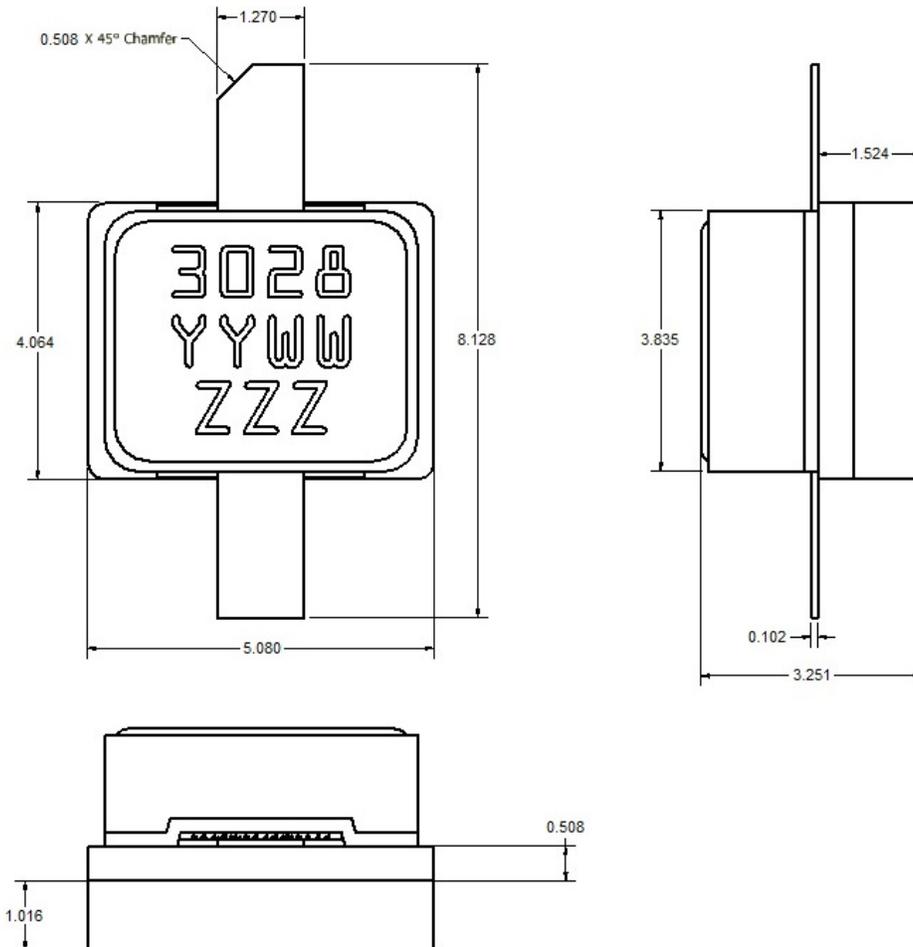

This package is lead-free/RoHS-compliant. The plating material on the leads is NiAu. It is compatible with both lead-free (maximum 260 °C reflow temperature) and tin-lead (maximum 245 °C reflow temperature) soldering processes.

# T1G6003028-FS

30W, 28V, DC – 6 GHz, GaN RF Power Transistor

## Product Compliance Information

### ESD Information



**Caution! ESD-Sensitive Device**

ESD Rating: Class 1A  
Value:  $\geq 250$  V  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

### MSL Rating

Level 3 at +260 °C convection reflow  
The part is rated Moisture Sensitivity Level 3 at 260 °C per JEDEC standard IPC/JEDEC J-STD-020.

### ECCN

US Department of Commerce EAR99

### Solderability


Compatible with the latest version of J-STD-020, Lead free solder, 260 °C

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ( $C_{15}H_{12}Br_4O_2$ ) Free
- PFOS Free
- SVHC Free

## Recommended Soldering Temperature Profile

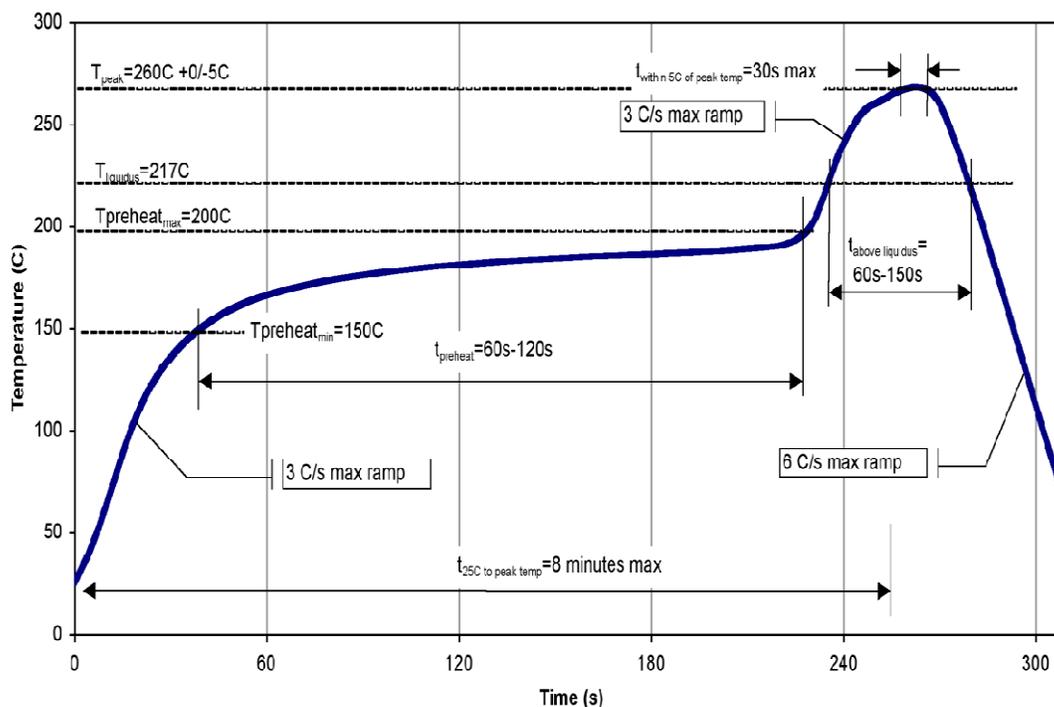

# T1G6003028-FS

**30W, 28V, DC – 6 GHz, GaN RF Power Transistor**



## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

**Web:** [www.triquint.com](http://www.triquint.com)  
**Email:** [info-sales@tqs.com](mailto:info-sales@tqs.com)

**Tel:** +1.972.994.8465  
**Fax:** +1.972.994.8504

For technical questions and application information:

**Email:** [info-products@tqs.com](mailto:info-products@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9