

MAX20331 Evaluation Kit

Evaluates: MAX20331/MAX20331A

General Description

The MAX20331 evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the MAX20331 high-voltage OVP on audio line device. The EV kit comes with the MAX20331EWL+ installed. The MAX20331 EV kit can also be used to evaluate MAX20331A.

Features

- 3.5mm Jack Audio Line Protection
- Proven PCB Layout
- Fully Assembled and Tested

EV Kit Contents

- EV kit board containing a MAX20331

Quick Start

Required Equipment

- MAX20331 EV kit
- Two Power Supplies
- Multimeter

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation:

- 1) Connect a 3V supply on TP15 and verify LED1 is on.
- 2) Connect a 1V supply on COM1 and verify NC1 is now 1V.
- 3) Increase voltage on COM1. NC1 voltage should go down to 0V when COM1 voltage reaches about 3.45V.
- 4) Decrease COM1 voltage. NC1 voltage again follows COM1 voltage.
- 5) Set COM1 voltage to -1V and verify NC1 voltage is -1V.
- 6) Decrease COM1 voltage and verify NC1 voltage goes up to 0V when COM1 voltage reaches about -3.45V.

- 7) Remove power supply from COM1, connect 1V supply on COM2, and verify NC2 is now 1V.
- 8) Increase voltage on COM2. NC2 voltage goes down to 0V when COM2 voltage reaches about 3.45V.
- 9) Decrease COM2 voltage. NC2 voltage again follows COM2 voltage.
- 10) Set COM2 voltage to -1V and verify NC2 voltage is -1V.
- 11) Decrease COM2 voltage and verify NC2 voltage goes up to 0V when COM2 voltage reaches about -3.45V.

Detailed Description

The MAX20331 EV kit is a fully assembled and tested circuit board demonstrating the MAX20331 audio line overvoltage protector in a 9-bump wafer-level package (WLP). The MAX20331 has overvoltage threshold $\pm 3.45V$.

V_{CC} Power Supply

The V_{CC} can be connected from USB power supply source or externally supplied from TP15.

Table 1. V_{CC} Jumper Setting

JUMPER	SHUNT POSITION	DESCRIPTION
JU1	1-2*	V _{CC} is connected to VEXT TP15
	2-3	V _{CC} is connected to LDO Output

*Default position.

Ordering Information


PART	TYPE
MAX20331EVKIT#	EVKIT

#Denotes RoHS compliant.

MAX20331 EV Kit Bill of Materials


ITEM	REF. DES	DNI/DNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION	COMMENTS
1	C1	—	1	C0603C104K9RAC; GRM188R70J104KA01	KEMET;MURATA	0.1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 0.1UF; 6.3V; TOL = 10%; MODEL = ; TG = -55°C TO +125°C; TC = X7R;	
2	C2, C3, C7	—	3	C1608X5R1V225K080AC; GRM188R6YA225KA12	TDK;MURATA	2.2UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 2.2UF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R	
3	C4	—	1	GRT188R60J475KE01	MURATA	4.7UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 4.7UF; 6.3V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R; AUTO	
4	C6	—	1	06035C102KAT2A	AVX	1000PF	CAPACITOR; SMT (0603); CERAMIC CHIP; 1000PF; 50V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R	
5	D1, D2	—	2	RCLAMP1851ZA	SEMTECH	18V	DIODE; TVS; SMT; VRM = 18V; IPP = 3A	
6	J1, J2	—	2	SJ-43515TS-SMT	CUI INC.	SJ-43515TS-SMT	CONNECTOR; FEMALE; SMT; 3.5MM AUDIO JACKS TIP SWITCH; RIGHT ANGLE; 6PINS	
7	J3	—	1	10103594-0001LF	FCI CONNECT	10103594-0001LF	CONNECTOR; FEMALE; THROUGH HOLE; MICRO USB 2.0 B RECEPTACLE STD SMT PLUS DIP; RIGHT ANGLE; 5PINS	
8	JU1	—	1	PEC03SAAN	SULLINS	PEC03SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS	
9	LED1	—	1	SML-LX1206GW-TR	LUMEX OPTOCOMPONENTS INC	SML-LX1206GW-TR	DIODE; LED; STANDARD; GREEN; SMT (1206); PIV = 2.2V; IF = 0.02A; -40°C TO +85°C	
10	P1	—	1	3262W-1-504LF	BOURNS	500K	RESISTOR; THROUGH HOLE; TRIMMING POTENTIOMETER; 500KΩ; 10%; 100PPM; 0.25W	
11	R1, R6	—	2	CRCW080500002S; ERJ-6GEY0R00V; RC2012J000; RMCF0805ZTOR00	DIGI-KEY	0	RESISTOR; 0805; 0Ω; JUMPER; 0.125W; THICK FILM	
12	R2	—	1	RK73H2ATTD3300F	KOA SPEER ELECTRONICS INC	330	RESISTOR; 0805; 330Ω; 1%; 100PPM; 0.25W; THICK FILM	
13	R3-R5	—	3	CRCW0805100KFK; RK73H2ATTD1003; ERJ-6ENF1003V	VISHAY DALE; KOA SPEER;PANASONIC	100K	RESISTOR; 0805; 100K; 1%; 100PPM; 0.125W; THICK FILM	
14	TP4, TP6, TP8, TP14, TP16	—	5	5011	KEYSTONE	N/A	TEST POINT; PIN DIA = 0.125IN; TOTAL LENGTH = 0.445IN; BOARD HOLE = 0.063IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	GND
15	TP3, TP5, TP7, TP9	—	4	5014	KEYSTONE	N/A	TESTPOINT;PINDIA = 0.125IN;TOTALLENGTH = 0.445IN; BOARDHOLE = 0.063IN; YELLOW; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	(TP3:COM1) (TP5:COM2) (TP7:NC1) (TP9:NC2)
16	TP11, TP12, TP13	—	3	5012	KEYSTONE	N/A	TESTPOINT;PINDIA = 0.125IN; TOTAL LENGTH = 0.445IN; BOARD HOLE = 0.063IN; WHITE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	(TP11:DET1) (TP12:DET2) (TP13:SLV)
17	TP15, TP17, TP19	—	3	5010	KEYSTONE	N/A	TEST POINT WITH 1.80MM HOLE DIA, RED, MULTIPURPOSE ;NOT FOR COLD TEST	(TP15:VEXT) (TP17:VCC) (TP19:VINT)
18	U1	—	1	MAX20331EWL+	MAXIM	MAX20331EWL+	EVKIT PART - IC; MAX20331EWL+; HIGH VOLTAGE PROTECTION 3.5MM AUDIO LINE OVP; PACKAGE OUTLINE DRAWING: 21-100234; PACKAGE CODE: W91Q1+1; WLP9	
19	U2	—	1	MAX8880EUT+	MAXIM	MAX8880EUT+	IC; VREG; ULTRA-LOW-IQ LOW-DROPOUT LINEAR REGULATOR WITH POK; SOT23-6	
20	PCB	—	1	MAX20331	MAXIM	PCB	PCB:MAX20331	
21	D3-D5	DNP	0	RCLAMP1851ZA	SEMTECH	18V	DIODE; TVS; SMT; VRM=18V; IPP=3A	
22	C5	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0603 NON-POLAR CAPACITOR	
23	R7-R9	DNP	0	N/A	N/A	OPEN	PACKAGE OUTLINE 0805 RESISTOR	
TOTAL			38					

MAX20331 EV Kit PCB Layout Diagrams

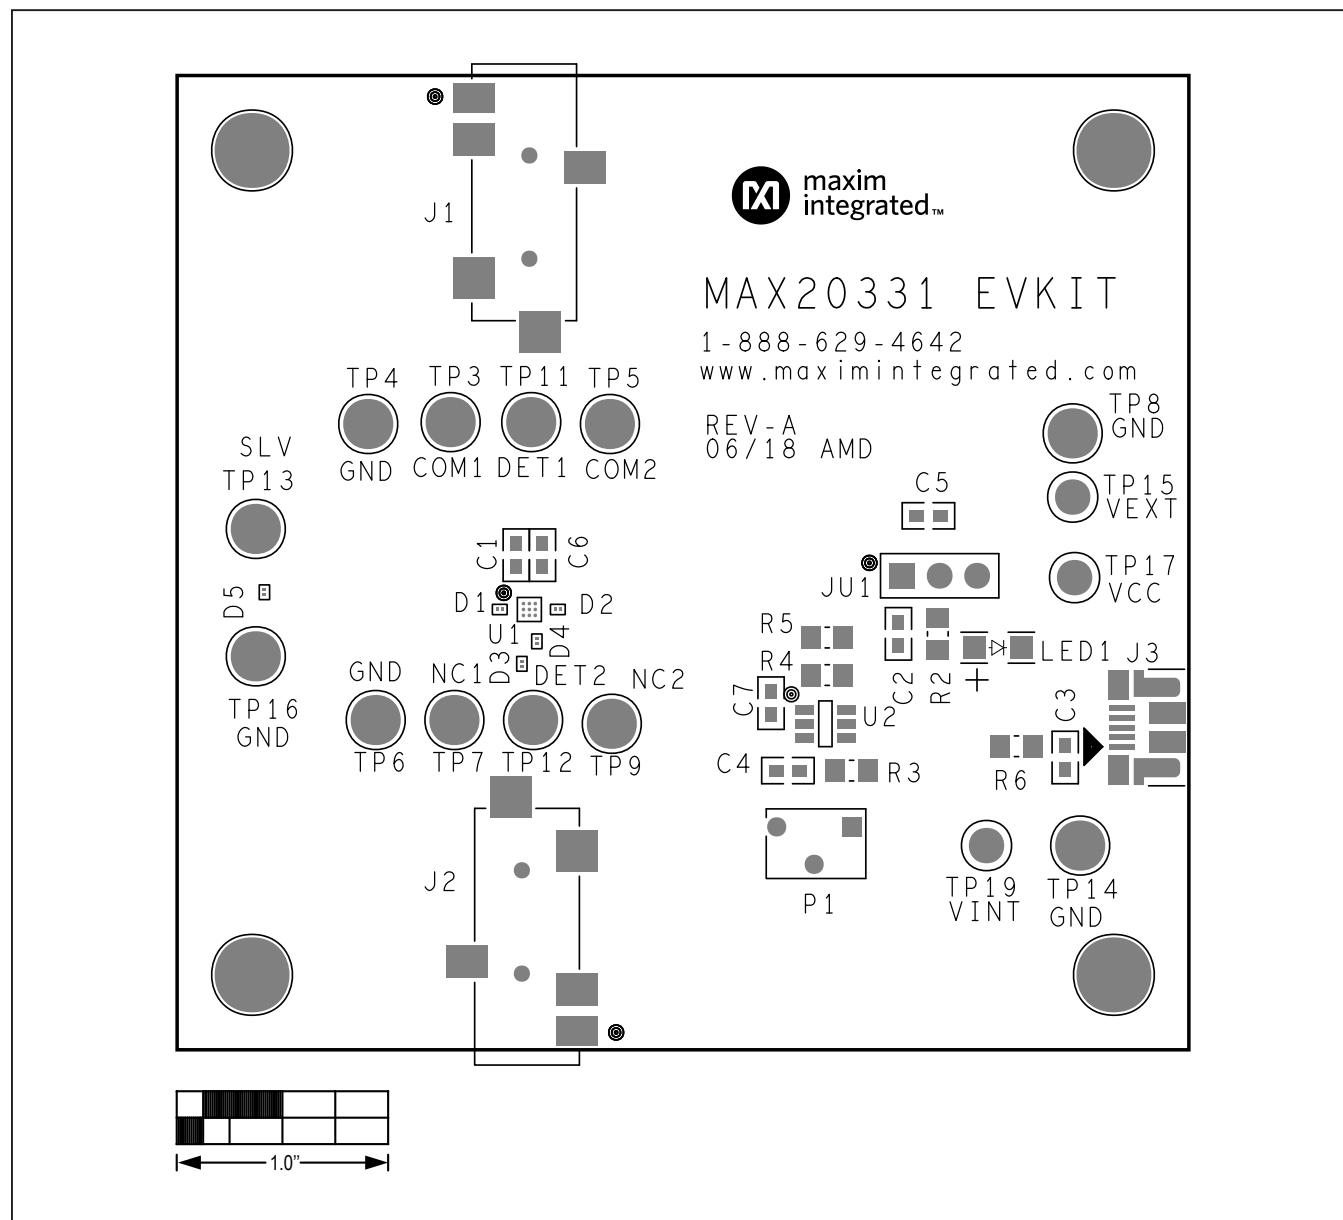


MAX20331 EV Kit—Top Silkscreen

MAX20331 EV Kit PCB Layout Diagrams (continued)

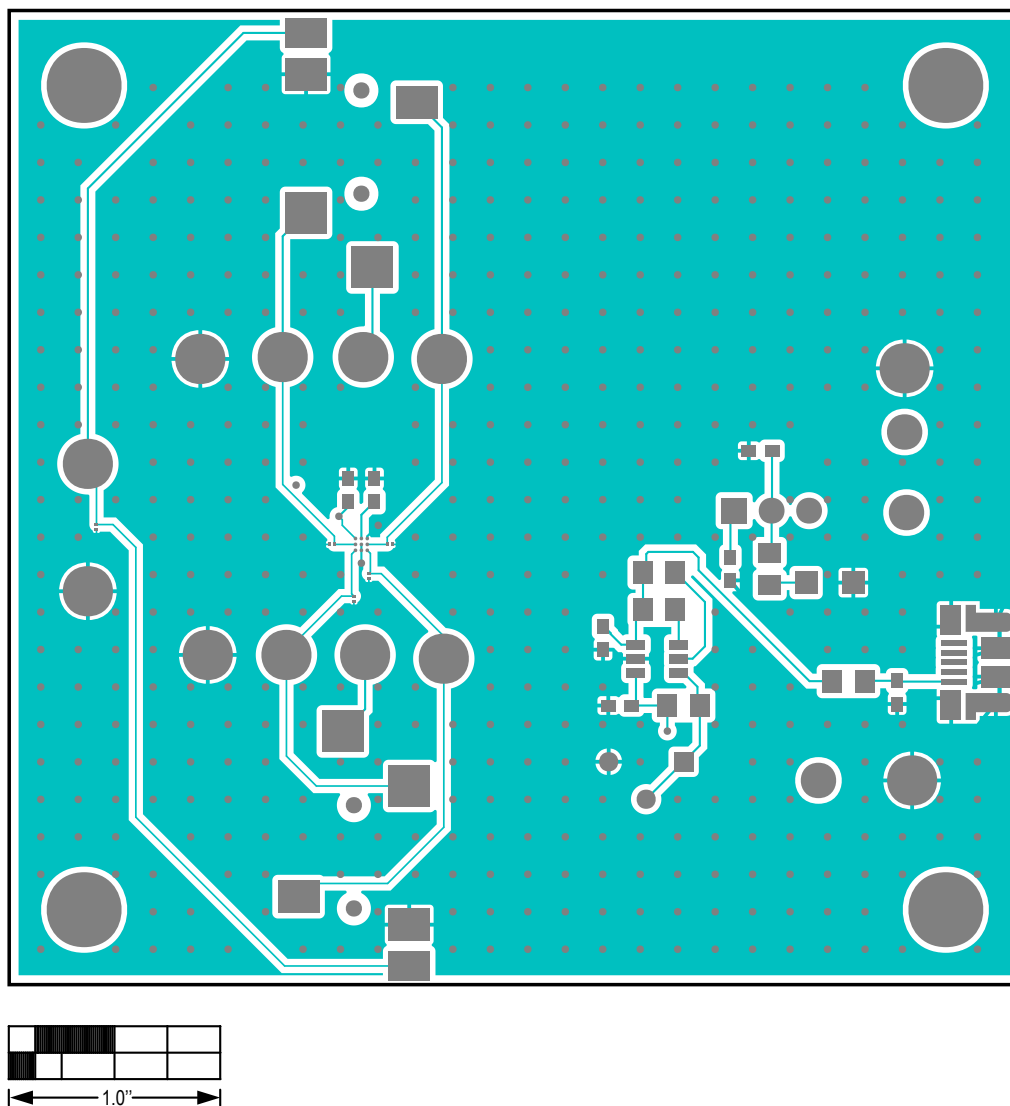



MAX20331 EV Kit—Top Layer

MAX20331 EV Kit PCB Layout Diagrams (continued)

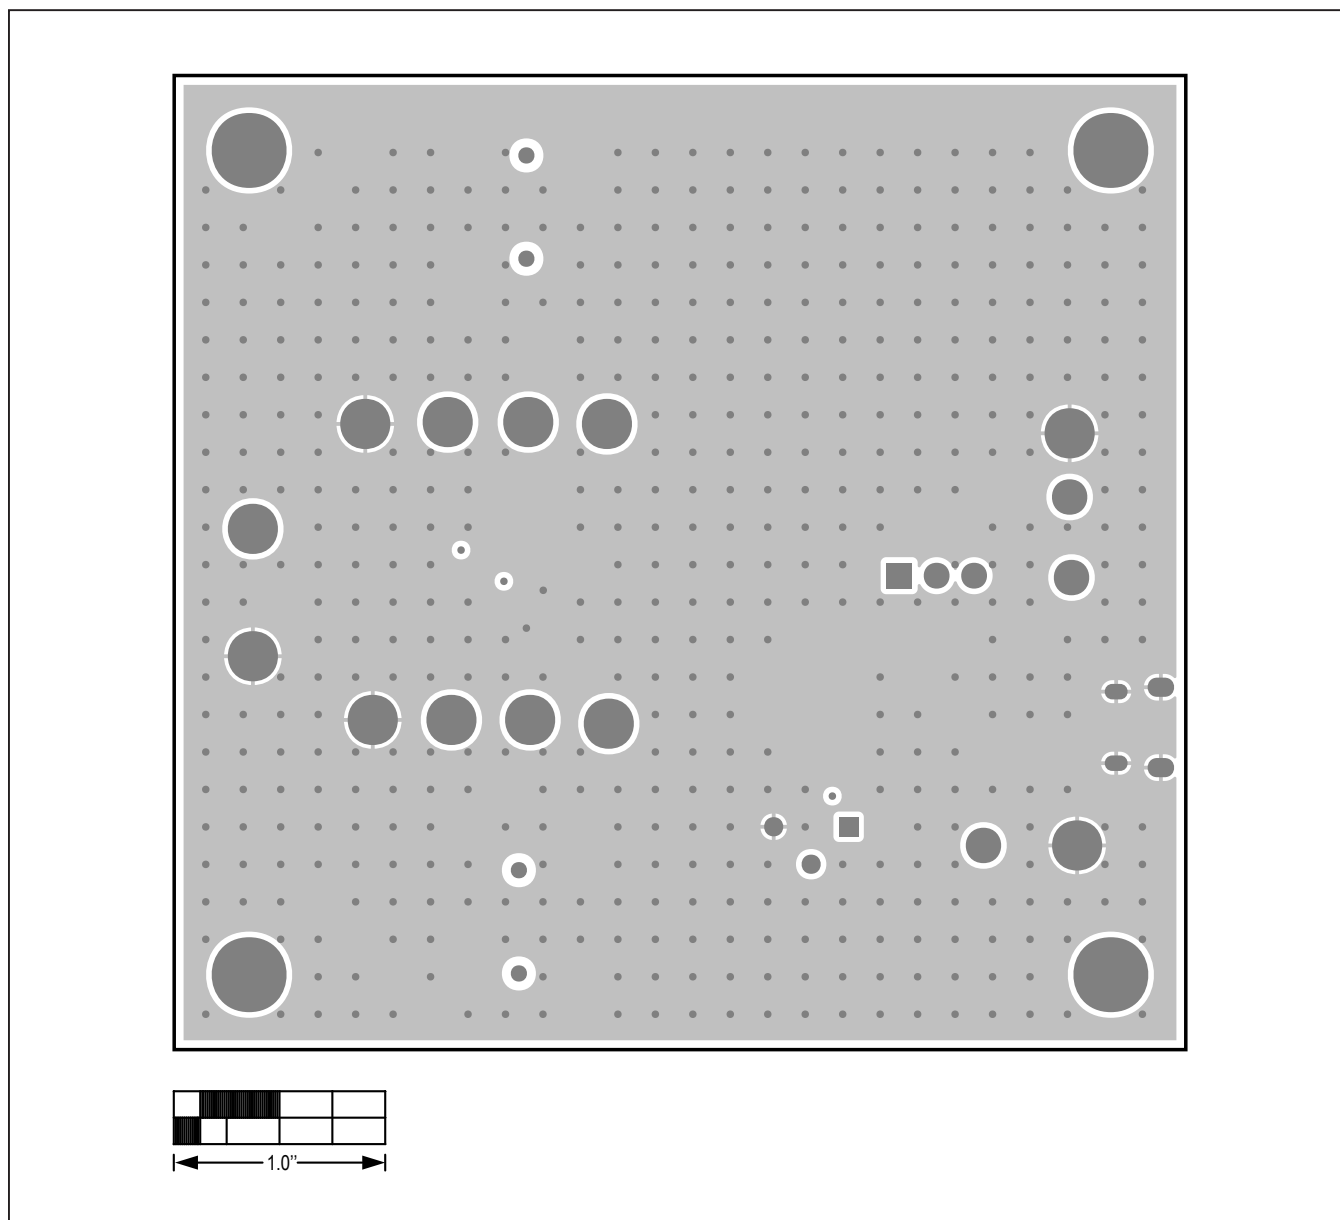


MAX20331 EV Kit—Internal Layer 2

MAX20331 EV Kit PCB Layout Diagrams (continued)

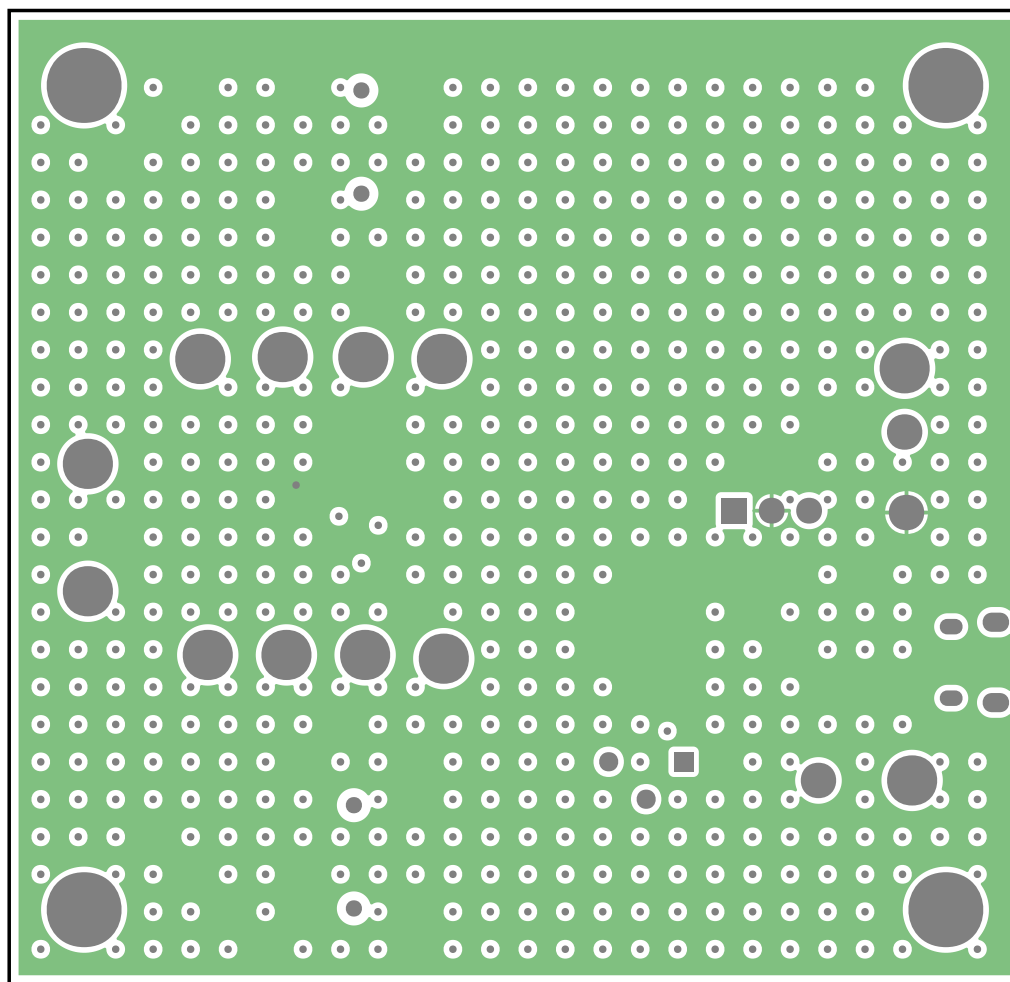


MAX20331 EV Kit—Internal Layer 3

MAX20331 EV Kit PCB Layout Diagrams (continued)

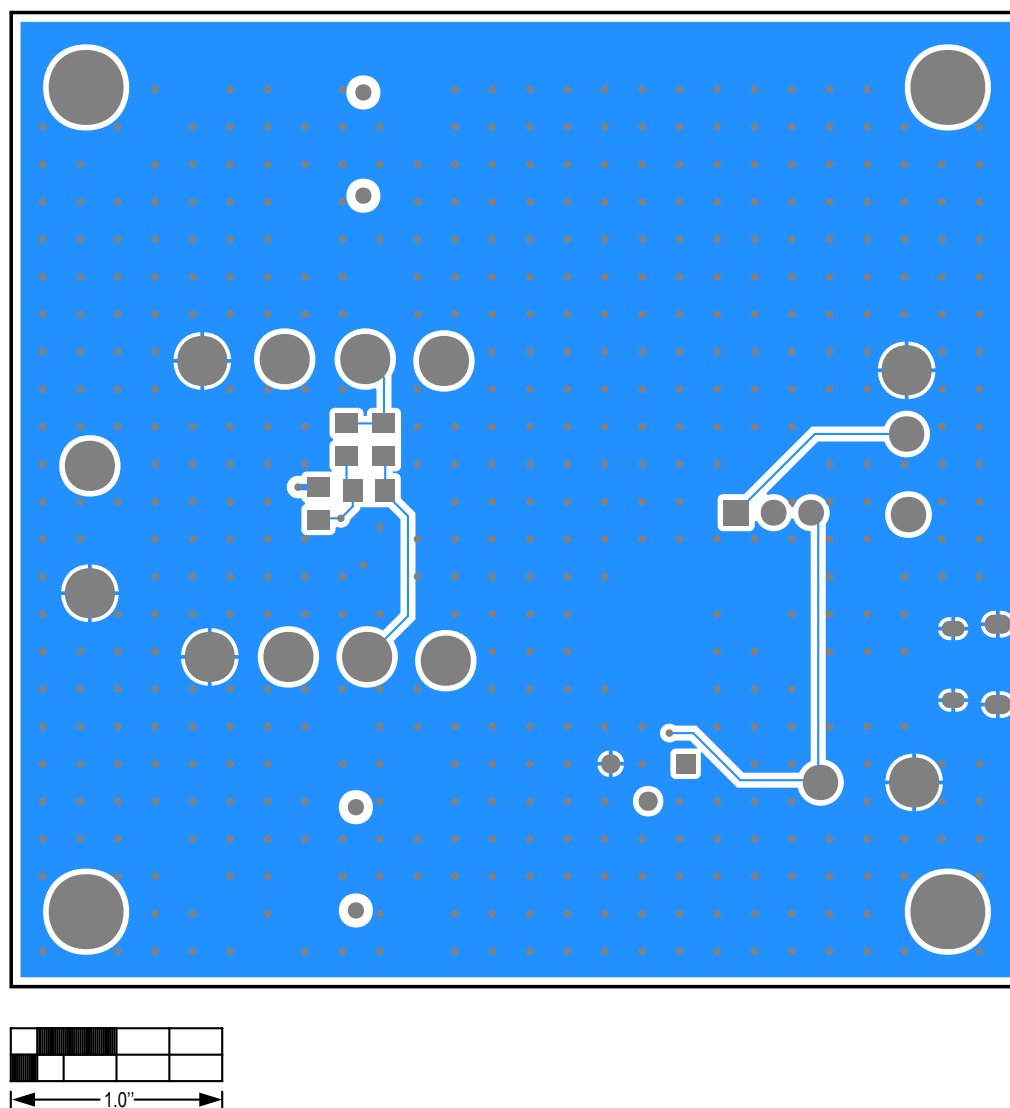

MAX20331 EV Kit—Bottom

MAX20331 EV Kit PCB Layout Diagrams (continued)

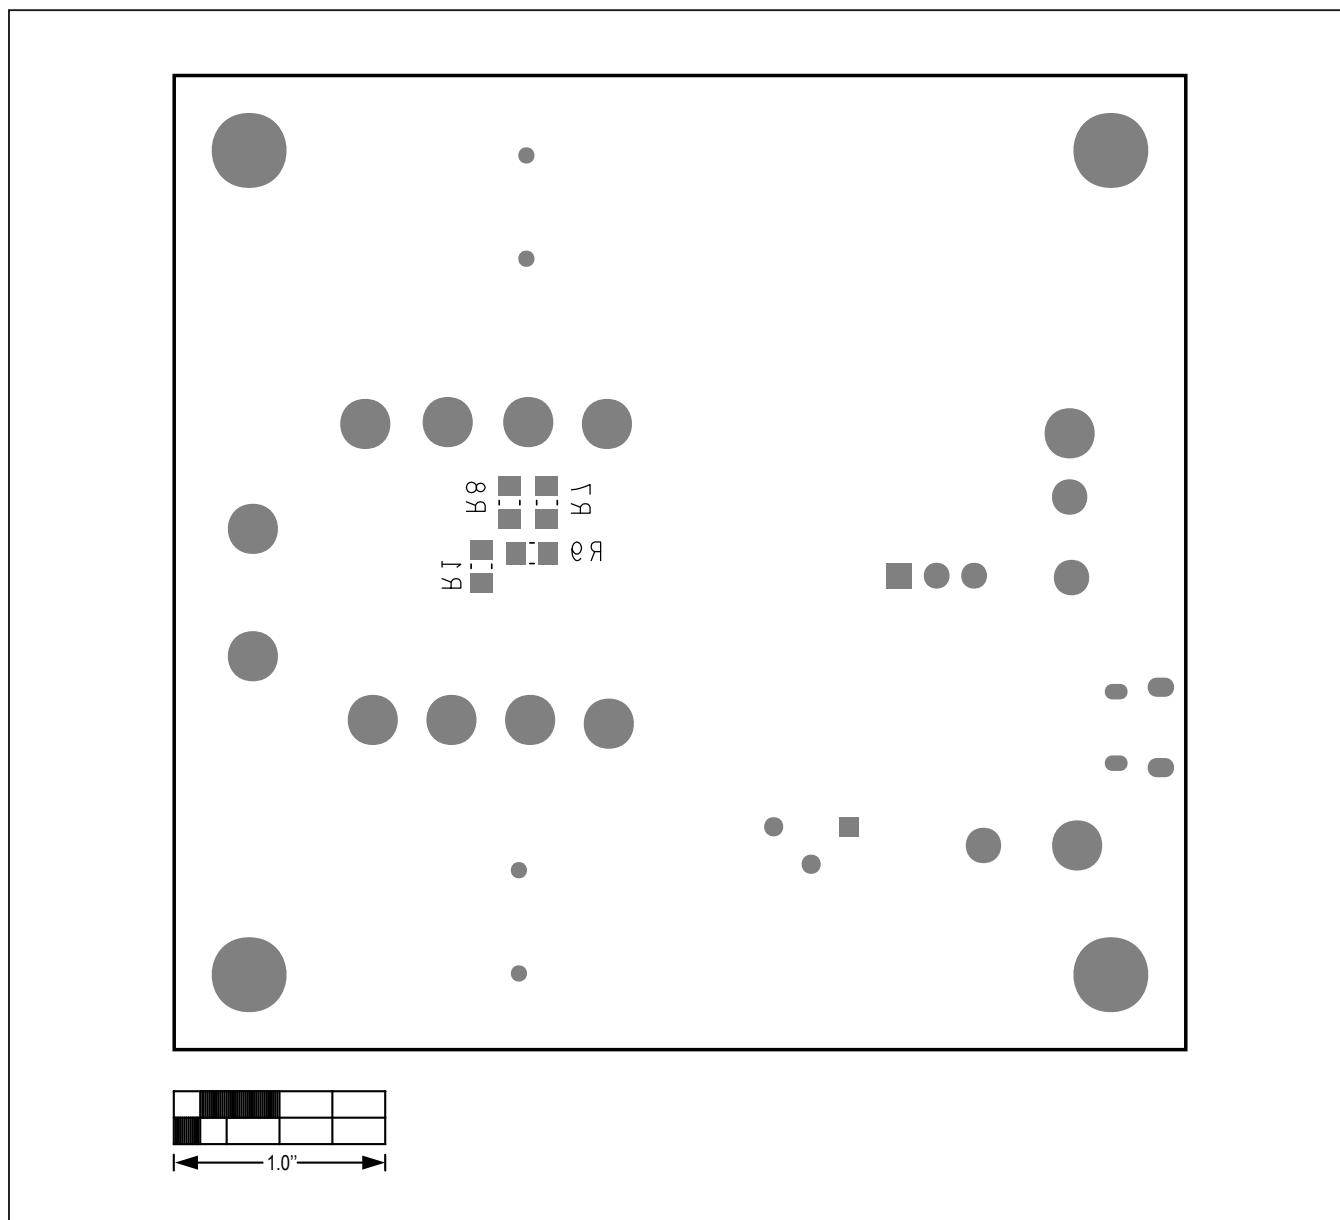

MAX20331 EV Kit—Bottom Silkscreen

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/18	Initial release	—
1	2/19	Added <i>Quick Start</i> section	1

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9