

DPDT SWITCH GaAs MMIC


■GENERAL DESCRIPTION

NJG1528KC1 is a GaAs high power DPDT switch MMIC for antenna switch of tri- and dual-mode cellular phone application such as CDMA, AMPS and PCS.

This switch features low loss, high isolation at high power.

The ultra small & ultra thin FLP10 package is applied.

■PACKAGE OUTLINE




NJG1528KC1

■FEATURES

- Low voltage operation
- Pin at 0.2dB compression point
- Low insertion loss
- High isolation
- Low control current
- Ultra small & ultra thin package

2.5V min.
 36dBm typ. @f=1.9GHz, $V_{CTL}=2.8V$
 0.60dB typ. @f=0.9GHz, $P_{IN}=31\text{dBm}$, $V_{CTL}=2.8V$
 0.70dB typ. @f=1.9GHz, $P_{IN}=25\text{dBm}$, $V_{CTL}=2.8V$
 26.5dB typ. @f=0.9GHz, $P_{IN}=31\text{dBm}$, $V_{CTL}=2.8V$
 20dB typ. @f=1.9GHz, $P_{IN}=25\text{dBm}$, $V_{CTL}=2.8V$
 10uA typ. @f=0.9GHz, $P_{IN}=31\text{dBm}$, $V_{CTL}=2.8V$
 FLP10-C1 (Package size: 3.0x2.8x0.75mm)

■PIN CONFIGURATION

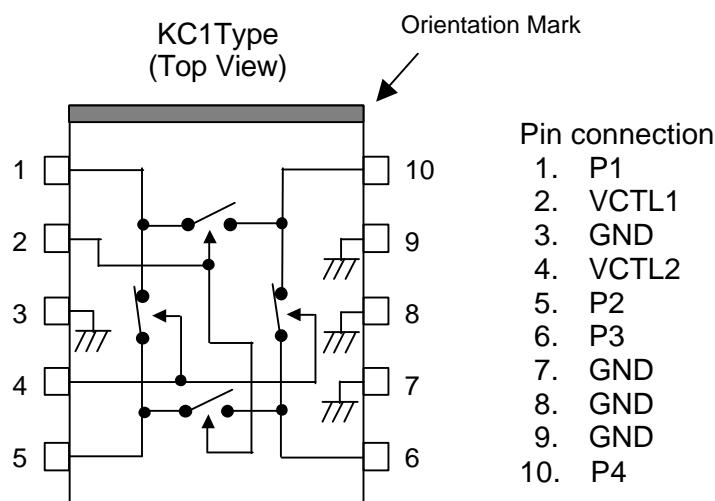

■TRUTH TABLE

ON Pass	VCTL1	VCTL2
P1-P2	L	H
P3-P4	L	H
P1-P4	H	L
P2-P3	H	L

NOTE: Please note that any information on this catalog is subject to change.

NJG1528KC1

■ABSOLUTE MAXIMUM RATINGS

($T_a=+25^\circ\text{C}$, $Z_s=Z_l=50\Omega$)

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNITS
RF Input Power	P_{IN}	$V_{CTL(L)}=0\text{V}$, $V_{CTL(H)}=3\text{V}$	37.5	dBm
Operating Voltage	V_{CTL}	$V_{CTL(H)}-V_{CTL(L)}$	12	V
Power Dissipation	P_D		550	mW
Operating Temp.	T_{opr}		-40~+85	°C
Storage Tempe.	T_{stg}		-55~+125	°C

■ELECTRICAL CHARACTERISTICS

(General conditions: $T_a=+25^\circ\text{C}$, $Z_s=Z_l=50\Omega$, $V_{CTL(L)}=0\text{V}$, $V_{CTL(H)}=2.8\text{V}$)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Control Voltage (Low)	$V_{CTL(L)}$	$f=0.01\sim 2.5\text{GHz}$	-0.2	0	0.2	V
Control Voltage (High)	$V_{CTL(H)}$	$f=0.01\sim 2.5\text{GHz}$	2.5	2.8	6.5	V
Control Current	I_{CTL}	$f=0.9\text{GHz}$, $P_{IN}=31\text{dBm}$	-	10	20	uA
Insertion loss 1	LOSS1	$f=0.9\text{GHz}$, $P_{IN}=31\text{dBm}$	-	0.60	0.70	dB
Insertion loss 2	LOSS2	$f=1.9\text{GHz}$, $P_{IN}=25\text{dBm}$	-	0.70	0.85	dB
Isolation 1	ISL1	$f=0.9\text{GHz}$, $P_{IN}=31\text{dBm}$	24.5	26.5	-	dB
Isolation 2	ISL2	$f=0.9\text{GHz}$, $P_{IN}=31\text{dBm}$	22	24	-	dB
Isolation 3	ISL3	$f=1.9\text{GHz}$, $P_{IN}=25\text{dBm}$	18	20	-	dB
Isolation 4	ISL4	$f=1.9\text{GHz}$, $P_{IN}=25\text{dBm}$	17	18	-	dB
Pin at 0.2dB Compression point	$P_{-0.2\text{dB}}$	$f=1.9\text{GHz}$	34	36	-	dBm
2nd Harmonics 1	2fo(1)	$f=0.9\text{GHz}$, $P_{IN}=25\text{dBm}$	-	-	-70	dBc
2nd Harmonics 2	2fo(2)	$f=1.9\text{GHz}$, $P_{IN}=25\text{dBm}$	-	-	-65	dBc
3rd Harmonics 1	3fo(1)	$f=0.9\text{GHz}$, $P_{IN}=25\text{dBm}$	-	-	-65	dBc
3rd Harmonics 2	3fo(2)	$f=1.9\text{GHz}$, $P_{IN}=25\text{dBm}$	-	-	-65	dBc
Input 3 rd order intercept Point 1	IIP3(1)	$f=900+901\text{MHz}$, $P_{in}=25\text{dBm}$ *1	-	60	-	dBm
Input 3 rd order intercept Point 2	IIP3(2)	$f=1900+1901\text{MHz}$, $P_{in}=25\text{dBm}$ *1	-	60	-	dBm
VSWR	$VSWR_i$	on-state ports, $f=1.9\text{GHz}$	-	1.1	1.3	
Switching time	T_{sw}	$f=0.1\sim 2.5\text{GHz}$	-	100	-	ns

*1: The input IP3 is defined as following equation.

$$\text{IIP3} = (3 \times \text{Pout} - \text{IM3}) / 2 + \text{LOSS}$$

■TERMINAL INFORMATION

No.	SYMBOL	EXPLANATION
1	P1	RF port. This port is connected with P2 port by controlling 2pin-V _{CTL(H)} (+2.5~+6.5V) and 4pin-V _{CTL(L)} (-0.2~+0.2V). This port is connected with P4 port by controlling 2pin-V _{CTL(L)} (-0.2~+0.2V) and 4pin-V _{CTL(H)} (+2.5~+6.5V). A DC cut capacitor 56pF is required at this terminal to block DC voltage of inner circuit.
2	VCTL1	Control port1. Please connect bypass capacitor (10pF) between this terminal and GND close to this IC.
3	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
4	VCTL2	Control port2. Please connect bypass capacitor (10pF) between this terminal and GND close to this IC.
5	P2	RF port. This port is connected with P1 port by controlling 2pin-V _{CTL(L)} (-0.2~+0.2V) and 4pin-V _{CTL(H)} (+2.5~+6.5V). This port is connected with P3 port by controlling 2pin-V _{CTL(H)} (+2.5~+6.5V) and 4pin-V _{CTL(L)} (-0.2~+0.2V). A DC cut capacitor 56pF is required at this terminal to block DC voltage of inner circuit.
6	P3	RF port. This port is connected with P2 port by controlling 2pin-V _{CTL(H)} (+2.5~+6.5V) and 4pin-V _{CTL(L)} (-0.2~+0.2V). This port is connected with P4 port by controlling 2pin-V _{CTL(L)} (-0.2~+0.2V) and 4pin-V _{CTL(H)} (+2.5~+6.5V). A DC cut capacitor 56pF is required at this terminal to block DC voltage of inner circuit.
7	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
8	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
9	GND	Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance.
10	P4	RF port. This port is connected with P1 port by controlling 2pin-V _{CTL(H)} (+2.5~+6.5V) and 4pin-V _{CTL(L)} (-0.2~+0.2V). This port is connected with P3 port by controlling 2pin-V _{CTL(L)} (-0.2~+0.2V) and 4pin-V _{CTL(H)} (+2.5~+6.5V). A DC cut capacitor 56pF is required at this terminal to block DC voltage of inner circuit.


NJG1528KC1

■ELECTRICAL CHARACTERISTICS

(with application circuit, losses of PCB, connector and DC blocking capacitor are excluded)


P1-P2 Insertion Loss vs.Frequency

(VCTL1=0V, VCTL2=2.8V, Pin=-10dBm)

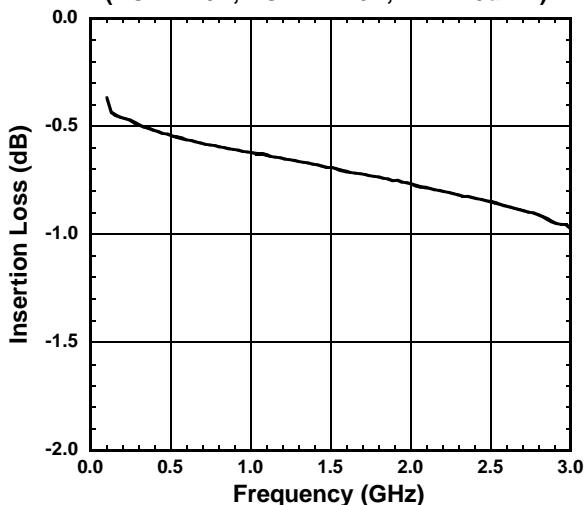


P3-P4 Insertion Loss vs.Frequency

(VCTL1=0V, VCTL2=2.8V, Pin=-10dBm)

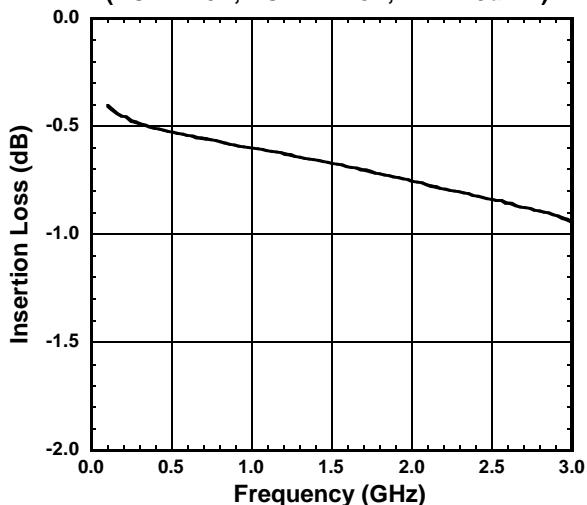


P1-P2 Isolation vs.Frequency

(VCTL1=2.8V, VCTL2=0V, Pin=-10dBm)

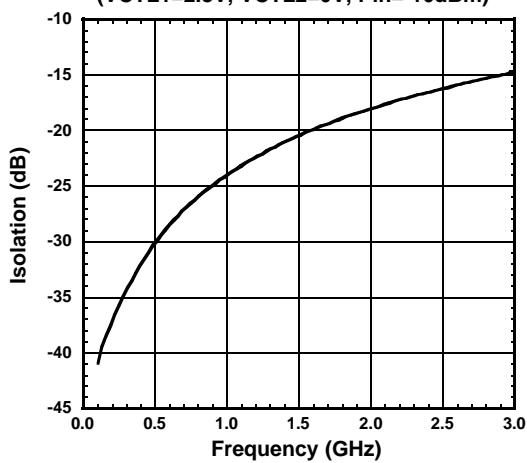


P1-P4 Isolation vs.Frequency

(VCTL1=0V, VCTL2=2.8V, Pin=-10dBm)

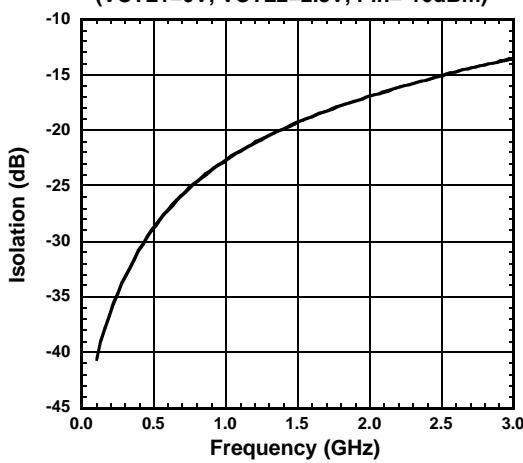


P1-P3 Isolation vs.Frequency

(VCTL1=0V, VCTL2=2.8V, Pin=-10dBm)

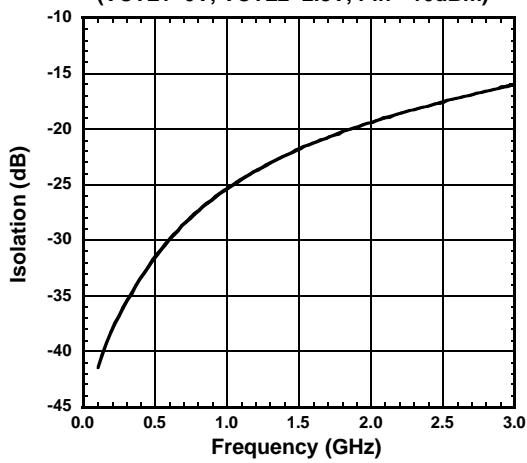

P1-P2(on) VSWR vs. Frequency


(VCTL1=0V,VCTL2=2.8V,P1 port)

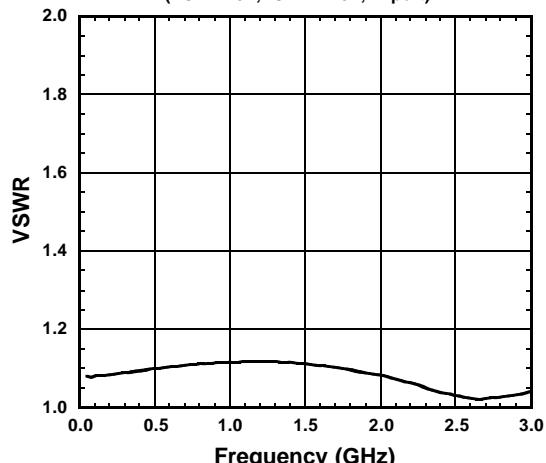


■ELECTRICAL CHARACTERISTICS

(with application circuit, losses of PCB, connector and DC blocking capacitor are excluded)


**Output Power, Control Current vs. Input Power
(P1-P2 ON, f=900MHz)**

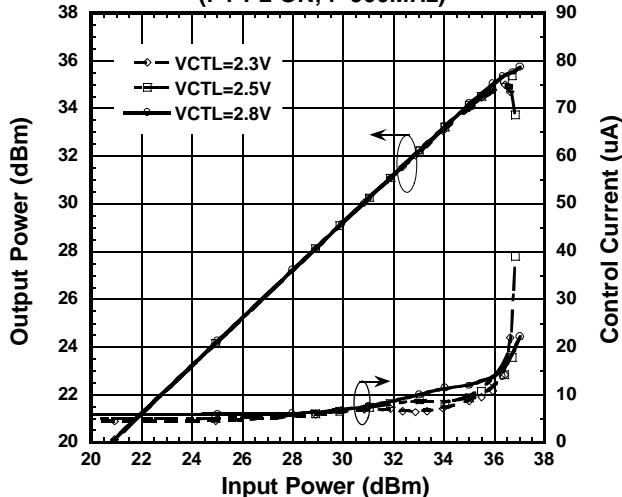


**Output Power, Control Current vs. Input Power
(P1-P2 ON, f=900MHz)**

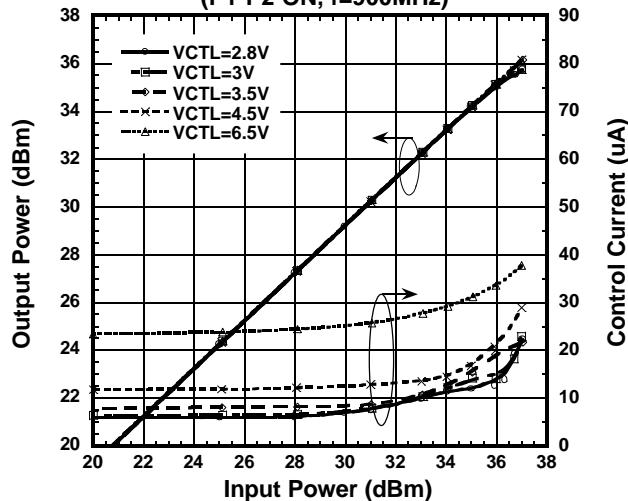


**Output Power, Control Current vs. Input Power
(P1-P2 ON, f=1.9GHz)**

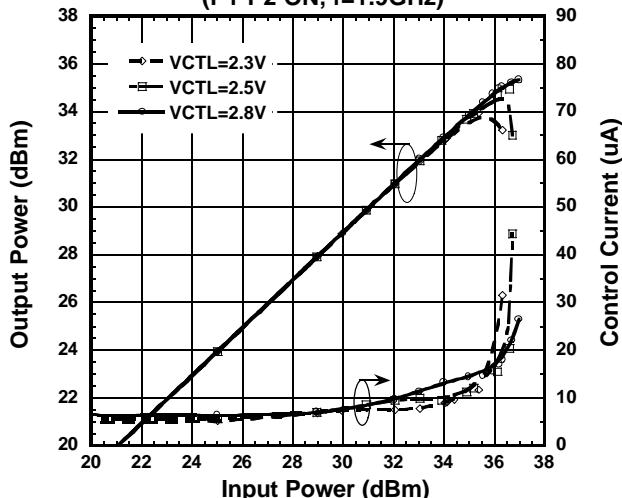


**Output Power, Control Current vs. Input Power
(P1-P2 ON, f=1.9GHz)**

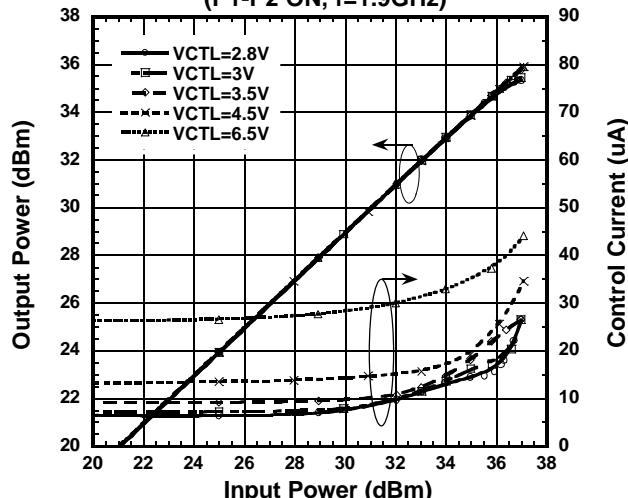

**Insertion Loss vs. Input Power
(P1-P2 ON, f=900MHz)**

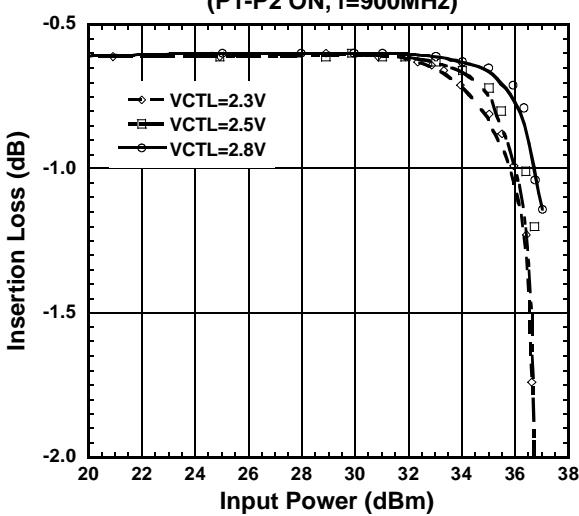

**Insertion Loss vs. Input Power
(P1-P2 ON, f=900MHz)**

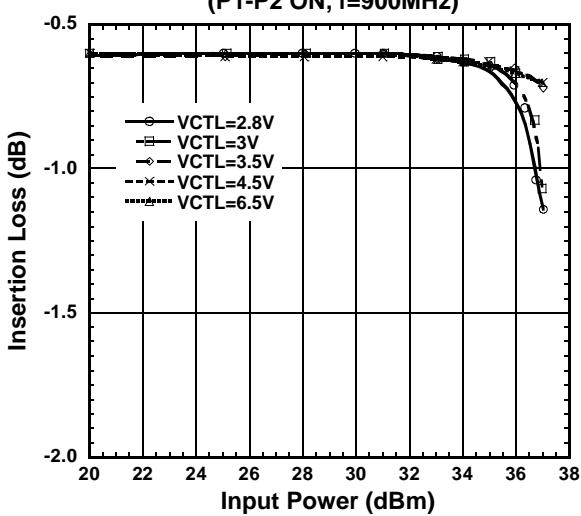


NJG1528KC1


ELECTRICAL CHARACTERISTICS

(with application circuit, losses of PCB, connector and DC blocking capacitor are excluded)


Insertion Loss vs. Input Power
(P1-P2 ON, f=1.9GHz)

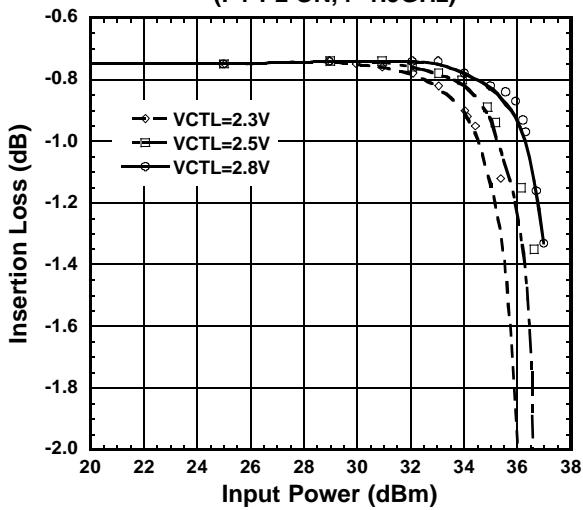


Insertion Loss vs. Input Power
(P1-P2 ON, f=1.9GHz)

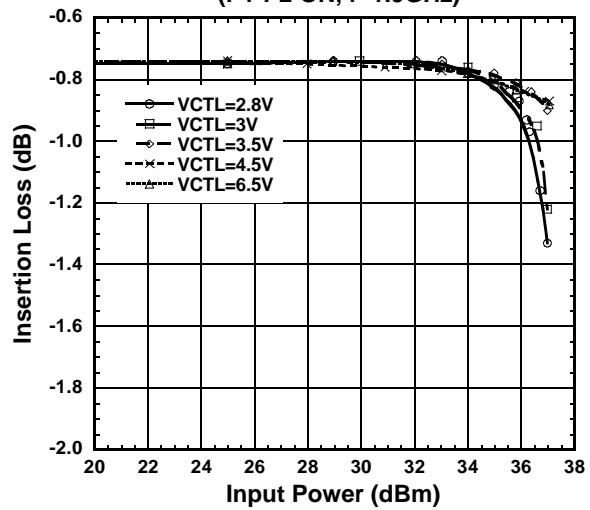


Isolation vs. Input Power
(P1-P2, f=900MHz)

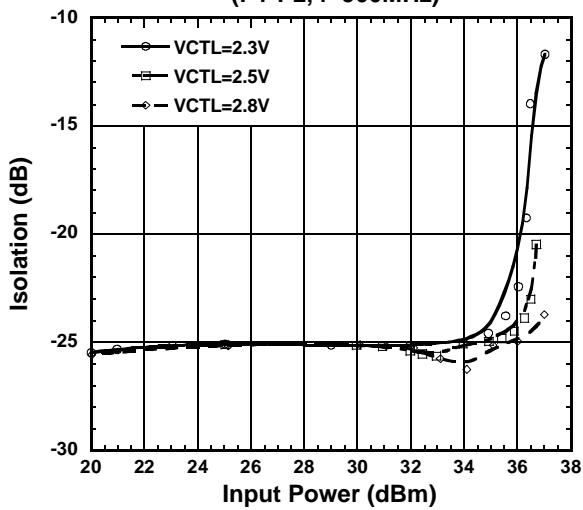


Isolation vs. Input Power
(P1-P2, f=900MHz)

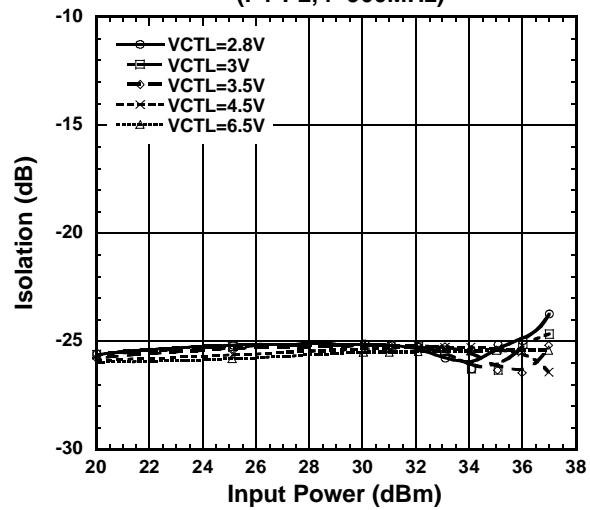







Isolation vs. Input Power
(P1-P2, f=1.9GHz)

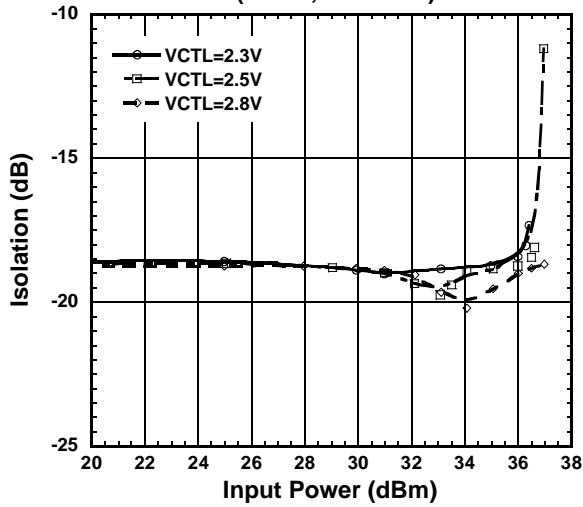

Isolation vs. Input Power
(P1-P2, f=1.9GHz)

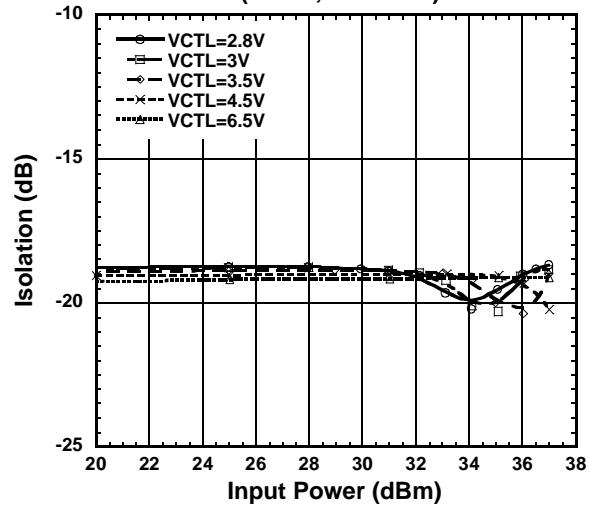


■ELECTRICAL CHARACTERISTICS (with application circuit)

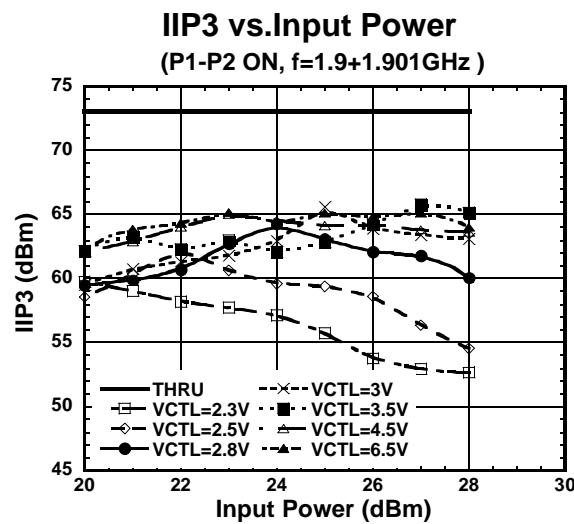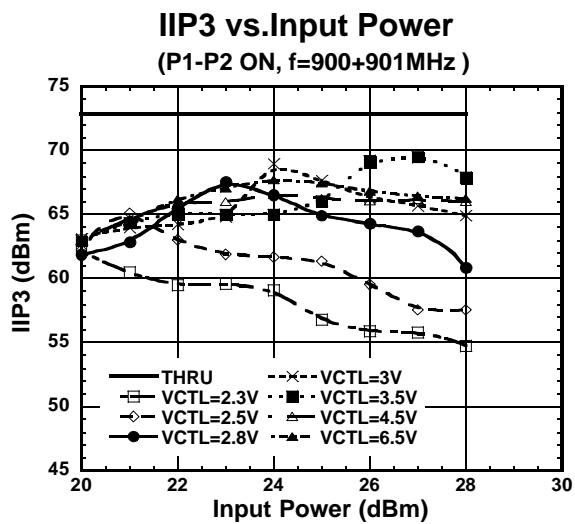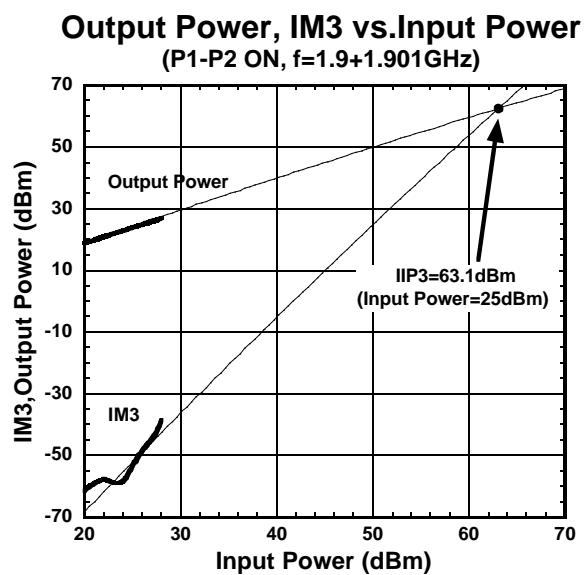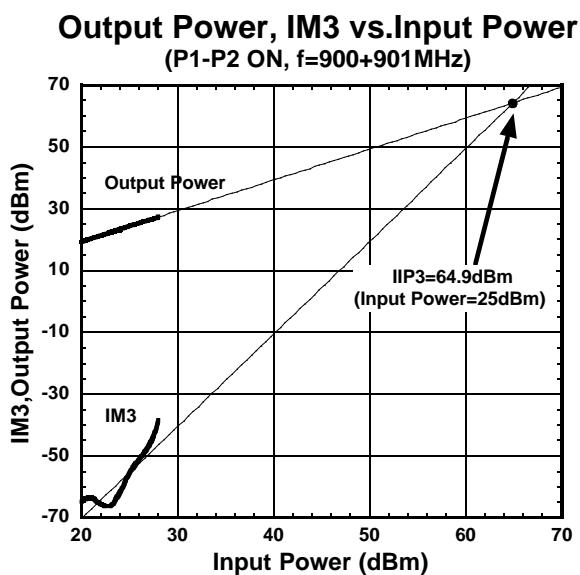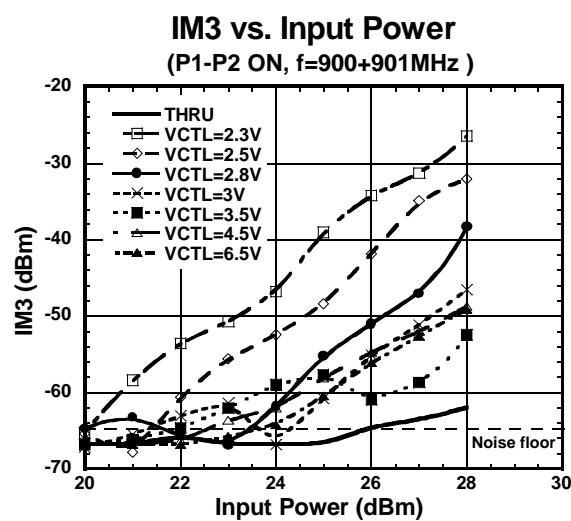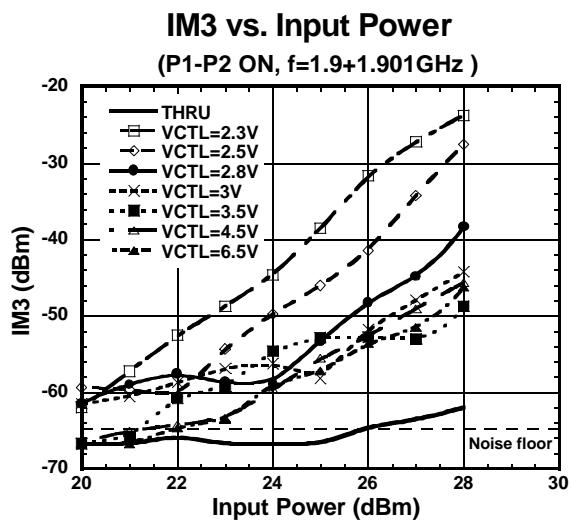


NJG1528KC1

■ELECTRICAL CHARACTERISTICS (with application circuit)


2nd Harmonics vs. Input Power
(P1-P2 ON, f=900MHz)

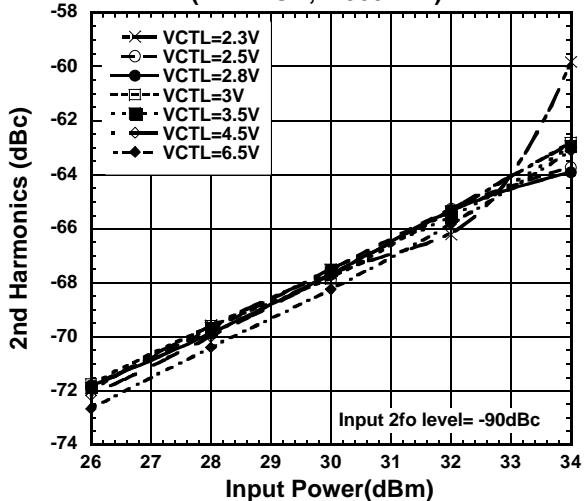


2nd Harmonics vs. Input Power
(P1-P2 ON, f=1.9GHz)

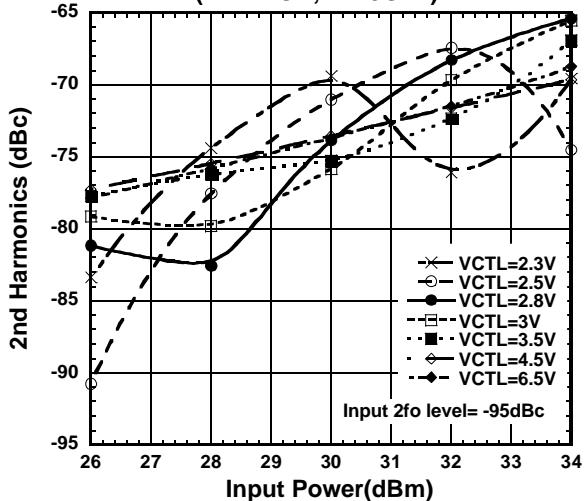


3rd Harmonics vs. Input Power
(P1-P2 ON, f=900MHz)

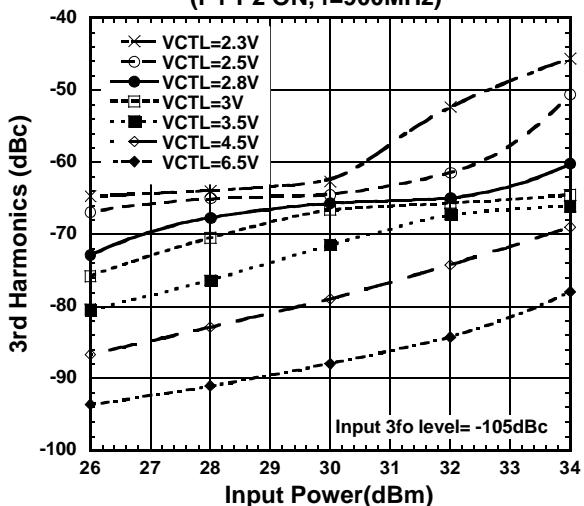

3rd Harmonics vs. Input Power
(P1-P2 ON, f=1.9GHz)

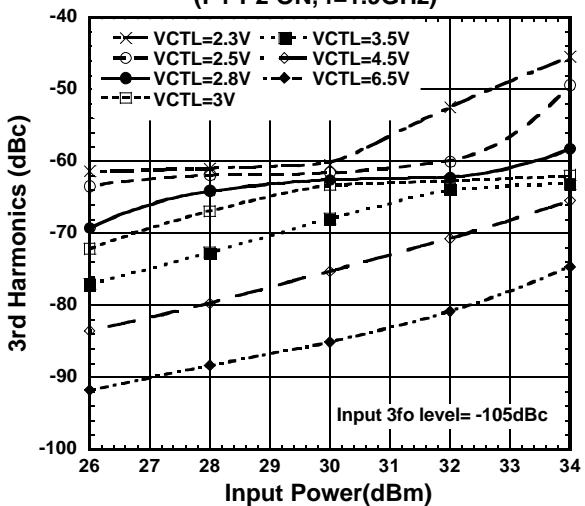


■APPLICATION CIRCUIT

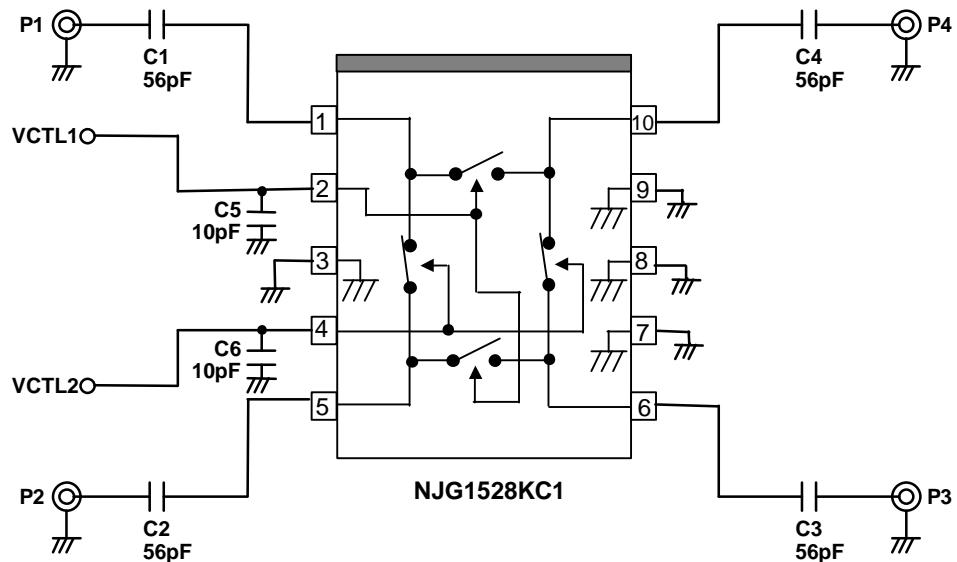

PARTS LIST

Parts No.	f=0.05-0.1GHz	f=0.1-0.5GHz	f=0.5-2.5GHz	Comment
C1 ~ C4	0.01uF	1000pF	56pF	MURATA (GRM36)
C5 ,C6	10pF	10pF	10pF	MURATA (GRM36)


■RECOMMENDED PCB DESIGN

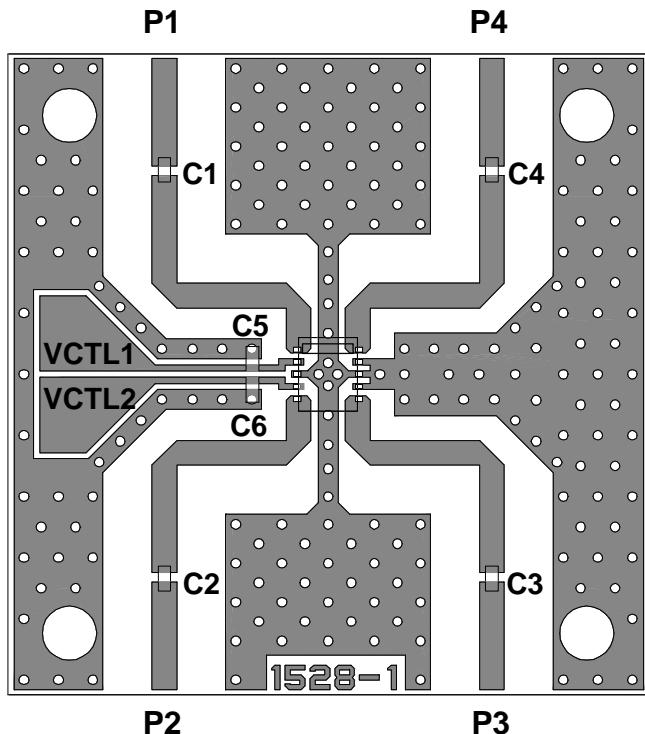

PCB SIZE=26x26 mm
PCB: FR-4 t=0.5mm
CAPACITOR: size 1005
STRIP LINE WIDETH=1.0mm

NJG1528KC1

■PACKAGE OUTLINE (FLP10-C1)

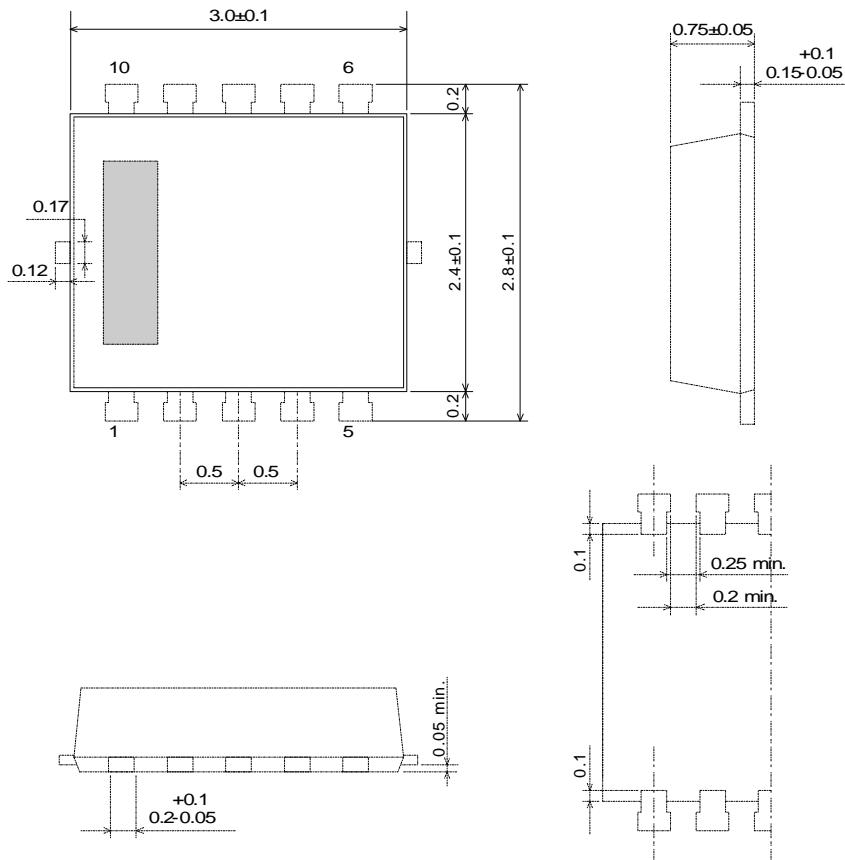

Lead material : Copper
Lead surface finish : Solder plating
Molding material : Epoxy resin
UNIT : mm
Weight : 15mg

Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9