

# RFFM6909

## 925MHz Transmit/Receive Module

This module is intended for 868MHz and 915MHz AMR solutions. The FEM provides separate ports for Rx/Tx paths, single-ended Tx and single-ended Rx or Rx differential port, 14dB gain single stage LNA, and single port antenna connection. The PA switch provides a nominal insertion loss of 0.8dB. The device is provided in a 4.0mm x 3.0mm, 18-pin package.




Package: LGA, 18-pin,  
4.0mm x 3.0mm

### Features

- Tx Insertion Loss: 0.7dB
- 50Ω Tx Transceiver Interface
- 75Ω Rx Differential Transceiver Interface
- Rx Gain: 14dB

### Applications

- Wireless Automated Metering
- Wireless Alarm Systems
- Portable Battery Powered Equipment
- Smart Energy
- 925MHz ISM Band Application
- Single Chip RF Front End Module

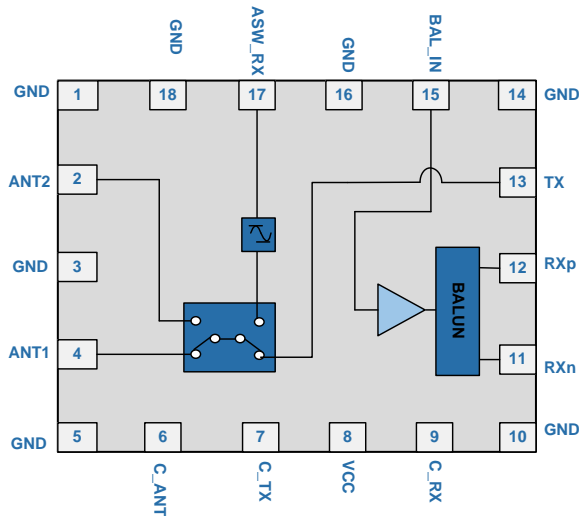

Functional Block Diagram

### Ordering Information

|                 |   |
|-----------------|---|
| RFFM6909SB      | Standard 5-piece bag                            |
| RFFM6909SQ      | Standard 25-piece bag                           |
| RFFM6909SR      | Standard 100-piece reel                         |
| RFFM6909TR13    | Standard 2500-pieces reel                       |
| RFFM6909PCK-410 | Fully assembled eval board w/5-piece sample bag |

## Absolute Maximum Ratings

| Parameter                               | Rating     | Unit |
|---|------------|------|
| Battery Voltage                         | 5.5        | V    |
| Operating Temperature                   | -40 to 85  | °C   |
| Storage Temperature                     | -40 to 150 | °C   |
| ESD, HBM (all pins)                     | 1000       | V    |
| ESD, CDM (all pins)                     | 1000       | V    |
| MSL                                     | MSL 3      |      |
| Maximum Input Power to TX Port          | +25        | dBm  |
| Maximum Input Power to ANT1/ANT2 Switch | +20        | dBm  |
| Maximum Input Power to BAL_IN           | +10        | dBm  |



**Caution!** ESD sensitive device.



RFMD Green: RoHS status based on EU Directive 2011/65/EU (at time of this document revision), halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

## Nominal Operating Parameters

| Parameter                            | Specification |     |      | Unit | Condition   |
|--------------------------------------|---------------|-----|------|------|---|
|                                      | Min           | Typ | Max  |      |   |
| Frequency                            | 922           | 925 | 929  | MHz  |   |
| RF Port Impedance                    |               | 50  |      | Ω    | Single-ended  |
|                                      |               | 75  |      | Ω    | Balanced; RX_P and RX_N   |
| Operating Temperature                | -40           |     | 85   | °C   |   |
| Storage Temperature                  | -40           |     | 150  | °C   |   |
| Total Leakage Current                |               | 1   | 10   | μA   |   |
| <b>RX Section</b>                    |               |     |      |      | <b>V<sub>CC</sub> = 3.6V, C<sub>TX</sub> = 0V, C<sub>RX</sub> = 3.4V, Temperature = 25°C; Unless otherwise specified.</b> |
| Battery Voltage                      | 3.3           | 3.6 | 4.0  | V    | V <sub>CC</sub>   |
| RX Gain                              | 12            | 14  | 16   | dB   |   |
| Noise Figure                         |               | 1.5 | 2    | dB   |   |
| Input IP3                            |               | 1   |      | dBm  |   |
| Input Return Loss                    | 7             | 10  |      | dB   |   |
| Output Return Loss                   | 10            | 15  |      | dB   |   |
| LNA Current                          | 6             | 8   | 12   | mA   | Over all conditions   |
| V <sub>CC</sub> RX Quiescent Current |               | 9   |      | mA   |   |
| Amplitude Imbalance                  | -0.6          |     | +0.6 | dB   | BAL_IN to RX_N/RX_P   |
| Phase Imbalance                      | -10           |     | +10  | Deg  |   |
| <b>Antenna Switch Section</b>        |               |     |      |      |   |
| Isolation                            |               | 25  |      | dB   | Any used port to any unused port  |
| TX Insertion Loss                    |               | 0.7 | 1.2  | dB   | Pins 2, 4 to Pins 13  |
| RX Insertion Loss                    |               | 1.0 | 1.5  | dB   | Pins 2, 4 to Pins 17  |
| Logic Voltage, High                  | 3.1           | 3.4 | 3.8  | V    | All Logic I/Os, V <sub>BAT</sub> -0.2V  |
| Logic Voltage, Low                   | 0.0           |     | 0.2  | V    | All Logic I/Os  |
| Logic Current, High                  |               | 5   | 10   | μA   |   |
| Logic Current, Low                   |               | 0.4 |      | μA   |   |

### Switch Control Truth Table


| Operating Mode | C_TX | C_RX | C_ANT |
|----------------|------|------|-------|
| TX-ANT1        | 1    | 0    | 0     |
| TX-ANT2        | 1    | 0    | 1     |
| RX-ANT1        | 0    | 1    | 0     |
| RX-ANT2        | 0    | 1    | 1     |
| All Off        | 0    | 0    | 0     |

Note:


\*Switch Control Logic High=Min 3.1V to Max 3.8V

\*Switch Control Logic Low= 0.0V to Max 0.2V

Pin Out

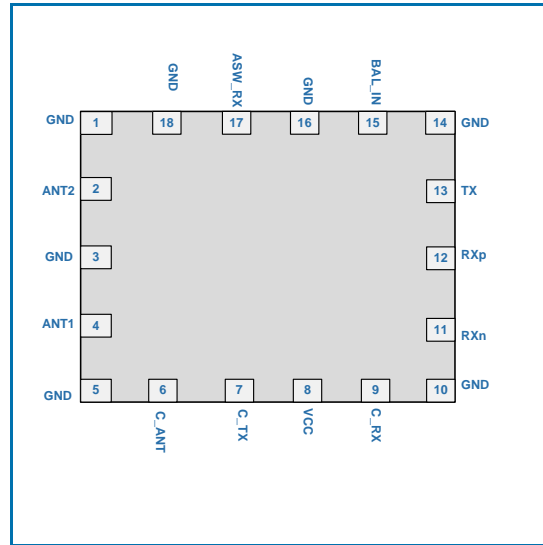

Package Outline and Branding Drawing (Dimensions in millimeters)

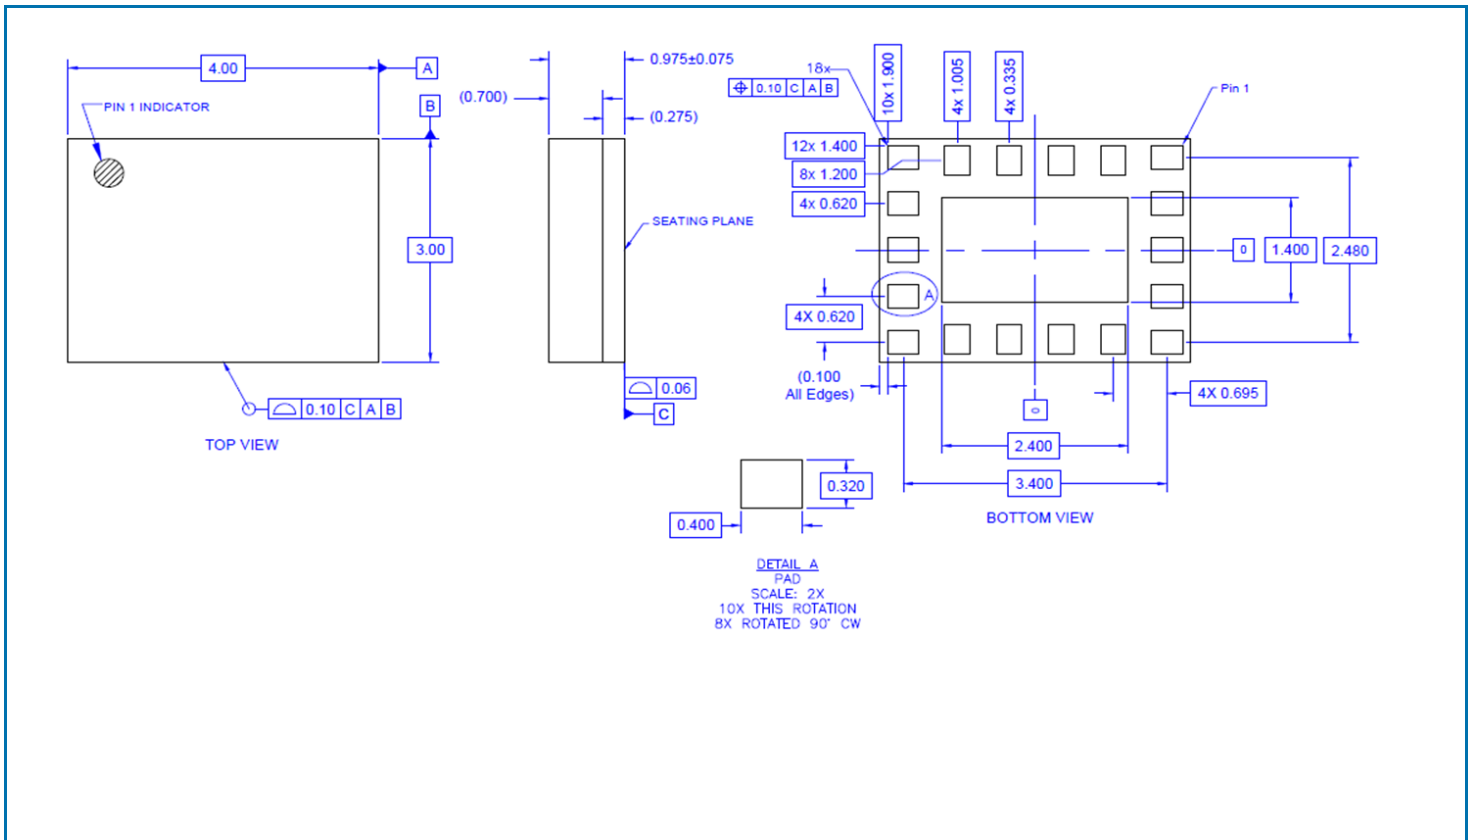

## Pin Names and Descriptions

| Pin | Name   | Description                     |
|-----|--------|---------------------------------|
| 1   | GND    | Ground                          |
| 2   | ANT2   | Antenna 2 Connect Port          |
| 3   | GND    | Ground                          |
| 4   | ANT1   | Antenna 1 Connect Port          |
| 5   | GND    | Ground                          |
| 6   | C_ANT  | Antenna Selection Control Line  |
| 7   | C_TX   | Transmit Selection Control Line |
| 8   | VCC    | Supply Voltage                  |
| 9   | C_RX   | Receive Selection Control Line  |
| 10  | GND    | Ground                          |
| 11  | RXN    | Receive Port Negative           |
| 12  | RXP    | Receive Port Positive           |
| 13  | TX     | Transmit Port                   |
| 14  | GND    | Ground                          |
| 15  | BAL_IN | Input to Balun                  |
| 16  | GND    | Ground                          |
| 17  | ASW_RX | Antenna Switched Rx Output      |
| 18  | GND    | Ground                          |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9