



## Features

- Two channel quadrature output
- Bushing or servo mount
- Square wave signal
- Small size
- Resolution to 256 PPR
- CMOS and TTL compatible
- Long life
- Ball bearing option for high operating speed up to 3000 rpm
- RoHS compliant\*

## EN - Rotary Optical Encoder

### Electrical Characteristics

|                                                         |                                                                                               |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Output.....                                             | 2-bit quadrature code, Channel A leads Channel B by 90 ° (electrical) with clockwise rotation |
| Resolution.....                                         | 25 to 256 cycles per revolution                                                               |
| Insulation Resistance (500 VDC) .....                   | 1,000 megohms                                                                                 |
| Electrical Travel.....                                  | Continuous                                                                                    |
| Supply Voltage.....                                     | 5.0 VDC $\pm 0.25$ VDC                                                                        |
| Supply Current.....                                     | 26 mA maximum                                                                                 |
| Output Voltage                                          |                                                                                               |
| Low Output.....                                         | 0.8 V maximum                                                                                 |
| High Output.....                                        | 4 V minimum                                                                                   |
| Output Current                                          |                                                                                               |
| Low Output.....                                         | 25 mA minimum                                                                                 |
| Rise/Fall Time.....                                     | 200 ns (typical)                                                                              |
| Shaft RPM (Ball Bearing) .....                          | 3,000 rpm maximum                                                                             |
| Power Consumption .....                                 | 136 mW maximum                                                                                |
| Pulse Width (Electrical Degrees, Each Channel) .....    | 180 ° $\pm 45$ ° typ.                                                                         |
| Pulse Width (Index Channel).....                        | 360 ° $\pm 90$ °                                                                              |
| Phase (Electrical Degrees, Channel A to Channel B)..... | 90 ° $\pm 45$ ° typ.                                                                          |

### Environmental Characteristics


|                                              |                                       |
|----------------------------------------------|---------------------------------------|
| Operating Temperature Range.....             | -40 °C to +75 °C (-40 °F to +167 °F)  |
| Storage Temperature Range .....              | -40 °C to +85 °C (-40 °F to +185 °F)  |
| Humidity.....                                | MIL-STD-202, Method 103B, Condition B |
| Vibration .....                              | 5 G                                   |
| Shock.....                                   | 50 G                                  |
| Rotational Life                              |                                       |
| A & C Bushings (300 rpm maximum)**.....      | 10,000,000 revolutions                |
| W, S & T Bushings (3,000 rpm maximum)**..... | 200,000,000 revolutions               |
| IP Rating.....                               | IP 40                                 |

### Mechanical Characteristics

|                                                       |                                                                                                  |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Mechanical Angle .....                                | 360 ° Continuous                                                                                 |
| Torque (Starting and Running)                         |                                                                                                  |
| A & C Bushings (Spring Loaded for Optimum Feel) ..... | 1 N-cm (1.5 oz-in.) maximum                                                                      |
| W, S & T Bushings (Ball Bearing Shaft Support) .....  | 0.07 N-cm (0.1 oz-in.) maximum                                                                   |
| Mounting Torque.....                                  | 1.7 to 2.0 N-cm (15 to 18 lb.-in.) maximum                                                       |
| Shaft End Play.....                                   | 0.30 mm (0.012 ") T.I.R. maximum                                                                 |
| Shaft Radial Play .....                               | 0.12 mm (0.005 ") T.I.R. maximum                                                                 |
| Weight .....                                          | 11 gms. (0.4 oz.)                                                                                |
| Terminals .....                                       | Axial or radial pc pins or ribbon cable                                                          |
| Soldering Condition                                   |                                                                                                  |
| Manual Soldering.....                                 | 96.5Sn/3.0Ag/0.5Cu solid wire or no-clean rosin cored wire<br>370 °C (700 °F) max. for 3 seconds |
| Wave Soldering .....                                  | 96.5Sn/3.0Ag/0.5Cu solder with no-clean flux<br>260 °C (500 °F) max. for 5 seconds               |
| Wash processes .....                                  | Not recommended                                                                                  |
| Marking.....                                          | Manufacturer's trademark, name, part number, and date code.                                      |
| Hardware .....                                        | One lockwasher and one mounting nut supplied with each encoder, except on servo mount versions.  |

\*\*For resolutions  $\leq 128$  quadrature cycles per shaft revolution.

### Quadrature Output Table

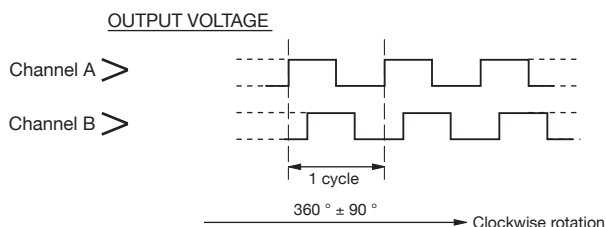

#### STANDARD RESOLUTIONS AVAILABLE

(Full quadrature output cycles per shaft revolution)

|     |     |
|-----|-----|
| 25* | 125 |
| 50* | 128 |
| 64  | 200 |
| 100 | 256 |

For Non-Standard Resolutions—Consult Factory


\* Channel B leads Channel A



# EN - Rotary Optical Encoder

**BOURNS®**


## Dimensional Drawings

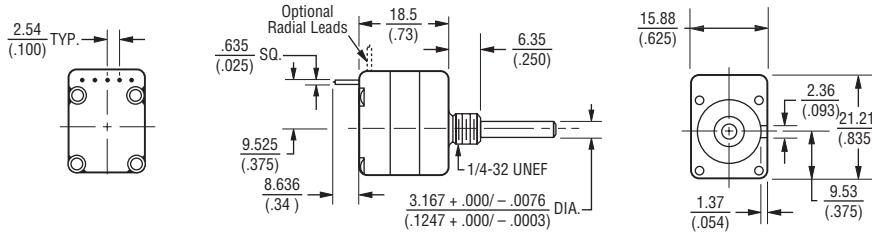

Consult factory for options not shown, including:



- Wire lead or cable options
- Connectors
- Non-standard resolutions
- Special shaft/bushing sizes and features
- Special performance characteristics
- PCB mounting bracket

Bushing Style C



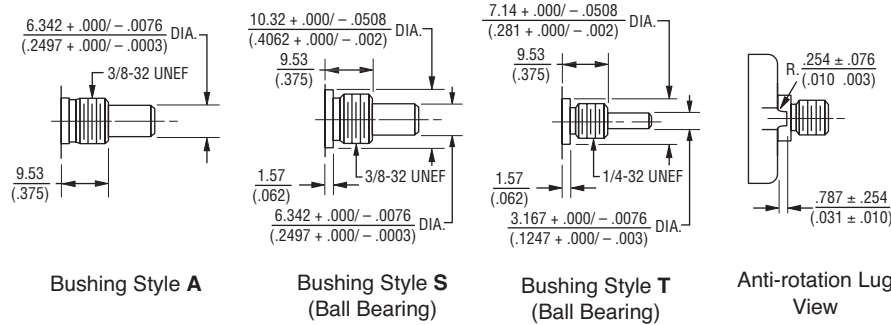


| SHAFT LENGTH | SHAFT FLAT LENGTH (DIM. F) |
|--------------|----------------------------|
| 12.7 (.050)  | 2.54 (.100)                |
| 15.9 (.625)  | 5.08 (.200)                |
| 19.1 (.750)  | 8.25 (.325)                |
| 22.2 (.875)  | 9.65 (.380)                |

## TERMINATION DIAGRAM

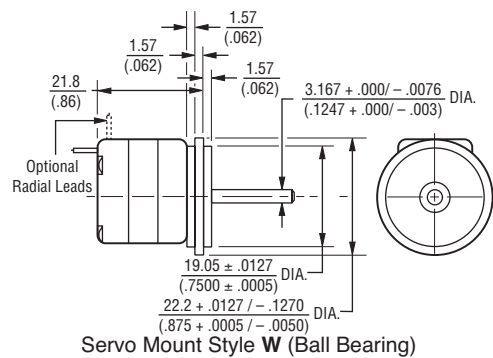

Servo Mount Style W (Ball Bearing)

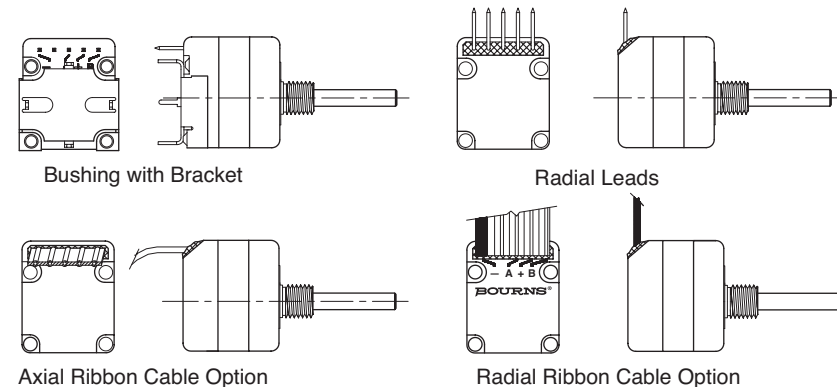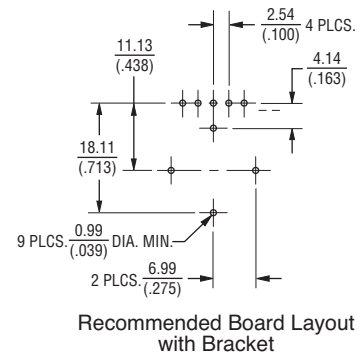

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

## GENERAL INFORMATION

The Bourns® EN model is a self-contained rotary optical encoder. It produces a 2-bit quadrature signal which is suitable for digital systems where both magnitude and direction of adjustment must be provided. The EN encoder is ideal for use as a digital panel control or as a position sensing device in applications where long life, reliability, high resolution and precise linearity are critical.

The EN series encoder converts rotary input into electrical signals which can be used by microprocessors without A/D conversion.


Bourns encoder output signals are square wave digital pulses which do not require debounce circuitry. Both features make it possible to significantly reduce the memory overhead, wiring and wiring interconnects required by other types of control devices.

EN optical encoders offer a useful rotational life of from 10 million to 200 million shaft revolutions, making them ideal for extended service applications. The Bourns encoder is also compact and well suited for situations where the available space is limited.

## EN - Rotary Optical Encoder

**BOURNS®**

### How To Order

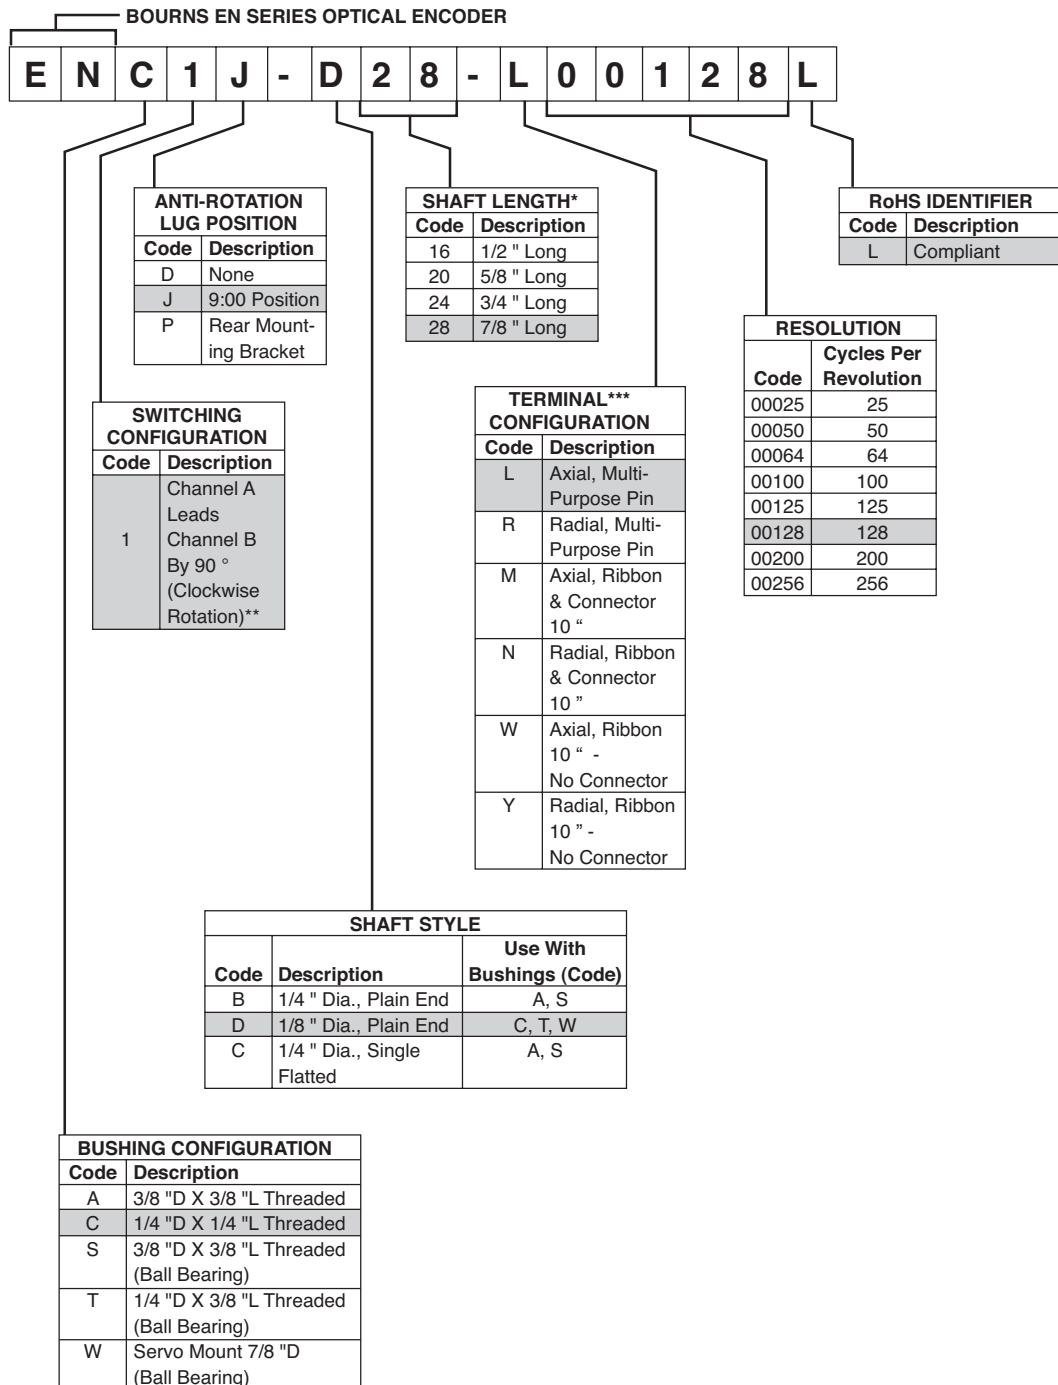

\* Shaft length measured from mounting surface.

\*\* 25 and 50 PPR is reversed (Channel B leads Channel A).

\*\*\* Standard ribbon cable is 10 " long. Consult factory for other lengths.

REV. 06/12

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9