



### **DEMO MANUAL DC2522A**

LT8609S

## 42V, 2A/3A Peak Micropower Synchronous Step-Down Regulator

#### DESCRIPTION

Demonstration circuit 2522A is a 42V, 2A/3A peak micropower synchronous step-down regulator featuring the LT®8609S. The demo board is designed for 5V output from a 5.5V to 42V input. The wide input range allows a variety of input sources, such as automotive batteries and industrial supplies. The LT8609S is a compact, high efficiency, high speed synchronous monolithic step-down switching regulator that consumes only 2.5µA of quiescent current when output is regulated at 5V. Top and bottom power switches, compensation components and other necessary circuits are inside of the LT8609S to minimize external components and simplify design.

The SYNC pin on the demo board is grounded by default for low ripple Burst Mode® operation. Move JP1 to PULSE SKIPPING position can change the operation mode to pulse-skipping operation. Once JP1 is on SPREAD SPECTRUM position, V<sub>CC</sub> is applied to the SYNC pin for low EMI spread spectrum operation. To synchronous to an

external clock, move JP1 to SYNC and apply the external clock to the SYNC turret. Figure 1 shows the efficiency of the circuit.

The demo board has an EMI filter installed. The radiated EMI performances of the board (with EMI filter) are shown in Figures 2 and 3. The red lines in Figures 2 and 3 are CISPR25 class 5 peak limit. To use the EMI filter, the input should be tied to VEMI, not  $V_{IN}$ . An inductor L2, which is a  $0\Omega$  jumper on the board by default now, can be added in the EMI filter to further reduce the conducted emission.

The LT8609S data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this demo manual for DC2522A.

Design files for this circuit board are available at http://www.linear.com/demo/DC2522A

### **PERFORMANCE SUMMARY** Specifications are at T<sub>A</sub> = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$\overline{V_{IN}}$	Input Voltage Range		5.5		42	V
V <sub>OUT</sub>	Output Voltage		4.8	5	5.2	V
I <sub>OUT</sub>	Maximum Output Current		2			А
f <sub>SW</sub>	Switching Frequency		1.85	2	2.15	MHz
EFE	Efficiency at DC	V <sub>IN</sub> = 12V, I <sub>OUT</sub> = 1A		93.1		%

DC2522A is easy to set up to evaluate the performance of the LT8609S. Refer to Figure 4 for proper measurement equipment setup and follow the procedure below:

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. See Figure 5 for the proper scope technique.

- 1. Set an input power supply that is capable of 42V/2A. Then turn off the supply.
- 2. With power off, connect the supply to the input terminals  $V_{\text{IN}}$  and GND.
- 3. Turn on the power at the input.

**NOTE:** Make sure that the input voltage never exceeds 42V.

- 4. Check for the proper output voltage of 5V. Turn off the power at the input.
- 5. Once the proper output voltage is established, connect a variable load capable of sinking 2A at 5V to the output terminals V<sub>OLIT</sub> and GND. Set the current for 0A.

- a. If efficiency measurements are desired, an ammeter can be put in series with the output load in order to measure the DC2522A's output current.
- A voltmeter can be placed across the output terminals in order to get an accurate output voltage measurement.
- 6. Turn on the power at the input.

**NOTE:** If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

- 7. Once the proper output voltage is established again, adjust the load and/or input within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other desired parameters.
- 8. An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC position). Please ensure that the chosen RT sets the LT8609S switching frequency to equal or below the lowest SYNC frequency. See the data sheet section, Synchronization.




Figure 1. Efficiency vs Load Current at 2MHz Switching Frequency

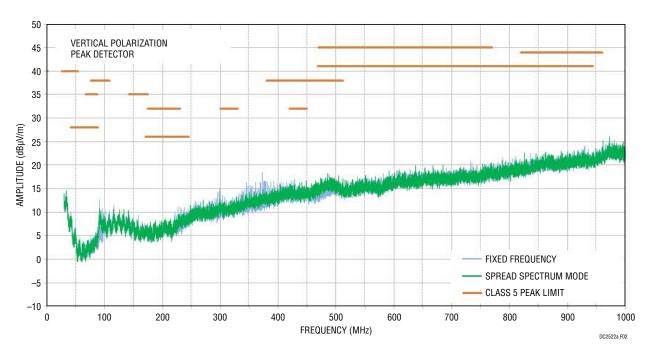


Figure 2. LT8609S Demo Circuit EMI Performance in CISPR25 Radiated Emission Test, Antenna Polarization: Vertical ( $V_{IN} = 14V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 2A$ , 2MHz Switching Frequency)

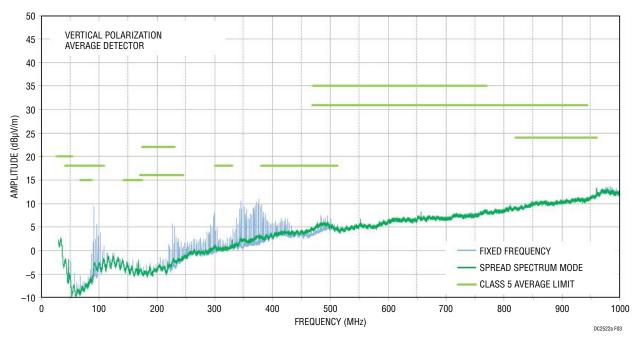


Figure 3. LT8609S Demo Circuit EMI Performance in CISPR25 Radiated Emission Test, Antenna Polarization: Horizontal ( $V_{IN} = 14V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 2A$ , 2MHz Switching Frequency)

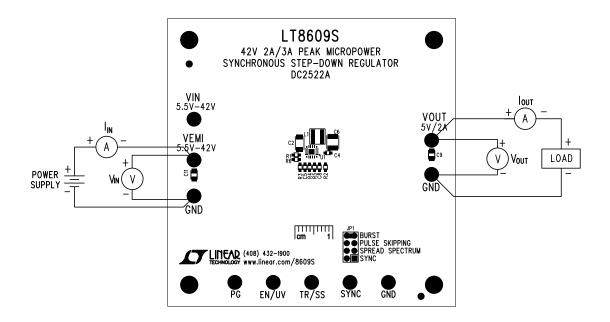


Figure 4. Proper Measurement Equipment Setup




Figure 5. Measuring Output Ripple

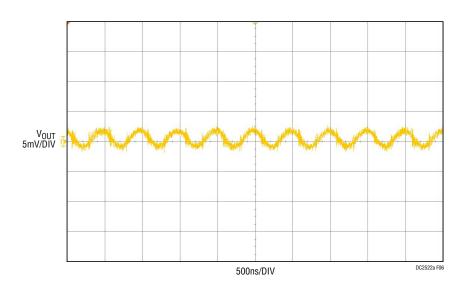



Figure 6. DC2522A Output Ripple ( $V_{IN} = 12V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 2A$ , 2MHz Switching Frequency)

# DEMO MANUAL DC2522A

## **PARTS LIST**

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Require	d Circuit	Components		·
1	1	C2	CAP, X7R, 4.7µF, 50V, 10% 1206	MURATA, GRM31CR71H475KA12L
2	1	C4	CAP, X7R, 1µF, 25V, 10%, 0603	MURATA, GRM188R71E105KA12D
3	1	C5	CAP, COG, 10pF, 25V, 5%, 0603	AVX, 06033A100JAT2A
4	1	C6	CAP, X7R, 47µF, 10V, 10%, 1210	MURATA, GRM32ER71A476KE15L
5	1	C8	CAP, X7R, 0.01µF, 16V, 10%, 0603	AVX, 0603YC103KAT2A
6	1	L1	IND, 2.2µH	COILCRAFT, XFL4020-222ME
7	1	R2	RES, CHIP, 18.2k, 1/10W, 1%, 0603	VISHAY, CRCW060318K2FKEA
8	1	R3	RES, CHIP, 49.9k, 1/10W, 1%, 0603	VISHAY, CRCW060349K9FKEA
9	2	R1, R4	RES, CHIP, 1M, 1/10W, 1%, 0603	VISHAY, CRCW06031M00FKEA
10	1	R5	RES, CHIP, 182k, 1/10W, 1%, 0603	VISHAY, CRCW0603182KFKEA
11	1	U1	IC, REGULATOR, LQFN-16	LINEAR TECHNOLOGY, LT8609SEV#PBF
Addition	al Demo	Board Circuit Comp	onents	·
1	1	C1	CAP, ALUM 22µF 63V	SUN ELECT, 63CE22BS
2	2	C3, C10	CAP, X7R, 4.7μF, 50V, 10% 1206	MURATA, GRM31CR71H475KA12L
3	1	C9	CAP, X7R, 4.7µF, 16V, 10%, 0805	MURATA, GRM21BR71C475K73L
4	1	C11	CAP, X7R, 1µF, 50V, 10%, 0805	MURATA, GRM21BR71H105KA12L
5	1	C12	CAP, X7R, 0.1µF, 50V, 10%, 0603	MURATA, GRM188R71H104KA93D
6	1	FB1	FERRITE BEAD 0805	TDK, MPZ2012S331AT000
7	1	L2	RES, CHIP, 0Ω, 3/4W, 2010	VISHAY, CRCW20100000Z0EF
8	0	R6 (0PT)	RES, 0603	
Hardwai	e: For D	emo Board Only		·
1	9	E1 T0 E9	TESTPOINT, TURRET, 0.094"	MILL-MAX, 2501-2-00-80-00-07-0
2	1	E10 (OPT)	TESTPOINT, TURRET, 0.094"	
3	1	JP1	DOUBLE ROW HEADER 2 × 4 0.079"	SULLINS, NRPN042PAEN-RC
4	1	XJP1	SHUNT, 0.079" CENTER	SAMTEC, 2SN-BK-G
5	4	MH1 TO MH4	STAND-OFF, NYLON 0.50" TALL	KEYSTONE, 8833(SNAP ON)

## **SCHEMATIC DIAGRAM**

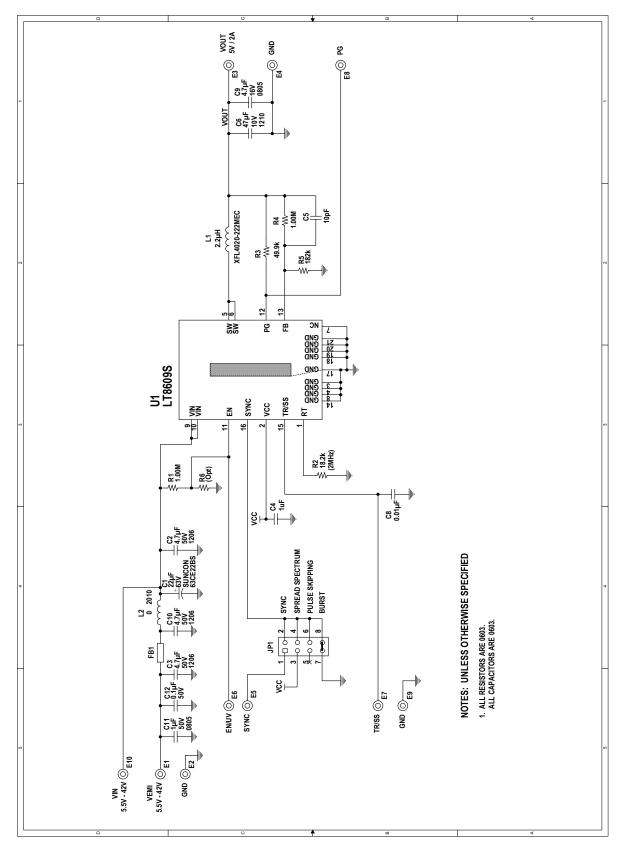

### DEMO MANUAL DC2522A

#### DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following AS IS conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.

LTC currently services a variety of customers for products around the world, and therefore this transaction is not exclusive.

**Please read the DEMO BOARD manual prior to handling the product**. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged**.

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology 1630 McCarthy Blvd. Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation





#### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

## Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru 4 moschip.ru 9