


PmodSTEP™ Reference Manual

Revised May 24, 2016

This manual applies to the PmodSTEP rev. A

Overview

The PmodSTEP provides a four channel drive for a stepper motor via the [ST L293DD](#). Users may wire two pairs of channels in series to drive up to 600 mA of current per channel and can view the current status of a GPIO signal through a set of user LEDs.

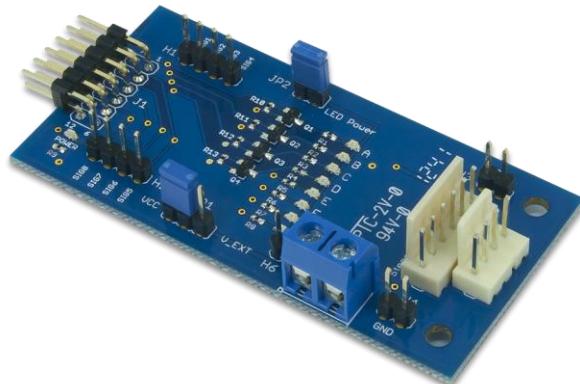

Features include:

- Stepper motor driver for 4 and 6-pin motors
- Can drive both motors simultaneously
- Multiple LEDs to indicate signal propagation
- Jumper for optional external power
- Small PCB size for flexible designs 2.8" x 1.3" (7.1 cm x 3.3 cm)
- 2x6-pin Pmod connector with GPIO interface
- Follows [Digilent Pmod Interface Specification](#) Type 1

The PmodSTEP.

1 Functional Description

The PmodSTEP utilizes ST's four channel driver, a L293DD, to drive stepper motors at higher currents than a system board can typically provide from their logic outputs. External test point headers and LEDs are provided for easy testing and observation of the propagation of signals.

2 Interfacing with the Pmod

The PmodSTEP communicates with the host board via the GPIO protocol.

This Pmod offers headers for both 4-pin and 6-pin stepper motors. Stepper motors work by alternately energizing the coils to different polarities inducing the stepper motor to rotate.

4-pin stepper motors only work in the bipolar configuration, requiring that the two inputs on each electromagnetic coil are brought to the correct logic level voltages to induce current flow in the correct direction. The 6-pin stepper

motor header on this Pmod can be oriented for either bipolar or unipolar configuration. The two extra pins on this header provide two positive power pins as a source of current for when an input on one end of a coil is driven to a logic low voltage level.

Pin	Signal	Description
1	SIG1	Signal 1
2	SIG2	Signal 2
3	SIG3	Signal 3
4	SIG4	Signal 4
5	GND	Power Supply Ground
6	VCC	Positive Power Supply
7	SIG5	Signal 5/Output 1 for the Stepper Motor
8	SIG6	Signal 6/Output 2 for the Stepper Motor
9	SIG7	Signal 7/Output 3 for the Stepper Motor
10	SIG8	Signal 8/Output 4 for the Stepper Motor
11	GND	Power Supply Ground
12	VCC	Positive Power Supply

Table 1. Pinout description table.

Any external power applied to the PmodSTEP must be within 4.5V and 36V; it is recommended that Pmod is operated at 5V.

3 Physical Dimensions

The pins on the pin header are spaced 100 mil apart. The PCB is 2.8 inches long on the sides parallel to the pins on the pin header and 1.38 inches long on the sides perpendicular to the pin header.

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9