


**Altera™
MT2000**
**Modified, Medical Grade, Polyolefin,
Heat - Shrinkable Tubing**

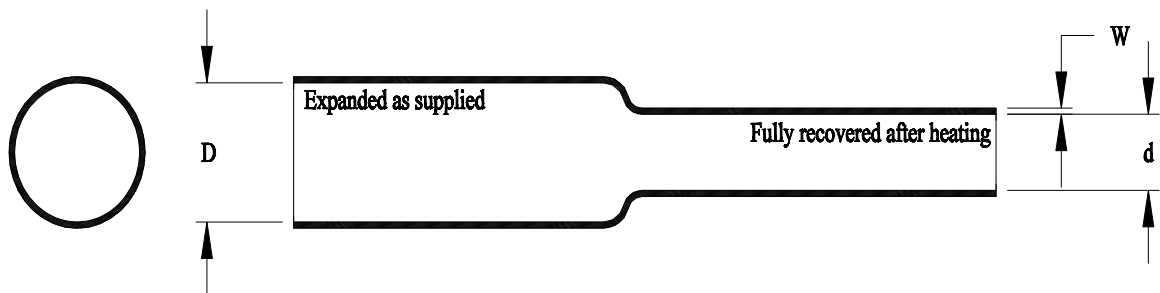

This specification covers the requirements for one type of single wall, electrical insulating, extruded tubing whose diameter will reduce to a predetermined size upon application of heat in excess of 140°C (284°F).

The tubing is fabricated from modified polyolefin crosslinked by irradiation. It shall be homogenous and essentially free from flaws, defects, pinholes, seams, cracks or inclusions.

The tubing is fabricated from materials which meet the requirements of U.S. Pharmacopeia Class VI Plastics. Color shall be black or clear unless otherwise specified.

Table 1: Dimensions

Size	As Supplied		Recovered							
	Inside Diameter Minimum (D)		Inside Diameter Maximum (d)		Wall Thickness(Inches, <i>Millimeters</i>) (W)					
	<i>mm.</i>	<i>in.</i>	<i>mm.</i>	<i>in.</i>	Minimum		Maximum		Nominal	
1mm	1.0	.040	0.45	.018	.008	0.20	.012	0.30	.010	.25
2mm	2.0	.080	0.80	.032	.008	0.20	.012	0.30	.010	.25
3mm	3.0	.120	1.20	.048	.008	0.20	.012	0.30	.010	.25
6mm	6.0	.240	2.4	.096	.008	0.20	.012	0.30	.010	.25
10mm	10.0	.400	4.0	.160	.012	0.30	.016	0.41	.014	.36

 TE Connectivity 300 Constitutional Drive Menlo Park, CA 94025 USA			Raychem	Specification Control Drawing Title: AlteraTM MT2000 Modified, Medical Grade, Polyolefin, Heat - Shrinkable Tubing		
TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No : MT2000			
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 11MAY11	Rev.: B1	Sheet: 1 of 2	

Print Date: 11-May-11 If this document is printed it becomes uncontrolled. Check for the latest revision.

Table 2: Properties

Property	Unit	Requirement	Test Method
PHYSICAL			
* Dimensions	Inches (<i>mm</i>)	In accordance with Table 1	
* Longitudinal Change	Percent	0, -10	ASTM D 2671
* Concentricity as supplied	Percent	60 minimum	ASTM D 2671
Tensile Strength	PSI (<i>MPa</i>)	3000 minimum (20.7)	ASTM D 2671,
Ultimate Elongation	Percent	200 minimum	2"/minute
Secant Modulus	PSI (<i>MPa</i>)	5.0 x 10 ⁴ minimum (344)	ASTM D 2671
Heat Resistance 168 hours at 125°C (257 °F) Followed by test for: Ultimate Elongation			ASTM D 2671,
	Percent	200 minimum	2"/minute
ELECTRICAL			
Dielectric Strength	Volts/mil (<i>volts/mm</i>)	1000 minimum (39.36)	ASTM D 2671
Dielectric Withstand 3000V, 60 Hz	sec	60 minimum	ASTM D 2671
CHEMICAL			
Fluid Resistance 24 hours at 23 ± 3°C (77 ± 5°F) Isopropyl Alcohol 5% Saline Solution Cidex** Followed by tests for: Dielectric Strength			ASTM D 2671
	Volts/mil (<i>volts/mm</i>)	1000 minimum (39.36)	ASTM D 2671
Tensile Strength	PSI (<i>MPa</i>)	3000 minimum (20.7)	ASTM D 2671
Heavy Metals Analysis Cadmium Mercury Lead Bismuth Antimony	ppm	1 maximum (total of all metals)	USP XXII Physicochemical Tests-Plastics (Note 1)

* Denotes lot acceptance test

**Trademark of Johnson & Johnson Company

Note 1: Sample preparation and extraction is per USP XXII. Metals analysis may be colorimetric as described in USP XXII or by equivalent quantitative analytical method.

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.

Rev. Date: 11MAY11	Rev.: B1	Document No. MT2000	Sheet: 2 of 2
-----------------------	-------------	-------------------------------	------------------

Print Date: 11-May-11 If this document is printed it becomes uncontrolled. Check for the latest revision.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9