

### 3.0V TO 3.6V, 2.4GHz TO 2.5GHz LINEAR POWER AMPLIFIER

Package Style: QFN, 8-Pin, 2.2x2.2x0.45mm




### **Features**

- Single Power Supply 3.0V to 3.6V
- 30dB Typical Gain, Input Matched to 50Ω
- 2.4 GHz to 2.5 GHz Frequency Range
- 11g P<sub>OUT</sub>=+18dBm@3% Typ EVM, 95 mA

### **Applications**

- IEEE802.11b/g/n WiFi Applications
- 2.5 GHz ISM Band Applications
- Commercial and Consumer Systems
- Portable Battery-Powered Equipment
- Spread-Spectrum and MMDS Systems

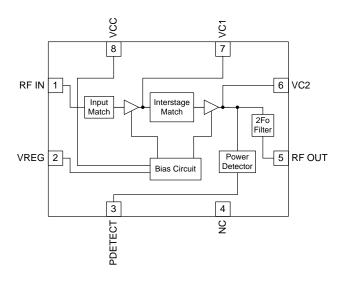

**Functional Block Diagram** 

### **Product Description**

The RF5622 is a linear, medium-power, high-efficiency, two-stage amplifier IC designed specifically for battery-powered WiFi applications such as PC cards, mini PCI, and compact flash applications. The device is manufactured on an advanced InGaP Gallium Arsenide Heterojunction Bipolar Transistor (HBT) process, and has been designed for use as the final RF amplifier in 2.5 GHz OFDM and other spread-spectrum transmitters. The device is provided in a 2.2 mmx2.2 mmx0.45 mm, 8-pin, QFN with a backside ground. The RF5622 is designed to maintain linearity over a wide range of supply voltage and power output. The RF5622 also has built-in power detector and incorporates the input and interstage matching components internally which reduces the component count used externally and makes it easier to incorporate on any design.

### **Ordering Information**

RF5622 Standard 25 piece bag RF5622SR Standard 100 piece reel RF5622TR7 Standard 2500 piece reel

RF5622PCK-410 Fully assembled evaluation board tuned for 2.4 GHz to

2.5 GHz and 5 piece loose samples

### **Optimum Technology Matching® Applied**

☐ GaAs HBT	☐ SiGe BiCMOS	☐ GaAs pHEMT	☐ GaN HEMT
☐ GaAs MESFET ✓ InGaP HBT	☐ Si BiCMOS	☐ Si CMOS	
<b>☑</b> InGaP HBT	☐ SiGe HBT	☐ Si BJT	

# **RF5622**



### **Absolute Maximum Ratings**

Parameter	Rating	Unit
Supply Voltage	-0.5 to +5.0	V <sub>DC</sub>
Power Control Voltage (V <sub>REG</sub> )	-0.5 to +3.3	V
DC Supply Current	240	mA
Input RF Power	+5	dBm
Extreme Operating Temperature	-30 to +85	°C
Full Specification Temperature Range	-15 to +85	°C
Storage Temperature	-40 to +150	°C
Moisture sensitivity	JEDEC Level 2	



### Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

Parameter	Specification		Heit	O and distant	
	Min.	Тур.	Max.	Unit	Condition
IEEE802.11g					Temperature=+25°C, V <sub>CC</sub> =3.3V, V <sub>REG</sub> =2.8V pulsed at 1% to 100% duty cycle, Frequency=2450 MHz, circuit per evaluation board schematic, unless otherwise specified
Frequency	2.4		2.5	GHz	IEEE802.11g IEEE802.11n
Output Power		13		dBm	At max data rate, OFDM modulation RMS, mean, V <sub>CC</sub> =2.8V
		18		dBm	At max data rate, OFDM modulation RMS, mean, V <sub>CC</sub> =3.3V
EVM*		3.0	4.0	%	RMS, mean
Gain	26	30		dB	At +18dBm RF P <sub>OUT</sub> and 54Mbps
Gain Variance Over Temperature			1.5	±dB	-30°C to +85°C, 2.4GHz to 2.5GHz
Power Detector					
P <sub>OUT</sub> =8dBm		0.320		V	
P <sub>OUT</sub> =18dBm		1.2		V	
Power Supply	2.8	3.3	3.6	V <sub>DC</sub>	
V <sub>REG</sub> Input Voltage	2.75	2.8	3.0	V <sub>DC</sub>	Operating
Output VSWR			10:1		No damage to the PA
Input Return Loss		-15	-10	dB	
Turn-on Time**		0.5	1.8	μS	Output stable to within 90% of final gain
Second Harmonic			-43	dBm	Fundamental frequency is between 2.4GHz and 2.5GHz; RFP <sub>OUT</sub> =+18dBm, 1Mbps CCK IEEE802.11b modulation
Current Consumption					
Quiescent Current		55		mA	Data rate @≤3.5% EVM RMS, mean
Operating Current		70		mA	P <sub>OUT</sub> =+13dBm, V <sub>CC</sub> =2.8V
		95		mA	P <sub>OUT</sub> =+18dBm, V <sub>CC</sub> =3.3V, diff. output match required
I <sub>REG</sub> Current		2	6	mA	$V_{CC}$ =+3.3 $V_{DC}$
Shutdown Current		0.5	10	μΑ	
					*

#### Notes


<sup>\*</sup>The EVM specification is obtained with a signal generator that has an EVM floor of less than 0.7%.

<sup>\*\*</sup>The PA must operate with gated bias voltage input at 1% to 99% duty cycles without any EVM or other parameter degradation.



Pin	Function	Description				
1	RF IN	RF input. Input is matched to $50\Omega$ and DC block is provided internally.				
2	VREG	Bias current control voltage for the first and second amplifier stage.				
3	PDETECT or	Power detector which provides an output voltage proportional to the RF output power level. May need extern				
	NC	decoupling capacitor for load sensitivity. May be left unconnected if function is not desired.				
4	NC	This pin may be left unconnected or may be connected to ground.				
5	RF OUT	RF output. A DC blocking capacitor may be needed as this pin of the PA is a DC short to ground.				
6	VC2	Voltage supply for second stage amplifier. External low frequency bypass capacitors should be connected if no other low frequency decoupling is employed.				
7	VC1	Voltage supply for the first amplifier stage. External low frequency bypass capacitors should be connected if no other low frequency decoupling is employed.				
8	VCC	Supply voltage for the bias reference and control circuit. May be connected with $V_{C1}$ and $V_{C2}$ (with a single supply voltage). The 56 pF bypass capacitor on the $V_{CC}$ line should be placed as close as possible to the IC.				
Pkg	GND	The center metal base of the QFN package provides DC and RF ground as well as heat sink for the amplifier.				
Base						


## **Package Drawing**

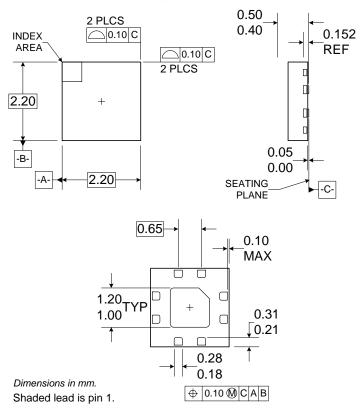

# **RF5622**



## Pin Out

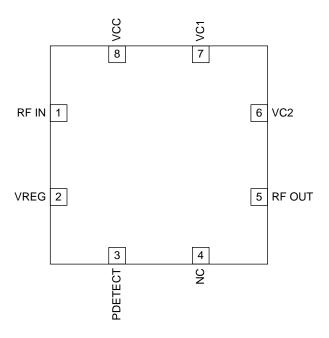



### **Theory of Operation and Application Information**


The RF5622 is a two-stage power amplifier (PA) with a typical gain of 30dB in the 2.4GHz to 2.5GHz ISM band. The RF5622 has integrated input and interstage matching components thus allowing a minimal bill of material (BOM) part count in end applications. The RF5622 is designed primarily for IEEE802.11b/g/n WiFi applications where the available supply voltage and current are limited. This amplifier will operate to (and below) the lowest expected voltage made available by a typical PCMCIA slot in a laptop PC, and will maintain required linearity at decreased supply voltages. The device is provided in a 2mmx2mmx0.45mm, 8-pin, QFN with backside ground.

The RF5622 requires only a single positive supply of 3.3V nominal to operate to full specifications. Power control is provided through one bias voltage pin ( $V_{REG}$ ). The input DC blocking cap is provided internally, the output of the PA is not internally DC blocked. The evaluation board circuit (available from RF Micro Devices, Inc. (RFMD)) is optimized for 3.3 $V_{DC}$  applications. For best performance, it is important to duplicate (as closely as possible) the layout of the evaluation board. The RF5622 has primarily been characterized with a voltage on  $V_{REG}$  of 2.8 $V_{DC}$ . If you prefer to use a bias voltage that is significantly different than 2.8 $V_{DC}$ , or a different frequency than the recommended frequency range, contact RFMD Sales or Applications Engineering for additional data and guidance.

For best results, the PA circuit layout from the evaluation board should be copied as closely as possible, particularly the ground layout and ground vias. Other configurations may also work, but the design process is much easier and quicker if the layout is copied from the RF5622 evaluation board. Gerber files of RFMD PCBA designs can be provided on request. The RF5622 is a very easy part to implement, but care in circuit layout and component selection is always advisable when designing circuits to operate at 2.5 GHz. The RF5622 evaluation board layout and schematic are available using 0201 (US) size components which will help shrink the overall size of the total area of the PA and components of the intended design. If you prefer to use a supply or bias voltage that is significantly different than what is specified, or a different frequency than the recommended frequency range, contact RFMD Sales or Applications Engineering for additional data and guidance.




# **Application Schematic**

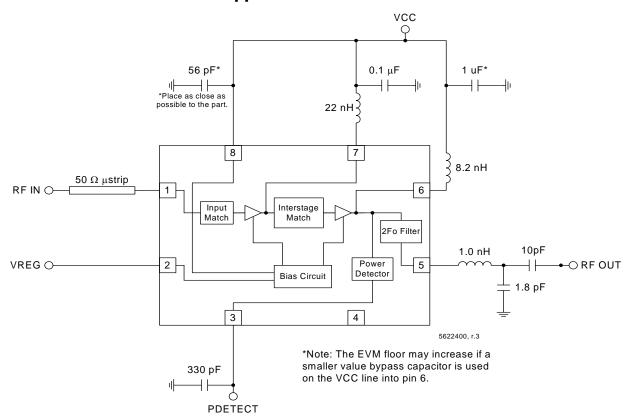




# Evaluation Board Schematic (PROTOTYPE) IEEE802.11b/g

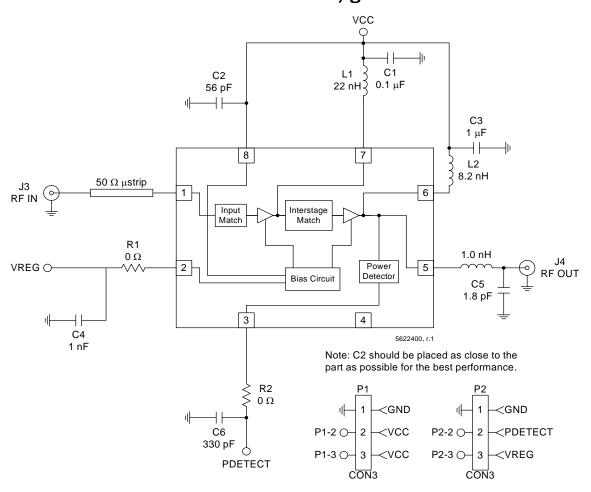






# **Evaluation Board Layout Board Size 1.2" x 1.2"**

Board Thickness 0.032", Board Material FR-4












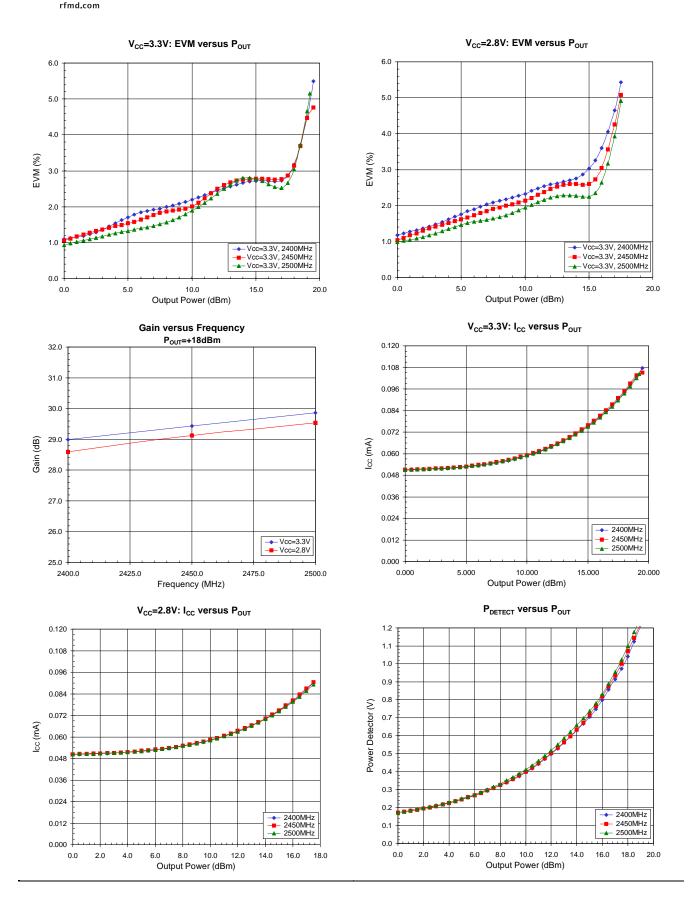

### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9