
12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Modules

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current



Applications

- Distributed power architectures
- Intermediate bus voltage applications
- Telecommunications equipment
- Servers and storage applications
- Networking equipment
- Industrial equipment



Features

- Compliant to RoHS II EU "Directive 2011/65/EU"
- Compliant to REACH Directive (EC) No 1907/2006
- Compliant to IPC-9592 (September 2008), Category 2, Class II
- Ultra low height design for very dense power applications.
- Small size: 12.2 mm x 12.2 mm x 2.9 mm (Max) (0.48 in x 0.48 in x 0.116 in)
- Output voltage programmable from 0.6Vdc to 5.5Vdc via external resistor. Digitally adjustable down to 0.45Vdc
- Wide Input voltage range (3Vdc-14.4Vdc)
- Wide operating temperature range [-40°C to 85°C]. See derating curves
- DOSA approved footprint
- Digital interface through the PMBus[™] protocol
- Tunable Loop[™] to optimize dynamic output voltage response
- Flexible output voltage sequencing EZ-SEQUENCE
- Power Good signal
- Remote On/Off
- Fixed switching frequency with capability of external synchronization
- Output overcurrent protection (non-latching)
- Overtemperature protection
- Ability to sink and source current
- Compatible in a Pb-free or SnPb reflow environment
- UL* 60950-1Recognized, CSA[†] C22.2 No. 60950-1-03 Certified, and VDE[‡] 0805:2001-12 (EN60950-1) Licensed
- ISO** 9001 and ISO 14001 certified manufacturing facilities

Description

The 12A Digital Pico SlimLynxTM Open Frame power modules are non-isolated dc-dc converters that can deliver up to 12A of output current. These modules operate over a wide range of input voltage ($V_{\rm IN} = 3 \rm Vdc-14.4 \rm Vdc$) and provide a precisely regulated output voltage from 0.45Vdc to 5.5Vdc, programmable via an external resistor and PMBus control. Features include a digital interface using the PMBus protocol, remote On/Off, adjustable output voltage, over current and over temperature protection. The PMBus interface supports a range of commands to both control and monitor the module. The module also includes the Tunable LoopTM feature that allows the user to optimize the dynamic response of the converter to match the load with reduced amount of output capacitance leading to savings on cost and PWB area.

- * UL is a registered trademark of Underwriters Laboratories, Inc.
- † CSA is a registered trademark of Canadian Standards Association.
- VDE is a trademark of Verband Deutscher Elektrotechniker e.V.
- ** ISO is a registered trademark of the International Organization of Standards
- # The PMBus name and logo are registered trademarks of the System Management Interface Forum (SMIF)



12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only, functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect the device reliability.

Parameter	Device	Symbol	Min	Max	Unit
Input Voltage	All	V _{IN}	-0.3	15	V
Continuous					
SEQ, SYNC, VS+	All			7	V
CLK, DATA, SMBALERT#	All			3.6	V
Operating Ambient Temperature	All	TA	-40	85	°C
(see Thermal Considerations section)					
Storage Temperature	All	T _{stg}	-55	125	°C

Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions.

Parameter	Device	Symbol	Min	Тур	Max	Unit
Operating Input Voltage	All	V _{IN}	3	_	14.4	Vdc
Maximum Input Current	All	I _{IN,max}			11	Adc
$(V_{IN}=3V \text{ to } 14.4V, I_{O}=I_{O, max})$						
Input No Load Current $(V_{IN} = 12Vdc, I_0 = 0, module enabled)$	$V_{O,set} = 0.6 \text{ Vdc}$	I _{IN,No load}		50		mA
	V _{O,set} = 5.5Vdc	I _{IN,No load}		180		mA
Input Stand-by Current ($V_{IN} = 12Vdc$, module disabled)	All	I _{IN,stand-by}		8		mA
Inrush Transient	All	I²t			1	A ² s
Input Reflected Ripple Current, peak-to-peak (5Hz to 20MHz, 1µH source impedance; V _{IN} =0 to 14V, Io= I _{Omax} ; See Test Configurations)	All			30		mAp-p
Input Ripple Rejection (120Hz)	All			-55	-	dB

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Electrical Specifications (continued)

Parameter	Device	Symbol	Min	Тур	Max	Unit
Output Voltage Set-point (with 0.1% tolerance for external resistor used to set output voltage)	All	V _{O, set}	-1.0		+1.0	% V _{O, set}
Output Voltage (Over all operating input voltage, resistive load, and temperature conditions until end of life)	All	V _{O, set}	-3.0	_	+3.0	% V _{O, set}
Adjustment Range (selected by an external resistor) (Some output voltages may not be possible depending on the input voltage – see Feature Descriptions Section)	All	Vo	0.6		5.5	Vdc
PMBus Adjustable Output Voltage Range	All	Vo,adj	-25	0	+25	%V _{O,set}
PMBus Output Voltage Adjustment Step Size	All		0.4			%V _{O,set}
Remote Sense Range	All				0.5	Vdc
Output Regulation (for $V_0 \ge 2.5 \text{Vdc}$)						
Line ($V_{IN}=V_{IN, min}$ to $V_{IN, max}$)	All				+0.4	% V _{O, set}
Load (Io=Io, min to Io, max)	All				10	mV
Output Regulation (for Vo < 2.5Vdc)						
Line (V _{IN} =V _{IN, min} to V _{IN, max})	All				5	mV
Load (Io=Io, min to Io, max)	All			_	10	mV
Temperature (T _{ref} =T _{A, min} to T _{A, max})	All			_	0.4	% V _{O, set}
Input Noise on nominal input at 25°C (VIN=VIN, nom and IO=IO, min to IO, max Cin = 1x47nF(0402) or equivalent, 2x22uF(1210) ceramic capacitors or equaivalent and Peak-to-Peak (Full Bandwidth) for all Vo	All		_	360		mVpk-pk
Output Ripple and Noise on nominal output at 25°C						
(V _{IN} =V _{IN, nom} and I _O =I _{O, min} to I _{O, max} Co = 2x47nF(0402) or equivalent, 2x47uF (1210) or equivalent ceramic capacitors on output and 1x47nF(0402) or equivalent, 2x22uF(1210) ceramic capacitors or equivalent and 470uF,16V electrolytic) on input Peak-to-Peak (Full bandwidth) Vo≤1.2Vo				30		mV _{pk-pk}
Peak-to-Peak (Full bandwidth) Vo>1.2Vo	All			3%Vo		mV _{pk-pk}
RMS (Full bandwidth) for all Vo	All			2%Vo		mVrms
External Capacitance ¹						
Without the Tunable Loop™						
ESR ≥ 1 mO	All	Co, max	1x47uf		200uF	μF
With the Tunable Loop™	7.11	CO, max	27,1701		20001	P1
ESR≥0.15 mO	All	Co, max	200		1000	μF
ESR ≥ 10 mΩ	All	Co, max	200		5000	μF
Output Current (in either sink or source mode)	All	·	0		12	Adc
Output Current Limit Inception (Hiccup Mode)		lo	0		12	
(current limit does not operate in sink mode)	All	I _{O, lim}		130		% I _{o,max}
Output Short-Circuit Current (V ₀ ≤250mV) (Hiccup Mode)	All	lo, s/c		1.3		Arms
Efficiency	V _{0,set} = 0.6Vdc	η		70.8		%
V _{IN} = 12Vdc, T _A =25°C	V _{O. set} = 1.2Vdc	η		81.5		%
Io=Io, max, Vo= Vo,set	V _{0.set} = 1.8Vdc	η		85.7		%
	$V_{0,\text{set}} = 2.5 \text{Vdc}$	η		88.3		%
	V _{0, set} = 2.3Vdc V _{0, set} = 3.3Vdc			90.1		%
	$V_{0, set} = 5.5 \text{ VdC}$ $V_{0, set} = 5.0 \text{ VdC}$	η		92.5		%
Cuitching Eraquancy		η				
Switching Frequency	All	f_{sw}	_	800	I —	kHz

¹External capacitors may require using the new Tunable Loop™ feature to ensure that the module is stable as well as getting the best transient response. See the Tunable Loop™ section for details.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Electrical Specifications (continued)

Parameter	Device	Symbol	Min	Тур	Max	Unit
Frequency Synchronization	All					
Synchronization Frequency Range	All		760	800	840	kHz
High-Level Input Voltage	All	VIH	2			V
Low-Level Input Voltage	All	V _{IL}			0.4	V
Input Current, SYNC	All	Isync			100	nA
Minimum Pulse Width, SYNC	All	t _{SYNC}	100			ns
Maximum SYNC rise time	All	t _{SYNC_SH}	100			ns

General Specifications

Parameter	Device	Min	Тур	Max	Unit
Calculated MTBF (I ₀ =0.8I _{0, max} , T _A =40°C) Telecordia Issue 3 Method 1 Case 3	All		29,951,054		Hours
Weight		_	0.732	_	g (oz.)

Feature Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions. See Feature Descriptions for additional information.

Parameter	Device	Symbol	Min	Тур	Max	Unit
On/Off Signal Interface						
$(V_{IN}=V_{IN, min}$ to $V_{IN, max}$; open collector or equivalent,						
Signal referenced to GND)						
Device code with suffix "4" – Positive Logic (See Ordering Information)						
Logic High (Module ON)						
Input High Current	All	lін		_	1	mA
Input High Voltage	All	VIH	2	_	V _{IN,max}	V
Logic Low (Module OFF)						
Input Low Current	All	lıL	_	_	1	mA
Input Low Voltage	All	VIL	-0.2	_	0.6	V
Device Code with no suffix – Negative Logic (See Ordering Information)						
(On/OFF pin is open collector/drain logic input with						
external pull-up resistor; signal referenced to GND)						
Logic High (Module OFF)						
Input High Current	All	lін	_	_	1	mA
Input High Voltage	All	VIH	2	_	V _{IN, max}	Vdc
Logic Low (Module ON)						
Input low Current	All	lıL	_	_	50	μΑ
Input Low Voltage	All	VIL	-0.2	_	0.6	Vdc

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Feature Specifications (cont.)

Parameter	Device	Symbol	Min	Тур	Max	Units
Turn-On Delay and Rise Times						
$(V_{\text{IN}}=V_{\text{IN, nom, }} _{O}=I_{O, \text{max}}, V_{O} \text{ to within } \pm 1\% \text{ of steady state})$						
Case 1: On/Off input is enabled and then input power is applied (delay from instant at which $V_{IN} = V_{IN,min}$ until $V_0 = 10\%$ of V_0,set)	All	Tdelay	_	0.9	_	msec
Case 2: Input power is applied for at least one second and then the On/Off input is enabled (delay from instant at which Von/Off is enabled until Vo = 10% of Vo, set)	All	Tdelay	_	0.8	_	msec
Output voltage Rise time (time for V ₀ to rise from 10% of V ₀ , set to 90% of V ₀ , set)	All	Trise	_	2	_	msec
Output voltage overshoot ($T_A = 25^{\circ}$ C $V_{IN} = V_{IN, min}$ to $V_{IN, max}$, $I_O = I_{O, min}$ to $I_{O, max}$) With or without maximum external capacitance					3	% Vo,
Over Temperature Protection (See Thermal Considerations section)	All	T_{ref}		130		°C
PMBus Over Temperature Warning Threshold *	All	T _{WARN}		120		°C
Tracking Accuracy (Power-Up: 2V/ms)	All	VSEQ -Vo		100		mV
(Power-Down: 2V/ms)	All	VSEQ -Vo		100		mV
$(V_{IN, min} to V_{IN, max}, I_{O, min} to I_{O, max} VSEQ < V_O)$						
Input Undervoltage Lockout						
Turn-on Threshold	All			3		Vdc
Turn-off Threshold	All			2.75		Vdc
Hysteresis	All			0.25		Vdc
PMBus Adjustable Input Under Voltage Lockout Thresholds	All		2.5		14	Vdc
Resolution of Adjustable Input Under Voltage Threshold	All				500	mV
PGOOD (Power Good)						
Signal Interface Open Drain, V _{supply} ≤ 5VDC						
Overvoltage threshold for PGOOD ON				108		%V _O , set
Overvoltage threshold for PGOOD OFF				110		%V _{0,}
Undervoltage threshold for PGOOD ON				92		set %V _O ,
Undervoltage threshold for PGOOD OFF				90		set %V _O ,
Pulldown resistance of PGOOD pin	All				50	set Ω
Sink current capability into PGOOD pin	All				5	mA

^{*} Over temperature Warning – Warning may not activate before alarm and unit may shutdown before warning

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Digital Interface Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions. See Feature Descriptions for additional information.


Parameter	Conditions	Symbol	Min	Тур	Max	Unit
PMBus Signal Interface Characteristics						
Input High Voltage (CLK, DATA)		VIH	2.1		3.6	V
Input Low Voltage (CLK, DATA)		VIL			0.8	V
Input high level current (CLK, DATA)		I _{IH}	-10		10	μΑ
Input low level current (CLK, DATA)		lıL	-10		10	μΑ
Output Low Voltage (CLK, DATA, SMBALERT#)	I _{OUT} =2mA	Vol			0.4	V
Output high level open drain leakage current (DATA, SMBALERT#)	V _{OUT} =3.6V	Іон	0		10	μΑ
Pin capacitance		Co		0.7		pF
PMBus Operating frequency range	Slave Mode	Fрмв	10		400	kHz
Data hold time	Receive Mode	thd:dat	0			ns
	Transmit Mode		300			115
Data setup time		t su:dat	250			ns
Measurement System Characteristics						
Read delay time		tdly	153	192	231	μs
Output current measurement range		I _{RNG}	0		18	А
Output current measurement resolution		IRES	62.5			mA
Output current measurement gain accuracy at 25°C (with Iout, CORR)		lacc		±5		%
Output current measurement offset		lofst		0.1		А
V _{OUT} measurement range		V _{OUT(rng)}	0		5.5	V
V _{OUT} measurement resolution		V _{OUT(res)}		15.625		mV
V _{OUT} measurement accuracy		V _{OUT(ACC)}	-15		15	%
V _{OUT} measurement offset		V _{OUT} (ofst)	-3		3	%
V _{IN} measurement range		V _{IN(rng)}	3		14.4	V
V _{IN} measurement resolution		V _{IN(res)}		32.5		mV
V _{IN} measurement accuracy		V _{IN(ACC)}	-15		15	%

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves

The following figures provide typical characteristics for the 12A Digital Pico SlimLynx™ at 0.6Vo and 25°C.



12 10 0.5m/s (100LFM) OUTPUT CURRENT, Io (A) 8 1m/s (200LFM) 6 2m/s (400LFM) 4 1.5m/s (300LFM) 2 0 50 60 65 70 80 85 AMBIENT TEMPERATURE, TA °C

Figure 1. Converter Efficiency versus Output Current.

Figure 2. Derating Output Current versus Ambient Temperature and Airflow.


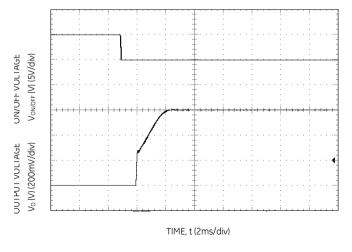




Figure 3. Typical output ripple ($C_0=2x47\mu F$ ceramic, $V_{IN}=12V$, $I_0=I_{0,max}$, 20MHz BW).

Figure 4. Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=4x47uF+6x330uF, CTune=47nF, RTune=300






Figure 5. Typical Start-up Using On/Off Voltage ($I_0 = I_{o,max}$).

Figure 6. Typical Start-up Using Input Voltage ($V_{IN} = 12V$, $I_0 = I_{0,max}$).


12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves

12V, $I_0 = I_{0,max}$, 20MHz BW).

The following figures provide typical characteristics for the 12A Digital Pico SlimLynx[™] at 1.2Vo and 25°C.







Figure 7. Converter Efficiency versus Output Current.

Figure 8. Derating Output Current versus Ambient Temperature and Airflow.







Figure 9. Typical output ripple ($C_0=2x47\mu F$ ceramic, $V_{IN}=$

Figure 10. Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=4x47uF+3x330uF, CTune=10nF,

TIME, t (20µs /div)






Figure 11. Typical Start-up Using On/Off Voltage (Io = Io,max).

Figure 12. Typical Start-up Using Input Voltage ($V_{IN} = 12V$, $I_0 = I_{0.max}$).


RTune=300

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves


The following figures provide typical characteristics for the 12A Digital Pico SlimLynx™ at 1.8Vo and 25°C.



12 10 NC OUTPUT CURRENT, Io (A) 8 1.0m/s (200LFM) 1.5m/s (300LFM) 6 0.5m/s (100LFM) 4 2.0m/s (400LFM) 2 0 50 60 65 70 80 85 AMBIENT TEMPERATURE, TA OC

Figure 13. Converter Efficiency versus Output Current.

Figure 14. Derating Output Current versus Ambient Temperature and Airflow.




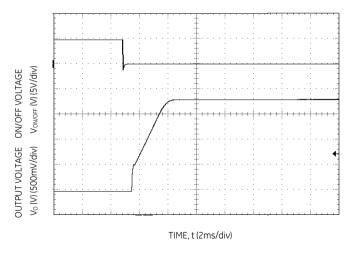


Figure 15. Typical output ripple ($C_0=2x47\mu F$ ceramic, $V_{IN}=12V$, $I_0=I_{O,max}$, 20MHz BW).

Figure 16. Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=4x47uF+2x330uF, CTune=8.2nF, RTune=300






Figure 17. Typical Start-up Using On/Off Voltage ($I_0 = I_{0,max}$).


Figure 18. Typical Start-up Using Input Voltage ($V_{IN} = 12V$, $I_0 = I_{O,max}$).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves

The following figures provide typical characteristics for the 12A Digital Pico SlimLynx™ at 2.5Vo and 25°C.







Figure 19. Converter Efficiency versus Output Current.

Figure 20. Derating Output Current versus Ambient Temperature and Airflow.







Figure 21. Typical output ripple ($C_0=2x47\mu F$ ceramic, $V_{IN}=12V$, $I_0=I_{0,max}$, 20MHz BW).

Figure 22. Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=4x47uF+1x330uF, CTune=2700p, RTune=300






Figure 23. Typical Start-up Using On/Off Voltage ($I_0 = I_{0,max}$).


Figure 24. Typical Start-up Using Input Voltage ($V_{IN} = 12V$, $I_0 = I_{O,max}$).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves

The following figures provide typical characteristics for the 12A Digital Pico SlimLynx™ at 3.3Vo and 25°C.







Figure 25. Converter Efficiency versus Output Current.

Figure 26. Derating Output Current versus Ambient Temperature and Airflow.




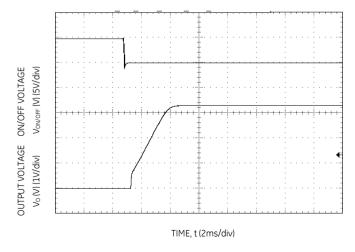


Figure 27. Typical output ripple and noise ($C_0=2x47\mu F$ ceramic, $V_{IN}=12V$, $I_0=I_{0,max}$, 20MHz BW).

Figure 28 Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=3x47uF+1x330uF, CTune=1800pF, RTune=300






Figure 29. Typical Start-up Using On/Off Voltage ($I_0 = I_{0,max}$).


Figure 30. Typical Start-up Using Input Voltage ($V_{IN}=12V$, $I_{o}=I_{o,max}$).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Characteristic Curves


The following figures provide typical characteristics for the 12A Digital Pico SlimLynx™ at 5Vo and 25°C.



12 10 Œ NC 8 OUTPUT CURRENT, IO 0.5m/s (100LFM) 6 1.5m/s (300LFM) 4 1m/s (200LFM) 2 2m/s (400LFM) 0 25 55 75 85 45 65 AMBIENT TEMPERATURE, TA °C

Figure 31. Converter Efficiency versus Output Current.

Figure 32. Derating Output Current versus Ambient Temperature and Airflow.




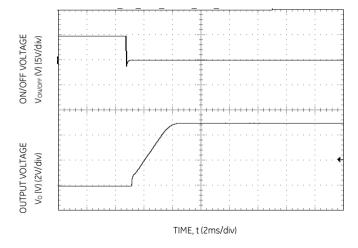


Figure 33. Typical output ripple and noise (Co=2x47 μ F ceramic, VIN = 12V, Io = Io,max, 20MHz BW).

Figure 34. Transient Response to Dynamic Load Change from 50% to 100% at 12Vin, Cout=6x47uF, CTune=1200pF, RTune=300






Figure 35. Typical Start-up Using On/Off Voltage ($I_0 = I_{o,max}$).

Figure 36. Typical Start-up Using Input Voltage ($V_{IN} = 12V$, $I_0 = I_{0,max}$).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Design Considerations

Input Filtering

The 12A Digital Pico SlimLynx[™] Open Frame module should be connected to a low ac-impedance source. A highly inductive source can affect the stability of the module. An input capacitance must be placed directly adjacent to the input pin of the module, to minimize input ripple voltage and ensure module stability.

To minimize input voltage ripple, ceramic capacitors are recommended at the input of the module. Figure 37 shows the input ripple voltage for various output voltages at 12A of load current with 1x22 µF or 2x22 µF ceramic capacitors and an input of 12V.




Figure 37. Input ripple voltage for various output voltages with 1x22 μF or 2x22 μF ceramic capacitors at the input (12A load). Input voltage is 12V. 20MHz BW

Output Filtering

These modules are designed for low output ripple voltage and will meet the maximum output ripple specification with $3\times0.047~\mu\text{F}$ ceramic and $2\times47~\mu\text{F}$ ceramic capacitors at the output of the module. However, additional output filtering may be required by the system designer for a number of reasons. First, there may be a need to further reduce the output ripple and noise of the module. Second, the dynamic response characteristics may need to be customized to a particular load step change.

To reduce the output ripple and improve the dynamic response to a step load change, additional capacitance at the output can be used. Low ESR polymer and ceramic capacitors are recommended to improve the dynamic response of the module. Figure 38 provides output ripple information, measured with a scope with its Bandwidth limited to 20MHz for different external capacitance values at various Vo and a full load current of 12A. For stable operation of the module, limit the capacitance to less than the maximum output capacitance as specified in the electrical specification table. Optimal performance of the module can be achieved by using the Tunable Loop™ feature described later in this data sheet.




Figure 38. Output ripple voltage for various output voltages with external 2x47 µF, 4x47 µF, 6x47 µF or 8x47 µF ceramic capacitors at the output (12A load). Input voltage is 12V.

Safety Considerations

For safety agency approval the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standards, i.e., UL 60950-1 2nd, CSA C22.2 No. 60950-1-07, DIN EN 60950-1:2006 + A11 (VDE0805 Teil 1 + A11):2009-11; EN 60950-1:2006 + A11:2009-03.

For the converter output to be considered meeting the requirements of safety extra-low voltage (SELV), the input must meet SELV requirements. The power module has extra-low voltage (ELV) outputs when all inputs are ELV.

The input to these units is to be provided with a fast-acting fuse (e.g. ABC Bussmann) with a maximum rating of 20 A in the positive input lead.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Analog Feature Descriptions

Remote On/Off

The module can be turned ON and OFF either by using the ON/OFF pin (Analog interface) or through the PMBus interface (Digital). The module can be configured in a number of ways through the PMBus interface to react to the two ON/OFF inputs:

- Module ON/OFF can be controlled only through the analog interface (digital interface ON/OFF commands are ignored)
- Module ON/OFF can be controlled only through the PMBus interface (analog interface is ignored)
- Module ON/OFF can be controlled by either the analog or digital interface

The default state of the module (as shipped from the factory) is to be controlled by the analog interface only. If the digital interface is to be enabled, or the module is to be controlled only through the digital interface, this change must be made through the PMBus. These changes can be made and written to non-volatile memory on the module so that it is remembered for subsequent use.

Analog On/Off

The 12A Digital Pico SlimLynx™ Open Frame power modules feature an On/Off pin for remote On/Off operation. Two On/Off logic options are available. In the Positive Logic On/Off option, (device code suffix "4" – see Ordering Information), the module turns ON during a logic High on the On/Off pin and turns OFF during a logic Low. With the Negative Logic On/Off option, (no device code suffix, see Ordering Information), the module turns OFF during logic High and ON during logic Low. The On/Off signal should be always referenced to ground. For either On/Off logic option, leaving the On/Off pin disconnected will turn the module ON when input voltage is present.

For positive logic modules, the circuit configuration for using the On/Off pin is shown in Figure 39. When the external transistor Q1 is in the OFF state, the internal diode is turned OFF. This keeps the internal Enable signal to be pulled up by the internal 3.3V, thus turning/keeping the module ON. When transistor Q1 is turned ON, the internal diode conducts and Enable signal is pulled low and the module is OFF.

For negative logic On/Off modules, the circuit configuration is shown in Fig. 40. The On/Off pin should be pulled high with an external pull-up resistor. When transistor Q1 is in the OFF state, the On/Off pin is pulled high, transistor Q2 is turned ON. This pulls the internal ENABLE low and the module is OFF. To turn the module ON, Q1 is turned ON pulling the On/Off pin low, turning transistor Q2 OFF, which results in the PWM Enable pin going high.

Digital On/Off

Please see the Digital Feature Descriptions section.




Figure 39. Circuit configuration for using positive On/Off logic.




Figure 40. Circuit configuration for using negative On/Off logic.

Monotonic Start-up and Shutdown

The module has monotonic start-up and shutdown behavior for any combination of rated input voltage, output current and operating temperature range.

Startup into Pre-biased Output

The module can start into a prebiased output as long as the prebias voltage is 0.5V less than the set output voltage.

Analog Output Voltage Programming

The output voltage of the module is programmable to any voltage from 0.6dc to 5.5Vdc by connecting a resistor between the Trim and SIG_GND pins of the module. Certain restrictions apply on the output voltage set point depending on the input voltage. These are shown in the Output Voltage vs. Input Voltage Set Point Area plot in Fig. 41. The Upper Limit curve shows that for output voltages lower than 1V, the input voltage must be lower than the maximum of 14.4V. The Lower Limit curve shows that for output voltages higher than 0.6V, the input voltage needs to be larger than the minimum of 3V.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current





Figure 41. Output Voltage vs. Input Voltage Set Point Area plot showing limits where the output voltage can be set for different input voltages.



Caution – Do not connect SIG_GND to GND elsewhere in the layout

Figure 42. Circuit configuration for programming output voltage using an external resistor.

Without an external resistor between Trim and SIG_GND pins, the output of the module will be 0.6Vdc.To calculate the value of the trim resistor, *Rtrim* for a desired output voltage, should be as per the following equation:

$$Rtrim = \left\lceil \frac{12}{(Vo - 0.6)} \right\rceil k\Omega$$

Rtrim is the external resistor in $k\Omega$

Vo is the desired output voltage.

Table 1 provides Rtrim values required for some common output voltages.

Table 1

V _{O, set} (V)	Rtrim (KΩ)
0.6	Open

0.9	40
1.0	30
1.2	20
1.5	13.33
1.8	10
2.5	6.316
3.3	4.444
5.0	2.727

Digital Output Voltage Adjustment

Please see the Digital Feature Descriptions section.

Remote Sense

The power module has a Remote Sense feature to minimize the effects of distribution losses by regulating the voltage between the sense pins (VS+ and VS-). The voltage drop between the sense pins and the VOUT and GND pins of the module should not exceed 0.5V.

Analog Voltage Margining

Output voltage margining can be implemented in the module by connecting a resistor, R_{margin-up}, from the Trim pin to the ground pin for margining-up the output voltage and by connecting a resistor, R_{margin-down}, from the Trim pin to output pin for margining-down. Figure 43 shows the circuit configuration for output voltage margining. The POL Programming Tool, available at www.gecriticalpower.com under the Downloads section, also calculates the values of R_{margin-up} and R_{margin-down} for a specific output voltage and % margin. Please consult your local GE Critical Power technical representative for additional details.




Figure 43. Circuit Configuration for margining Output voltage.

Digital Output Voltage Margining

Please see the Digital Feature Descriptions section.

Output Voltage Sequencing

The power module includes a sequencing feature, EZ-SEQUENCE that enables users to implement various types of

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc –14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not using the sequencing feature, leave it unconnected.

The voltage applied to the SEQ pin should be scaled down by the same ratio as used to scale the output voltage down to the reference voltage of the module. This is accomplished by an external resistive divider connected across the sequencing voltage before it is fed to the SEQ pin as shown in Fig. 44. In addition, a small capacitor (suggested value 100pF) should be connected across the lower resistor R1.

For all SlimLynx modules, the minimum recommended delay between the ON/OFF signal and the sequencing signal is 10ms to ensure that the module output is ramped up according to the sequencing signal. This ensures that the module soft-start routine is completed before the sequencing signal is allowed to ramp up.




Figure 44. Circuit showing connection of the sequencing signal to the SEQ pin.

When the scaled down sequencing voltage is applied to the SEQ pin, the output voltage tracks this voltage until the output reaches the set-point voltage. The final value of the sequencing voltage must be set higher than the set-point voltage of the module. The output voltage follows the sequencing voltage on a one-to-one basis. By connecting multiple modules together, multiple modules can track their output voltages to the voltage applied on the SEQ pin.

The module's output can track the SEQ pin signal with slopes of up to 0.5V/msec during power-up or power-down.

To initiate simultaneous shutdown of the modules, the SEQ pin voltage is lowered in a controlled manner. The output voltage of the modules tracks the voltages below their setpoint voltages on a one-to-one basis. A valid input voltage must be maintained until the tracking and output voltages reach ground potential.

Note that in all digital SlimLynx series of modules, the PMBus Output Undervoltage Fault will be tripped when sequencing is employed. This will be detected using the STATUS_WORD and STATUS_VOUT PMBus commands. In addition, the SMBALERT# signal will be asserted low as occurs for all faults and warnings. To avoid the module shutting down due to the Output Undervoltage Fault, the module must be set to continue operation without interruption as the response to

this fault (see the description of the PMBus command VOUT UV FAULT RESPONSE for additional information).

Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current-limiting circuitry and can endure current limiting continuously. At the point of current-limit inception, the unit enters hiccup mode. The unit operates normally once the output current is brought back into its specified range.

Digital Adjustable Overcurrent Warning

Please see the Digital Feature Descriptions section.

Overtemperature Protection

To provide protection in a fault condition, the unit is equipped with a thermal shutdown circuit. The unit will shut down if the overtemperature threshold of 150°C(typ) is exceeded at the thermal reference point T_{ref} . Once the unit goes into thermal shutdown it will then wait to cool before attempting to restart.

Digital Temperature Status via PMBus

Please see the Digital Feature Descriptions section.

Digitally Adjustable Output Over and Under Voltage Protection

Please see the Digital Feature Descriptions section.

Input Undervoltage Lockout

At input voltages below the input undervoltage lockout limit, the module operation is disabled. The module will begin to operate at an input voltage above the undervoltage lockout turn-on threshold.

Digitally Adjustable Input Undervoltage Lockout

Please see the Digital Feature Descriptions section.

Digitally Adjustable Power Good Thresholds

Please see the Digital Feature Descriptions section.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Synchronization

The module switching frequency can be synchronized to a signal with an external frequency within a specified range. Synchronization can be done by using the external signal applied to the SYNC pin of the module as shown in Fig. 45, with the converter being synchronized by the rising edge of the external signal. The Electrical Specifications table specifies the requirements of the external SYNC signal. If the SYNC pin is not used, the module should free run at the default switching frequency. If synchronization is not being used, connect the SYNC pin to GND.




Figure 45. External source connections to synchronize switching frequency of the module.

Measuring Output Current, Output Voltage and Input Voltage

Please see the Digital Feature Descriptions section.

Tunable Loop™

The module has a feature that optimizes transient response of the module called Tunable LoopTM.

External capacitors are usually added to the output of the module for two reasons: to reduce output ripple and noise (see Figure 38) and to reduce output voltage deviations from the steady-state value in the presence of dynamic load current changes. Adding external capacitance however affects the voltage control loop of the module, typically causing the loop to slow down with sluggish response. Larger values of external capacitance could also cause the module to become unstable.

The Tunable LoopTM allows the user to externally adjust the voltage control loop to match the filter network connected to the output of the module. The Tunable LoopTM is implemented by connecting a series R-C between the VS+ and TRIM pins of the module, as shown in Fig. 47. This R-C allows the user to externally adjust the voltage loop feedback compensation of the module.




Figure. 47. Circuit diagram showing connection of R_{TUME} and C_{TUNE} to tune the control loop of the module

Recommended values of R_{TUNE} and C_{TUNE} for different output capacitor combinations are given in Table 2. Table 2 shows the recommended values of R_{TUNE} and C_{TUNE} for different values of ceramic output capacitors up to 1000uF that might be needed for an application to meet output ripple and noise requirements. Selecting R_{TUNE} and C_{TUNE} according to Table 2 will ensure stable operation of the module. In applications with tight output voltage limits in the presence of dynamic current loading, additional output capacitance will be required. Table 3 lists recommended values of R_{TUNE} and C_{TUNE} in order to meet 2% output voltage deviation limits for some common output voltages in the presence of a 6A to 12A step change (50% of full load), with an input voltage of 12V.

Please contact your GE Critical Power technical representative to obtain more details of this feature as well as for guidelines on how to select the right value of external R-C to tune the module for best transient performance and stable operation for other output capacitance values.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Table 2. General recommended values of of R_{TUNE} and C_{TUNE} for Vin=12V and various external ceramic capacitor combinations.

Со	3x47μF	4x47μF	6x47μF	10x47μF	20x47μF
R _{TUNE}	300	300	300	300	300
C _{TUNE}	680pF	820pF	1200pF	2700pF	5600pF

Table 3. Recommended values of R_{TUNE} and C_{TUNE} to obtain transient deviation of 2% of Vout for a 6A step load with Vin=12V.

Vo	5V	3.3V	2.5V	1.8V	1.2V	0.6V
Co	6x47μF Ceramic	1x330μF		2x330μF	4x47μF + 3x330μF Polymer	3x47μF + 3x330μF Polymer
R _{TUNE}	300	300	300	300	300	300
C _{TUNE}	1200pF	1800pF	2700pF	8200pF	10nF	47nF
ΔV	89mV	62mV	49mV	33mV	24mV	11mV

Note: The capacitors used in the Tunable Loop tables are 47 $\mu\text{F}/2$ $m\Omega$ ESR ceramic and 330 $\mu\text{F}/9$ $m\Omega$ ESR polymer capacitors.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Digital Feature Descriptions

PMBus Interface Capability

The 12A Digital Pico SlimLynx[™] Open Frame power modules have a PMBus interface that supports both communication and control. The PMBus Power Management Protocol Specification can be obtained from www.pmbus.org. The modules support a subset of version 1.1 of the specification (see Table 6 for a list of the specific commands supported). Most module parameters can be programmed using PMBus and stored as defaults for later use.


All communication over the module PMBus interface must support the Packet Error Checking (PEC) scheme. The PMBus master must generate the correct PEC byte for all transactions, and check the PEC byte returned by the module.

The module also supports the SMBALERT# response protocol whereby the module can alert the bus master if it wants to talk. For more information on the SMBus alert response protocol, see the System Management Bus (SMBus) specification.

The module has non-volatile memory that is used to store configuration settings. Not all settings programmed into the device are automatically saved into this non-volatile memory, only those specifically identified as capable of being stored can be saved (see Table 6 for which command parameters can be saved to non-volatile storage).

PMBus Data Format

For commands that set thresholds, voltages or report such quantities, the module supports the "Linear" data format among the three data formats supported by PMBus. The Linear Data Format is a two byte value with an 11-bit, two's complement mantissa and a 5-bit, two's complement exponent. The format of the two data bytes is shown below:



The value is of the number is then given by Value = Mantissa \times 2 ^{Exponent}

PMBus Addressing

The power module can be addressed through the PMBus using a device address. The module has 64 possible addresses (0 to 63 in decimal) which can be set using resistors connected from the ADDR0 and ADDR1 pins to SIG_GND. Note that some of these addresses (0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 12, 40, 44, 45, 55 in decimal) are reserved according to the SMBus specifications and may not be useable. The address is set in the form of two octal (0 to 7) digits, with each pin setting one digit. The ADDR1 pin sets the high order digit and ADDR0 sets the low order digit. The resistor values suggested for each digit are shown in Table 4 (1% tolerance resistors are recommended). Note that if either

address resistor value is outside the range specified in Table 4, the module will respond to address 127.

Table 4

Digit	Resistor Value (KΩ)
0	10
1	15.4
2	23.7
3	36.5
4	54.9
5	84.5
6	130
7	200

The user must know which I²C addresses are reserved in a system for special functions and set the address of the module to avoid interfering with other system operations. Both 100kHz and 400kHz bus speeds are supported by the module. Connection for the PMBus interface should follow the High Power DC specifications given in section 3.1.3 in the SMBus specification V2.0 for the 400kHz bus speed or the Low Power DC specifications in section 3.1.2. The complete SMBus specification is available from the SMBus web site, smbus.org.




Figure 48. Circuit showing connection of resistors used to set the PMBus address of the module.

PMBus Enabled On/Off

The module can also be turned on and off via the PMBus interface. The OPERATION command is used to actually turn the module on and off via the PMBus, while the ON_OFF_CONFIG command configures the combination of analog ON/OFF pin input and PMBus commands needed to turn the module on and off. Bit [7] in the OPERATION command data byte enables the module, with the following functions:

0 : Output is disabled1 : Output is enabled

This module uses the lower five bits of the ON_OFF_CONFIG data byte to set various ON/OFF options as follows:

Bit Position	4	3	2	1	0
Access	r/w	r/w	r/w	r/w	r
Function	PU	CMD	CPR	POL	CPA
Default Value	1	0	1	1	1

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

PU: Sets the default to either operate any time input power is present or for the ON/OFF to be controlled by the analog ON/OFF input and the PMBus OPERATION command. This bit is used together with the CP, CMD and ON bits to determine startup.

Bit Value	Action
0	Module powers up any time power is present regardless of state of the analog ON/OFF pin
1	Module does not power up until commanded by the analog ON/OFF pin and the OPERATION command as programmed in bits [2:0] of the ON_OFF_CONFIG register.

CMD: The CMD bit controls how the device responds to the OPERATION command.

Bit Value	Action
	Module ignores the ON bit in the OPERATION command
	Module responds to the ON bit in the OPERATION command

CPR: Sets the response of the analog ON/OFF pin. This bit is used together with the CMD, PU and ON bits to determine startup.

Bit Value	Action	
0	Module ignores the analog ON/OFF pin, i.e. ON/OFF is only controlled through the PMBUS via the OPERATION command	
1	Module requires the analog ON/OFF pin to be asserted to start the unit	

PMBus Adjustable Soft Start Rise Time

The soft start rise time can be adjusted in the module via PMBus. When setting this parameter, make sure that the charging current for output capacitors can be delivered by the module in addition to any load current to avoid nuisance tripping of the overcurrent protection circuitry during startup. The TON_RISE command sets the rise time in ms, and allows choosing soft start times between 600µs and 9ms, with possible values listed in Table 5. Note that the exponent is fixed at -4 (decimal) and the upper two bits of the mantissa are also fixed at 0.

Table 5

Rise Time	Exponent	Mantissa
600µs	11100	0000001010
900µs	11100	0000001110
1.2ms	11100	00000010011
1.8ms	11100	00000011101
2.7ms	11100	00000101011
4.2ms	11100	00001000011
6.0ms	11100	00001100000
9.0ms	11100	00010010000

Output Voltage Adjustment Using the PMBus

The VOUT_SCALE_LOOP parameter is important for a number of PMBus commands related to output voltage trimming, margining, over/under voltage protection and the PGOOD thresholds. The output voltage of the module is set as the combination of the voltage divider formed by RTrim and a $20k\Omega$ upper divider resistor inside the module, and the internal reference voltage of the module. The reference voltage V_{REF} is nominally set at 600mV, and the output regulation voltage is then given by

$$V_{\scriptscriptstyle OUT} = \! \left[\frac{20000 + RTrim}{RTrim} \right] \! \times V_{\scriptscriptstyle REF}$$

Hence the module output voltage is dependent on the value of RTrim which is connected external to the module. The information on the output voltage divider ratio is conveyed to the module through the VOUT_SCALE_LOOP parameter which is calculated as follows:

$$VOUT_SCALE_LOOP = \frac{RTrim}{20000 + RTrim}$$

The VOUT_SCALE_LOOP parameter is specified using the "Linear" format and two bytes. The upper five bits [7:3] of the high byte are used to set the exponent which is fixed at -9 (decimal). The remaining three bits of the high byte [2:0] and the eight bits of the lower byte are used for the mantissa. The default value of the mantissa is 00100000000 corresponding to 256 (decimal), corresponding to a divider ratio of 0.5. The maximum value of the mantissa is 512 corresponding to a divider ratio of 1. Note that the resolution of the VOUT_SCALE_LOOP command is 0.2%.

When PMBus commands are used to trim or margin the output voltage, the value of V_{REF} is what is changed inside the module, which in turn changes the regulated output voltage of the module.

The nominal output voltage of the module can be adjusted with a minimum step size of 0.4% over a $\pm 25\%$ range from nominal using the VOUT_TRIM command over the PMBus.

The VOUT_TRIM command is used to apply a fixed offset voltage to the output voltage command value using the

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

"Linear" mode with the exponent fixed at -10 (decimal). The value of the offset voltage is given by

$$V_{OUT(offset)} = VOUT_TRIM \times 2^{-10}$$

This offset voltage is added to the voltage set through the divider ratio and nominal V_{REF} to produce the trimmed output voltage. The valid range in two's complement for this command is -4000h to 3FFFh. The high order two bits of the high byte must both be either 0 or 1. If a value outside of the +/-25% adjustment range is given with this command, the module will set it's output voltage to the nominal value (as if VOUT_TRIM had been set to 0), assert SMBALRT#, set the CML bit in STATUS_BYTE and the invalid data bit in STATUS_CML.

Output Voltage Margining Using the PMBus

The module can also have its output voltage margined via PMBus commands. The command VOUT_MARGIN_HIGH sets the margin high voltage, while the command VOUT_MARGIN_LOW sets the margin low voltage. Both the VOUT_MARGIN_HIGH and VOUT_MARGIN_LOW commands use the "Linear" mode with the exponent fixed at –10 (decimal). Two bytes are used for the mantissa with the upper bit [7] of the high byte fixed at 0. The actual margined output voltage is a combination of the VOUT_MARGIN_HIGH or VOUT_MARGIN_LOW and the VOUT_TRIM values as shown below.

$$V_{OUT(MH)} =$$

$$(VOUT_MARGIN_HIGH + VOUT_TRIM) \times 2^{-10}$$

 $V_{OUT(ML)} =$

$$(VOUT_MARGIN_LOW + VOUT_TRIM) \times 2^{-10}$$

Note that the sum of the margin and trim voltages cannot be outside the ±25% window around the nominal output voltage. The data associated with VOUT_MARGIN_HIGH and VOUT_MARGIN_LOW can be stored to non-volatile memory using the STORE_DEFAULT_ALL command.

The module is commanded to go to the margined high or low voltages using the OPERATION command. Bits [5:2] are used to enable margining as follows:

00XX : Margin Off

0101 : Margin Low (Ignore Fault) 0110 : Margin Low (Act on Fault) 1001 : Margin High (Ignore Fault) 1010 : Margin High (Act on Fault)

PMBus Adjustable Overcurrent Warning

The module can provide an overcurrent warning via the PMBus. The threshold for the overcurrent warning can be set using the parameter IOUT_OC_WARN_LIMIT. This command uses the "Linear" data format with a two byte data word where the upper five bits [7:3] of the high byte represent the exponent and the remaining three bits of the high byte [2:0] and the eight bits in the low byte represent the mantissa. The exponent is fixed at –1 (decimal). The upper five bits of the mantissa are fixed at 0 while the lower six bits are programmable. Note that the actual value for IOUT_OC_WARN_LIMIT will vary from module to module due

to calibration during production test, The resolution of this warning limit is 500mA. The value of the IOUT_OC_WARN_LIMIT can be stored to non-volatile memory using the STORE_DEFAULT_ALL command.

Temperature Status via PMBus

The module can provide information related to temperature of the module through the STATUS_TEMPERATURE command. The command returns information about whether the pre-set over temperature fault threshold and/or the warning threshold have been exceeded.

PMBus Adjustable Output Over and Under Voltage Protection

The module has output over and under voltage protection capability. The PMBus command VOUT_OV_FAULT_LIMIT is used to set the output over voltage threshold from four possible values: 108%, 110%, 112% or 115% of the commanded output voltage. The command VOUT_UV_FAULT_LIMIT sets the threshold that causes an output under voltage fault and can also be selected from four possible values: 92%, 90%, 88% or 85%. The default values are 112% and 88% of commanded output voltage. Both commands use two data bytes formatted as two's complement binary integers. The "Linear" mode is used with the exponent fixed to –10 (decimal) and the effective over or under voltage trip points given by:

$$\begin{split} V_{OUT(OV_REQ)} &= (VOUT_OV_FAULT_LIMIT) \times 2^{-10} \\ V_{OUT(UV_REO)} &= (VOUT_UV_FAULT_LIMIT) \times 2^{-10} \end{split}$$

Values within the supported range for over and undervoltage detection thresholds will be set to the nearest fixed percentage. Note that the correct value for VOUT_SCALE_LOOP must be set in the module for the correct over or under voltage trip points to be calculated. In addition to adjustable output voltage protection, the 12A Digital Pico SlimLynxTM Open Frame module can also be programmed for the response to the fault. The VOUT_OV_FAULT RESPONSE and VOUT_UV_FAULT_RESPONSE commands specify the response to the fault. Both these commands use a single data byte with the possible options as shown below.

- 1. Continue operation without interruption (Bits [7:6] = 00, Bits [5:3] = xxx)
- Continue for four switching cycles and then shut down if the fault is still present, followed by no restart or continuous restart (Bits [7:6] = 01, Bits [5:3] = 000 means no restart, Bits [5:3] = 111 means continuous restart)
- Immediate shut down followed by no restart or continuous restart (Bits [7:6] = 10, Bits [5:3] = 000 means no restart, Bits [5:3] = 111 means continuous restart).
- 4. Module output is disabled when the fault is present and the output is enabled when the fault no longer exists (Bits [7:6] = 11, Bits [5:3] = xxx).

Note that separate response choices are possible for output over voltage or under voltage faults.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

PMBus Adjustable Input Undervoltage Lockout

The module allows adjustment of the input under voltage lockout and hysteresis. The command VIN_ON allows setting the input voltage turn on threshold, while the VIN_OFF command sets the input voltage turn off threshold. For the VIN_ON command, possible values are 2.75V, and 3V to 14V in 0.5V steps. For the VIN_OFF command, possible values are 2.5V to 14V in 0.5V steps. If other values are entered for either command, they will be mapped to the closest of the allowed values.

VIN_ON must be set higher than VIN_OFF. Attempting to write either VIN_ON lower than VIN_OFF or VIN_OFF higher than VIN_ON results in the new value being rejected, SMBALERT being asserted along with the CML bit in STATUS BYTE and the invalid data bit in STATUS CML.

Both the VIN_ON and VIN_OFF commands use the "Linear" format with two data bytes. The upper five bits represent the exponent (fixed at -2) and the remaining 11 bits represent the mantissa. For the mantissa, the four most significant bits are fixed at 0.

Power Good

The module provides a Power Good (PGOOD) signal that is implemented with an open-drain output to indicate that the output voltage is within the regulation limits of the power module. The PGOOD signal will be de-asserted to a low state if any condition such as overtemperature, overcurrent or loss of regulation occurs that would result in the output voltage going outside the specified thresholds. The PGOOD thresholds are user selectable via the PMBus (the default values are as shown in the Feature Specifications Section). Each threshold is set up symmetrically above and below the nominal value. The POWER_GOOD_ON command sets the output voltage level above which PGOOD is asserted (lower threshold). For example, with a 1.2V nominal output voltage, the POWER GOOD ON threshold can set the lower threshold to 1.14 or 1.1V. Doing this will automatically set the upper thresholds to 1.26 or 1.3V.

The POWER_GOOD_OFF command sets the level below which the PGOOD command is de-asserted. This command also sets two thresholds symmetrically placed around the nominal output voltage. Normally, the POWER_GOOD_ON threshold is set higher than the POWER_GOOD_OFF threshold.

Both POWER_GOOD_ON and POWER_GOOD_OFF commands use the "Linear" format with the exponent fixed at –10 (decimal). The two thresholds are given by

$$V_{OUT(PGOOD_ON)} = (POWER_GOOD_ON) \times 2^{-10}$$

$$V_{OUT(PGOOD_OFF)} = (POWER_GOOD_OFF) \times 2^{-10}$$

Both commands use two data bytes with bit [7] of the high byte fixed at 0, while the remaining bits are r/w and used to set the mantissa using two's complement representation. Both commands also use the VOUT_SCALE_LOOP parameter so it must be set correctly. The default value of POWER_GOOD_ON is set at 1.1035V and that of the POWER_GOOD_OFF is set at 1.08V. The values associated

with these commands can be stored in non-volatile memory using the STORE_DEFAULT_ALL command.

The PGOOD terminal can be connected through a pullup resistor (suggested value $100 \mathrm{K}\Omega$) to a source of 5VDC or lower.

Measurement of Output Current, Output Voltage and Input Voltage

The module is capable of measuring key module parameters such as output current and voltage and input voltage and providing this information through the PMBus interface. Roughly every 200µs, the module makes 16 measurements each of output current, voltage and input voltage. Average values of of these 16 measurements are then calculated and placed in the appropriate registers. The values in the registers can then be read using the PMBus interface.

Measuring Output Current Using the PMBus

The module measures current by using the inductor winding resistance as a current sense element. The inductor winding resistance is then the current gain factor used to scale the measured voltage into a current reading. This gain factor is the argument of the IOUT_CAL_GAIN command, and consists of two bytes in the linear data format. The exponent uses the upper five bits [7:3] of the high data byte in two-s complement format and is fixed at –15 (decimal). The remaining 11 bits in two's complement binary format represent the mantissa.

The current measurement accuracy is also improved by each module being calibrated during manufacture with the offset in the current reading. The IOUT_CAL_OFFSET command is used to store and read the current offset. The argument for this command consists of two bytes composed of a 5-bit exponent (fixed at -4d) and a 11-bit mantissa. This command has a resolution of 62.5mA and a range of -4000mA to +3937.5mA. During manufacture, each module is calibrated by measuring and storing the current gain factor and offset into non-volatile storage.

The READ_IOUT command provides module average output current information. This command only supports positive or current sourced from the module. If the converter is sinking current a reading of 0 is provided. The READ_IOUT command returns two bytes of data in the linear data format. The exponent uses the upper five bits [7:3] of the high data byte in two-s complement format and is fixed at – 4 (decimal). The remaining 11 bits in two's complement binary format represent the mantissa with the 11th bit fixed at 0 since only positive numbers are considered valid.

Note that the current reading provided by the module is not corrected for temperature. The temperature corrected current reading for module temperature T_{Module} can be estimated using the following equation

$$I_{OUT,CORR} = \frac{I_{READ_OUT}}{1 + [(T_{IND} - 30) \times 0.00393]}$$

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

where I_{OUT_CORR} is the temperature corrected value of the current measurement, I_{READ_OUT} is the module current measurement value, T_{IND} is the temperature of the inductor winding on the module. Since it may be difficult to measure T_{IND} , it may be approximated by an estimate of the module temperature.

Measuring Output Voltage Using the PMBus

The module can provide output voltage information using the READ_VOUT command. The command returns two bytes of data all representing the mantissa while the exponent is fixed at -10 (decimal).

During manufacture of the module, offset and gain correction values are written into the non-volatile memory of the module. The command VOUT_CAL_OFFSET can be used to read and/or write the offset (two bytes consisting of a 16-bit mantissa in two's complement format) while the exponent is always fixed at -10 (decimal). The allowed range for this offset correction is -125 to 124mV. The command VOUT_CAL_GAIN can be used to read and/or write the gain correction - two bytes consisting of a five-bit exponent (fixed at -8) and a 11-bit mantissa. The range of this correction factor is -0.125V to +0.121V, with a resolution of 0.004V. The corrected output voltage reading is then given by:

$$\begin{split} &V_{OUT}(Final) = \\ &[V_{OUT}(Initial) \times (1 + VOUT_CAL_GAIN)] \\ &+ VOUT_CAL_OFFSET \end{split}$$

Measuring Input Voltage Using the PMBus

The module can provide output voltage information using the READ_VIN command. The command returns two bytes of data in the linear format. The upper five bits [7:3] of the high data form the two's complement representation of the exponent which is fixed at -5 (decimal). The remaining 11 bits are used for two's complement representation of the mantissa, with the $11^{\rm th}$ bit fixed at zero since only positive numbers are valid.

During module manufacture, offset and gain correction values are written into the non-volatile memory of the module. The command VIN_CAL_OFFSET can be used to read and/or write the offset - two bytes consisting of a five-bit exponent (fixed at -5) and a11-bit mantissa in two's complement format. The allowed range for this offset correction is -2 to 1.968V, and the resolution is 32mV. The command VIN_CAL_GAIN can be used to read and/or write the gain correction - two bytes consisting of a five-bit exponent (fixed at -8) and a 11-bit mantissa. The range of this correction factor is -0.125V to +0.121V, with a resolution of 0.004V. The corrected output voltage reading is then given by:

$$V_{IN}(Final) =$$

$$[V_{IN}(Initial) \times (1 + VIN _CAL_GAIN)] + VIN \quad CAL \quad OFFSET$$

Reading the Status of the Module using the PMBus

The module supports a number of status information commands implemented in PMBus. However, not all features are supported in these commands. A 1 in the bit position indicates the fault that is flagged.

STATUS_BYTE: Returns one byte of information with a summary of the most critical device faults.

Bit Position	Flag	Default Value
7	X	0
6	OFF	0
5	VOUT Overvoltage	0
4	IOUT Overcurrent	0
3	VIN Undervoltage	0
2	Temperature	0
1	CML (Comm. Memory Fault)	0
0	None of the above	0

STATUS_WORD : Returns two bytes of information with a summary of the module's fault/warning conditions.

LOW Byte			
Bit Position	Flag	Default Value	
7	X	0	
6	OFF	0	
5	VOUT Overvoltage	0	
4	IOUT Overcurrent	0	
3	VIN Undervoltage	0	
2	Temperature	0	
1	CML (Comm. Memory Fault)	0	

Low Puto

High Byte

None of the above

Bit Position	Flag	Default Value
7	VOUT fault or warning	0
6	IOUT fault or warning	0
5	X	0
4	X	0
3	POWER_GOOD# (is negated)	0
2	X	0
1	X	0
0	X	0

0

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

STATUS_VOUT: Returns one byte of information relating to the status of the module's output voltage related faults.

Bit Position	Flag	Default Value
7	VOUT OV Fault	0
6	X	0
5	X	0
4	VOUT UV Fault	0
3	X	0
2	X	0
1	X	0
0	X	0

STATUS_IOUT: Returns one byte of information relating to the status of the module's output voltage related faults.

Bit Position	Flag	Default Value
7	IOUT OC Fault	0
6	X	0
5	IOUT OC Warning	0
4	X	0
3	X	0
2	X	0
1	X	0
0	X	0

STATUS_TEMPERATURE: Returns one byte of information relating to the status of the module's temperature related faults.

Bit Position	Flag	Default Value
7	OT Fault	0
6	OT Warning	0
5	X	0
4	X	0
3	X	0
2	X	0
1	X	0
0	X	0

STATUS_CML: Returns one byte of information relating to the status of the module's communication related faults.

Bit Position	Flag	Default Value
7	Invalid/Unsupported Command	0
6	Invalid/Unsupported Command	0
5	Packet Error Check Failed	0
4	X	0
3	X	0
2	X	0
1	Other Communication Fault	0
0	X	0

MFR_VIN_MIN: Returns minimum input voltage as two data bytes of information in Linear format (upper five bits are

exponent – fixed at -2, and lower 11 bits are mantissa in two's complement format – fixed at 12)

MFR_VOUT_MIN: Returns minimum output voltage as two data bytes of information in Linear format (upper five bits are exponent – fixed at -10, and lower 11 bits are mantissa in two's complement format – fixed at 614)

MFR_SPECIFIC_00: Returns information related to the type of module and revision number. Bits [7:2] in the Low Byte indicate the module type (001011 corresponds to the PxDT012 series of module), while bits [7:3] indicate the revision number of the module.

Low Byte

Bit Position	Flag	Default Value
7:2	Module Name	001011
1:0	Reserved	10

High Byte

Bit Position	Flag	Default Value
7:3	Module Revision Number	None
2:0	Reserved	000

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Summary of Supported PMBus CommandsPlease refer to the PMBus 1.1 specification for more details of these commands.

Table 6

Hex Code	Command			Non-Volatile Memory Storage										
		Turn Module on or	off. Also	used to	o margir	n the ou	itput vo	ltage						
		Format			-	Jnsigne	d Binar	V						
01	ODEDATION	Bit Position	7	6	5	4	3	2	1	0				
01	OPERATION	Access	r/w	r	r/w	r/w	r/w	r/w	r	r				
		Function	On	X	.,		rgin		Χ	X				
		Default Value	0	0	0	0	0	0	Χ	X				
02	ON_OFF_CONFIG	Configures the ON/ and PMBus common Format Bit Position Access Function	7 r X	6 r X	5 r	Jnsigne 4 r/w pu	d Binar 3 r/w cmd	y 2 r/w cpr	1 r/w pol	F pin O r cpa	YES			
		Default Value	0	0	0	1	0	1	1	1				
03	CLEAR_FAULTS	Clear any fault bits if the device has be				et, also r	eleases	the SM	BALERT	# signal				
		Used to control writ setting in the modu into non-volatile me Format	le whos	se comn	nand co 1) on the	de mat	ches th e	e value						
		Bit Position	7	6	5	4	3	2	1	0				
		Access	r/w	r/w	r/w	X	X	X	X	X				
			Function bit7 bit6 bit5 X X X X X											
			Default Value 0 0 0 X X X X X X X ItS: 0 - Enables all writes as permitted in bit6 or bit7											
10	WRITE_PROTECT	1 - Disables all and ON_OF Bit 6: 0 - Enables al 1 - Disables al OPERATION Bit7: 0 - Enables all 1 - Disables all (bit5 and bit	writes of F_CONF I writes I writes of writes of writes of writes of writes of must	except to as permexcept (bit 6 as permexcept (bit 6 as permexcept for be 0)	the WRI 5 and bi nitted in for the ' it5 and nitted in for the V	TE_PRO t7 must bit5 or WRITE_ bit7 mu bit5 or VRITE_F	TECT, O t be 0) bit7 PROTEC est be 0) bit6 PROTEC	T and	and		YES			
11	STORE_DEFAULT_ALL	Copies all current re (EEPROM) on the me	egister s odule. T	settings akes ab	in the roout 50r	nodule ns for th	into nor ne comr	n-volatil mand to	e memo execut	ory e.				
12	RESTORE_DEFAULT_ALL	Restores all current non-volatile memo			gs in the	modul	e from v	values ii	n the m	odule				
13	STORE_DEFAULT_CODE	Copies the current matches the value module Bit Position												
		Access	W	W	W	W				w				
		Function	VV	L *V	1			•	. **	- **				
14	RESTORE_DEFAULT_CODE	Restores the currer matches the value memory (EEPROM) Bit Position Access Function	estores the current register setting in the module whose command code atches the value in the data byte from the value in the module non-volatile emory (EEPROM) Bit Position 7 6 5 4 3 2 1 0 Access w w w w w w w w w w w											
		The module has MC cannot be changed					ı	ı	1					
20	VOUT_MODE	Bit Position	7	6	5	4	3	2	1	0				
		Access	r	r	r	r	r	r	r	r				
		Function	_	Mode	_ ^			xponer						
		Default Value	0	0	0	1	0	1	1	0				

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex Code	Command			Bri	ief Desc	ription					Non-Volatile Memory Storage
- Journal of the second of the		Apply a fixed offset	voltage	to the	output v	oltage	commo	ınd valu	іе. Ехро	nent is	Tromory Storage
		fixed at -10. The off	set is V								
		Format			inear, tv				·		
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
22	VOUT_TRIM	Function	_		1 0		Byte				YES
		Default Value	7	0 6	5	0	3	2	0	0	
		Bit Position Access	r/w	r/w	r/w	r/w	r/w	r/w	1 r/w	r/w	
		Function	1700	1700	1/00		Byte	1/00	1700	1700	
		Default Value	0	0	0	0	0	0	0	0	
		Sets the target volt	-			•	_		•		
		The offset is (VOUT_						роттотте		GC 10.	
		Format			inear, tv			nt bina	ry		
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
25	VOUT_MARGIN_HIGH	Function		1	1		Byte	1			YES
		Default Value	0	0	0	0	0	1	0	1	
1		Bit Position	7	6	5	4	3	2	1	0	
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function Default Value	0	1	0	LOW	Byte 0	1	1	1	
		Sets the target volt	·			U U	·		1 I	± 10	
		The offset is (VOUT_						onentis	s lixea a	IL -10.	
		Format			inear, tv			nt hina	rv		
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
26	VOUT_MARGIN_LOW	Function				High	Byte				YES
		Default Value	0	0	0	0	0	1	0	0	
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function		1	1		Byte				
		Default Value	0	1	0	1	0	0	0	1	
		Sets the scaling of tratio. VOUT_SCALE					he feed	back re	sistor di	vider	
		Format		L	inear, tv	vo's cor	mpleme	nt bina	ry		
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r	r	r	r	r	r/w	r/w	
29	VOUT_SCALE_LOOP	Function			Exponen				Mantiss		YES
		Default Value	1	0	1	1	1	0	0	1	
		Bit Position	7	6 r/w	5 r/w	4	3	2	1	0	
		Access Function	r/w	I/W	I/W	r/w Man	r/w tissa	r/w	r/w	r/w	
		Default Value	0	0	0	0	0	0	Ω	0	
-		Sets the value of in							ic muc+	ــــــــــــــــــــــــــــــــــــــ	
		higher than VIN_OF					iie turns	oui. M	เร เมนรโ	ne	
		• 2.75V	Jupp	oi icu v	aiucs Ul	-					
		• 3V to 18	V in inc	ement	of 0.5V						
		Format			inear, tv		mpleme	nt bina	ry		
		Bit Position	7	6	5	4	3	2	1	0	
35	VIN_ON	Access	r	r	r	r	r	r	r	r	YES
	_	Function			xponen	t			Mantiss	a	
		Default Value	1	1	1	1	0	0	0	0	
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function	<u> </u>		T -		tissa				
		Default Value	0	0	0	0	1	0	1	1	

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex Code	Command			Br	ief Desc	ription					Non-Volatile Memory Storage
36	VIN_OFF	Sets the value of in than VIN_OFF. Supple 2.5V to 1 Format Bit Position Access Function Default Value Bit Position Access Function Default Value Bit Position Access Function Default Value	orted V	alues a ncreme L 6 r	re	.5V vo's cor 4 r	npleme 3 r 0 3 r/w	nt binaı 2 r		0 r	YES
38	IOUT_CAL_GAIN	Returns the value of output current Format Bit Position Access Function Default Value Bit Position Access Function Default Value		in corre		rm used vo's con 4 r t 0 4 r/w Man	npleme 3 r 1 3 r/w tissa	rect the nt binar 2 r 0 2 r/w	measur Ty 1 r Mantissa 0 1 r/w	o r/w	YES
39	IOUT_CAL_OFFSET	Returns the value of output current Format Bit Position Access Function Default Value Bit Position Access Function Default Value Default Value	f the off	6 r	inear, tv 5 r Exponen 1 5 r/w	vo's cor 4 r t 0 4 r/w Man	npleme 3 r 0 3 r/w tissa	nt binar 2 r/w V 2 r/w		0 r	YES
40	VOUT_OV_FAULT_LIMIT	Sets the voltage lev Four fixed percental Format Bit Position Access Function Default Value Bit Position Access Function Default Value	rel for arrages of 1 7 r 0 7 r/w	.08%, 1	t overvo 10%, 11 inear, tw 5 r/w	2%and	115% conpleme 3 r/w Byte 0 3 r/w	are avai	lable	0 r/w 1 0 r/w 0	YES

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex Code	Command			Br	rief Des	cription					Non-Volatile Memory Storage
41	VOUT_OV_FAULT_RESPONSE	Instructs the modul fault. The options at 00 - Module 01 Module of fault pers 01- Module st 11 - Module st RS[2:0] 000 - Module 111- Module g Format Bit Position Access Function Default Value	re: RSP[continue sists shuts do huts do	1:0] ues with e s oper own and wn and	nout into ration fo d respon attemp apt to re ormal s	erruption or 4 swite ods to Ri ots to res	n ching cy S[2:0] start	cles an			YES
44	VOUT_UV_FAULT_LIMIT	Sets the voltage lev Four fixed percenta Format Bit Position Access Function Default Value Bit Position Access Function Default Value	el for ar ges of 9 7 r 0 7 r/w	92%, 90	%, 88%	voltage and 859 wo's cor 4 r/w High 0 4 r/w Low	% are average and a second sec	/ailable		0 r/w 0 0 r/w 1	YES
45	VOUT_UV_FAULT_RESPONSE	Instructs the modul undervoltage fault. The options are: RSI 02 - Module 03 Module of fault pers 02 - Module structure 11 - Module shuts of the structure RS[2:0] 000 - Module does 111 - Module goes to Format Bit Position Access Function Default Value	P[1:0] continue continue sists shuts de down ar	ues with e s oper own and atter empt to	nout interation for the control of t	erruption or 4 swith ods to R nds to R	n ching cy S[2:0] uously.	rcles an		down if	YES
46	IOUT_OC_FAULT_LIMIT	Sets the output ove Format Bit Position Access Function Default Value Bit Position Access Function Default Value	rcurren 7 r 1 7 r	6 r		vo's cor 4 r	nplemei 3 r 1 3 r	nt binar 2 r	ry 1 r Mantissa 0 1 r	0 r 3 0 0 r	YES

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex Code	Command			В	rief Des	criptio	n				Non-Volatile
Code		Sets the output over	ercurrer	nt warni	ing leve	l in A					Memory Storage
		Format					mpleme	ent bina	ry		
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r	r	r	r	r	r	r	
4A	IOUT OC WARN LIMIT	Function			Expone	nt			Mantiss	sa	YES
4/1	1001_0C_WAKIN_EIIIII	Default Value	1	1	1	1	1	0	0	0	11.5
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r	r/w	r/w	r/w	r/w	r/w	r/w	
		Function Default Value	0	0	0	1	ntissa 1	1	0	1	
		Delduit value	U	U	U	1	1 1	1	U	1	
		Sets the output volis fixed at -10.	tage lev	el at w	hich the	PGOOI) pin is c	asserted	d high.	Exponent	
		Format					mpleme			إ	
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function Default Value	0	0	0	Higi 0	n Byte 0	1	0	0	
		Bit Position	7	6	5	4	3	2	1	0	
5E	POWER GOOD ON	Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	YES
JL	1 0WEN_000B_0N	Function			1		/ Byte		1		123
		Default Value	0	1	1	0	1	0	1	0	
		POWER_GOOD_ON LOW HIGH 95% 105% 92% 108% 90% 110%	6 6								
		Sets the output vol Exponent is fixed a	t -10.				•	de-asse	rted lov	V.	
		Format			compler						
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function	High B	yte			1	1		•	
		Default Value	0	0	0	0	0	1	0	0	
		Bit Position	7	6	5	4	3	2	1	0	
5F	POWER_GOOD_OFF	Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	YES
		Function	Low By		1	1	1	1	1	1	
		Default Value	0	1	0	1	0	0	1	0	
		POWER_GOOD_OF	F LEVEL	S	1	1	L	1	1		
		LOW HIGH 92% 108% 90% 110% 88% 112%	6 6								
1		112/	U								

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Code	Command			Bri	ief Des	cription					Non-Volatile Memory Storage
		Sets the rise time of 0.6ms, 0.9ms, 1.2ms		, 2.7ms	, 4.2ms	, 6.0ms,				s are	
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r	r	r	r	r	r	r	r/w	
61	TON RISE	Function	· ·		xpone			·	Mantiss		YES
		Default Value	1	1	1	0	0	0	0	0	1.20
		Bit Position	7	6	5	4	3	2	1	0	
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
		Function				Mar	ntissa				
		Default Value	0	0	1	0	1	0	1	0	
		Returns one byte of faults Format	f inform	ation w			of the n		itical mo	odule	
		Bit Position	7	6	5	4	3	2	1	0	
78	STATUS_BYTE	Access	r	r	r	r	r	r	r	r	
					VOUT		VIN_U			OTHE	
		Flag	Х	OFF	OV	OC	V	TEMF	CML	R	
		Default Value	0	0	0	0	0	0	0	0	
		Returns two bytes of conditions Format	of inforn	nation v		,	y of the		e's fault,	/warning	
		Bit Position	7	6	5	4	3	2	1	0	
1		Access	r	r	r	r	r	r	r	r	
79	STATUS_WORD	Flag	VOUT	IOUT_ OC	Х	Х	PGOO D	Х	Х	Х	
1		Default Value	0	0	0	0	0	0	0	0	
		Bit Position	7	6	5	4	3	2	1	0	
1		Access	r	r	r	r	r	r	r	r	
1		Flag	Х	OFF	_OV	OC	VIN_U V	TEMF		OTHE R	
		Returns one byte of	0 f inform	0 ation w	0 ith the	0 status c	0 of the mo	0 odule's	0 output	0 voltage	
		related faults	I			l lnoi	лd П:				
, ₇ ,	CTATUS VOLIT	Format Bit Position	7			Unsigne	ed Binar	y 3	2 1		
7A	STATUS_VOUT	Access	r			r	4	r	2 1	0 r	
.]		Flag	VOUT			X VO	<u>r</u> UT_UV	X	r r X X		
.]		Default Value	0) \	01_00	0	0 0		
		Returns one byte of related faults Format			ith the	status c		odule's			
7B	STATUS_IOUT	Bit Position	7		6	5			3 2	1 0	
.]	_	Access	r		r	r	•		r r	r r	
		Flag	IOUT	OC		OT_OC	_WARN			XX	
		Default Value	0		0	0		0	0 0	0 0	

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex	Command	Brief Description										Non-Volatile	
Code		Datuma control	£:£						انام			L	Memory Storage
		Returns one byte of related faults	tintormo	ition (with the	status	of th	e mo	dule's	temp	era	ture	
		Format				Unsig	ned R	inary					1
7D	STATUS_TEMPERATURE	Bit Position	7		6		5	4	3	2	1	0	
10	STATUS_TEMPERATURE	Access	r		r		r	r	r	r	r	r	1
		Flag	OT_FA	UIIT	OT_W		X	Х	X	X	X	X	1
		Default Value	0	.02.	C C		0	0	0	0	0	0	1
		Returns one byte o	f informo	ation (with the					comi	mun	ication	1
		Format	7			Unsig					1	Ι ο	4
7E	CTATUS CMI	Bit Position	7		6	5	4	3 r	2	-	<u>L</u> r	0 r	4
/E	STATUS_CML	Access	1		r	r	r	ı	r	Otl		-	
		Flag	Inval Comm		Invalid Data	PEC Fail	Х	Χ	Х		mm	X	
		Default Value	0		0	0	0	0	0	()	0	
		Returns the value o	of the inn	ut vol	ltage an	plied to	o the	modi	ıle				
		Format			Linear, 1					arv			1
		Bit Position	7	6	5	4		3	2	1		0	1
		Access	r	r	r	r		r	r	r	_	r	1
00	DEAD 1//N	Function			Expone	nt				Mant	issa		1
88	READ_VIN	Default Value	1	1	0	1		1	0	0	_	0	1
		Bit Position	7	6	5	4		3	2	1		0	1
		Access	r	r	r	r		r	r	r		r	1
		Function				Mo	antiss	a]
		Default Value	0	0	0	0		0	0	0)	0	
		Returns the value of	of the out								xed	at -10.	;
		Format	7		Linear,					_			4
		Bit Position	7	6	5	4		3	2	1	-+	0	4
		Access Function	r	r	r	r		r	r	r		r	4
8B	READ_VOUT	Default Value	0	0	0	0	antiss	0	0	0	. 1	0	4
		Bit Position	7	6	5	4		3	2	1		0	1
		Access	r	r	r	r	_	r	r	r	-+	r	4
		Function	' '				antiss			'			1
		Default Value	0	0	0	T 0		0	0	0) [0	1
								1			- 1		4
		Returns the value of	of the out	tput c	urrent o	f the n	nodul	e_					_
		Format			Linear,				nt bind	ary]
		Bit Position	7	6	5	4		3	2	1	\Box	0	_
		Access	r	r		r		r	r	r		r	1
8C	READ IOUT	Function	<u> </u>		Expone					Mant			41
	112.15_1001	Default Value	1	1	1	0	_	0	0	0	_	0	4
		Bit Position	7	6	5	4		3	2	1		0	4
		Access	r	r	r	r		r	r	r		r	4
		Function	0	0	0	_	antiss		0	0	, ,	0	4
		Default Value				0		0	0				<u> </u>
		Returns one byte ir only)	ndicating	the n	nodule i					Spec.	1.1 (read	_
98	PMBUS REVISION	Format				Unsig	ned B	inary					YES
30	FILIDO2_VEAISION	Bit Position	7	6	5	4		3	2	1	. [0	1E3
		Access	r	r	r	r	_	r	r	r	_	r	11
		Default Value	0	0	0	1		0	0	0)	1]
		•											

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Hex Code	Command				Brief D	escripti	ion					Non-Volatile Memory Storage
		Returns the minimu	ım innı	ıt voltac	e the m	odule is	snecifi	ed to or	perate a	t (read a	nly)	
		Format	I			wo's cor				t (read t]	
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
		Function			xponer				Mantiss	a .		
Α0	MFR_VIN_MIN	Default Value	1	1	1	1	0	0	0	0		YES
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
		Function		1	1	Man	tissa			1		
		Default Value	0	0	0	0	1	1	0	0		
			ı									
		Returns the minimu	ım outp	out volto	ge pos	sible fro	m the n	nodule (read on	ly)	_	
		Format		L	inear, t	wo's cor	mpleme	nt bina	ry			
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
A4	MFR VOUT MIN	Function				Man	tissa					YES
A4	1411 K_VOO1_14111V	Default Value	0	0	0	0	0	0	1	0		TLS
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
		Function				Man	tissa					
		Default Value	0	1	1	0	0	1	1	0		
		Returns module na	me info	rmatior							1	
		Format		1 -		Unsigne						
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
D0	MFR SPECIFIC 00	Function					rved					YES
		Default Value	X	X	X	X	X	Х	Х	X		. = 0
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r	r	r	r	r	r	r	r		
		Function	0	Ι ο		e Name	1 1	1		rved		
		Default Value	0	0	1	0	1	1	Х	Χ		
		Applies an offset to module measurement is fixed at	ents of	the out	put volt	age (bet	ween -	125mV	and +12	ffset err !4mV).	ors in	
		Format Bit Position	7			wo's cor			ry 1	0		
		Access	r/w	6 r	5 r		3 r	2	1	0 r		
D4	VOUT_CAL_OFFSET	Function	1/W		r	r Man	ticca	r	r	r		YES
	_ -	Default Value	V	0	0	0	tissa 0	0	0	0		
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w		
		Function	17 00	1700	17 VV		tissa	17 VV	1/00	1700		
		Default Value	V	V	V	V	V	V	V	V		
		Applies a gain corre	ection t	to the R	EAD_VC	UT com	mand r	esults t	o calibro	ate out		
		errors in module m	easurer							ana 0.12	(1) 1	
		Format		1		wo's cor			1	-		
		Bit Position	7	6	5	4	3	2	1	0		
	VOLE 011 - 1111	Access	r	r	r 	r	r	r	r	r/w		
D5	VOUT_CAL_GAIN	Function			Exponer				Mantiss			YES
		Default Value	1	1	0	0	0	0	0	V		
		Bit Position	7	6	5	4	3	2	1	0		
		Access	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w		
		Function		1		Man						
		Default Value	V	V	V	V	V	V	V	V	J	
		1										

12A Digital Pico SlimLynx[™] Open Frame: Non-Isolated DC-DC Power 3Vdc −14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

		Applies an offset co		Brief Description											
		errors in module me	easuren	nents of L	the inp inear, tv	ut volta	ge (betv npleme	veen -2\ nt binar	V and $+$:	1.968V)	offset				
		Bit Position	7	6	5	4	3	2	1	0					
		Access	r	r	r	r	r/w	r	r	r/w					
D6	VIN_CAL_OFFSET	Function			xponen	t		1	1antissa	נ		YES			
		Default Value	1	1	0	1	V	0	0	V					
		Bit Position	7	6	5	4	3	2	1	0					
		Access	r	r	r/w	r/w	r/w	r/w	r/w	r/w					
		Function			•	Man	tissa								
		Default Value	0	0	V	V	V	V	V	V					
D7	VIN_CAL_GAIN	Applies a gain corre errors in module me Format Bit Position Access Function Default Value Bit Position Access Function Default Value		nents of L 6 r		ut volta vo's cor 4 r	ge (betv npleme 3 r/w V 3 r/w	veen -0. nt binar 2 r	125 and	0.121) 0 r/w	า	YES			

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Thermal Considerations

Power modules operate in a variety of thermal environments; however, sufficient cooling should always be provided to help ensure reliable operation.

Considerations include ambient temperature, airflow, module power dissipation, and the need for increased reliability. A reduction in the operating temperature of the module will result in an increase in reliability. The thermal data presented here is based on physical measurements taken in a wind tunnel. The test set-up is shown in Figure 49. The preferred airflow direction for the module is in Figure 50.




Figure 49. Thermal Test Setup.

The thermal reference points, T_{ref} used in the specifications are also shown in Figure 50. For reliable operation the

temperatures at the Q3 should not exceed 120°C and the temperature at L1 core should not exceed 125°C. The output power of the module should not exceed the rated power of the module (Vo,set x Io,max).

Please refer to the Application Note "Thermal Characterization Process For Open-Frame Board-Mounted Power Modules" for a detailed discussion of thermal aspects including maximum device temperatures.




Figure 50. Preferred airflow direction and location of hotspot of the module (Tref).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current


Example Application Circuit

Requirements:

Vin: 12V Vout: 1.8V

Iout: 9A max., worst case load transient is from 6A to 9A
 ΔVout: 1.5% of Vout (27mV) for worst case load transient

Vin, ripple 1.5% of Vin (180mV, p-p)

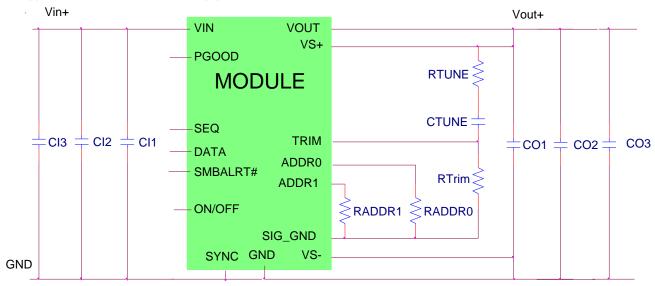

CI1 Decoupling cap - 1x0.047µF/16V ceramic capacitor (e.g. Murata LLL185R71C473MA01)

CI2 2x22µF/16V ceramic capacitor (e.g. Murata GRM32ER61C226KE20)

CI3 $470\mu\text{F}/16\text{V}$ bulk electrolytic

CO1 Decoupling cap - $1\times0.047\mu$ F/16V ceramic capacitor (e.g. Murata LLL185R71C473MA01) + $1\times0.047\mu$ F/16V

0402size ceramic capacitor

CO2 3x47µF/16V ceramic capacitor (e.g. Murata GRM32ER61C226KE20)

CO3 $1 \times 330 \mu F/6 V$ POSCAP

CTune 3900pF ceramic capacitor (can be 1206, 0805 or 0603 size)

RTune 300 Ω SMT resistor (can be 1206, 0805 or 0603 size)

RTrim $10k\Omega$ SMT resistor (can be 1206, 0805 or 0603 size, recommended tolerance of 0.1%)

<u>Note:</u> The DATA, CLK and SMBALRT pins do not have any pull-up resistors inside the module. Typically, the SMBus master controller will have the pull-up resistors as well as provide the driving source for these signals.

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power


3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current


Mechanical Outline

Dimensions are in millimeters and (inches).

Tolerances: x.x mm \pm 0.5 mm (x.xx in. \pm 0.02 in.) [unless otherwise indicated]

x.xx mm \pm 0.25 mm (x.xxx in \pm 0.010 in.)

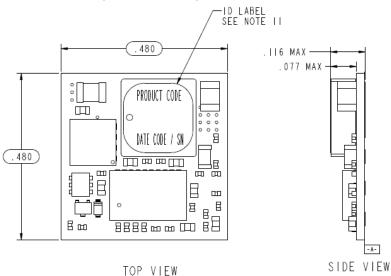

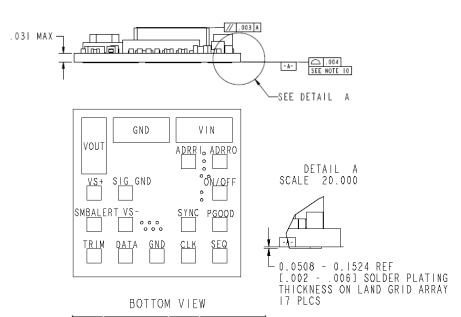

PIN	FUNCTION	PIN	FUNCTION		
1	ON/OFF	10	PGOOD		
2	VIN	11	SYNC ¹		
3	GND	12	VS-		
4	VOUT	13	SIG. GND		
5	VS+ (SENSE)	14	SMBALERT#		
6	TRIM	15	DATA		
7	GND	16	ADDR0		
8	CLK	17	ADDR1		
9	SEQ				

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power


3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Recommended Pad Layout

Dimensions are in millimeters and (inches).

Tolerances: x.x mm \pm 0.5 mm (x.xx in. \pm 0.02 in.) [unless otherwise indicated]

x.xx mm \pm 0.25 mm (x.xxx in \pm 0.010 in.)

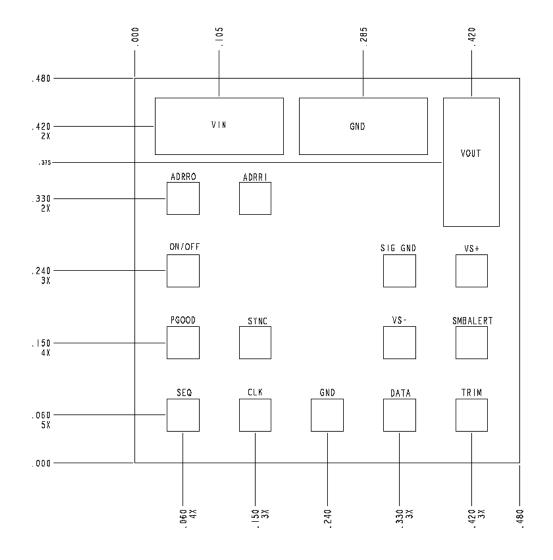

PIN	FUNCTION	PIN	FUNCTION	
1	ON/OFF	10	PGOOD	
2	VIN	11	SYNC ²	
3	GND	12	VS-	
4	VOUT	13	SIG_GND	
5	VS+ (SENSE)	14	SMBALERT#	
6	TRIM	15	DATA	
7	GND	16	ADDR0	
8	CLK	17	ADDR1	
9	SEQ			

² If unused, connect to Ground


12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power


3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Packaging Details

The 12V Digital Pico SlimLynx TM 12A Open Frame modules are supplied in tape & reel as standard. Modules are shipped in quantities of 600 modules per reel.

All Dimensions are in millimeters and (in inches).



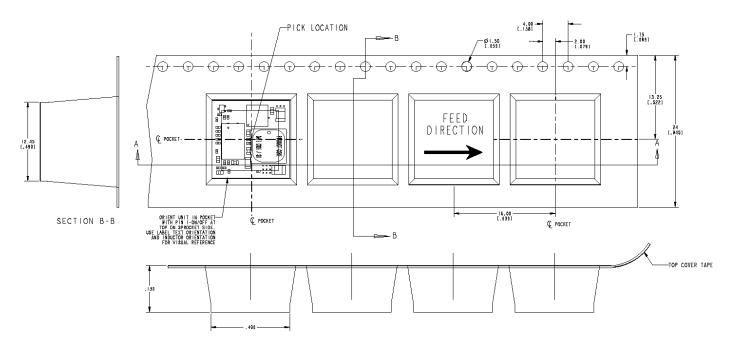

Reel Dimensions:

 Outside Dimensions:
 330.2 mm (13.00)

 Inside Dimensions:
 177.8 mm (7.00")

 Tape Width:
 24.00 mm (0.945")

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Surface Mount Information

Pick and Place

The 12A Digital Pico SlimLynx[™] Open Frame modules use an open frame construction and are designed for a fully automated assembly process. The modules are fitted with a label designed to provide a large surface area for pick and place operations. The label meets all the requirements for surface mount processing, as well as safety standards, and is able to withstand reflow temperatures of up to 300°C. The label also carries product information such as product code, serial number and the location of manufacture.

Nozzle Recommendations

The module weight has been kept to a minimum by using open frame construction. Variables such as nozzle size, tip style, vacuum pressure and placement speed should be considered to optimize this process. The minimum recommended inside nozzle diameter for reliable operation is 3mm. The maximum nozzle outer diameter, which will safely fit within the allowable component spacing, is 7 mm.

Lead Free Soldering

The modules are lead-free (Pb-free) and RoHS compliant and fully compatible in a Pb-free soldering process. Failure to observe the instructions below may result in the failure of or cause damage to the modules and can adversely affect long-term reliability.

Pb-free Reflow Profile

Power Systems will comply with J-STD-020 Rev. D (Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices) for both Pb-free solder profiles and MSL classification procedures. This standard provides a recommended forced-air-convection reflow profile based on the volume and thickness of the package (table 4-2). The suggested Pb-free solder paste is Sn/Ag/Cu (SAC). The recommended linear reflow profile using Sn/Ag/Cu solder is shown in Fig. 50. Soldering outside of the recommended profile requires testing to verify results and performance.

MSL Rating

The 12A Digital Pico SlimLynx $^{\text{TM}}$ Open Frame modules have a MSL rating of 2a.

Storage and Handling

The recommended storage environment and handling procedures for moisture-sensitive surface mount packages is detailed in J-STD-033 Rev. A (Handling, Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices). Moisture barrier bags (MBB) with desiccant are required for MSL ratings of 2 or greater. These sealed packages should not be broken until time of use. Once the original package is broken, the floor life of the product at conditions of $\leq 30^{\circ}\text{C}$ and 60% relative humidity varies according to the MSL rating (see J-STD-033A). The shelf life for dry packed SMT packages will be a minimum of 12 months from the bag seal date,

when stored at the following conditions: $<40^{\circ}$ C, <90% relative humidity.




Figure 51. Recommended linear reflow profile using Sn/Ag/Cu solder.

Post Solder Cleaning and Drying Considerations

Post solder cleaning is usually the final circuit-board assembly process prior to electrical board testing. The result of inadequate cleaning and drying can affect both the reliability of a power module and the testability of the finished circuit-board assembly. For guidance on appropriate soldering, cleaning and drying procedures, refer to Board Mounted Power Modules: Soldering and Cleaning Application Note (AN04-001).

12A Digital Pico SlimLynx™ Open Frame: Non-Isolated DC-DC Power

3Vdc -14.4Vdc input; 0.45Vdc to 5.5Vdc output; 12A Output Current

Ordering Information

Please contact your GE Sales Representative for pricing, availability and optional features.

Table 9. Device Codes

Device Code	Input Voltage Range	Output Voltage	Output Current	On/Off Logic	Sequencing	Comcodes
PNDT012A0X3-SRZ	3 – 14.4Vdc	0.45 – 5.5 Vdc	12A	Negative	Yes	150038560
PNDT012A0X43-SRZ	3 – 14.4Vdc	0.45 – 5.5 Vdc	12A	Positive	Yes	150038563

⁻Z refers to RoHS compliant parts

Table 10. Coding Scheme

Package Identifier	Family	Sequencing Option	Output current	Output voltage	On/Off logic	Remote Sense	Options	ROHS Compliance
Р	ND	Т	012A0	X		3	-SR	Z
P=Pico	ND=SlimLynx	T=with EZ	12A		4 =	3 = Remote	S = Surface	Z = ROHS6
U=Micro	Digital Open Frame	Sequence X=without		able output	positive No entry =	Sense	Mount	
M=Mega	NV=SlimLynx	sequencing			negative		R = Tape & Reel	
G=Giga	Analog Open Frame							

GE Digital Non-Isolated DC-DC products use technology licensed from Power-One, protected by US patents: US20040246754, US2004090219A1, US2004093533A1, US2004123164A1, US2004123167A1, US2004178780A1, US2004179382A1, US200502200344, US20050223252, US2005829373A1, US200600561214, US2006015616A1, US20060174145, US20070226526, US20070226526, US2007024000, US20080052551, US200801860072080, US20080186006, US6741099, US6788036, US6936999, US6949916, US7000125, US7049798, US7068021, US7080265, US7249267, US7266709, US7315156, US7372682, US7373527, US7394445, US7456617, US7459892, US7493504, US75266609, US7315156, US7372682, US7373527, US7394445, US7456617, US7459892, US7493504, US75266609

Outside the US the Power-One licensed technology is protected by patents: AU3287379AA, AU3287437AA, AU3290643AA, AU3291357AA, CN10371856C, CN10452610C, CN10458656C, CN10459360C, CN10465848C, CN11069332A, CN11124619A, CN11346682A, CN1685299A, CN1685459A, CN1685582A, CN1685582A, CN1698023A, CN1802619A, EP1561156A1, EP156710A1, EP1576710A1, EP1576711A1, EP1604254A4, EP1604264A4, EP174369A2, EP1745536A4, EP1769382A4, EP1899789A2, EP1984801A2, W004044718A1, W004045042A3, W004045042C1, W004062061A1, W004062062A1, W004070780A3, W004084390A3, W004084391A3, W005079227A3, W005081771A3, W006019569A3, W02007001584A3, W02007094935A3

Contact Us

For more information, call us at

USA/Canada:

+1 877 546 3243, or +1 972 244 9288

Asia-Pacific:

+86.021.54279977*808

Europe, Middle-East and Africa:

+49.89.878067-280

www.gecriticalpower.com

GE Critical Power reserves the right to make changes to the product(s) or information contained herein without notice, and no liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

imagination at work

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9