COSEL AC-DC Power Supplies PCB Mount type

TUHS3

Ordering information

TUH	S	3	F	05	
①	②	③	④	⑤	

①Series name
②Single output
③Output wattage
④Universal Input
⑤Output voltage

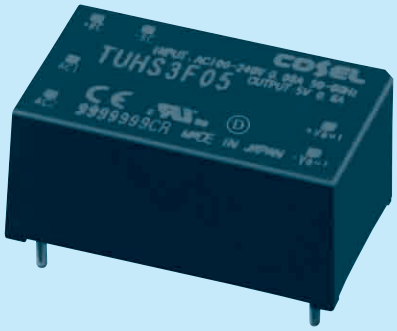

Class II

TUHS

✻Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
✻To use TUHS, external components are required. Refer to the instruction manual for details.

MODEL	TUHS3F05	TUHS3F12	TUHS3F24
MAX OUTPUT WATTAGE[W]	3.00	3.00	3.12
DC OUTPUT	5V 0.6A	12V 0.25A	24V 0.13A

SPECIFICATIONS

	MODEL		TUHS3F05	TUHS3F12	TUHS3F24
INPUT	VOLTAGE[V]		AC85 - 264 1φ DC120 - 370		
	CURRENT[A]	ACIN 100V	0.08typ (Io=100%)		
		ACIN 200V	0.05typ (Io=100%)		
	FREQUENCY[Hz]		50/60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	79typ	81typ	81typ
		ACIN 200V	78typ	79typ	79typ
	INRUSH CURRENT		Limited by external components		
	LEAKAGE CURRENT[mA]		0.40/0.75 max (ACIN100V/240V , 60Hz, Io=100% , According to IEC60950-1)		
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		0.6	0.25	0.13
	LINE REGULATION[mV]		20max	48max	96max
	LOAD REGULATION[mV]		40max	100max	150max
	RIPPLE[mVp-p]	30 to 100% Load ✻1	120max	160max	200max
		0 to 30% Load AC85V - 240V ✻1	400max	480max	580max
	RIPPLE NOISE[mVp-p]	30 to 100% Load ✻1	160max	200max	240max
		0 to 30% Load AC85V - 240V ✻1	480max	560max	660max
	TEMPERATURE REGULATION[mV]	0 to +85℃	100max	180max	360max
		-40 to +85℃	150max	270max	480max
	DRIFT[mV]	✻2	20max	48max	96max
	OUTPUT VOLTAGE SETTING[V]		4.90 - 5.30	11.40 - 12.60	23.00 - 25.00
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recover automatically		
	OVERVOLTAGE PROTECTION[V]		5.50 - 8.00	13.20 - 19.20	26.40 - 38.40
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)		
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max		
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max		
	VIBRATION		10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1		
	CONDUCTED NOISE		Complies with FCC-B,VCCI-B,CISPR-B,EN55022-B ✻3		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Class A) (Not built-in to active filter)		
OTHERS	CASE SIZE/WEIGHT		28.7×12.7×17.5mm[1.13×0.50×0.69 inches] (W×H×D) / 15g max		
	COOLING METHOD		Convection / Forced air		

✻1 Refer to instruction manual for measuring method of electric characteristics.
✻2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated value.
✻3 Do not ground secondly circuit, in case of a standard adapted.
✻ Measured with 18μF capasitor as Cbc.

External view

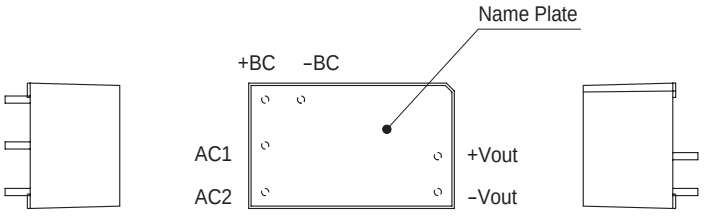



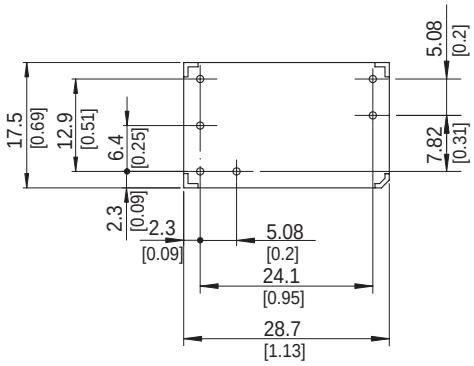

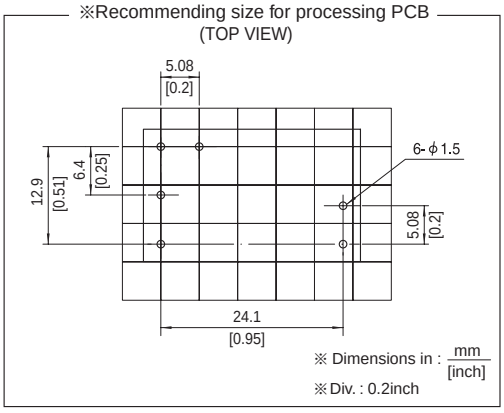

※ Tolerance : ±0.5 [±0.02]
※ Weight : 15g max
※ Case material : PBT
※ Pin material : Copper
※ Plating treatment of pin : Lead free plating
※ Dimensions in mm, [ ]=inches

COSEL AC-DC Power Supplies PCB Mount type

TUHS5

Ordering information

TUH	S	5	F	05	
①	②	③	④	⑤	

①Series name
②Single output
③Output wattage
④Universal Input
⑤Output voltage

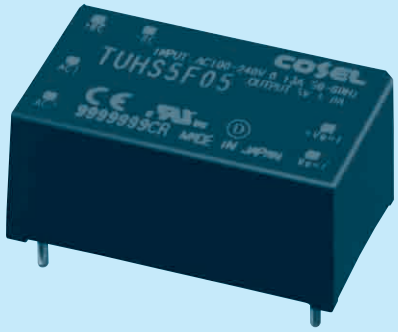

Class II

TUHS

✻Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
✻To use TUHS, external components are required. Refer to the instruction manual for details.

MODEL	TUHS5F05	TUHS5F12	TUHS5F24
MAX OUTPUT WATTAGE[W]	5.00	5.40	5.28
DC OUTPUT	5V 1A	12V 0.45A	24V 0.22A

SPECIFICATIONS

	MODEL		TUHS5F05	TUHS5F12	TUHS5F24
INPUT	VOLTAGE[V]		AC85 - 264 1φ DC120 - 370		
	CURRENT[A]	ACIN 100V	0.13typ (Io=100%)		
		ACIN 200V	0.08yp (Io=100%)		
	FREQUENCY[Hz]		50/60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	78typ	82typ	83typ
		ACIN 200V	79typ	82typ	83typ
	INRUSH CURRENT		Limited by external components		
	LEAKAGE CURRENT[mA]		0.40/0.75 max (ACIN100V/240V , 60Hz, Io=100% , According to IEC60950-1)		
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		1	0.45	0.22
	LINE REGULATION[mV]		20max	48max	96max
	LOAD REGULATION[mV]		40max	100max	150max
	RIPPLE[mVp-p]	30 to 100% Load ✻1	120max	160max	200max
		0 to 30% Load AC85V - 240V ✻1	400max	480max	580max
	RIPPLE NOISE[mVp-p]	30 to 100% Load ✻1	160max	200max	240max
		0 to 30% Load AC85V - 240V ✻1	480max	560max	660max
	TEMPERATURE REGULATION[mV]	0 to +80℃	100max	180max	360max
		-40 to +80℃	150max	270max	480max
	DRIFT[mV]	✻2	20max	48max	96max
	OUTPUT VOLTAGE SETTING[V]		4.90 - 5.30	11.40 - 12.60	23.00 - 25.00
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recover automatically		
	OVERVOLTAGE PROTECTION[V]		5.50 - 8.00	13.20 - 19.20	26.40 - 38.40
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)		
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max		
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max		
	VIBRATION		10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1		
	CONDUCTED NOISE		Complies with FCC-B,VCCI-B,CISPR-B,EN55022-B ✻3		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Class A) (Not built-in to active filter)		
OTHERS	CASE SIZE/WEIGHT		28.7×12.7×17.5mm[1.13×0.50×0.69 inches] (W×H×D) / 15g max		
	COOLING METHOD		Convection / Forced air		

✻1 Refer to instruction manual for measuring method of electric characteristics.
✻2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated value.
✻3 Do not ground secondly circuit, in case of a standard adapted.
✻ Measured with 22μF capasitor as Cbc.

External view

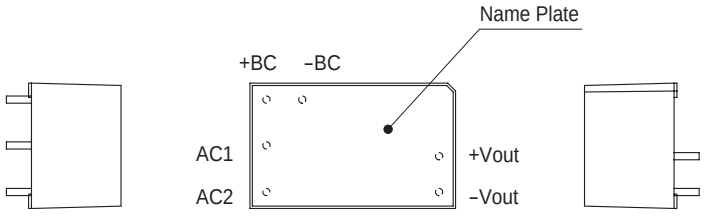



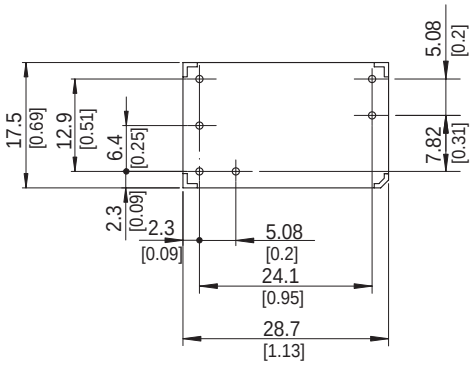

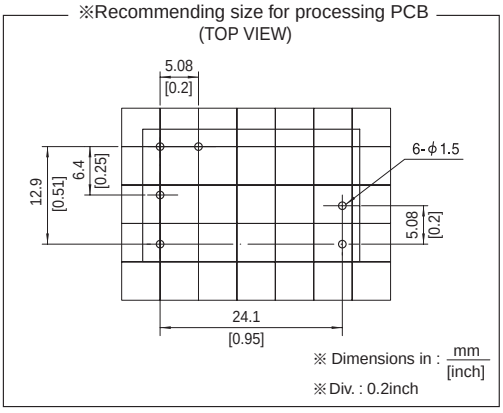

※ Tolerance : ±0.5 [±0.02]
※ Weight : 15g max
※ Case material : PBT
※ Pin material : Copper
※ Plating treatment of pin : Lead free plating
※ Dimensions in mm, [ ]=inches

COSEL AC-DC Power Supplies PCB Mount type

TUHS10

Ordering information

TUH	S	10	F	05	
①	②	③	④	⑤	

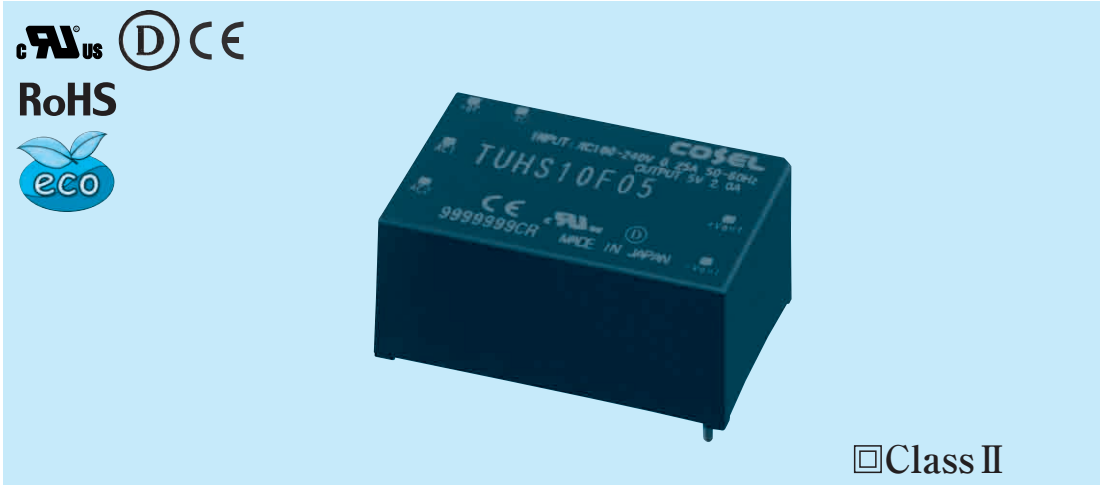

①Series name
②Single output
③Output wattage
④Universal Input
⑤Output voltage

Class II

TUHS

✻Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
✻To use TUHS, external components are required. Refer to the instruction manual for details.

MODEL	TUHS10F05	TUHS10F12	TUHS10F24
MAX OUTPUT WATTAGE[W]	10.00	10.80	10.80
DC OUTPUT	5V 2A	12V 0.9A	24V 0.45A

SPECIFICATIONS

	MODEL		TUHS10F05	TUHS10F12	TUHS10F24
INPUT	VOLTAGE[V]		AC85 - 264 1φ DC120 - 370		
	CURRENT[A]	ACIN 100V	0.25typ (Io=100%)		
		ACIN 200V	0.14typ (Io=100%)		
	FREQUENCY[Hz]		50/60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	81typ	85typ	86typ
		ACIN 200V	82typ	85typ	87typ
	INRUSH CURRENT		Limited by external components		
	LEAKAGE CURRENT[mA]		0.40/0.75 max (ACIN100V/240V , 60Hz, Io=100% , According to IEC60950-1)		
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		2	0.9	0.45
	LINE REGULATION[mV]		20max	48max	96max
	LOAD REGULATION[mV]		40max	100max	150max
	RIPPLE[mVp-p]	30 to 100% Load ✻1	120max	160max	200max
		0 to 30% Load AC85V - 240V ✻1	400max	480max	580max
	RIPPLE NOISE[mVp-p]	30 to 100% Load ✻1	160max	200max	240max
		0 to 30% Load AC85V - 240V ✻1	480max	560max	660max
	TEMPERATURE REGULATION[mV]	0 to +70℃	100max	180max	360max
		-40 to +70℃	150max	270max	480max
	DRIFT[mV] ✻2		20max	48max	96max
	OUTPUT VOLTAGE SETTING[V]		4.90 - 5.30	11.40 - 12.60	23.00 - 25.00
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recover automatically		
	OVERVOLTAGE PROTECTION[V]		5.50 - 8.00	13.20 - 19.20	26.40 - 38.40
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)		
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max		
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max		
	VIBRATION		10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1		
	CONDUCTED NOISE		Complies with FCC-B,VCCI-B,CISPR-B,EN55022-B ✻3		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Class A) (Not built-in to active filter)		
OTHERS	CASE SIZE/WEIGHT		33.0×15.0×22.0mm[1.3×0.59×0.86 inches] (W×H×D) / 25g max		
	COOLING METHOD		Convection / Forced air		

✻1 Refer to instruction manual for measuring method of electric characteristics.
✻2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated value.
✻3 Do not ground secondly circuit, in case of a standard adapted.
✻ Measured with 47μF capasitor as Cbc.

External view

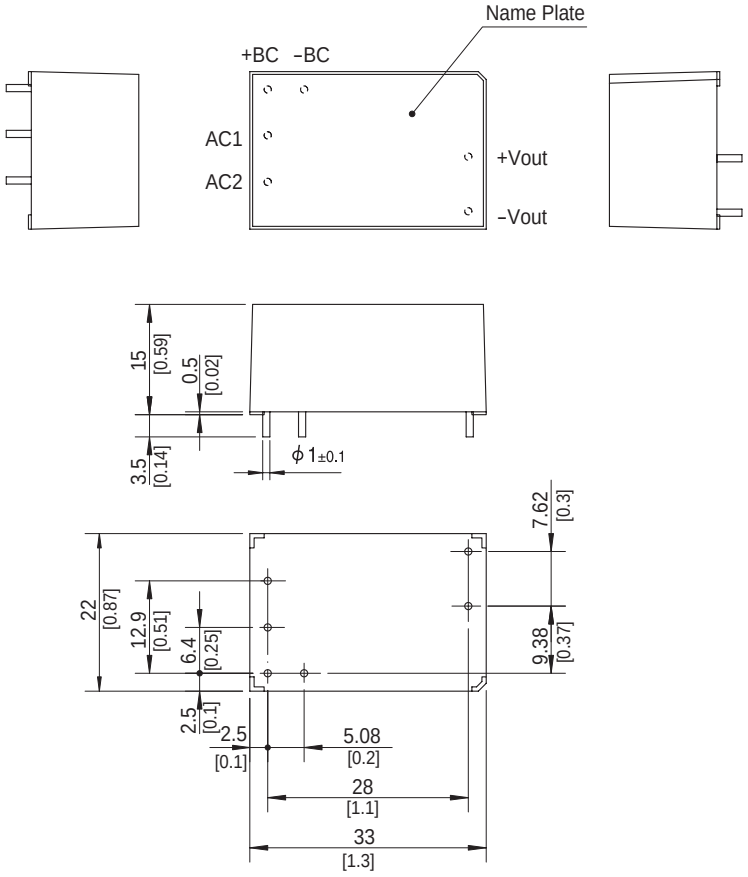

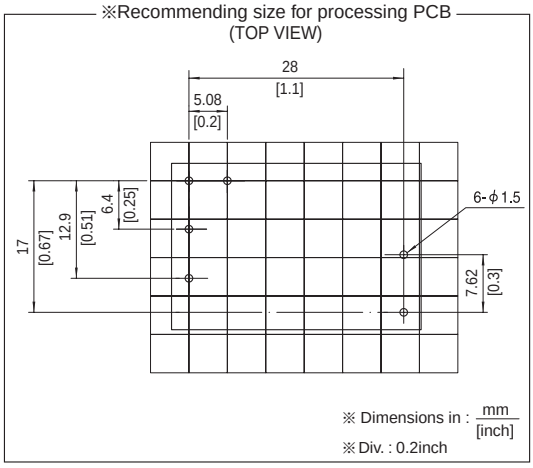

※ Tolerance : ±0.5 [±0.02]
※ Weight : 25g max
※ Case material : PBT
※ Pin material : Copper
※ Plating treatment of pin : Lead free plating
※ Dimensions in mm, [ ]=inches

COSEL AC-DC Power Supplies PCB Mount type

TUHS15

Ordering information

TUH	S	15	F	12	
①	②	③	④	⑤	

①Series name
②Single output
③Output wattage
④Universal Input
⑤Output voltage

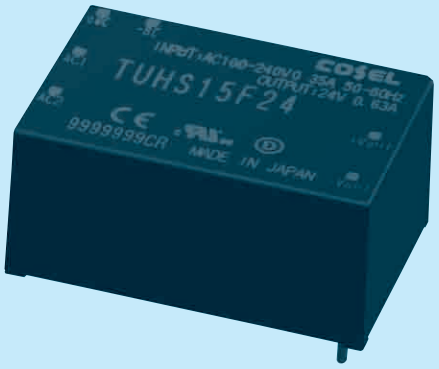

Class II

TUHS

✻Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
✻To use TUHS, external components are required. Refer to the instruction manual for details.

MODEL	TUHS15F12	TUHS15F24
MAX OUTPUT WATTAGE[W]	15.00	15.12
DC OUTPUT	12V 1.25A	24V 0.63A

SPECIFICATIONS

	MODEL		TUHS15F12	TUHS15F24
INPUT	VOLTAGE[V]		AC85 - 264 1φ DC120 - 370	
	CURRENT[A]	ACIN 100V	0.35typ (Io=100%)	
		ACIN 200V	0.18typ (Io=100%)	
	FREQUENCY[Hz]		50/60 (47 - 63)	
	EFFICIENCY[%]	ACIN 100V	85typ	86typ
		ACIN 200V	85typ	87typ
	INRUSH CURRENT		Limited by external components	
	LEAKAGE CURRENT[mA]		0.40/0.75 max (ACIN100V/240V , 60Hz, Io=100% , According to IEC60950-1)	
OUTPUT	VOLTAGE[V]		12	24
	CURRENT[A]		1.25	0.63
	LINE REGULATION[mV]		48max	96max
	LOAD REGULATION[mV]		100max	150max
	RIPPLE[mVp-p]	30 to 100% Load ✻1	160max	200max
		0 to 30% Load AC85V - 240V ✻1	480max	580max
	RIPPLE NOISE[mVp-p]	30 to 100% Load ✻1	200max	240max
		0 to 30% Load AC85V - 240V ✻1	560max	660max
	TEMPERATURE REGULATION[mV]	0 to +50℃	180max	360max
		-40 to +50℃	270max	480max
	DRIFT[mV] ✻2		48max	96max
	OUTPUT VOLTAGE SETTING[V]		11.40 - 12.60	23.00 - 25.00
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recover automatically	
	OVERVOLTAGE PROTECTION[V]		13.20 - 19.20	26.40 - 38.40
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)	
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max	
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max	
	VIBRATION		10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT		196.1m/s² (20G), 11ms, once each along X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1	
	CONDUCTED NOISE		Complies with FCC-B,VCCI-B,CISPR-B,EN55022-B ✻3	
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Class A) (Not built-in to active filter)	
OTHERS	CASE SIZE/WEIGHT		33.0×15.0×22.0mm[1.3×0.59×0.86 inches] (W×H×D) / 25g max	
	COOLING METHOD		Convection / Forced air	

✻1 Refer to instruction manual for measuring method of electric characteristics.
✻2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated value.
✻3 Do not ground secondly circuit, in case of a standard adapted.
✻ Measured with 68μF capasitor as Cbc.

External view

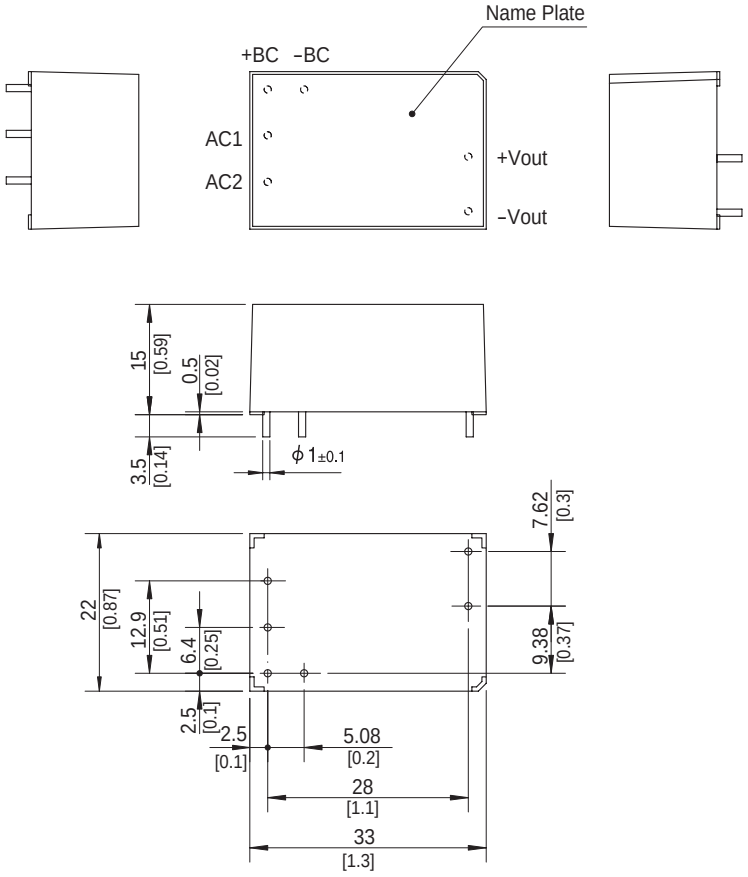

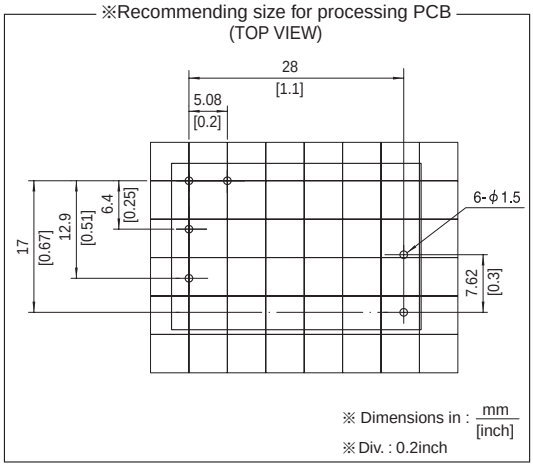

※ Tolerance : ±0.5 [±0.02]
※ Weight : 25g max
※ Case material : PBT
※ Pin material : Copper
※ Plating treatment of pin : Lead free plating
※ Dimensions in mm, [ ]=inches

COSEL AC-DC Power Supplies PCB Mount type

TUHS25

Ordering information

TUH	S	25	F	05	
①	②	③	④	⑤	

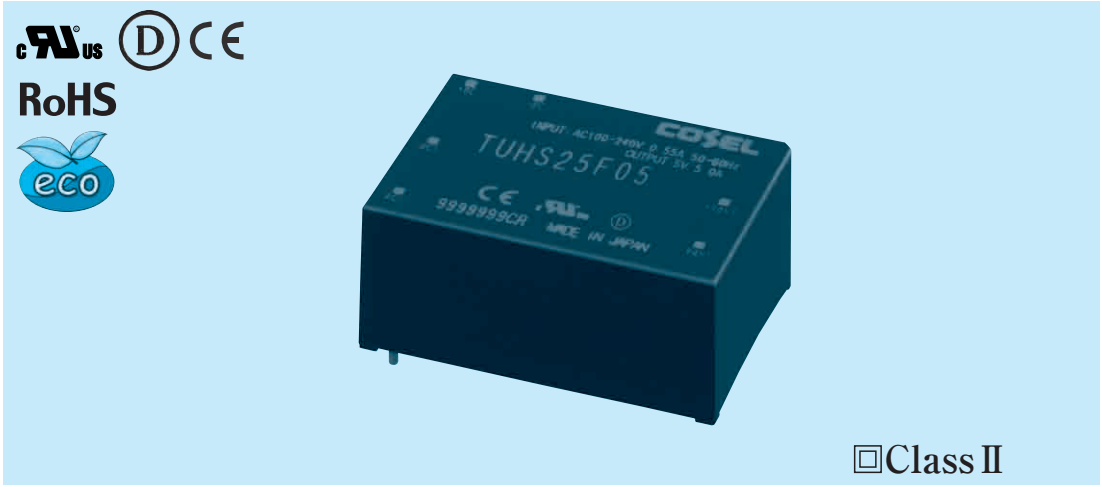

①Series name
②Single output
③Output wattage
④Universal Input
⑤Output voltage

TUHS

✻Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
✻To use TUHS, external components are required. Refer to the instruction manual for details.

MODEL	TUHS25F05	TUHS25F12	TUHS25F24
MAX OUTPUT WATTAGE[W]	25.00	25.20	26.40
DC OUTPUT	5V 5A	12V 2.1A	24V 1.1A

SPECIFICATIONS

	MODEL		TUHS25F05	TUHS25F12	TUHS25F24
INPUT	VOLTAGE[V]		AC85 - 264 1φ DC120 - 370		
	CURRENT[A]	ACIN 100V	0.55typ (Io=100%)		
		ACIN 200V	0.35typ (Io=100%)		
	FREQUENCY[Hz]		50/60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	87typ	88typ	89typ
		ACIN 200V	87typ	88typ	90typ
	INRUSH CURRENT		Limited by external components		
	LEAKAGE CURRENT[mA]		0.40/0.75 max (ACIN100V/240V , 60Hz, Io=100% , According to IEC60950-1)		
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		5	2.1	1.1
	LINE REGULATION[mV]		20max	48max	96max
	LOAD REGULATION[mV]		40max	100max	150max
	RIPPLE[mVp-p]	30 to 100% Load ✻1	120max	160max	200max
		0 to 30% Load AC85V - 240V ✻1	400max	480max	580max
	RIPPLE NOISE[mVp-p]	30 to 100% Load ✻1	160max	200max	240max
		0 to 30% Load AC85V - 240V ✻1	480max	560max	660max
	TEMPERATURE REGULATION[mV]	0 to +50℃	100max	180max	360max
		-40 to +50℃	150max	270max	480max
	DRIFT[mV]	✻2	20max	48max	96max
	OUTPUT VOLTAGE SETTING[V]		4.90 - 5.30	11.40 - 12.60	23.00 - 25.00
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recover automatically		
	OVERVOLTAGE PROTECTION[V]		5.50 - 8.00	13.20 - 19.20	26.40 - 38.40
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)		
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000 feet) max		
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max		
	VIBRATION		10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each along X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		UL60950-1, C-UL (CSA60950-1), EN60950-1		
	CONDUCTED NOISE		Complies with FCC-B,VCCI-B,CISPR-B,EN55022-B ✻3		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Class A) (Not built-in to active filter)		
OTHERS	CASE SIZE/WEIGHT		36.0×16.5×25.4mm[1.42×0.65×1.0 inches] (W×H×D) / 40g max		
	COOLING METHOD		Convection / Forced air		

✻1 Refer to instruction manual for measuring method of electric characteristics.
✻2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated value.
✻3 Do not ground secondly circuit, in case of a standard adapted.
✻ Measured with 120μF capasitor as Cbc.

External view

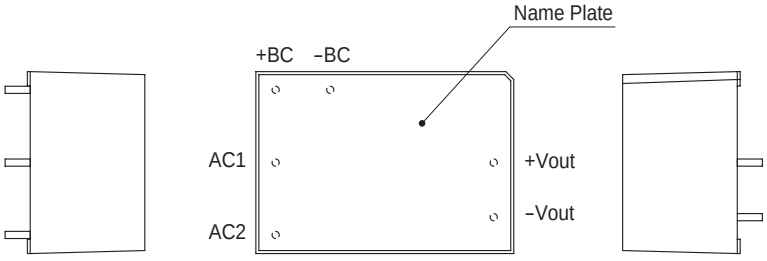

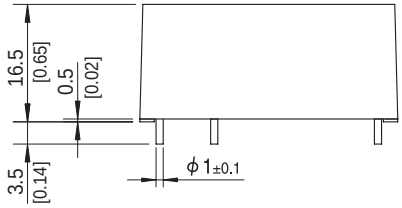

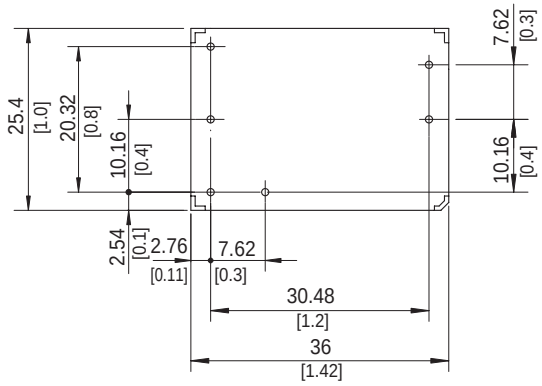

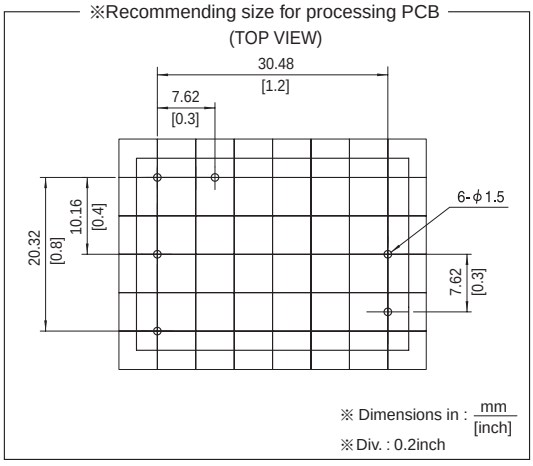

※ Tolerance : ±0.5 [±0.02]
※ Weight : 40g max
※ Case material : PBT
※ Pin material : Copper
※ Plating treatment of pin : Lead free plating
※ Dimensions in mm, [ ]=inches

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

TUHS3F24 TUHS5F24 TUHS3F12 TUHS25F24 TUHS5F12 TUHS10F24 TUHS10F12 TUHS10F05 TUHS5F05 TUHS3F05 TUHS25F12 TUHS25F05 TUHS15F24 TUHS15F12

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9