

# LV0111CF

## Ambient Light Sensor, Logarithmic Current Output, with Standby Function



**ON Semiconductor**<sup>®</sup>  
www.onsemi.com

### Overview

LV0111CF is a Photo IC for ultra-small package ambient light sensor which has the characteristics of spectral response similar to that of human eyes. It is suitable for the applications like mobile phone (for Digital-TV, One-segment), LCD-TV, laptop computer, PDA, DSC and Camcorder. It is goods for a free halogen.

### Features

- Logarithm current output
- Excellent luminous efficiency function
- Built-in sleep function
- Low current consumption

### Typical Applications

- Ambient Light Sensor
- Feature phone, Smart phone, ...
- Digital TV : (CRT, LCD, OLED, ...)
- DSC, DVC, DSLR, Mirrorless, ...

### SPECIFICATION

#### ABSOLUTE MAXIMUM RATINGS at Ta = 25°C (Note 1)

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub> max		6	V
Operating temperature	T <sub>opr</sub>		-30 to +85	°C
Storage temperature	T <sub>stg</sub>		-40 to +100	°C


1. Stresses exceeding those listed in the Absolute Maximum Rating table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### RECOMMENED OPERATING CONDITIONS AND

#### OPERATING VOLTAGE RANGE at Ta = 25°C (Note 2)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Recommended supply voltage	V <sub>CC</sub>		2.3	2.5	5.5	V
SW pin low voltage	V <sub>I</sub>	Sleep mode	0		0.4	V
SW pin high voltage	V <sub>h</sub>	Normal mode	1.5		V <sub>CC</sub>	V

2. Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

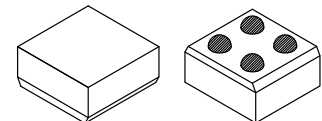

ODCSP4J 1.08 mm x 1.08 mm

### ORDERING INFORMATION

Ordering Code:  
LV0111CF-TLM-H

Package  
ODCSP4J  
(Pb-Free / Halogen Free)

Shipping (Qty / packing)  
5000 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.  
[http://www.onsemi.com/pub\\_link/Collateral/BRD8011-D.PDF](http://www.onsemi.com/pub_link/Collateral/BRD8011-D.PDF)

# LV0111CF

## ELECTRICAL AND OPTICAL CHARACTERISTICS at $T_a = 25^\circ\text{C}$ , $V_{CC} = 2.5\text{V}$ (Note 3)


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation (Note 4, 6)	$I_{CC}$	$E_v = 1000 \text{ lx}$ , $R_L = 27\text{k}\Omega$	50	75	100	$\mu\text{A}$
Sleep current	$I_{sl}$	$E_v = 0 \text{ lx}$		0.01	0.1	$\mu\text{A}$
Output current (1) (Note 4, 6)	$I_{O1}$	$E_v = 100 \text{ lx}$	18	21	24	$\mu\text{A}$
Output current (2) (Note 4, 6)	$I_{O2}$	$E_v = 1000 \text{ lx}$	27	31	35	$\mu\text{A}$
Dark current	$I_{leak}$	$E_v = 0 \text{ lx}$		0.35	0.5	$\mu\text{A}$
Temperature coefficient (Note 5)	$I_{tc}$	$E_v = 100 \text{ lx}$		0.1		$\%/^\circ\text{C}$
Rise time (Note 7)	$T_{r1}$	$E_v = 1000 \text{ lx}$		40	100	$\mu\text{s}$
Fall time (Note 7)	$T_{f1}$	$E_v = 1000 \text{ lx}$		2	5	ms
Peak sensitivity wave length (Note 5)	$\lambda_p$			550		nm

3. Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


4. Measured with the standard light source A. White LED is used instead in the mass production line.

5. Design guaranteed item

6. Test circuit for measuring current dissipation and output current


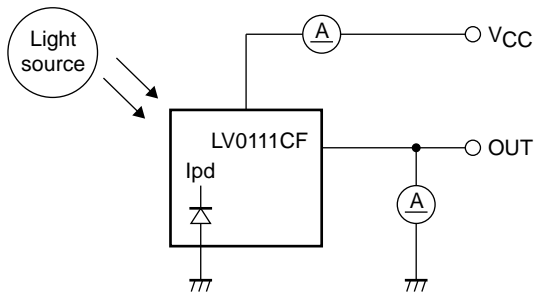


7. Measuring method of rise time ( $T_r$ ) and fall time ( $T_f$ )

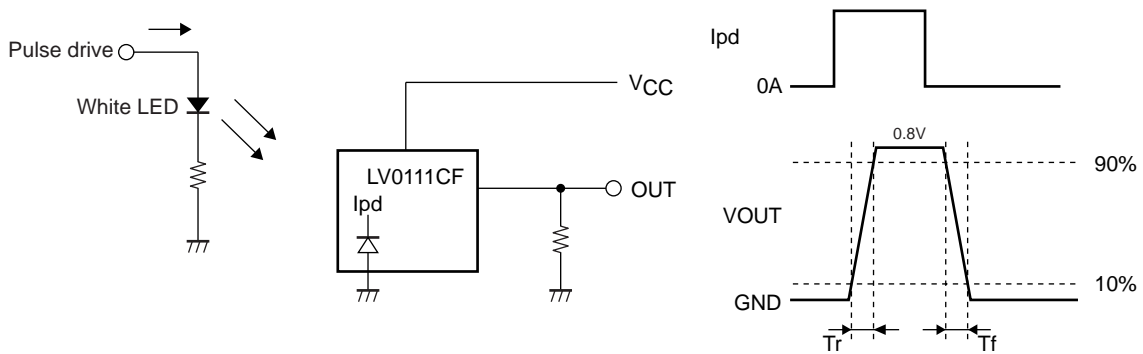

# LV0111CF



## PAD LAYOUT

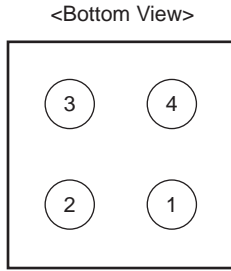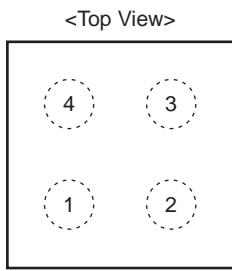

Pin No.	Pin Name	Function
1	VCC	Power supply
2	EN	Enable
3	GND	Ground
4	OUT	Output

Ball pitch : 0.5mm, Ball size : 0.25mm $\phi$


## PAD LAYOUT (Photos)

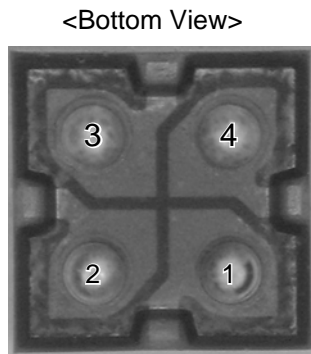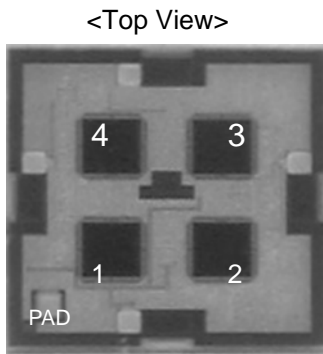


\* The position with PAD becomes pin 1.

# LV0111CF

## Internal Block Diagram








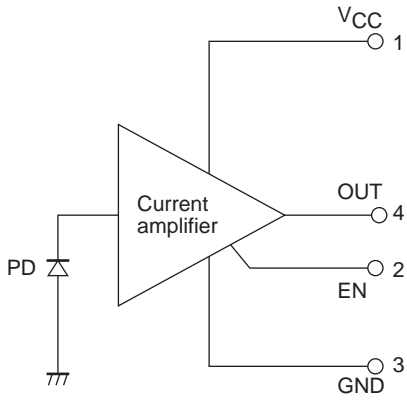


## Chip Pattern Diagram



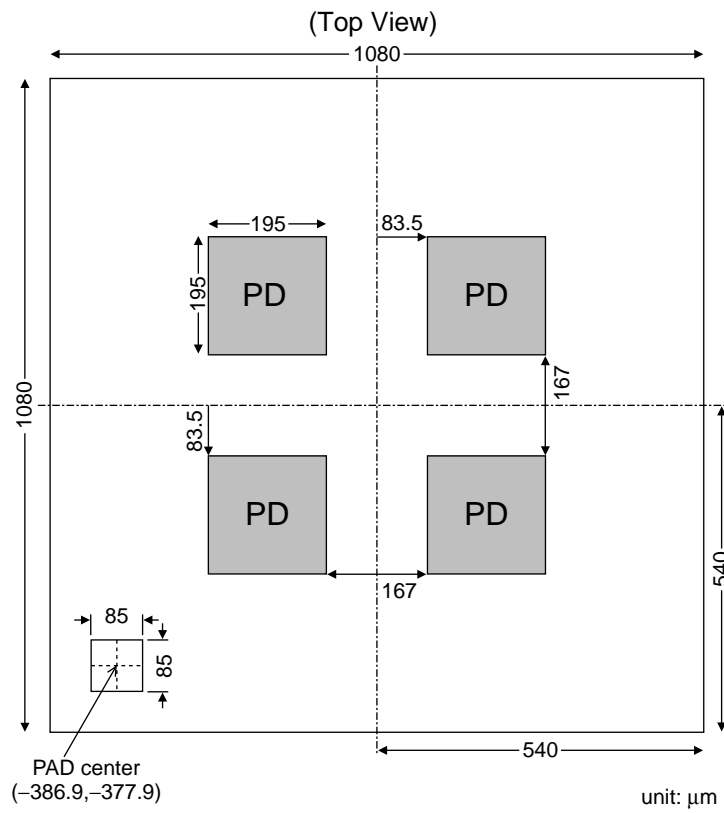


\* The PAD becomes pin 1.

# LV0111CF

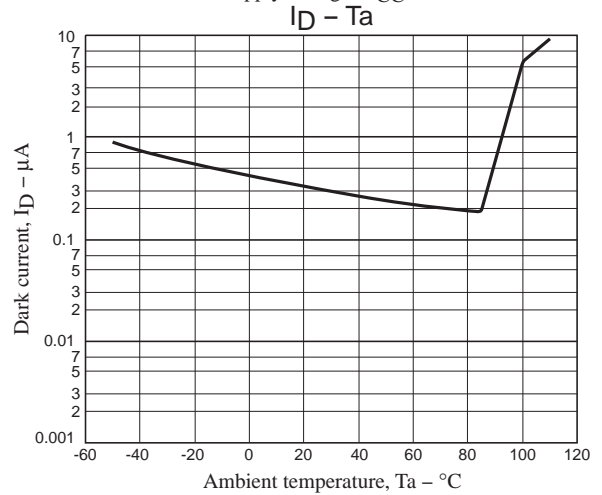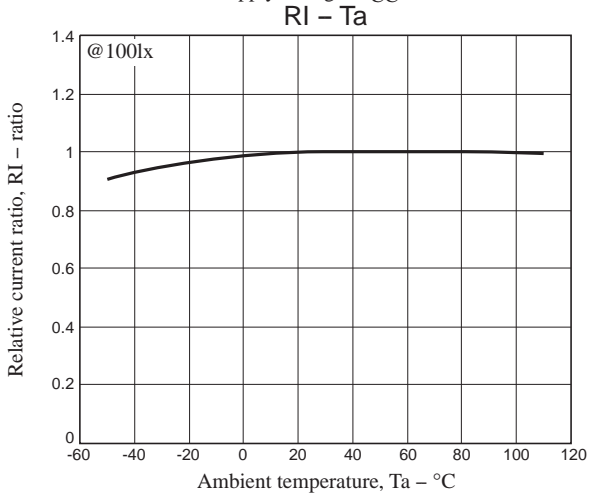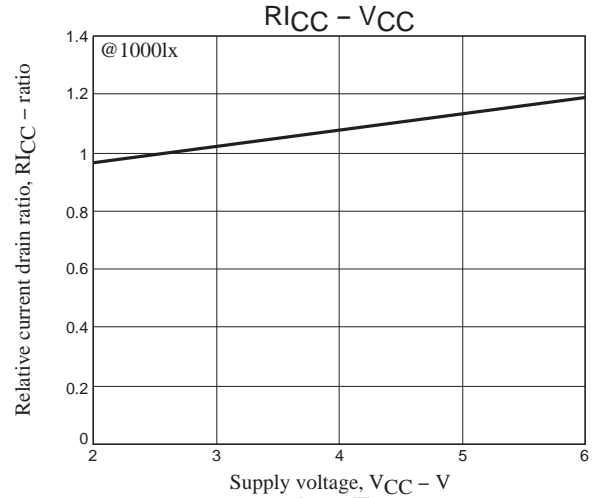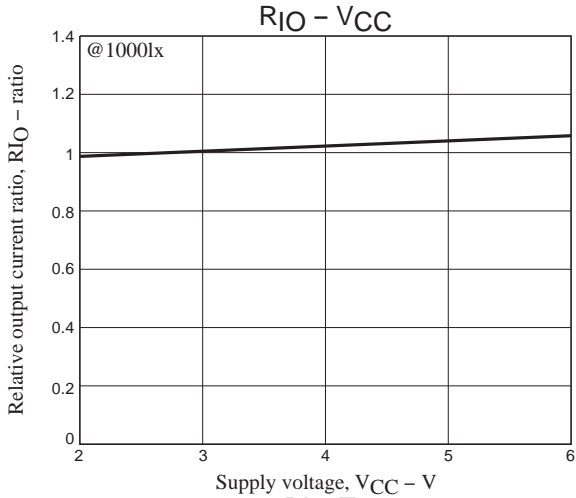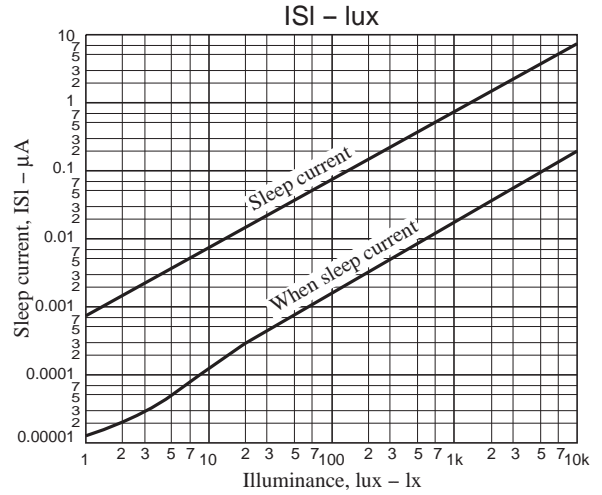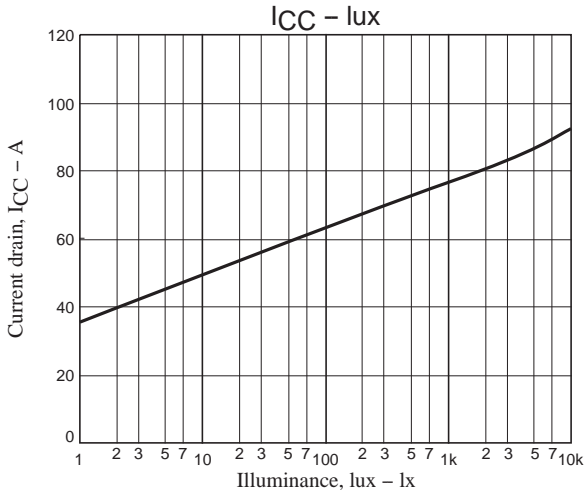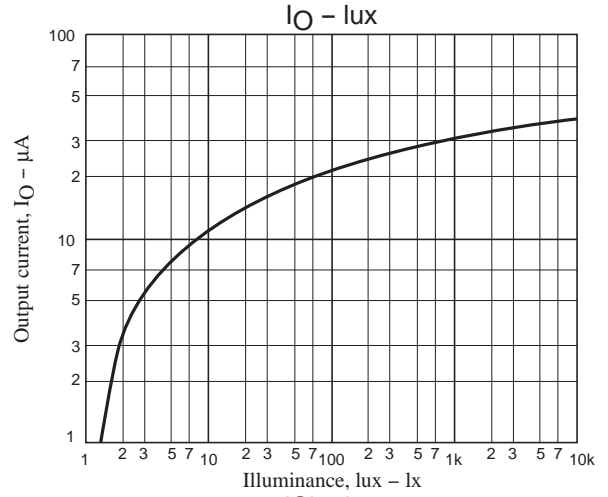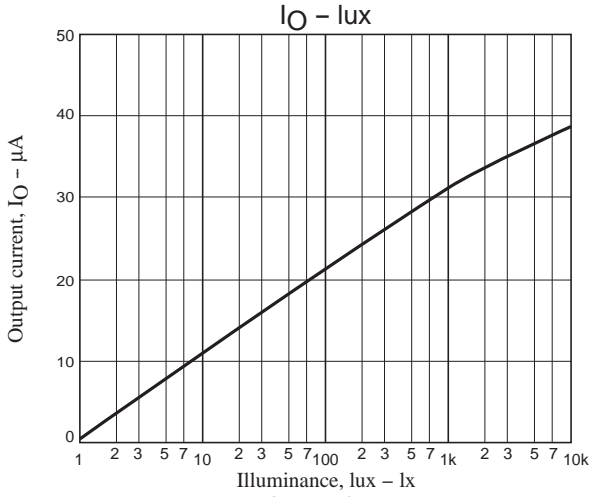

# LV0111CF

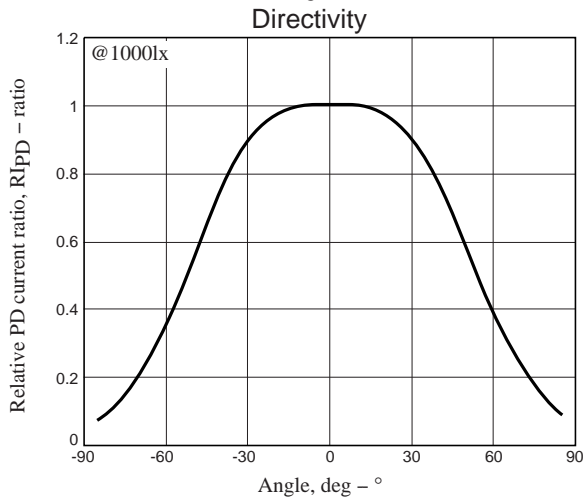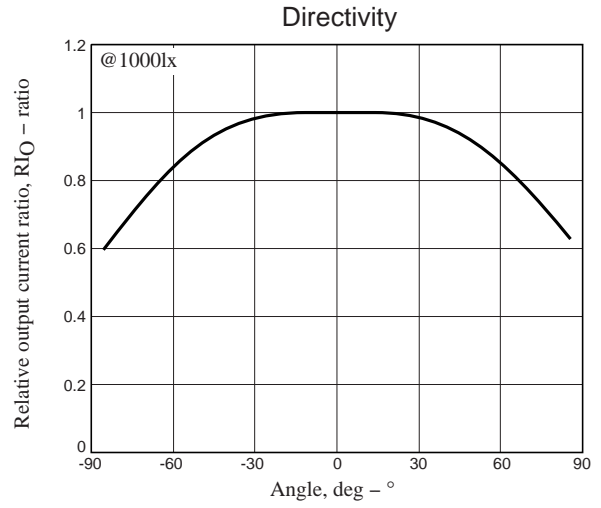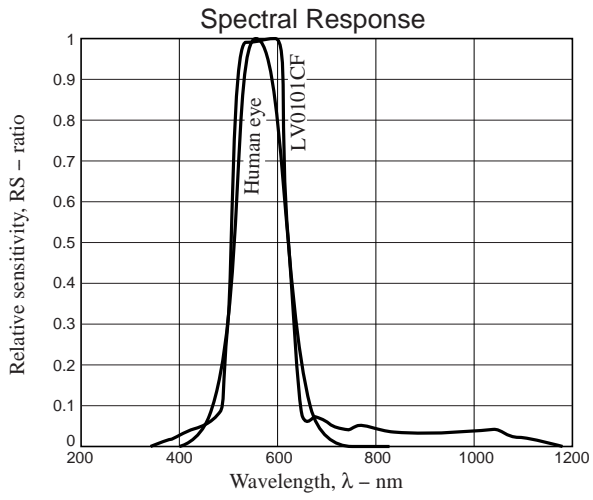


# LV0111CF

## PACKAGE DIMENSIONS

unit : mm

ODCSP4J 1.08x1.08  
CASE 570AD  
ISSUE O

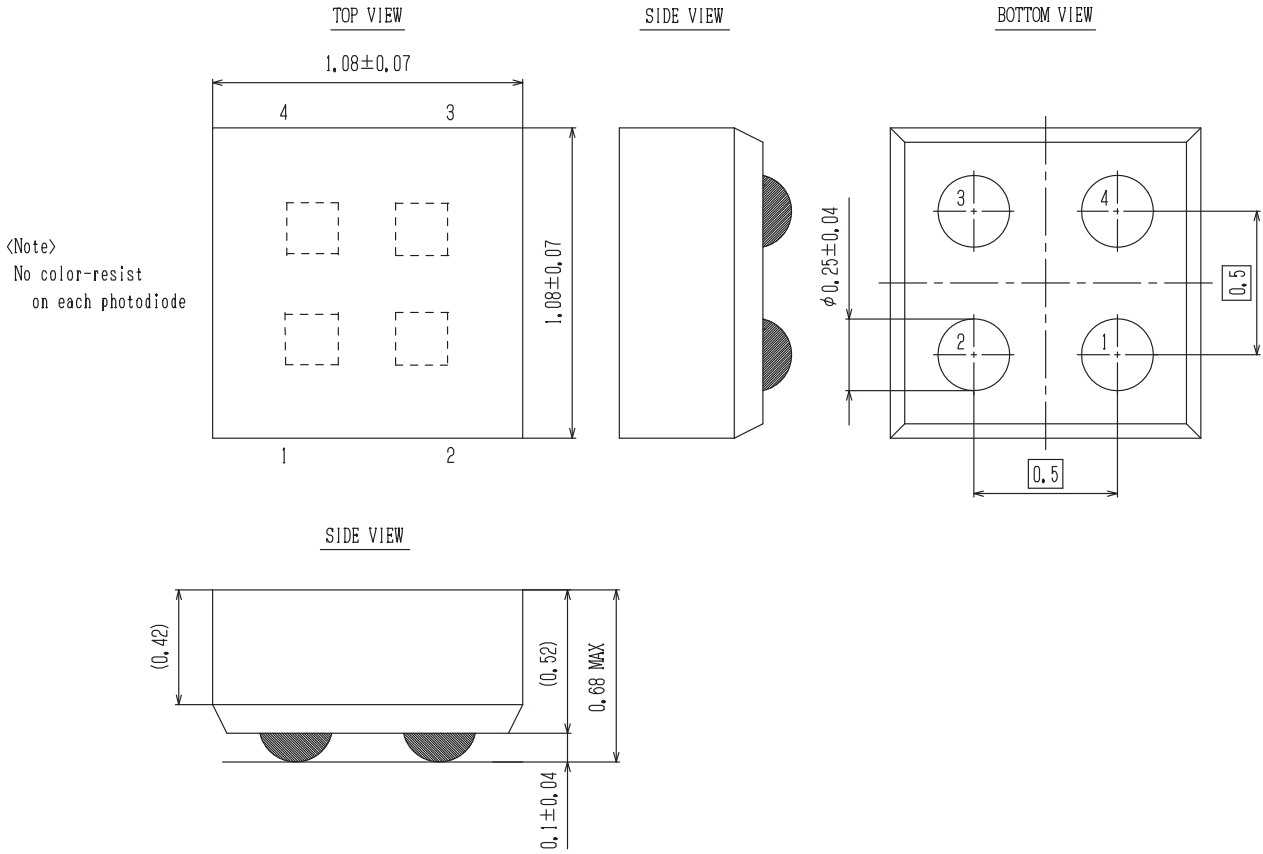

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9