

General Description

The MIC2772 is a dual power supply supervisor that provides under-voltage monitoring and power-on reset generation. It may replace two discrete voltage supervisors such as MIC1810, MIC1815, MIC809, MIC811, MIC6315, etc. The two voltage supervisors are completely independent. Each functional block features an under-voltage detector, a delay-generator, and a de-bounced manual reset input.


A wide choice of voltage thresholds is available. The reset output is asserted at power-on and any time the input voltage drops below the reference voltage. It remains asserted for the chosen timeout period after the input rises back above the threshold. Reset timeouts of 20, 140, and 1100ms (minimum) are available.

A reset can be generated at any time by asserting the manual reset input, /MR. This input is internally de-bounced, and the reset output will remain active for the timeout period after the release of /MR. The /MR input can also be used to daisy-chain one or more of the MIC2772's supervisors onto existing power monitoring circuitry or other supervisors.

The tiny 2x2mm MLF package has a footprint smaller than that of a single SOT23 voltage supervisor.

Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.

Typical Application

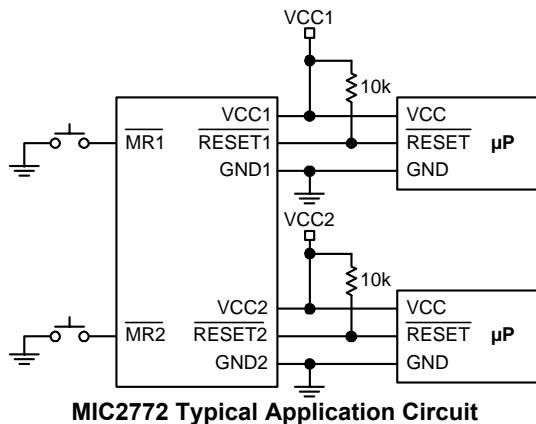

Features

- Two independent voltage supervisors
- Directly replaces discrete supervisors
- Generates power-on reset pulses
- De-bounced manual reset Inputs
- Choice of voltage thresholds
- 20, 140, or 1100ms reset timeouts
- Reset output may be pulled above VCC
- Rejects brief input transients
- Ultra-small 2x2mm MLF package

Applications

- Servers
- Embedded Controllers
- Telecommunications Systems
- Power Supply Sequencing
- Hot-swapping
- Power supplies


Ordering Information

| Part Number | | Top Mark | | Supervisor 1 | | Supervisor 2 | |
|--------------------------------|--------------------------------|----------|---------|--------------|------------------|--------------|------------------|
| Standard | Pb-Free | Standard | Pb-Free | V_{TH} (V) | t_{RESET} (ms) | V_{TH} (V) | t_{RESET} (ms) |
| | MIC2772-L2L3YML ⁽²⁾ | | UP0 | 4.63 | 20 | 4.63 | 140 |
| | MIC2772-M2M3YML ⁽²⁾ | | UP1 | 4.38 | 20 | 4.38 | 140 |
| MIC2772-L3L3BML ⁽¹⁾ | MIC2772-L3L3YML ⁽¹⁾ | UP2 | UP2 | 4.63 | 140 | 4.63 | 140 |
| MIC2772-M3M3BML ⁽¹⁾ | MIC2772-M3M3YML ⁽¹⁾ | UP3 | UP3 | 4.38 | 140 | 4.38 | 140 |
| MIC2772-T3T3BML ⁽¹⁾ | MIC2772-T3T3YML ⁽¹⁾ | UP4 | UP4 | 3.08 | 140 | 3.08 | 140 |
| MIC2772-S3S3BML ⁽¹⁾ | MIC2772-S3S3YML ⁽¹⁾ | UP5 | UP5 | 2.93 | 140 | 2.93 | 140 |
| | MIC2772-T2T3YML ⁽²⁾ | | UP6 | 3.08 | 20 | 3.08 | 140 |
| | MIC2772-S2S3YML ⁽²⁾ | | UP7 | 2.93 | 20 | 2.93 | 140 |
| | MIC2772-L3T3YML ⁽²⁾ | | UP8 | 4.63 | 140 | 3.08 | 140 |
| | MIC2772-M3S3YML ⁽²⁾ | | UP9 | 4.38 | 140 | 2.93 | 140 |

Note:

1. Available now.
2. Contact factory.

Pin Configuration

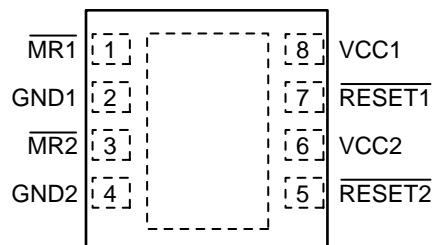

8-lead 2mm X 2mm MLF(ML)

Pin Description

| Pin Number | Pin Name | Pin Function |
|------------|----------|---|
| 1 | /MR1 | Digital Input; supervisor 1. Driving this pin low initiates an immediate and unconditional reset. If VCC1 is above the threshold when /MR1 is released (returns high), RESET1 will be de-asserted no less than t_{RESET1} later. /MR1 may be driven by a CMOS or TTL logic signal or a mechanical switch. De-bouncing is performed internally. /MR1 has an internal pull-up to VCC1; leave open if unused. |
| 2 | GND1 | Ground return for supervisor 1. |
| 3 | /MR2 | Digital Input; supervisor 2. Driving this pin low initiates an immediate and unconditional reset. If VCC2 is above the threshold when /MR2 is released (returns high), the /RESET2 will be de-asserted no less than t_{RESET2} later. /MR2 may be driven by a CMOS or TTL logic signal or a mechanical switch. De-bouncing is performed internally. /MR2 has an internal pull-up to VCC2; leave open if unused. |
| 4 | GND2 | Ground return for supervisor 2. |
| 5 | /RESET2 | Digital Output; open-drain; supervisor 2. Asserted low whenever VCC2 falls below the threshold voltage. It remains asserted for no less than t_{RESET2} and is de-asserted after VCC2 returns above the threshold. |
| 6 | VCC2 | Analog Input. Power supply input for supervisor 2. |
| 7 | /RESET1 | Digital Output; open-drain; supervisor 1. Asserted low whenever VCC1 falls below the threshold voltage. It remains asserted for no less than t_{RESET1} and is de-asserted after VCC1 returns above the threshold. |
| 8 | VCC1 | Analog Input. Power supply input for supervisor 1. |

Absolute Maximum Ratings⁽¹⁾

| | |
|--------------------------------|--------------------------|
| Supply Voltage, V_{CC} | -0.3V to 6.0V |
| Input Voltage, /MR | -0.3V to $V_{CC} + 0.3V$ |
| Input Voltage, /RESET | -0.3V to 6.0V |
| Input Current (VCC, /MR) | 20mA |
| Output Current (/RESET) | 20mA |
| Storage Temperature..... | -65°C to +150°C |
| ESD Rating (Note 3) | 3kV |

Operating Ratings⁽²⁾

| | |
|--|----------------|
| Supply Voltage..... | 1V to 5.5V |
| Input Voltage (/MR) | 0 to 5.5V |
| Input Voltage (/RESET) | 0 to +5.5V |
| Operating Temperature Range (T_A).... | -40°C to +85°C |
| Lead Temperature – Soldering, 10s | 300°C |
| Package Thermal Resistance (θ_{JA}) | 93°C/W |

Electrical Characteristics

For typical values, $T_A = 25^\circ C$, $2.5V \leq VCCn \leq 5.5V$; values in bold are for $2.5V \leq VCCn \leq 5.5V$, $T_{MIN} \leq T_A \leq T_{MAX}$, unless otherwise noted.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|-----------------|---------------------------|---|---------------------------|------|----------------------------|-------|
| Power Supply | | | | | | |
| I_{DD} | Supply Current | /MR1 = /MR2 = /RESET1 = /RESET2 = open, $VCC1 = VCC2 = 5.5V$ | | 10 | 30 | µA |
| | | /MR1 = /MR2 = /RESET1 = /RESET2 = open, $VCC1 = VCC2 = 3.6V$ | | 10 | 20 | µA |
| | | /MR1 = /MR2 = /RESET1 = /RESET2 = open, $VCCn = 0V$, $VCCm = 5.5V$ | | 5 | 15 | µA |
| | | /MR1 = /MR2 = /RESET1 = /RESET2 = open, $VCCn = 0V$, $VCCm = 3.6V$ | | 5 | 10 | µA |
| /RESETn OUTPUTS | | | | | | |
| V_{THn} | Reset-voltage threshold | L voltage code | 4.5 | 4.63 | 4.75 | V |
| | | M voltage code | 4.25 | 4.38 | 4.50 | V |
| | | S voltage code | 2.85 | 2.93 | 3.00 | V |
| | | T voltage code | 3.00 | 3.08 | 3.15 | V |
| t_{RESET} | Reset Pulse Width | timeout code = 2 | 20 | | 44 | ms |
| | | timeout code = 3 | 140 | | 320 | |
| | | timeout code = 4 | 1100 | | 2500 | |
| V_{OL} | /RESET Output Voltage Low | $V_{CCn} \geq 4.25V$, $I_{SINK} = 3.2mA$ | | | 0.4 | V |
| | | $V_{CCn} \geq 2.5V$, $I_{SINK} = 1.2mA$ | | | 0.3 | V |
| | | $V_{CCn} \geq 1V$, $I_{SINK} = 50\mu A$ | | | 0.3 | V |
| I_{LEAK} | Output leakage | /RESET not asserted | | | ±1 | µA |
| /MRn INPUTS | | | | | | |
| V_{IH} | Input Voltage, High | $V_{THn} > 4.0V$ | 2.3 | | | V |
| | | $V_{THn} < 4.0V$ | 0.7*V_{CC} | | | V |
| V_{IL} | Input Voltage, Low | $V_{THn} > 4.0V$ | | | 0.8 | V |
| | | $V_{THn} < 4.0V$ | | | 0.25*V_{CC} | V |


Electrical Characteristics cont.

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|--------------|---------------------------------|--|-----|-----|-----|-----------|
| t_{PROP} | /MR to /RESET Propagation Delay | $/MR_n < V_{IL} \rightarrow /RESET_n < V_{IL}$ | | 0.5 | | μs |
| t_{MIN} | Minimum Input Pulse Width | Reset Occurs | 10 | | | μs |
| t_{REJECT} | Widest Pulse Ignored | No Reset Occurs | | 100 | | ns |
| R_{PU} | Pull-up Resistance | | 10 | 20 | 30 | $k\Omega$ |

Notes:


1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

Timing Diagram

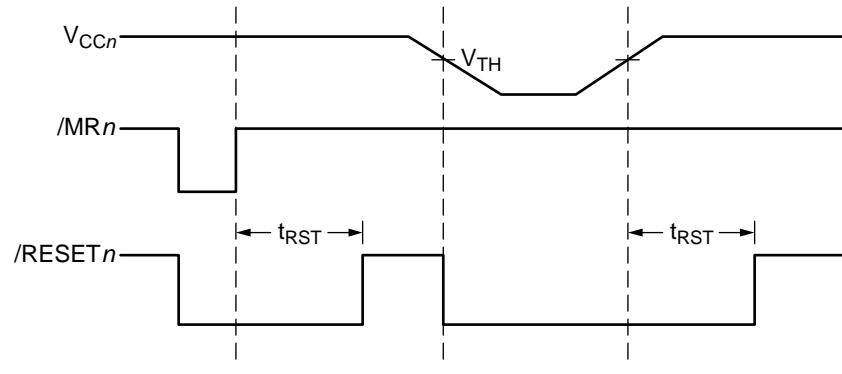

MIC2772 Timing Diagram

Functional Block Diagram

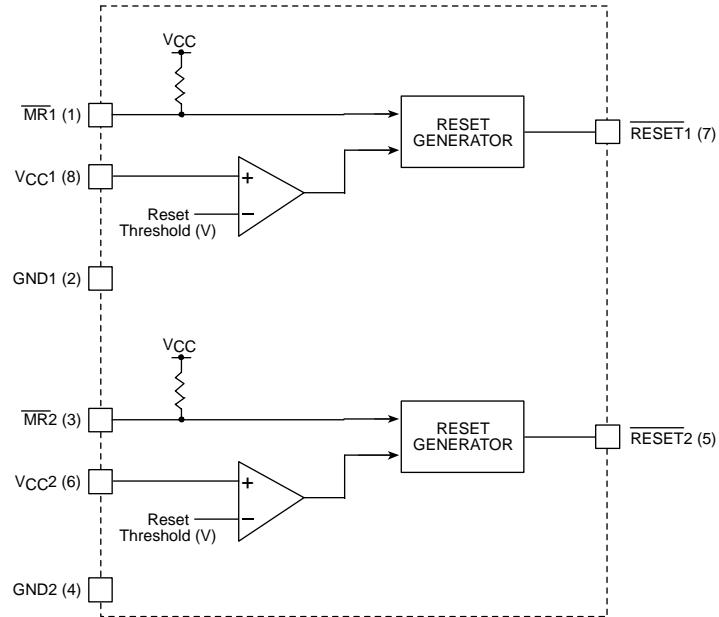

MIC2772 Block Diagram

Application Information

Reset Output, /RESET

The /RESET pin is active low (open drain) pin. The /RESET pin is asserted whenever VCC falls below the reset threshold voltage or if /MR (manual reset) is forced low. The /RESET pin remains asserted for the duration of the threshold timeout period after VCC has risen above the reset threshold and/or /MR has returned high. The reset function ensures the microprocessor is properly reset and power up in a known condition after a power failure. /RESET will remain valid with VCC as low as 1.0V.

The /RESET output is a simple open-drain N-channel MOSFET structure. A pull-up resistor must be used to pull this output to some voltage. For most applications, this voltage will be the same power supply that supplies VCC to MIC2772. It is possible however to tie this resistor to some other voltage. This will allow the MIC2772 to monitor one voltage while level-shifting the /RESET output to some other voltage. The pull-up voltage must be limited to 6.0V or less (absolute maximum) to avoid damage to the MIC2772. The resistor must be small enough to supply current to the inputs and leakage paths that are driven by the /RESET output.

Manual Reset Input, /MR

The ability to initiate a reset via external logic or a manual switch is provided in addition to the MIC2772's automatic supervisory functions. Driving the /MR input to a logic low causes an immediate and unconditional reset to occur. Assuming VCC is within tolerance when /MR is released (returns high), the /RESET output will be de-asserted no less than t_{RESET} later. /MR may be driven by a CMOS or TTL logic signal, or a mechanical switch. Typically, a momentary push-button switch is connected such that /MR is shorted to ground when the switch contacts close. Switch de-bouncing is performed internally; the switch may be connected directly between /MR and GND. /MR has an internal 20k Ω pull-up resistor (typical) to VCC and may be left open if unused.

Transients on VCC

The MIC2772 is inherently immune to very short "glitches" on VCC. In the case of very brief transients, VCC may drop below the reset-voltage threshold without triggering a reset. As shown in the graph, the MIC2772 is relatively immune to transients with typical duration of 25us. The lines on the graph represent the typical allowable transient duration for a given amount of threshold overdrive that will not generate a reset. The data was taken by adding negative-going square-wave pulse to a DC input voltage set at 0.5V above actual measured threshold for the part being characterized. Figure 1 shows the graph for the MIC2772[UP3] and Figure 2 shows the graph for the MIC2772[UP5]

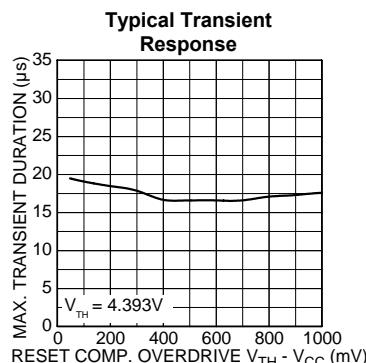


Figure 1

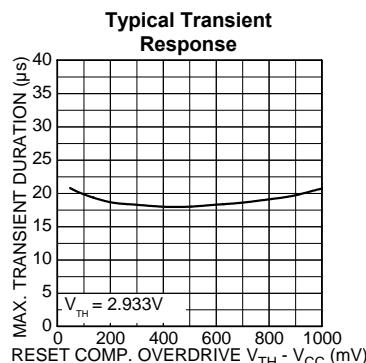


Figure 2

Interfacing to Processors with Bi-directional Reset Pins

Some microprocessors have reset signal pins that are bi-directional, rather than input only. The


Motorola 68HC11 family is one example. Because the MIC2772's output is active-low, open-drain, it can be connected directly to the processor's reset pin with only the pull-up resistor normally required.

MIC2772 Replaces Single Supervisor


The table below lists common single voltage supervisors that can be considered for replacement by MIC2772.

| P/N Suffix | Supervisor #1 | Supervisor #2 |
|------------|---|---|
| L2L3 | MIC6315-46D2 | MIC1810-5, MIC6315-46D3, MIC809L, MIC811L |
| M2M3 | MIC6315-44D2 | MIC1810-10, MIC6315-44D3, MIC809M, MIC811M |
| L3L3 | MIC1810-5, MIC6315-46D3, MIC809L, MIC811L | MIC1810-5, MIC6315-46D3, MIC809L, MIC811L |
| M3M3 | MIC1810-10, MIC6315-44D3, MIC809M, MIC811M | MIC1810-10, MIC6315-44D3, MIC809M, MIC811M |
| T3T3 | MIC6315-31D3, MIC809T, MIC811T | MIC6315-31D3, MIC809T, MIC811T |
| S3S3 | MIC1815-10, MIC6315-29D3, MIC809S, MIC811S | MIC1815-10, MIC6315-29D3, MIC809S, MIC811S |
| T2T3 | MIC6315-31D2 | MIC6315-31D3, MIC809T, MIC811T |
| S2S3 | MIC6315-29D2 | MIC1815-10, MIC6315-29D3, MIC809S, MIC811S |
| L3T3 | MIC1810-5, MIC6315-46D3, MIC809L, MIC811L | MIC6315-31D3, MIC809T, MIC811T |
| M3S3 | MIC1810-10, MIC6315-44D3, MIC809M, MIC811M | MIC1815-10, MIC6315-29D3, MIC809S, MIC811S |


Package Information

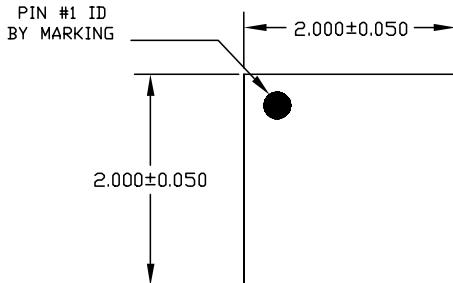

TOP VIEW

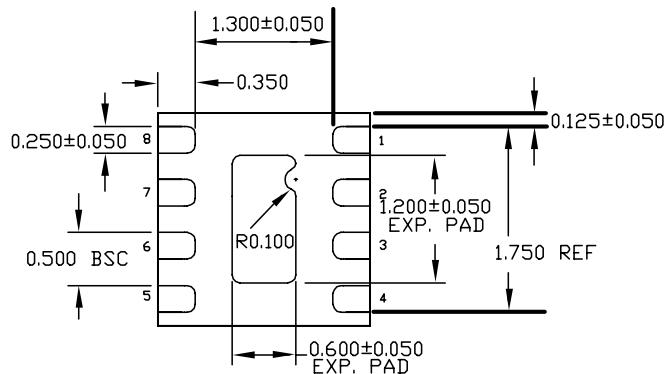

BOTTOM VIEW

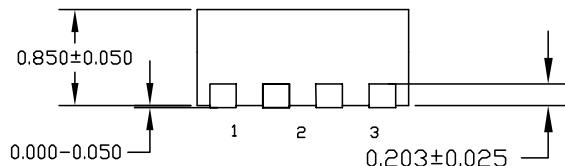

SIDE VIEW

8-Pin 2mm X 2mm MLF (ML)

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. MAX. PACKAGE WARPAGE IS 0.05 mm.
3. MAXIMUM ALLOWABLE BURRS IS 0.076 mm IN ALL DIRECTIONS.
4. PIN #1 ID ON TOP WILL BE LASER/INK MARKED.

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
 TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9