

# DIN-Rail EMC/RFI Filter with Minimum Leakage Current



- Compact state-of-the-art filter concept
- Light weight plastic enclosure design
- Minimized filter leakage current
- Hinged safety covers
- Revolutionary embedded filter terminals
- Chassis or DIN-rail mounting option
- Selectable performance level
- Environmental friendly design without potting compound




## Performance indicators

Attenuation performance



Rated current [A]



## Technical specifications

|  |  |
|--|--|
| <b>Design corresponding to</b>                   | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939   |
| <b>Flammability corresponding to</b>             | UL 94 V-2 or better  |
| <b>High potential test voltage</b>               | P → E 2000 VAC for 2 sec (HL types)<br>P → P 2250 VDC for 2 sec<br>P → E 3000 VDC for 2 sec (HP types) |
| <b>Maximum continuous operating voltage</b>      | 3x 520/300 VAC   |
| <b>MTBF @ 50°C/400V (Mil-HB-217F)</b>            | >200,000 hours   |
| <b>Operating frequency</b>                       | dc to 60 Hz  |
| <b>Overload capability</b>                       | 4x rated current at switch on,<br>1.5x rated current for 1 minute, once per hour                       |
| <b>Protection category</b>                       | IP00 (protection according to VBG 4)   |
| <b>Rated currents</b>                            | 10 to 50 A @ 50 °C   |
| <b>Temperature range (operation and storage)</b> | -25 °C to +100 °C (25/100/21)  |

## Approvals



Design protected by European patent (EP 1727280)


## Features and benefits

- FN 3025 filters are designed for traditional chassis mounting
- For extra fast installation, FN 3026 filters can comfortably be snapped-in on TS 35 DIN-rails
- Two different performance levels are offered (L types, P types). The suitable filter can be selected by choosing the required performance level, the admissible leakage current and the preferred installation style
- A plastic housing and a metal ground plate are cleverly combined to get the lowest possible product weight without compromising EMC behavior
- The embedded jump-terminal system from Schaffner guarantees user-friendly handling as well as fast and reliable electrical connection
- Captive hinged protective covers contribute to overall safety by offering protection against unintended contact with live conductors. They are included in the standard delivery package without causing extra cost
- Very low leakage current values make these filter ranges ideally suitable for use in Japanese electricity networks as well as in applications which set value on safety and reliability

## Typical applications

- Applications with the requirement for extremely compact filter solutions
- Applications with tough leakage current requirements or sensitive earth leakage detectors
- Applications with insufficient internal filtering or moderate interference levels
- Automation equipment
- Motor drives and servo drives with short motor cables
- Applications including stepping motors
- Semiconductor manufacturing equipment
- Electrical cabinets
- Three-phase power supplies
- Medical equipment (not patient-coupled)

### Filter selection table

| Filter          | Rated current<br>@ 50 °C (40 °C) | Typical drive<br>power rating* | Leakage current**<br>@ 480 VAC/50 Hz | Power loss<br>@ 25 °C/50 Hz | Input/Output<br>connections<br> | Weight<br>[kg] |
|-----------------|----------------------------------|--------------------------------|--------------------------------------|-----------------------------|--|----------------|
|                 | [A]                              | [kW]                           | [mA]                                 | [W]                         |  |                |
| FN 3025HL-10-71 | 10 (10.7)                        | 5.5                            | 0.4                                  | 4.8                         | -71  | 0.52           |
| FN 3025HL-20-71 | 20 (21.4)                        | 11                             | 0.4                                  | 6.2                         | -71  | 0.52           |
| FN 3025HL-30-71 | 30 (32.1)                        | 18.5                           | 0.4                                  | 7.0                         | -71  | 0.54           |
| FN 3025HL-50-72 | 50 (53.5)                        | 30                             | 0.4                                  | 10.5                        | -72  | 0.93           |
| FN 3025HP-10-71 | 10 (10.7)                        | 5.5                            | 2.5                                  | 4.8                         | -71  | 0.52           |
| FN 3025HP-20-71 | 20 (21.4)                        | 11                             | 2.5                                  | 6.2                         | -71  | 0.52           |
| FN 3025HP-30-71 | 30 (32.1)                        | 18.5                           | 2.5                                  | 7.0                         | -71  | 0.54           |
| FN 3025HP-50-72 | 50 (53.5)                        | 30                             | 2.5                                  | 10.5                        | -72  | 0.93           |
| FN 3026HL-10-71 | 10 (10.7)                        | 5.5                            | 0.4                                  | 4.8                         | -71  | 0.56           |
| FN 3026HL-20-71 | 20 (21.4)                        | 11                             | 0.4                                  | 6.2                         | -71  | 0.56           |
| FN 3026HL-30-71 | 30 (32.1)                        | 18.5                           | 0.4                                  | 7.0                         | -71  | 0.58           |
| FN 3026HL-50-72 | 50 (53.5)                        | 30                             | 0.4                                  | 10.5                        | -72  | 0.98           |
| FN 3026HP-10-71 | 10 (10.7)                        | 5.5                            | 2.5                                  | 4.8                         | -71  | 0.56           |
| FN 3026HP-20-71 | 20 (21.4)                        | 11                             | 2.5                                  | 6.2                         | -71  | 0.56           |
| FN 3026HP-30-71 | 30 (32.1)                        | 18.5                           | 2.5                                  | 7.0                         | -71  | 0.58           |
| FN 3026HP-50-72 | 50 (53.5)                        | 30                             | 2.5                                  | 10.5                        | -72  | 0.98           |

\* Calculated at rated current, 480 VAC and cos phi = 0.8. The exact value depends upon the efficiency of the drive, the motor and the entire application.

\*\* Maximum leakage under normal operating conditions. Note: if two phases are interrupted, worst case leakage could reach up to 10 times higher levels (at 520 VAC/60 Hz).

### Typical filter attenuation





Per CISPR 17; A = 50 Ω/50 Ω sym; B = 50 Ω/50 Ω asym; C = 0.1 Ω/100 Ω sym; D = 100 Ω/0.1 Ω sym

10 and 20 A HL types


10 and 20 A HP types

30 and 50 A HL types

30 and 50 A HP types





### Installation

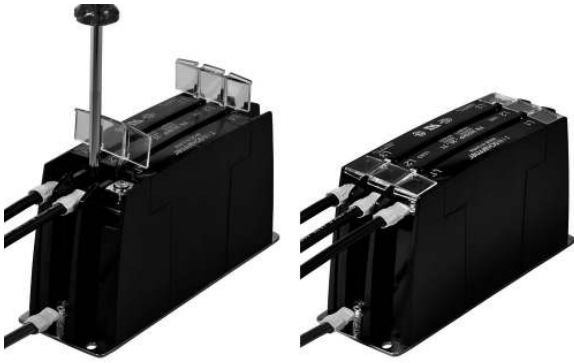


FN 3025/FN 3026 are delivered with closed plastic covers and unfastened terminals. To install the filter please proceed as follows:

- Mount the filter on a metal surface with four screws or snap it onto a TS 35 DIN- rail.
- First connect the green/yellow wire to the earth stud of the filter.
- Gently lift the two hinged plastic covers.
- Connect phase wires with cable lugs by pushing down and tightening the screws.
- Please note the torque recommendation on top of the filter.
- Push the covers back into their locked position to finish the filter installation.

### Mechanical data

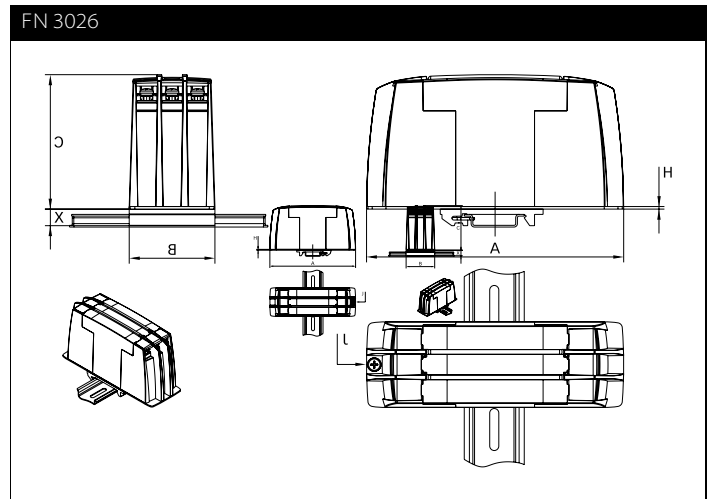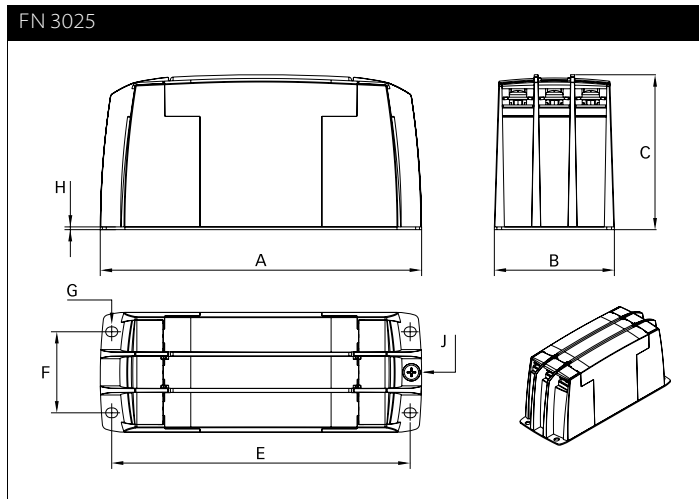

### Typical electrical schematic

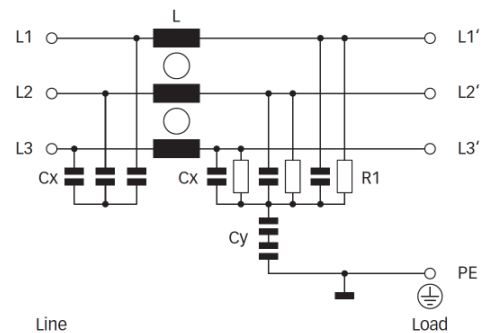





## Dimensions

|          | FN 3025   |           |           |           | FN 3026 |      |      |      |
|----------|-----------|-----------|-----------|-----------|---------|------|------|------|
|          | 10 A      | 20 A      | 30 A      | 50 A      | 10 A    | 20 A | 30 A | 50 A |
| <b>A</b> | 150       | 150       | 150       | 177       | 150     | 150  | 150  | 177  |
| <b>B</b> | 50        | 50        | 50        | 65        | 50      | 50   | 50   | 65   |
| <b>C</b> | 78        | 78        | 78        | 84        | 78      | 78   | 78   | 84   |
| <b>E</b> | 140       | 140       | 140       | 162       |         |      |      |      |
| <b>F</b> | 32        | 32        | 32        | 44        |         |      |      |      |
| <b>G</b> | 4.3 x 5.5 | 4.3 x 5.5 | 4.3 x 5.5 | 5.3 x 6.5 |         |      |      |      |
| <b>H</b> | 1.5       | 1.5       | 1.5       | 1.5       | 1.5     | 1.5  | 1.5  | 1.5  |
| <b>J</b> | M4        | M4        | M4        | M5        | M4      | M4   | M4   | M5   |
| <b>X</b> |           |           |           |           | 9.7     | 9.7  | 9.7  | 9.7  |

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m / EN 22768-m


## Filter input/output connector cross sections

|                             | -71 (10A)   | -71 (20A)   | -71 (30A)   | -72 (50A)   |
|-----------------------------|---|---|---|---|
|                             |  |  |  |  |
| <b>Flex wire</b>            | 1.3-2.5 mm <sup>2</sup>   | 4-6 mm <sup>2</sup>   | 8-10mm <sup>2</sup>   | 16-20mm <sup>2</sup>  |
| <b>AWG type wire</b>        | AWG 16-AWG 13   | AWG 12-AWG 10   | AWG 8-AWG 7   | AWG 5-AWG 4   |
| <b>Ring/fork lug (W/d)*</b> | max. 11 mm (9.5 mm)/<br>min. Ø 4.3 mm**   | max. 11 mm (9.5 mm)/<br>min. Ø 4.3 mm**   | max. 11 mm (9.5 mm)/<br>min. Ø 4.3 mm**   | max. 16.5 mm (15 mm)/<br>min. Ø 5.3 mm**  |
| <b>Recommended torque</b>   | 1.0-1.2 Nm  | 1.0-1.2 Nm  | 1.0-1.2 Nm  | 1.9-2.2 Nm  |

\* Schaffner recommends the use of insulated and UL-recognized ring lugs or fork lugs of the appropriate size.

\*\* Specification in () relates to earth connector.

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9