

Thermal Transfer Labels



PANDUIT®
building a smarter,
unified business foundation
Connect. Manage. Automate.

Thermal Transfer Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industries and applications – including electrical, electronics, industrial, and network. Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.





Cable/Wire Labels

Turn-Tell® Labels 4

Self-Laminating Labels 5 – 7

LabelCore™ Fiber Optic Cable Identification System . . . 7 – 8

Flag Labels 8

Non-Laminated Vinyl Cloth Labels 9

Non-Laminated Nylon Cloth Labels 10

Marker Plates

High-Temperature Flame-Retardant Marker Plates 11

Halogen-Free Flame-Retardant Marker Plates 11

Standard Marker Plates 12

Heat Shrink Labels

Military Grade – Single-Sided Labels 13

Military Grade – Two-Sided Labels 14

Halogen-Free – Two-Sided Labels 15

Fluid-Resistant – Two-Sided Labels 16

Component Labels/Continuous Tapes

Raised Panel Labels 17 – 20

Polyester Component Labels 21

Super-Tack Polyester Component Labels 22

Tedlar® Component Labels 23

Tamper-Evident Polyester Component Labels 23

Non-Adhesive Polyester Component Labels 24

Vinyl Cloth Component Labels 24

Polyimide Component Labels 25

Paper Component Labels 26

Continuous Tape 26 – 28

Software/Printers/Accessories

Software 29

TDP43ME Printer and Ribbons 30

TDP43HE and TDP46HE Printers and Ribbons 31

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

Turn-Tell® Labels

- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics

- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
R050X075V1T	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	18 – 14 AWG	8	5000
R050X125V1T	White	0.50	12.7	1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG	8	5000
R050X150V1T	White	0.50	12.7	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	8	5000
R100X075V1T	White	1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	18 – 14 AWG	4	2500
R100X125V1T	White	1.00	25.4	1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG	4	2500
R100X150V1T	White	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X150V2T	TIA Blue	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X150V3T	TIA Green	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X150V4T	TIA Gray	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X150V7T	TIA Red	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X150V8T	TIA Yellow	1.00	25.4	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
R100X225V1T	White	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X225V2T	TIA Blue	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X225V3T	TIA Green	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X225V4T	TIA Gray	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X225V7T	TIA Red	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X225V8T	TIA Yellow	1.00	25.4	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	2500
R100X400V1T	White	1.00	25.4	4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	4	1000
R150X150V1T	White	1.50	38.1	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	1000
R200X150V1T	White	2.00	50.8	1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	1000
R200X225V1T	White	2.00	50.8	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	1000
R200X400V1T	White	2.00	50.8	4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	2	1000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S050X075VA1Y	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	0.50	2.0	4.0	18 – 14 AWG	8	5000
S050X075VATY*	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	0.50	2.0	4.0	18 – 14 AWG	8	5000
S050X125VA1Y	White	0.50	12.7	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	8	5000
S050X125VATY*	White	0.50	12.7	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	8	5000
S050X150VA1Y	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	8	5000
S050X150VATY*	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	8	5000
S050X250VATY*	White	0.50	12.7	2.50	63.5	1.00	25.4	0.32	8.1	0.95	24.3	6 – 2 AWG	8	5000
S075X075VATY*	White	0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	5	5000
S075X100VATY*	White	0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	5000
S075X125VATY*	White	0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	5000
S075X150VATY*	White	0.75	19.1	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	5	5000
S100X075VA1Y	White	1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	4	2500
S100X075VATY*	White	1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	4	5000
S100X125VA1Y	White	1.00	25.4	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	4	2500
S100X125VATY*	White	1.00	25.4	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	4	5000
S100X150VA1Y	White	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	2500
S100X150VATY*	White	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VBTY*	TIA Blue	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VCTY*	TIA Brown	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VDTY*	TIA Green	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VETTY*	TIA Gray	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VFTY*	TIA Orange	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VGTYY*	TIA Purple	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S100X150VHTY*	TIA Red	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150VITY*	TIA Yellow	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150V0TY*	Black	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X150V9TY*	Gold	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	4	5000
S100X225VA1Y	White	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	1500
S100X225VATY*	White	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VBTY*	TIA Blue	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VCTY*	TIA Brown	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VDTY*	TIA Green	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VETY*	TIA Gray	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VFTY*	TIA Orange	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VGTY*	TIA Purple	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VHTY*	TIA Red	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225VITY*	TIA Yellow	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225V0TY*	Black	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X225V9TY*	Gold	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	5000
S100X250VA1Y	White	1.00	25.4	2.50	63.5	1.00	25.4	0.32	8.1	0.95	24.3	6 – 2 AWG	4	1500
S100X250VATY*	White	1.00	25.4	2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 – 2 AWG	4	5000
S100X400VA1Y	White	1.00	25.4	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	4	1000
S100X400VATY*	White	1.00	25.4	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	4	2500
S100X650VA1Y	White	1.00	25.4	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 250 MCM	4	250
S100X650VATY*	White	1.00	25.4	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 250 MCM	4	1000
S150X150VATY*	White	1.50	38.1	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	5000
S150X225VATY*	White	1.50	38.1	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	8 – 4 AWG	2	5000
S150X400VATY*	White	1.50	38.1	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.1	2 – 1 AWG	2	2500
S200X150VATY*	White	2.00	50.8	1.50	38.1	0.50	21.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	5000
S200X225VA1Y	White	2.00	50.8	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	2	500
S200X225VATY*	White	2.00	50.8	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	2	1000
S200X250VATY*	White	2.00	50.8	2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 – 2 AWG	2	1000
S200X400VA1Y	White	2.00	50.8	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	2	500
S200X400VATY*	White	2.00	50.8	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.1	2 – 1 AWG	2	1000
S200X650VA1Y	White	2.00	50.8	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 250 MCM	2	250
S200X650VATY*	White	2.00	50.8	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 250 MCM	2	1000

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

PVDF Self-Laminating Labels

- Self-extinguishing material and recommended alternative to Tedlar®
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH149799



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S050X150T1T	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	8	5000
S075X125T1T	White	0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	5000
S100X075T1T	White	0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	18 – 14 AWG	4	2500
S100X125T1T	White	1.00	25.4	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	12 – 10 AWG	4	2500
S100X150T1T	White	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	2500
S100X225T1T	White	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG	4	1500
S100X400T1T	White	1.00	25.4	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	4	2500
S200X400T1T	White	2.00	50.8	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	2	500


Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

LabelCore™ Fiber Optic Cable Identification System

- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot



Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	100

Order number of labels required in multiples of Standard Package Quantity.

LabelCore™ Fiber Optic Cable Identification System (continued)

Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	100
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	100
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	100
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, 100 per pack, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	100

Order number of labels required in multiples of Standard Package Quantity.

Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized C22.2 No. 0.15-01, File # MH14979



Part Number	Width		Height		Print-On Area				Min. Cable O.D.		Max. Cable O.D.		Wire Range	Std. Pkg. Qty. Roll
	In.	mm	In.	mm	Width		Height		In.	mm	In.	mm		
F100X150AJT	1.00	25.4	1.50	38.1	0.88	22.4	0.75	19.1	0.12	3.1	0.20	5.1	12 – 10 AWG	2500
F100X213AJT	1.00	25.4	2.13	54.1	0.88	22.4	0.75	19.1	0.32	8.1	0.38	9.7	Cat. 5e – Cat. 6	2500
F100X300AJT	1.00	25.4	3.00	76.2	0.88	22.4	2.00	50.8	0.09	2.3	0.28	7.1	8 – 4 AWG	2500
F100X363AJT	1.00	25.4	3.63	92.2	0.88	22.4	2.00	50.8	0.20	5.1	0.46	11.7	2 – 1 AWG	2500

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Laminated Vinyl Cloth Labels

- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Use thermal transfer hybrid ribbon
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Print-On Area Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
N025X075CBT	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
N025X125CBT	White	0.25	6.4	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	7	10000
N025X150CBT	White	0.25	6.4	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	7	2500
N025X175CBT	White	0.25	6.4	1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG	7	10000
N050X075CBT	White	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
N050X100CBT	White	0.50	12.7	1.00	25.4	0.16	4.1	0.24	6.1	10 – 8 AWG	7	10000
N050X125CBT	White	0.50	12.7	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	7	10000
N050X150CBT	White	0.50	12.7	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	7	2500
N050X175CBT	White	0.50	12.7	1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG	7	2500
N100X075CBT	White	1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
N100X125CBT	White	1.00	25.4	1.25	31.8	0.20	4.1	0.32	8.1	10 – 6 AWG	3	5000
N100X150CBT	White	1.00	25.4	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	3	5000
N100X175CBT	White	1.00	25.4	1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG	3	2500
N150X075CBT	White	1.50	38.1	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	1	5000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Laminated Nylon Cloth Labels

- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking
- Use thermal transfer resin ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)



Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
N050X075C1T	White	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	5	10000
N050X075C2T	Yellow	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	5	10000
N050X125C1T	White	0.50	12.7	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	5	10000
N050X125C2T	Yellow	0.50	12.7	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	5	10000
N050X150C1T	White	0.50	12.7	1.50	38.1	0.24	6.1	0.40	10.5	8 – 2 AWG	5	5000
N050X150C2T	Yellow	0.50	12.7	1.50	38.1	0.24	6.1	0.40	10.5	8 – 2 AWG	5	5000
N100X075C1T	White	1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
N100X075C2T	Yellow	1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
N100X125C1T	White	1.00	25.4	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	3	5000
N100X125C2T	Yellow	1.00	25.4	1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG	3	5000
N100X150C1T	White	1.00	25.4	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	3	5000
N100X150C2T	Yellow	1.00	25.4	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	3	5000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Color	Width		Height		Print-On Area				Labels Per Roll	Std. Pkg. Qty. (Roll)
						Width		Height			
		In.	mm	In.	mm	In.	mm	In.	mm		
M200X042FQT	White	2.00	50.8	0.42	10.7	0.42	10.7	1.22	31.0	500	1
M200X042FQT-B	White	2.00	50.8	0.42	10.7	0.42	10.7	1.22	31.0	2000	1
M200X080FQT	White	2.00	50.8	0.80	20.3	0.80	20.3	1.22	31.0	250	1
M200X080FQT-B	White	2.00	50.8	0.80	20.3	0.80	20.3	1.22	31.0	1000	1

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 193°F (-40°C to 90°C)




Part Number	Color	Width		Height		Print-On Area				Labels Per Roll	Std. Pkg. Qty. (Roll)
						Width		Height			
		In.	mm	In.	mm	In.	mm	In.	mm		
M200X042UPT	White	2.00	50.8	0.42	10.7	0.42	10.7	1.30	33.0	500	1
M200X042UPT-B	White	2.00	50.8	0.42	10.7	0.42	10.7	1.30	33.0	2000	1
M200X080UPT	White	2.00	50.8	0.80	20.3	0.80	20.3	1.30	33.0	500	1
M200X080UPT-B	White	2.00	50.8	0.80	20.3	0.80	20.3	1.30	33.0	2000	1

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

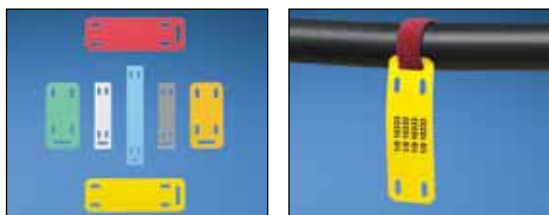

Part Number	Color	Width		Length		Print-On Area Width		Wire Range	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm			
M200X050Y6T	TIA Yellow	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050Y7T	White	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050ACT	TIA Blue	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050AET	TIA Green	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050AFT	TIA Gray	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050AGT	TIA Orange	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050AIT	TIA Red	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X100Y6T	TIA Yellow	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100Y7T	White	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100ACT	TIA Blue	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100AET	TIA Green	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100AFT	TIA Gray	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100AGT	TIA Orange	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M200X100AIT	TIA Red	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	500	1
M300X050Y6T	TIA Yellow	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050Y7T	White	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050ACT	TIA Blue	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050AET	TIA Green	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050AFT	TIA Gray	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050AGT	TIA Orange	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X050AIT	TIA Red	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	1
M300X100Y6T	TIA Yellow	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100Y7T	White	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100ACT	TIA Blue	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100AET	TIA Green	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100AFT	TIA Gray	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100AGT	TIA Orange	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1
M300X100AIT	TIA Red	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	1

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



Part Number	Part Number	Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
				In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H050X025H1T*	H050X025H2T	H050X025H3T	H050X025H4T	0.13	3.1	0.50	12.7	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	4	2000	1
H075X025H1T*	H075X025H2T	H075X025H3T	H075X025H4T			0.75	19.1	0.25	6.4						2	1000	1
H100X025H1T*	H100X025H2T	H100X025H3T	H100X025H4T			1.00	25.4	0.25	6.4						2	1000	1
H150X025H1T*	H150X025H2T	H150X025H3T	H150X025H4T			1.50	38.1	0.25	6.4						1	500	1
H200X025H1T*	H200X025H2T	H200X025H3T	H200X025H4T			2.00	50.8	0.25	6.4						1	500	1
H050X034H1T*	H050X034H2T	H050X034H3T	H050X034H4T	0.19	4.7	0.50	12.7	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	4	2000	1
H075X034H1T*	H075X034H2T	H075X034H3T	H075X034H4T			0.75	19.1	0.34	8.6						2	1000	1
H100X034H1T*	H100X034H2T	H100X034H3T	H100X034H4T			1.00	25.4	0.34	8.6						2	1000	1
H150X034H1T*	H150X034H2T	H150X034H3T	H150X034H4T			1.50	38.1	0.34	8.6						1	500	1
H200X034H1T*	H200X034H2T	H200X034H3T	H200X034H4T			2.00	50.8	0.34	8.6						1	500	1
H050X044H1T*	H050X044H2T	H050X044H3T	H050X044H4T	0.25	6.3	0.50	12.7	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	4	2000	1
H075X044H1T*	H075X044H2T	H075X044H3T	H075X044H4T			0.75	19.1	0.44	11.2						2	1000	1
H100X044H1T*	H100X044H2T	H100X044H3T	H100X044H4T			1.00	25.4	0.44	11.2						2	1000	1
H150X044H1T*	H150X044H2T	H150X044H3T	H150X044H4T			1.50	38.1	0.44	11.2						1	500	1
H200X044H1T*	H200X044H2T	H200X044H3T	H200X044H4T			2.00	50.8	0.44	11.2						1	500	1
H050X064H1T*	H050X064H2T	H050X064H3T	H050X064H4T	0.38	9.7	0.50	12.7	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	4	2000	1
H100X064H1T*	H100X064H2T	H100X064H3T	H100X064H4T			1.00	25.4	0.64	16.3						2	1000	1
H200X064H1T*	H200X064H2T	H200X064H3T	H200X064H4T			2.00	50.8	0.64	16.3						1	500	1
H100X084H1T	H100X084H2T	H100X084H3T	H100X084H4T	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	1
H200X084H1T	H200X084H2T	H200X084H3T	H200X084H4T			2.00	50.8	0.84	21.3						1	500	1
H100X165H1T	H100X165H2T	H100X165H3T	H100X165H4T	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	1
H200X165H1T	H200X165H2T	H200X165H3T	H200X165H4T			2.00	50.8	1.65	41.9						1	250	1

Order number of labels required in multiples of Standard Package Quantity.

*Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number

Military Grade Two-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A, C and D when printed using resin or hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025H1T-2	H100X025H2T-2	0.13	3.1	1.00	25.4	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	2	1000	1
H100X025H1T-2-B	H100X025H2T-2-B			1.00	25.4	0.25	6.4						2	5000	1
H200X025H1T-2	H200X025H2T-2			2.00	50.8	0.25	6.4						1	500	1
H200X025H1T-2-B	H200X025H2T-2-B			2.00	50.8	0.25	6.4						1	2500	1
H100X034H1T-2	H100X034H2T-2	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	1
H100X034H1T-2-B	H100X034H2T-2-B			1.00	25.4	0.34	8.6						2	5000	1
H200X034H1T-2	H200X034H2T-2			2.00	50.8	0.34	8.6						1	500	1
H200X034H1T-2-B	H200X034H2T-2-B			2.00	50.8	0.34	8.6						1	2500	1
H100X044H1T-2	H100X044H2T-2	0.25	6.3	1.00	25.4	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	1
H100X044H1T-2-B	H100X044H2T-2-B			1.00	25.4	0.44	11.2						2	5000	1
H200X044H1T-2	H200X044H2T-2			2.00	50.8	0.44	11.2						1	500	1
H200X044H1T-2-B	H200X044H2T-2-B			2.00	50.8	0.44	11.2						1	2500	1
H100X064H1T-2	H100X064H2T-2	0.38	9.7	1.00	25.4	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	1
H100X064H1T-2-B	H100X064H2T-2-B			1.00	25.4	0.64	16.3						2	5000	1
H200X064H1T-2	H200X064H2T-2			2.00	50.8	0.64	16.3						1	500	1
H200X064H1T-2-B	H200X064H2T-2-B			2.00	50.8	0.64	16.3						1	2500	1
H100X084H1T-2	H100X084H2T-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	1
H100X084H1T-2-B	H100X084H2T-2-B			1.00	25.4	0.84	21.3						2	5000	1
H200X084H1T-2	H200X084H2T-2			2.00	50.8	0.84	21.3						1	500	1
H200X084H1T-2-B	H200X084H2T-2-B			2.00	50.8	0.84	21.3						1	2500	1
H100X122H1T-2	H100X122H2T-2	0.75	19.0	1.00	25.4	1.22	31.0	0.25	6.3	0.75	19.0	8 – 4/0 AWG	2	500	1
H200X122H1T-2	H200X122H2T-2			2.00	50.8	1.22	31.0						1	250	1
H100X165H1T-2	H100X165H2T-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	1
H200X165H1T-2	H200X165H2T-2			2.00	25.4	1.65	41.9						1	250	1

Order number of labels required in multiples of Standard Package Quantity.

Halogen-Free Two-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbon
- Temperature range: -22°F to 221°F (-30°C to 105°C)



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025HFT-2	H100X025HGT-2	0.13	3.1	1.00	25.4	0.25	6.4	0.06	1.5	0.13	3.3	22 – 18 AWG	2	1000	1
H200X025HFT-2	H200X025HGT-2			2.00	50.8	0.25	6.4					18 – 12 AWG	1	500	1
H100X034HFT-2	H100X034HGT-2	0.19	4.7	1.00	25.4	0.34	8.6	0.09	2.3	0.19	4.8	16 – 10 AWG	2	1000	1
H200X034HFT-2	H200X034HGT-2			2.00	50.8	0.34	8.6					12 – 6 AWG	1	500	1
H100X044HFT-2	H100X044HGT-2	0.25	6.4	1.00	25.4	0.44	11.1	0.13	3.3	0.25	6.4	8 – 1 AWG	2	1000	1
H200X044HFT-2	H200X044HGT-2			2.00	50.8	0.44	11.1					8 AWG – 500 MCM	1	500	1
H100X064HFT-2	H100X064HGT-2	0.38	9.7	1.00	25.4	0.64	16.2	0.19	4.8	0.38	9.7	8 – 1 AWG	2	1000	1
H200X064HFT-2	H200X064HGT-2			2.00	50.8	0.64	16.2					8 AWG – 500 MCM	1	500	1
H100X084HFT-2	H100X084HGT-2	0.50	12.7	1.00	25.4	0.84	21.3	0.25	6.4	0.50	12.7	8 AWG – 500 MCM	2	1000	1
H200X084HFT-2	H200X084HGT-2			2.00	50.8	0.84	21.3					8 AWG – 500 MCM	1	500	1
H100X165HFT-2	H100X165HGT-2	1.00	25.4	1.00	25.4	1.65	41.9	0.50	12.7	1.00	25.4	8 AWG – 500 MCM	2	500	1
H200X165HFT-2	H200X165HGT-2			2.00	50.8	1.65	41.9					8 AWG – 500 MCM	1	250	1

Order number of labels required in multiples of Standard Package Quantity.

Fluid-Resistant Two-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Cross-linked, semi-rigid, fluid-resistant, shrinkable polyolefin material
- Available in yellow only
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties AMS-DTL-23053/6 Class 1 and NF F00-608 Class A and H when printed with resin thermal transfer ribbons
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13 Solutions A and D, and MIL-STD-202G Method 215K, Solutions A and D when printed with resin thermal transfer ribbons
- Shrink ratio 3:1
- Use thermal transfer RMER4BL-C resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X034HST-2	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	1
H200X034HST-2			2.00	50.8	0.34	8.6	0.06	1.5	0.19	4.8		1	500	1
H100X044HST-2	0.25	6.4	1.00	25.4	0.44	11.1	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	1
H200X044HST-2			2.00	50.8	0.44	11.1	0.08	2.0	0.25	6.4		1	500	1
H100X064HST-2	0.38	9.7	1.00	25.4	0.64	16.2	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	1
H200X064HST-2			2.00	50.8	0.64	16.2	0.13	3.3	0.38	9.7		1	500	1
H100X084HST-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	1
H200X084HST-2			2.00	50.8	0.84	21.3	0.17	4.3	0.50	12.7		1	500	1
H100X165HST-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	1
H200X165HST-2			2.00	50.8	1.65	41.9	0.33	8.4	1.00	25.4		1	250	1

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm		
C120X150APT-22	White	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150A8T-22	Yellow	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150AST-22	Green	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150AWT-22	Red	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150A0T-22	Black	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X190APT-22	White	1.20	30.5	1.90	48.3	0.85	21.6	0.87	22.0	3	500
C120X190A8T-22	Yellow	1.20	30.5	1.90	48.3	0.85	21.6	0.87	22.0	3	500
C120X190AST-22	Green	1.20	30.5	1.90	48.3	0.85	21.6	0.87	22.0	3	500
C120X190AWT-22	Red	1.20	30.5	1.90	48.3	0.85	21.6	0.87	22.0	3	500
C120X190A0T-22	Black	1.20	30.5	1.90	48.3	0.85	21.6	0.87	22.0	3	500
C180X180APT-30	White	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	2	500
C180X180A8T-30	Yellow	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	2	500
C180X180AST-30	Green	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	2	500
C180X180AWT-30	Red	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	2	500
C180X180A0T-30	Black	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	2	500
C240X240APT-30	White	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	500
C240X240A8T-30	Yellow	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	500
C240X240AST-30	Green	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	500
C240X240AWT-30	Red	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	500
C240X240A0T-30	Black	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Push Button Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Hole Diameter		Labels Per Roll	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm		
C120X150YK-22	Clear	1.20	30.5	1.50	38.1	0.87	22.0	3	500
C120X190YK-22	Clear	1.20	30.5	1.90	48.3	0.87	22.0	3	500
C180X180YK-30	Clear	1.80	45.7	1.80	45.7	1.18	30.0	2	500
C240X240YK-30	Clear	2.40	60.9	2.40	60.9	1.18	30.0	1	500

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm		
C180X130APT-30H	White	1.80	45.7	1.30	33.0	1.18	30.0	1	500
C240X200APT-30H	White	2.40	61.0	2.00	50.8	1.18	30.0	1	500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C100X050APT	White	1.00	25.4	0.50	12.7	3	500
C100X050A8T	Yellow	1.00	25.4	0.50	12.7	3	500
C100X050AST	Green	1.00	25.4	0.50	12.7	3	500
C100X050AUT	Orange	1.00	25.4	0.50	12.7	3	500
C100X050AWT	Red	1.00	25.4	0.50	12.7	3	500
C100X050A0T	Black	1.00	25.4	0.50	12.7	3	500
C100X050AMT	Silver	1.00	25.4	0.50	12.7	3	500
C125X030APT	White	1.25	31.8	0.30	7.6	1	500
C125X030A0T	Black	1.25	31.8	0.30	7.6	1	500
C200X100APT	White	2.00	50.8	1.00	25.4	1	500
C200X100A8T	Yellow	2.00	50.8	1.00	25.4	1	500
C200X100AST	Green	2.00	50.8	1.00	25.4	1	500
C200X100AUT	Orange	2.00	50.8	1.00	25.4	1	500
C200X100AWT	Red	2.00	50.8	1.00	25.4	1	500
C200X100A0T	Black	2.00	50.8	1.00	25.4	1	500
C200X100AMT	Silver	2.00	50.8	1.00	25.4	1	500
C252X030APT	White	2.52	64.0	0.30	7.6	1	500
C252X030A0T	Black	2.52	64.0	0.30	7.6	1	500
C300X100APT	White	3.00	76.2	1.00	25.4	1	500
C300X100AUT	Orange	3.00	76.2	1.00	25.4	1	500
C300X100A8T	Yellow	3.00	76.2	1.00	25.4	1	500
C300X100AWT	Red	3.00	76.2	1.00	25.4	1	500
C300X100A0T	Black	3.00	76.2	1.00	25.4	1	500
C300X250APT	White	3.00	76.2	2.50	63.5	1	500
C300X250A8T	Yellow	3.00	76.2	2.50	63.5	1	500
C300X250AST	Green	3.00	76.2	2.50	63.5	1	500
C300X250AUT	Orange	3.00	76.2	2.50	63.5	1	500
C300X250AWT	Red	3.00	76.2	2.50	63.5	1	500
C300X250A0T	Black	3.00	76.2	2.50	63.5	1	500
C300X250AMT	Silver	3.00	76.2	2.50	63.5	1	500
C350X300APT	White	3.50	88.9	3.00	76.2	1	500
C350X300AUT	Orange	3.50	88.9	3.00	76.2	1	500
C350X300A8T	Yellow	3.50	88.9	3.00	76.2	1	500
C350X300A0T	Black	3.50	88.9	3.00	76.2	1	500
C379X030APT	White	3.79	96.3	0.30	7.6	1	500
C379X030A0T	Black	3.79	96.3	0.30	7.6	1	500
C400X100APT	White	4.00	101.6	1.00	25.4	1	500
C400X100A8T	Yellow	4.00	101.6	1.00	25.4	1	500
C400X100AST	Green	4.00	101.6	1.00	25.4	1	500
C400X100AUT	Orange	4.00	101.6	1.00	25.4	1	500
C400X100AWT	Red	4.00	101.6	1.00	25.4	1	500
C400X100A0T	Black	4.00	101.6	1.00	25.4	1	500
C400X100AMT	Silver	4.00	101.6	1.00	25.4	1	500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Labels Per Roll	Std. Pkg. Qty.
		In.	mm	In.	mm		
C100X050YK	Clear	1.00	25.4	0.50	12.7	1	500
C200X100YK	Clear	2.00	50.8	1.00	25.4	1	500
C300X100YK	Clear	3.00	76.2	1.00	25.4	1	500
C300X250YK	Clear	3.00	76.2	2.50	63.5	1	500
C350X300YK	Clear	3.50	88.9	3.00	76.2	1	500
C400X100YK	Clear	4.00	101.6	1.00	25.4	1	500

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Diameter		Hole Diameter		Std. Pkg. Qty.
		In.	mm	In.	mm	
C235A8-30-ES	Black on Yellow	2.35	60.0	1.18	30.0	25
C235AW-30-ES	White on Red	2.35	60.0	1.18	30.0	25
C350A8-30-ES	Black on Yellow	3.50	89.0	1.18	30.0	25
C350AW-30-ES	White on Red	3.50	89.0	1.18	30.0	25

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C025X025YJT	White	0.25	6.4	0.25	6.4	12	10000
C038X038YJT	White	0.38	9.7	0.38	9.7	7	10000
C050X044YJT	White	0.50	12.7	0.44	11.2	5	10000
C060X020YJT	White	0.60	15.2	0.20	5.1	3	10000
C075X025YJT	White	0.75	19.1	0.25	6.4	3	10000
C075X025YMT	Silver	0.75	19.1	0.25	6.4	3	10000
C080X020YJT	White	0.80	20.3	0.20	5.1	3	10000
C090X025YJT	White	0.90	22.9	0.25	6.4	3	10000
C100X025YJT	White	1.00	25.4	0.25	6.4	3	10000
C100X038YJT	White	1.00	25.4	0.38	9.7	3	10000
C100X050YJT	White	1.00	25.4	0.50	12.7	3	10000
C100X050YKT	Clear	1.00	25.4	0.50	12.7	3	10000
C100X050YMT	Silver	1.00	25.4	0.50	12.7	3	10000
C125X038YJT	White	1.25	31.8	0.38	9.7	3	10000
C150X050YJT	White	1.50	38.1	0.50	12.7	1	5000
C150X075YJT	White	1.50	38.1	0.75	19.1	1	5000
C150X075YMT	Silver	1.50	38.1	0.75	19.1	1	5000
C160X020YJT	White	1.60	40.6	0.20	5.1	1	10000
C200X025YJT	White	2.00	50.8	0.25	6.4	1	5000
C200X038YJT	White	2.00	50.8	0.38	9.7	1	5000
C200X050YJT	White	2.00	50.8	0.50	12.7	1	5000
C200X100YJT	White	2.00	50.8	1.00	25.4	1	2500
C200X100YKT	Clear	2.00	50.8	1.00	25.4	1	2500
C200X100YMT	Silver	2.00	50.8	1.00	25.4	1	2500
C275X125YJT	White	2.75	69.9	1.25	31.8	1	2500
C275X125YMT	Silver	2.75	69.9	1.25	31.8	1	2500
C300X025YJT	White	3.00	76.2	0.25	6.4	1	5000
C300X038YJT	White	3.00	76.2	0.38	9.7	1	5000
C300X100YJT	White	3.00	76.2	1.00	25.4	1	2500
C300X100YMT	Silver	3.00	76.2	1.00	25.4	1	2500
C300X200YJT	White	3.00	76.2	2.00	50.8	1	1000
C300X200YMT	Silver	3.00	76.2	2.00	50.8	1	1000
C350X100YJT	White	3.50	88.9	1.00	25.4	1	2500
C400X100YJT	White	4.00	101.6	1.00	25.4	1	2500
C400X200YJT	White	4.00	101.6	2.00	50.8	1	1000
C400X200YMT	Silver	4.00	101.6	2.00	50.8	1	1000
C400X300YJT	White	4.00	101.6	3.00	76.2	1	2500
C400X400YJT	White	4.00	101.6	4.00	101.6	1	1000
C400X600YJT	White	4.00	101.6	6.00	152.4	1	1000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Type of Application	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm			
C061X030YPT	White	0.61	15.5	0.30	7.6	1-port	4	2500
C100X050YPT	White	1.00	25.4	0.50	12.7	general identifier	3	10000
C125X030YPT	White	1.25	31.8	0.30	7.6	2-port	3	2500
C138X019YPT	White	1.38	35.1	0.19	4.8	module	1	2500
C138X019Y0T	Black	1.38	35.1	0.19	4.8	module	1	2500
C188X030YPT	White	1.88	47.8	0.30	7.6	3-port	1	2500
C200X100YPT	White	2.00	50.8	1.00	25.4	general identifier	1	2500
C200X100Y0T	Black	2.00	50.8	1.00	25.4	general identifier	1	2500
C252X030YPT	White	2.52	64.0	0.30	7.6	4-port	1	2500
C252X030YPT-P*	White	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YQT-P*	TIA Blue	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YRT-P*	TIA Brown	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YST-P*	TIA Green	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YTT-P*	TIA Gray	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YUT-P*	TIA Orange	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YVT-P*	TIA Purple	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030YWT-P*	TIA Red	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030Y0T-P*	Black	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030Y8T-P*	TIA Yellow	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C252X030Y9T-P*	Gold	2.52	64.0	0.30	7.6	1, 2, 3 or 4-port	1	2500
C261X030YPT	White	2.61	66.3	0.30	7.6	4-port	1	2500
C275X125YPT	White	2.75	69.9	1.25	31.8	general identifier	1	2500
C275X125Y0T	Black	2.75	69.9	1.25	31.8	general identifier	1	2500
C288X030YPT	White	2.88	73.2	0.30	7.6	5-port	1	2500
C300X200YPT	White	3.00	76.2	2.00	50.8	general identifier	1	2500
C315X030YPT	White	3.15	80.0	0.30	7.6	5-port	1	2500
C379X030YPT	White	3.79	96.3	0.30	7.6	6-port	1	2500
C379X030YPT-P*	White	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YQT-P*	TIA Blue	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YRT-P*	TIA Brown	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YST-P*	TIA Green	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YTT-P*	TIA Gray	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YUT-P*	TIA Orange	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YVT-P*	TIA Purple	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030YWT-P*	TIA Red	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030Y0T-P*	Black	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030Y8T-P*	TIA Yellow	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C379X030Y9T-P*	Gold	3.79	96.3	0.30	7.6	1, 2, 3, 4, 5 or 6-port	1	2500
C400X200Y8T	Yellow	4.00	101.6	2.00	50.8	general identifier	1	1000
C400X300YPT	White	4.00	101.6	3.00	76.2	general identifier	1	2500

*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.
Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C060X020TJT	White	0.60	15.2	0.20	5.1	3	10000
C090X025TJT	White	0.90	22.9	0.25	6.4	3	10000
C100X038TJT	White	1.00	25.4	0.38	9.7	3	10000
C100X050TJT	White	1.00	25.4	0.50	12.7	3	10000
C125X038TJT	White	1.25	31.8	0.38	9.7	3	2500
C200X038TJT	White	2.00	50.8	0.38	9.7	1	5000
C200X100TJT	White	2.00	50.8	1.00	25.4	1	2500
C300X038TJT	White	3.00	76.2	0.38	9.7	1	5000

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tamper-Evident Polyester Component Labels

- Leaves a checkerboard of silver material allowing you to see if label has been tampered with
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C075X025AAT	Silver	0.75	19.1	0.25	6.4	3	10000
C100X050AAT	Silver	1.00	25.4	0.50	12.7	3	10000
C200X100AAT	Silver	2.00	50.8	1.00	25.4	1	2500
C275X125AAT	Silver	2.75	69.9	1.25	31.8	1	2500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbon
- Temperature range: -10°F to 302°F (-23°C to 150°C)



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C150X030Y1T	White	1.50	38.1	0.30	7.6	2	1000
C195X040Y1T	White	1.95	49.5	0.40	10.2	2	1000
C261X035Y1T	White	2.61	66.3	0.35	8.9	2	1000
C288X040Y1T	White	2.88	73.2	0.40	10.2	2	1000
C390X030Y1T	White	3.90	99.1	0.30	7.6	2	1000
C750X050Y1T	White	7.50	190.5	0.50	12.7	2	1000
C788X050Y1T	White	7.88	200.2	0.50	12.7	2	1000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbon
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C050X044CBT	White	0.50	12.7	0.44	11.2	5	10000
C060X020CBT	White	0.60	15.2	0.20	5.1	3	10000
C075X025CBT	White	0.75	19.1	0.25	6.4	3	10000
C100X025CBT	White	1.00	25.4	0.25	6.4	3	10000
C100X038CBT	White	1.00	25.4	0.38	9.7	3	10000
C100X050CBT	White	1.00	25.4	0.50	12.7	3	10000
C150X075CBT	White	1.50	38.1	0.75	19.1	1	5000
C160X020CBT	White	1.60	40.6	0.20	5.1	1	10000
C200X050CBT	White	2.00	50.8	0.50	12.7	1	5000
C400X100CBT	White	4.00	101.6	1.00	25.4	1	2500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process
- Use thermal transfer resin ribbon on white polyimide
- Use thermal transfer hybrid ribbon on tan polyimide
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C025X025KBT	White	0.25	6.4	0.25	6.4	12	10000
C025X025KCT	Tan	0.25	6.4	0.25	6.4	12	10000
C038X038KBT	White	0.38	9.7	0.38	9.7	7	10000
C038X038KCT	Tan	0.38	9.7	0.38	9.7	7	10000
C050X013KBT	White	0.50	12.7	0.13	3.3	5	10000
C050X013KCT	Tan	0.50	12.7	0.13	3.3	5	10000
C050X020KBT	White	0.50	12.7	0.20	5.1	5	10000
C050X044KBT	White	0.50	12.7	0.13	3.3	5	10000
C050X044KCT	Tan	0.50	12.7	0.13	3.3	5	10000
C060X020KBT	White	0.60	15.2	0.20	5.1	3	10000
C060X020KCT	Tan	0.50	15.3	0.20	5.1	3	10000
C065X019KBT	White	0.65	16.5	0.19	4.8	3	10000
C065X019KCT	Tan	0.65	16.5	0.19	4.8	3	10000
C075X025KBT	White	0.75	19.1	0.25	6.4	3	10000
C075X025KCT	Tan	0.75	19.1	0.25	6.4	3	10000
C080X020KBT	White	0.80	20.3	0.20	5.1	3	10000
C080X020KCT	Tan	0.80	20.3	0.20	5.1	3	10000
C090X025KBT	White	0.90	22.9	0.25	6.4	3	10000
C090X025KCT	Tan	0.90	22.9	0.25	6.4	3	10000
C100X019KBT	White	1.00	25.4	0.19	4.8	3	10000
C100X019KCT	Tan	1.00	25.4	0.19	4.8	3	10000
C100X025KBT	White	1.00	25.4	0.25	6.4	3	10000
C100X025KCT	Tan	1.00	25.4	0.25	6.4	3	10000
C100X038KBT	White	1.00	25.4	0.38	9.7	3	10000
C100X038KCT	Tan	1.00	25.4	0.38	9.7	3	10000
C125X025KBT	White	1.25	31.8	0.25	6.4	2	10000
C125X025KCT	Tan	1.25	31.8	0.25	6.4	2	10000
C150X025KBT	White	1.50	38.1	0.25	6.4	2	5000
C150X025KCT	Tan	1.50	38.1	0.25	6.4	2	5000
C160X020KBT	White	1.60	40.6	0.20	5.1	1	10000
C160X020KCT	Tan	1.60	40.6	0.20	5.1	1	10000
C200X025KBT	White	2.00	50.8	0.25	6.4	1	5000
C200X025KCT	Tan	2.00	50.8	0.25	6.4	1	5000
C200X038KBT	White	2.00	50.8	0.38	9.7	1	5000
C300X025KBT	White	3.00	76.2	0.25	6.4	1	5000
C300X025KCT	Tan	3.00	76.2	0.25	6.4	1	5000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Paper Component Labels

- General purpose material
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 160°F (-54°C to 71°C)
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C075X025PBT	White	0.75	19.1	0.25	6.4	3	10000
C100X050PBT	White	1.00	25.4	0.50	12.7	3	10000
C150X075PBT	White	1.50	38.1	0.75	19.1	1	5000
C200X100PBT	White	2.00	50.8	1.00	25.4	1	2500
C300X200PBT	White	3.00	76.2	2.00	50.8	1	1000
C400X100PBT	White	4.00	101.6	1.00	25.4	1	2500
C400X200PBT	White	4.00	101.6	2.00	50.8	1	1000
C400X300PBT	White	4.00	101.6	3.00	76.2	1	2500
C400X500PBT	White	4.00	101.6	5.00	127.0	1	1000
C400X600PBT	White	4.00	101.6	6.00	152.4	1	1000

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Reflective Continuous Tapes

- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Material	Width		Length		Std. Pkg. Qty. (Roll)
			In.	mm	Ft.	m	
T100X000RP1	White	Reflective	1.00	25.4	50.0	15.2	1
T100X000RU1	Orange	Reflective	1.00	25.4	50.0	15.2	1
T100X000RX1	Yellow	Reflective	1.00	25.4	50.0	15.2	1
T200X000RP1	White	Reflective	2.00	50.8	50.0	15.2	1
T200X000RU1	Orange	Reflective	2.00	50.8	50.0	15.2	1
T200X000RX1	Yellow	Reflective	2.00	50.8	50.0	15.2	1
T300X000RP1	White	Reflective	3.00	76.2	50.0	15.2	1
T400X000RP1	White	Reflective	4.00	101.6	50.0	15.2	1
T400X000RQ1	Blue	Reflective	4.00	101.6	50.0	15.2	1
T400X000RU1	Orange	Reflective	4.00	101.6	50.0	15.2	1
T400X000RW1	Red	Reflective	4.00	101.6	50.0	15.2	1
T400X000RX1	Yellow	Reflective	4.00	101.6	50.0	15.2	1

Order number of labels required in multiples of Standard Package Quantity.

Continuous Tapes

- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability
- Use thermal transfer resin ribbon
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




Part Number	Color	Material	Temperature Range	Width		Length		Std. Pkg. Qty. (Roll)
				In.	mm	Ft.	m	
T024X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.24	6.1	100.0	30.5	1
T031X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.31	7.9	100.0	30.5	1
T038X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.38	9.7	100.0	30.5	1
T050X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.50	12.7	100.0	30.5	1
T100X000VP1Y	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VQ1Y	Blue	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VS1Y	Green	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VU1Y	Orange	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VW1Y	Red	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VX1Y	Yellow	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000VY1Y	Black	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4	100.0	30.5	1
T100X000YK1	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)	1.00	25.4	100.0	30.5	1
T200X000VP1Y	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VQ1Y	Blue	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VR1Y	Brown	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VS1Y	Green	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VT1Y	Gray	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VU1Y	Orange	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VV1Y	Purple	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VW1Y	Red	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VX1Y	Yellow	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000VY1Y	Black	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
T200X000YK1	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)	2.00	50.8	100.0	30.5	1
T400X000VP1Y	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VQ1Y	Blue	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VR1Y	Brown	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VS1Y	Green	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VT1Y	Gray	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VU1Y	Orange	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VV1Y	Purple	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VW1Y	Red	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VX1Y	Yellow	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000VY1Y	Black	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6	100.0	30.5	1
T400X000YK1	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)	4.00	101.6	100.0	30.5	1

Order number of rolls required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Continuous Tapes

- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979



			Width		Length		Std. Pkg. Qty. (Roll)
Part Number	Color	Material	In.	mm	Ft.	m	
T038X000YP1	White	Polyester	0.38	9.7	100.0	30.5	1
T038X000Y01	Black						
T050X000YP1	White		0.50	12.7			
T050X000Y01	Black						
T100X000YP1	White		1.00	25.4			
T100X000Y01	Black						
T200X000YP1	White		2.00	50.8			
T200X000Y01	Black						
T400X000YP1	White		4.00	101.6			
T400X000Y01	Black						

Order number of labels required in multiples of Standard Package Quantity.

Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2" and 4" continuous tapes
- Temperature range: -40°F to 302°F (-40°C to 150°C)

Part Number	Color	Material	Width		Length		Std. Pkg. Qty. (Roll)
			In.	mm	Ft.	m	
T225X000YK1	Clear	Polyester	2.25	57.2	100.0	30.5	1
T425X000YK1	Clear	Polyester	4.25	107.9	100.0	30.5	1

Order number of labels required in multiples of Standard Package Quantity.

Easy-Mark™ Labeling Software

- Quickly and easily generate labels
- Market specific labeling application tools assist in creation of identification solutions for data centers, network applications, panel shops, and construction and maintenance applications
- Saves time and money (up to 75%) with features such as WYSIWYG user interface, data import, symbol import, and pre-loaded formats
- Upgrades available at www.panduit.com
- Site license available for up to five additional installs per license

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows^ 2000, XP, Vista, 7, or 8
- Mouse or compatible pointing device
- Microsoft.NET Framework 2.0 or higher
- CD-ROM Drive or USB Port



Part Number	Color	Std Pkg. Qty.	Std. Pkg. Qty.
PROG-EMCD3	Easy-Mark™ Labeling Software, CD-ROM	1	10
PROG-EM2GO	Easy-Mark™ Portable Application, USB Flash Drive	1	10

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

CAD-Connect™ Labeling Software

- Facilitates quick and easy organization of identifiers from CAD for printing within Easy-Mark™ Labeling Software
- Easily captures and organizes CAD data for future use and documentation
- Saves time and reduces errors by utilizing identifiers previously created in CAD files to eliminate manual entry of data into labeling software
- Compatible with full versions of AutoCAD* 2002 to 2012 and Visio^ version 2002 or newer
- Exports to alternative formats such as Excel^ (XLS) or Text (CSV) files for future use and documentation

- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows^ 2000, XP, Vista, or 7
- Mouse or compatible pointing device
- Microsoft.NET Framework 2.0 or higher
- CD-ROM Drive



Part Number	Color	Std Pkg. Qty.	Std. Pkg. Qty.
PROG-CCCD	CAD-Connect™ Labeling Software, including Easy-Mark™ Labeling Software, CD-ROM.	1	10

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

TDP43ME Desktop Printer and Accessories

- Creates durable, crisp, clear legends and graphics that offer superior legibility
- Prints durable legends for harsh industrial environments
- Fine resolution for small type characters and images
- Easy-Mark™ Labeling Software included with printer
- Up to 4 inches per second print speed
- Auto-sensing label gap and black mark sensors
- One-button operation, and automatic self test
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, or Ethernet
- Easy ribbon loading reduces printer down time
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



Part Number	Part Description	Std Pkg. Qty
TDP43ME	300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America	1
TDP43ME/E	300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, EuroPlug cord, USB cable, user manual, quick start card, and driver disk; for use outside North America	1
TDP43ME-KIT	TDP43ME printer kit. Includes: printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America	1
TDP43ME/E-KIT	TDP43ME/E printer kit. Includes: printer, Panduit® Easy-Mark™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with EuroPlug cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use outside North America	1
TDP43ME-RS	External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3" cores.	1
TDP43ME-CASE	Hardside carrying case accommodates printer, AC power adapter, ribbons, printer cable, external roll stand, labels, and tools.	1
TDP43ME-AC	Replacement AC power adapter with power cord (US cord only).	1
TDP43ME-CUTTER	Optional power/automatic cutter for TDP43ME thermal transfer desktop printer; easy to install for automatic cutting of labels.	1
PTR-CLN	Printer cleaning kit – contains bottle of cleaning solution with MSDS, cleaning pen, swabs, alcohol wipes, and cleaning instructions.	1

TDP43ME Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.
		In.	mm	Ft.	m	
RMEH4BL*	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels.	4.25	108.0	300.0	91.4	1
RMER4BL*	Black resin thermal transfer ribbon. Use with polyester and white polyimide labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4BU	Blue resin thermal transfer ribbon. Use with polyester and white polyimide labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4GR	Green resin thermal transfer ribbon. Use with polyester and white polyimide labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4RD	Red resin thermal transfer ribbon. Use with polyester and white polyimide labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4WH*	White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.					
RMER4BL-C	Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels.					

Order number of ribbons required in multiples of Standard Package Quantity.

*For 2.5" wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5" wide black hybrid thermal transfer ribbon is RMEH2BL.

TDP43HE and TDP46HE Desktop Printers and Accessories

- Convenient, easy setup; quickly begin producing labels
- Durable, clear communication through superior legibility
- Print small, fine characters and high-quality images and bar codes
- Allow continuous use in construction, industrial, and harsh environments
- Reduce time required to switch between label styles
- Fast label production without sacrificing print quality
- Easy-Mark™ Labeling Software included with printer
- Up to 8 inches per second print speed
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- UL60950 listed, File # E165747



Part Number	Part Description	Std Pkg. Qty
TDP43HE	300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk and US power cord; for use in North America.	1
TDP43HE/E	300 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America.	1
TDP46HE	600 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and US power cord; for use in North America.	1
TDP46HE/E	600 dpi printer; includes printer, Panduit® Easy-Mark™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: Europlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America.	1
PTR-CLN	Printer cleaning kit - contains bottle of cleaning solution with MSDS, cleaning pen, swabs, alcohol wipes, and cleaning instructions.	1

TDP43HE and TDP46HE Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.			
		In.	mm	Ft.	m				
RHEH4BL	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels.	4.33	110.0	1181.0	363.0	1			
RHER4BL	Black resin thermal transfer ribbon. Use with polyester and white polyimide labels, continuous vinyl tape, marker plates, and raised panel labels.								
RHER4WH	White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.	4.50	114.3						
RHER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.	4.33	110.0						
RHER4BL-C	Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers.								

Order number of ribbons required in multiples of Standard Package Quantity.

Real-World Solutions

*With a proven reputation for excellence and innovation, Panduit and our partners work with you to overcome challenges and implement real-world solutions that create a competitive business advantage. Panduit offers the broadest range of solutions, from data centers and intelligent buildings to manufacturing operations, to help you build a **smarter, unified business foundation**.*



Technology Leadership

Panduit develops innovative physical infrastructure solutions that meet the rapidly changing needs of our clients, from hardware and software to advisory services. This commitment is supported by investment in advanced research, solutions-focused product development, world-class manufacturing, and collaboration with customers at the forefront of technology.



Partner Ecosystem

Our best-in-class partner ecosystem offers a comprehensive portfolio of services that span the project lifecycle, from planning and design to delivery, deployment, maintenance, and operation. Panduit business partners – distributors, and certified architects, consultants, engineers, designers, system integrators, and contractors – are qualified to help you achieve your objectives and realize predictable and measurable results.



Strategic Alliances

Panduit cultivates long-term strategic alliances with industry leaders, including Cisco Systems, EMC, IBM, and Rockwell Automation, to develop, optimize, and validate solutions for our customers. This investment in people and resources helps solve our customers' greatest business challenges.



Global Business Commitment

Panduit is committed to delivering a consistently high level of quality and service the world over. With a presence in more than 100 countries, local Panduit sales representatives and technical specialists offer guidance and support that bring value to your business. Our global supply chain, which includes manufacturing, customer service, logistics, and distribution partners, provides prompt response to your inquiries and streamlines delivery to any worldwide destination.



Sustainability

With a commitment to environmental sustainability, Panduit develops and implements solutions that protect, replenish, and restore the world in which we live. This commitment is demonstrated by Panduit's LEED Gold certified World Headquarters, leveraging the Unified Physical InfrastructureSM approach to enable convergence of critical building systems to drive energy efficiency and ongoing operational improvement.

*Transform Your
Physical Infrastructure*

*Call or visit us online,
we can show you how.*

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com
US and Canada: 800.777.3300
Europe, Middle East, and Africa:
44.20.8601.7200
Latin America: 52.33.3777.6000
Asia Pacific: 65.6305.7575

www.panduit.com

PANDUIT®

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9