




FERRI SHIELD **FERRITES**

**BISECTED & SOLID BEAD STYLES
FOR ROUND AND FLAT CABLES & WIRES**

- World's Largest In-Stock Selection
- Frequency-Specific Formulations
- Flexible Mounting Options

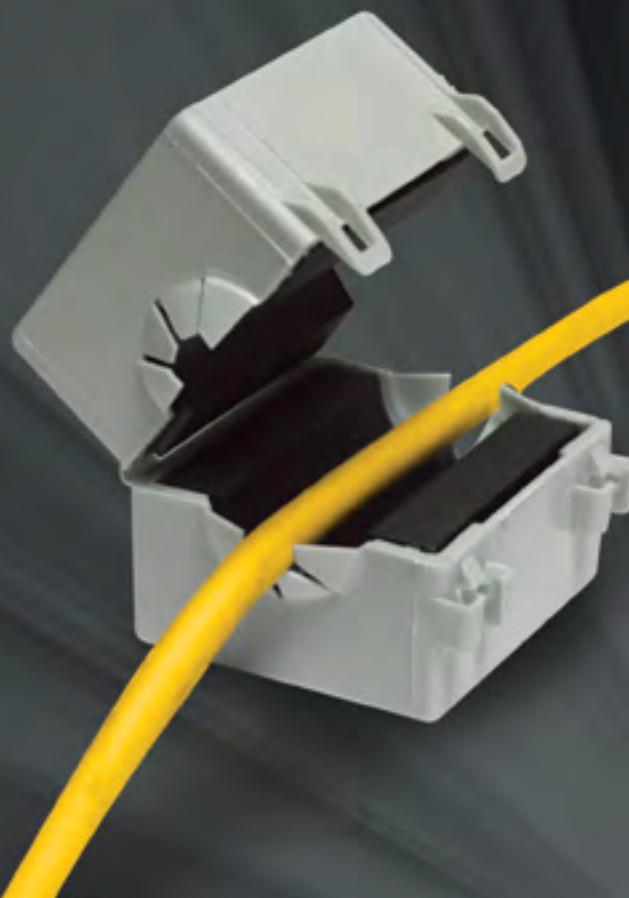

LEADER
TECH 
a HEICO company

The Leading Edge in EMI Shielding Technology

For more than 25 years, FerriShield ferrites have been the preferred cable shielding solution for many of the world's leading EMI Shielding Distributors, Sales Representatives and OEM's. Since acquiring the company in 2006, Leader Tech has embraced the FerriShield philosophy of maintaining the world's largest in-stock selection of bisected and solid core ferrites.

The addition of cable mounted ferrites to Leader Tech's existing EMI shielding product line has significantly increased value for our customers. Backed by unparalleled service and engineering support, Leader Tech now offers the market's most reliable selection of board, enclosure and cable shielding solutions.

**LEADER
TECH**
a HEICO company



FerriShield®

Ferrite Suppressors

Shielded enclosures, even the most robust designs, will permit electromagnetic energy to enter or exit along the main cabling. FerriShield Ferrites are one of the most versatile and cost-effective cable shielding methods available today. Our ferrites attack unwanted RF right on the circuit wiring, eliminating the need for more costly forms of RFI control. Available in solid and bisected designs, each style can make the task of regulatory compliance quicker and less troublesome.

Our bisected styles use FerriShield's innovative, quick-snap clamshell enclosures. This unique design concept offers engineers the ultimate in adaptability and easy installation. The RF absorbing core material interacts directly with unwanted high-frequency energy and dissipates it effectively while allowing data signals to pass unimpeded.



ferrites for flat and round cables

Universal Wideband Material (28 Material)

- 10 cable snaps for round cables
- 12 sleeve snaps for round cables
- 13 USB cable sleeve snap with universal variable diameter
- 14 cable bundle clamps for wire and cable groups
- 14 telecom cable snaps for flat-oval cables
- 15 solid beads and toroids for round cables
- 15 extra large toroids up to 6.66" inside diameter
- 16 flat cable clamps for flat cables and flex circuits
- 16 low profile flat cable clamps for flat cables and flex-circuits
- 19 low profile solids for flat cables and flex-circuits
- 19 rectangular solids for flat cables and flex circuits
- 21 universal wideband bus bar ferrites extra large openings for most sizes

Low-Frequency Material (33 Material)

- 22 low frequency cable snaps for round cables
- 23 low frequency cable clamps for flat cables and flex circuits

High-Frequency Material (25 Material)

- 24 high frequency cable snaps for round cables
- 25 high frequency cable clamps for flat cables and flex circuits

Bluetooth/Microwave Material (20 Material)

- 26 bluetooth/microwave cable snaps for round cables
- 27 bluetooth/microwave cable clamps for flat cables

RFID shielding

- 28 RFID overview 13.56, 433.32, 860-930 MHz; 2.45 & 5.8 GHz
- 29 frequency-specific ferrites 13.56, 433.32, 860-930 MHz; 2.45 & 5.8 GHz

electrical and mechanical specifications

- 7 insertion loss formula simple engineering calculation model
- 9 technical information for specifying products
- 32 attenuation by part number impedance performance by frequency
- 33 material properties typical performance characteristics
- 33 cable size by part number recommended cable sizes

testing aids

- 30 engineering kits and test equipment test fixtures, test probes
- 34 test probes electric and magnetic near-field detectors

installation, ordering, part # reference

- 35 installation guidelines for ferrites cable size, positioning, attachment options
- 36 all part numbers by page number all catalog items in stock at all times
- 39 ordering general information, customer samples, ISO 9001:2008 Quality System Registration, RoHS





Simply one of the most flexible and cost-effective cable shielding solutions on the market

PRODUCT OVERVIEW:

4 Frequency-Specific Ferrite Formulations

- 28 Material Wideband Ferrite (Most Popular)
- 33 Material Low-Frequency Ferrite
- 25 Material High-Frequency Ferrite
- 20 Material Bluetooth/Microwave Ferrite

1,000s of Styles and Sizes

- Solid and Bisection Styles
- I.D.'s from .034" to 6.6"
- Round, Square & Flat Shapes
- Special application designs

10 Flexible, Quick Mounting Options

Integrated Mounting Options:

- Snug Cable-Fit
- Button Mount
- Adhesive Mount
- Screw Mount
- Flexible-Grip End Ports

2-Piece Mounting Options:

- Cable Tie Base
- Press Fit Base
- Adhesive Mount Base
- Screw Mount Base
- Screw Mount Strap

HOW TO select a FerriShield Ferrite for your application

1

Choose a ferrite material

FerriShield ferrites are offered in (4) unique formulations. The chart below offers an overview of typical material properties and catalog page references.

Ferrite	Performance	Catalog Pages
28 Material- Most Popular Wideband	10MHz-1GHz (250MHz peak)	10 to 21
33 Material- Low-Frequency Ferrite	1MHz-60MHz (30MHz peak)	22 to 23
25 Material- High-Frequency Ferrite	1MHz-1.2GHz (700MHz peak)	24 to 25
20 Material- Bluetooth/Microwave	2.45GHz peak	26 to 27

For detailed Attenuation and Material Properties see page 32 and 33



2

Select a mounting option

Each section of this catalog features multiple mounting options for bisected and solid bead ferrites. FerriShield Ferrites are recognized for their ease of installation and reliable performance over time.



3

Select the inside diameter of your ferrite

FerriShield Ferrites are designed to fit tight against the cable or wiring bundle that requires shielding. Ideally, you should select a ferrite with an inside diameter that is slightly less (+/- .04") than the outside diameter of your cable.

For quick reference, all part numbers in this catalog have an accompanying technical drawing and specifications chart that illustrates dimensions and impedance for the selected ferrite.

For a more detailed technical explanation see page 33.



Helpful Tips and Insider Hints

- Ferrite performance typically increases as ferrite volume increases. The larger the ferrite mass, the better the RF attenuation.
- Smaller cables can be looped through larger ferrites to increase performance. Impedance increase by the square of the number of loops. For example, by looping a cable through a ferrite 2 times (2^2), impedance increases by a factor of 4.

For a detailed explanation see page 6- Electromagnetic Characteristics

- Ferrite installation guidelines and recommendations are shown on page 35
- Attenuation properties by part number can be referenced on page 32
- Maximum recommend cable size by part number can be found on page 33



Product Profile

Ferrite shielding materials are widely accepted as providing the simplest, most convenient and most cost-effective solution for radio frequency interference problems in cables and connectors. Further, they accomplish both RF attenuation and suppression of unwanted high frequency oscillations with no loss in dc or low frequency signal strength.

The basic composition of ferrite materials is a combination of ferrous oxide and one or more other powdered metals - most often manganese, zinc, cobalt or nickel. An extensive selection of shapes and sizes is already available, and custom geometries may be manufactured for special situations.

There are infinite varieties of formulas and performance levels possible. Each discrete ferrite formulation results in a stoichiometric ratio which is its performance characteristic signature regarding electrical, magnetic and mechanical relationships. The most common expression of ferrites' performance capabilities is in terms of their permeability (μ). This property expresses the ratio of the magnitude of magnetic induction to magnetizing force. The materials are normally categorized according to initial permeability (μ_i).

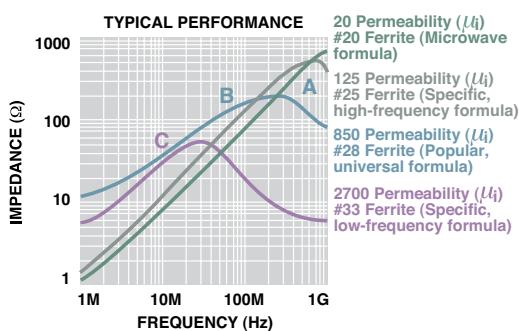


fig. 1 Typical attenuation profiles

FerriShield has developed four principal formulations which together serve the common spectrum of today's RFI needs. For frequencies from 10 MHz to 1 GHz, #28 formulation is recommended, especially when higher frequency harmonics are a consideration. For frequencies typified by microprocessor speeds in excess of 100MHz and harmonics peak interference at nominally 700MHz, #25 formulation is designed to cover this range with even some effect beyond that. For frequencies from 1 MHz to 30 MHz, #33 material offers a concentration of impedance in that range with a decreasing effect above 30 MHz. For microwave frequencies relating to Bluetooth™ 2.45GHz operations, the #20 material is available. See figure 1 above.

Electromagnetic Characteristics

Stated most simply, the operative characteristic which makes ferrites effective in RFI/EMI suppression is their variable sensitivity to frequency. With a ferrite installed as a suppressor, lower frequencies will pass with no significant loss. But above the frequency where $(\tan \delta/\mu)$ climbs sharply (see figure 1), the signal couples with the ferrite to create an impedance which is quite high compared with the rest of the circuit. The offending RFI is thus immediately and consistently blocked out by way of impedance damping of the unwanted high frequency signals. It is this greater resistive impedance which allows the basically passive, apparently simple material to suppress multiple signals in a variety of application situations.

fig. 2
Impedance comparison
vs. cubic volume.


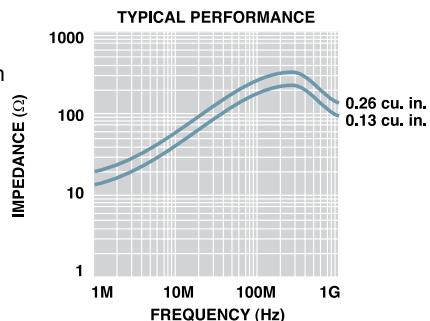


fig. 3
Two turn loop through
ferrite increases
effective magnetic
path. Impedance
increases by the square
of the number of turns
(N²).



fig. 4
Increased impedance;
multiple turns (N²)
vs. one turn through
ferrite; i.e., 2 turns
(2²) = 4 times
impedance





Organizing the Engineering Model

To understand the various practical modeling techniques employed with ferrite, it is best to prepare a properly engineered calculation of expected results. An empirical trial and error method may leave the circuit close to borderline performance without adequate safety margins. As indicated previously, a wide range of formulations is possible. The major application factors to be used when defining a specific ferrite solution for a particular interference problem include the following:

- Frequency where maximum attenuation is required.
- Amount of attenuation needed.
- Ferrite permeability formulation characteristics as they relate to the frequency range in question (i.e., initial permeability)
- Ferrite formulation consistency (i.e., expected range of variation in attenuation performance)
- Installation environment and mechanical attachment requirements.

The frequency range requiring attenuation must be matched to the performance of a given ferrite composition (figure 1 on previous page). The optimum profile would be a ferrite in which the highest attenuation level coincides with the disruptive frequency (A). That same ferrite could be used even if the frequency falls in a lower area of its impedance curve (B) but there would be correspondingly reduced attenuation. Conversely, a different ferrite formulation could be employed in the same frequency situation with the intent of using a lower part of its performance curve (C). Space and weight considerations are not normally a concern since good quality ferrites provide high performance per a given cubic volume.

The modeling procedure to calculate impedance characteristics of the source and load coupled with the ferrite suppressor is developed as follows:

$$\text{Insertion Loss (dB)} = 20 \log_{10} \frac{(Z_A + Z_B + Z_F)}{(Z_A + Z_B)}$$

Where:

Insertion Loss = A measure of the effectiveness of a filter, expressed in decibels, is described as the ratio of voltages with, and without, the filter in the circuit.

Z_A = Source Impedance

Z_B = Load Impedance

Z_F = Ferrite Impedance

If the circuit impedance ($Z_A + Z_B$) is 50 ohms and the ferrite impedance is 250 ohms, then the insertion loss will be:

$$20 \log_{10} (50+250)/50 = 15.56 \text{ dB}$$

Even though the same unit of ferrite is used, the attenuation provided by a ferrite suppressor can differ somewhat as the original circuit impedance varies. The ferrite is more effective when the circuit impedance is low. For example, by using the same 250 ohm ferrite in a 75 ohm circuit, the result will be:

$$20 \log_{10} (75 + 250)/75 = 12.7 \text{ dB}$$

With a high circuit impedance, it may be possible to increase the number of turns or passes through the ferrite (figures 3 and 4), or to use a larger amount of ferrite (cubic volume) in the circuit in order to achieve the same level of insertion loss (fig. 2). By increasing the number of turns (passes) through the ferrite opening, the "effective magnetic path" is increased – impedance then increases by the square of the number of turns (N^2) ; i.e., two turns (2^2) = 4 times the impedance. When additional ferrite volume is added, impedance increases on almost a direct percentage basis; i.e., a 100 percent increase in volume will provide about 100 percent increase in impedance (figure 2) in most situations according to certain prescribed dimensional ratios.

An alternative modeling procedure may also be structured in reverse by solving for a desired insertion loss goal. The result yields an impedance requirement. This can be matched to known performance profiles of existing ferrite configurations in the geometric style best suited for mechanical and packaging requirements.

As an example, a 15dB insertion loss is required for a flat ribbon cable at 100 MHz. Using the formula:

$$\text{Insertion Loss (dB)} = 20 \log_{10} \frac{(Z_A + Z_B + Z_F)}{(Z_A + Z_B)}$$

Where: $IL = 15 \text{ dB}$

$Z_A = 25 \text{ ohms}$

$Z_B = 25 \text{ ohms}$

$Z_F = \text{Unknown ferrite impedance}$
(solve for this value)

$$15\text{dB} = 20 \log_{10} \left(\frac{50 + Z_F}{25 + 25} \right)$$

$$0.75 = \log_{10} \left(\frac{50 + Z_F}{50} \right)$$

$$5.625 = \frac{50 + Z_F}{50}$$


$$Z_F = 231.25 \text{ ohms}$$

Next, refer to the Attenuation Properties on page 36. The flat ribbon cable style part that closely matches is #28B2480 with a 250½ impedance at 100 MHz.

Once the ferrite suppressor is installed in the circuit, results should be confirmed by testing. Although these ferrites are "linear," the term is relative to the common operating range of temperatures. The permeability is different at every degree of temperature. The published initial permeability (μ_i) nomenclature applies to standard temperature, 59°F (15°C) only. There are only minor impedance differences, however, throughout normal operational ranges and up to 180° F (82°C). See Material Properties on page 33.

Controlling RFI/EMI

Any device used to block an RFI signal between its source and a receiver is an electromagnetic interference (EMI) shield.

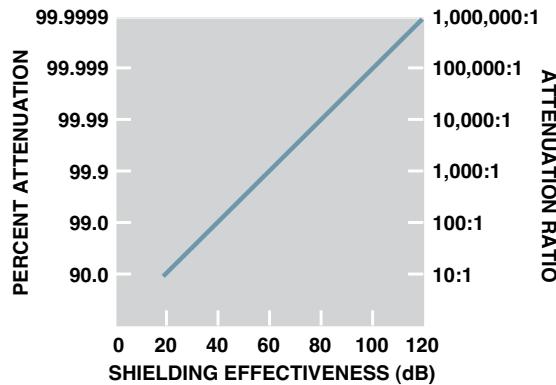

The measure of this ability to attenuate RFI is Shielding Effectiveness, SE, which is expressed in decibels, dB, the ratio of field strength on one side of the shield to the other side. The figure above shows the relationship between shielding effectiveness (in dB), the amount of attenuation, and attenuation percentage.



Typical FerriShield RFI suppressor.


FerriShield Advantages



I/O cable with RFI suppressor.

The concept of bisected ferrites has been developed to address a number of industry needs in the area of Electromagnetic Compatibility, EMC.

- engineering adaptability
- risk-free engineering:
 - tight tolerance performance
 - easy to upgrade attenuation by changing size or number of turns.
- easy retrofitting
- convenient installation
- integral mounting features
- cost-effectiveness
- extended resistance to core saturation under Direct Current loads.
- consistent performance

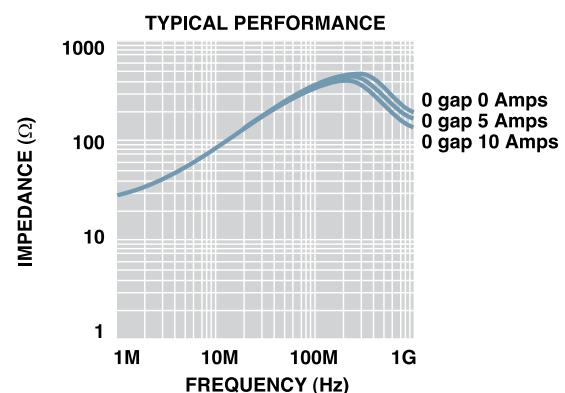

Gap effect of ferrite subjected to direct current.

Design Support

Engineering assistance is always available. We will be pleased to help with applications, cross-referencing or complete insertion loss calculations when a custom suppressor is required.

The technical air gap in bisected ferrites actually extends current carrying capability with only an imperceptible reduction in impedance versus solid ferrites of the same size. The gap is magnetically insignificant while it is electrically significant as a discontinuity, thereby accommodating more current.

Installation is simple


Just snap over circuit wiring to be controlled - even after wiring has been terminated Radio interference sources usually radiate their RFI power at frequencies above 30 MHz by way of the main cabling, which acts as an antenna.

Anywhere There is an Antenna-Like Structure

Electronic cabling and wires, by virtue of their length-to-width ratios, are perfect natural antennas. In the presence of high speed microprocessor signals, cables will conduct, radiate and/or receive unwanted high frequency interfering signals. Control of radio frequency interference can be assured by proper placement of an insertion loss device, such as a ferrite suppressor.

CABLING


RFI suppressor functions

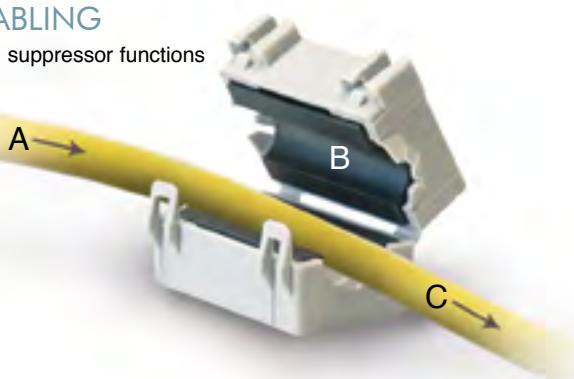

- A. Data signals and high frequency interference signals absorbed and conducted
- B. All high frequency interference absorbed by ferrite suppressor and thermally dissipated
- C. Low frequency data signals pass unimpeded

BUS BARS

RFI suppressor functions: bus bars

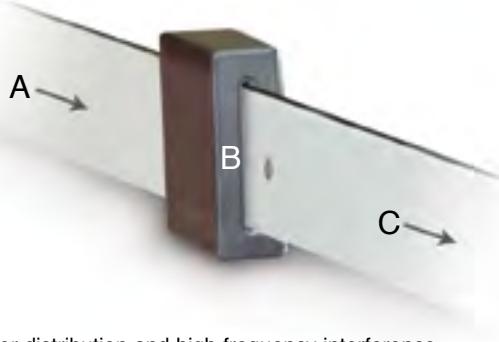

- A. Power distribution and high frequency interference signals absorbed and conducted
- B. All high frequency interference absorbed by ferrite suppressor and thermally dissipated
- C. Power distribution characteristics pass unimpeded

Application Points

FerriShield installation locations.




Advantages

Compared to other alternatives, ferrites' high resistivity per cubic volume stands out as the most important advantage. Prior to the development of bisected ferrites, suppression engineering was restricted to the costly addition of filters, cable shielding, and less versatile solid core (not bisected) ferrites. While these methods offer a degree of suppression, they are often awkward to install and, in many cases, are not completely effective. Bisected ferrites have a concentrated, homogeneous magnetic structure with high permeability. They are consistently stable versus time and temperature, and provide RF suppression without high eddy current losses.

cable snap

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 2.0" (50,8mm) diameter. Snap closed around wire by clasping shut to position assembly.

May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

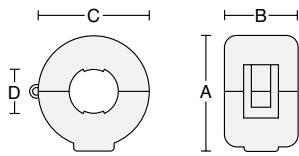

PART No.	A	B	C	D	IMPEDANCE IN OHMS
CS28B1642	.852	21,6	.885	22,5	.840 21,3 .282 7,2
CS28B1805	1.040	26,4	.667	16,9	1.025 26,4 .340 8,6
CS28B1937	1.182	30,0	.780	19,8	1.188 30,2 .425 10,8
CS28B1984	1.218	30,9	.705	17,9	1.220 31,0 .525 13,3
CS28B1501	1.725	43,8	1.232	31,3	1.720 43,7 .710 18,0
CS28B1500	1.725	43,8	1.232	31,3	1.720 43,7 .960 24,4
CS28B2000	2.350	59,7	1.851	47,0	2.309 58,6 .960 24,4
CS28B4000	4.500	114,2	1.851	47,0	4.687 119,0 1.960 49,8


See page 31 for more details

See page 31 for more details



cable snap

WITH PRESS-FIT BUTTON MOUNT BASE. Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 1.0" (25,4mm) diameter. Includes a button mount base which press-fits into a .150" (3,8mm) diameter hole.

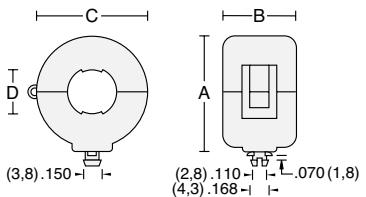


PART No.	A	B	C	D	IMPEDANCE IN OHMS
CF28B1642	.852	21,6	.885	22,5	.840 21,3 .282 7,2
CF28B1805	1.040	26,4	.667	16,9	1.025 26,4 .340 8,6
CF28B1937	1.182	30,0	.780	19,8	1.188 30,2 .425 10,8
CF28B1984	1.218	30,9	.705	17,9	1.220 31,0 .525 13,3
CF28B1501	1.725	43,8	1.232	31,3	1.720 43,7 .710 18,0
CF28B1500	1.725	43,8	1.232	31,3	1.720 43,7 .960 24,4
CF28B2000	2.350	59,7	1.851	47,0	2.309 58,6 .960 24,4



cable snap

WITH ADHESIVE MOUNT BASE. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a 1.0" (25,4mm) diameter. After closing around wire and clasping shut, assembly is ready for mounting. Installs by removing protective paper strip from base and pressing into place.




PART No.	A	B	C	D	E	F	IMPEDANCE IN OHMS
CA28B1642	.882	22,4	.885	22,5	.840 21,3 .282 7,2	.375 9,5	.375 9,5
CA28B1805	1.070	27,2	.667	16,9	1.025 26,4 .340 8,6	.375 9,5	.375 9,5
CA28B1937	1.212	30,8	.780	19,8	1.188 30,2 .425 10,8	.375 9,5	.375 9,5
CA28B1984	1.248	31,7	.705	17,9	1.220 31,0 .525 13,3	.375 9,5	.375 9,5
CA28B1501	1.755	44,6	1.232	31,3	1.720 43,7 .710 18,0	.875 22,2	.875 22,2
CA28B1500	1.755	44,6	1.232	31,3	1.720 43,7 .960 24,4	.875 22,2	.875 22,2
CA28B2000	2.380	60,5	1.851	47,0	2.309 58,6 .960 24,4	1.000 25,4	1.500 38,1



cable snap

WITH SCREW MOUNT BASE. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a 1.0" (25,4mm) diameter. Mounting base press-fits into receptacle on bottom. Installs at the intended location with a screw through the .125" (3,2 mm) diameter hole provided. The base may be positioned at 90° increments relative to the upper case to provide four alternative assembly configurations.




PART No.	A	B	C	D	E	F	IMPEDANCE IN OHMS
CW28B1642	.916	23,3	.885	22,5	.840 21,3 .282 7,2	1.250 31,8	.375 9,5
CW28B1805	1.105	28,1	.667	16,9	1.025 26,4 .340 8,6	1.250 31,8	.375 9,5
CW28B1937	1.236	31,4	.780	19,8	1.188 30,2 .425 10,8	1.250 31,8	.375 9,5
CW28B1984	1.282	32,6	.705	17,9	1.220 31,0 .525 13,3	1.250 31,8	.375 9,5
CW28B1501	1.789	45,5	1.232	31,3	1.720 43,7 .710 18,0	1.250 31,8	.375 9,5
CW28B1500	1.789	45,5	1.232	31,3	1.720 43,7 .960 24,4	1.250 31,8	.375 9,5
CW28B2000	2.414	61,3	1.851	47,0	2.309 58,6 .960 24,4	1.250 31,8	.375 9,5



cable snap

WITH VARIABLE DIAMETER END PORTS. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a .500 (12,7 mm) diameter. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .120" to .500" (3,2 to 12,7 mm). The grip-locking action prevents lateral movement along the cable or wire bundle.




PART No.	A	B	C	D	E	F (ref.)	IMPEDANCE IN OHMS
CV28B1642	.852	21,6	.885	22,5	.840 21,3 .282 7,2	.120 3,0	1.020 25,9
CV28B1805	1.040	26,4	.667	16,9	1.025 26,4 .340 8,6	.120 3,0	.820 20,8
CV28B1937	1.182	30,0	.780	19,8	1.188 30,2 .375 9,5	.120 3,0	.950 24,1
CV28B1984	1.218	30,9	.705	17,9	1.220 31,0 .500 12,7	.120 3,0	.940 23,9

Patent No. 5,003,278

cable snap

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a .520" (13.2mm) diameter. Snap closed around wire by clasping shut to position assembly. Cable tie-wraps may be threaded through the loops on each side.


Larger I.D.'s permit multiple cable turns for greater impedance effect. See page 6, figures 3 and 4.



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
CS28B0642	.923	23,4	.708	18,0	.780	19,8	.300	7,6	.143	3,6	.818	20,8	1.000	25,4	100 @ 100MHz
CS28B0805	1.095	27,8	.476	12,1	.965	24,5	.345	8,8	.100	2,5	1.003	25,5	.890	22,6	73 @ 100MHz
CS28B0937	1.222	31,0	.691	17,6	1.078	27,4	.425	10,8	.098	2,5	1.116	28,3	.930	23,6	117 @ 100MHz
CS28B0984	1.275	32,3	.547	13,9	1.145	29,1	.525	13,3	.095	2,4	1.183	30,0	.867	22,0	62 @ 100MHz

cable snap


WITH PRESS FIT MOUNT. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a .520" (13.2mm) diameter. After closing around wire and clasping shut, assembly snap-fits into mounting base. Base may be installed either before or after product assembly by pressing the integral spring tab fastener into a .187" (4.7mm) diameter hole.



PART No.	A	B	C	D	E	F	G	H	IMPEDANCE IN OHMS								
CF28B0642	.995	25,2	.708	18,0	.780	19,8	.300	7,6	.280	7,1	.183	4,6	1.000	25,4	240	6,1	100 @ 100MHz
CF28B0805	1.180	30,0	.476	12,1	.965	24,5	.345	8,8	.280	7,1	.183	4,6	.890	22,6	240	6,1	73 @ 100MHz
CF28B0937	1.293	32,8	.691	17,6	1.078	27,4	.425	10,8	.280	7,1	.183	4,6	.930	23,6	240	6,1	117 @ 100MHz
CF28B0984	1.360	34,5	.547	13,9	1.145	29,1	.525	13,3	.280	7,1	.183	4,6	.867	22,0	240	6,1	62 @ 100MHz

cable snap


WITH ADHESIVE MOUNTING BASE. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a .520" (13.2mm) diameter. After closing around wire and clasping shut, assembly is snap-fitted into its mounting base. May be installed in its intended location before or after product assembly simply by removing protective paper strip from base and pressing into place.



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
CA28B0642	.995	25,2	.708	18,0	.780	19,8	.300	7,6	.177	4,5	.818	20,8	1.000	25,4	100 @ 100MHz
CA28B0805	1.180	30,0	.476	12,1	.965	24,5	.345	8,8	.177	4,5	1.003	25,5	.890	22,6	73 @ 100MHz
CA28B0937	1.293	32,8	.691	17,6	1.078	27,4	.425	10,8	.177	4,5	1.116	28,3	.930	23,6	117 @ 100MHz
CA28B0984	1.360	34,5	.547	13,9	1.145	29,1	.525	13,3	.177	4,5	1.183	30,0	.867	22,0	62 @ 100MHz

cable snap


WITH SCREW MOUNT BASE. Ferrite assembly in fully enclosed nylon case; various sizes are functional with wires and cables up to a .520" (13.2mm) diameter. Mounting base is pre-installed at the intended location with a screw through the .125" (3.2mm) diameter hole in the bottom. After closing around wire and clasping shut, assembly snap-fits into base.



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
CW28B0642	.995	25,2	.708	18,0	.780	19,8	.300	7,6	.177	4,5	.818	20,8	1.000	25,4	100 @ 100MHz
CW28B0805	1.180	30,0	.476	12,1	.965	24,5	.345	8,8	.177	4,5	1.003	25,5	.890	22,6	73 @ 100MHz
CW28B0937	1.293	32,8	.691	17,6	1.078	27,4	.425	10,8	.177	4,5	1.116	28,3	.930	23,6	117 @ 100MHz
CW28B0984	1.360	34,5	.547	13,9	1.145	29,1	.525	13,3	.177	4,5	1.183	30,0	.867	22,0	62 @ 100MHz

cable clamp


Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25.4 mm) diameter. Holes are provided for screw mounting.



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS						
TC28B0550	.685	17,4	1.105	28,1	.685	17,4	.214	5,4	1.102	28,0	.195	5,0		281 @ 100MHz
TC28B0617	.740	18,8	1.125	28,6	.740	18,8	.276	7,0	1.215	30,9	.195	5,0		273 @ 100MHz
TC28B0642	.785	19,9	.630	16,0	.785	19,9	.320	8,1	1.335	33,9	.195	5,0		100 @ 100MHz
TC28B0805	.948	24,1	.500	12,7	.948	24,1	.404	10,3	1.498	38,0	.195	5,0		73 @ 100MHz
TC28B0937	1.127	28,6	.551	14,0	1.127	28,6	.449	11,4	1.677	42,6	.195	5,0		117 @ 100MHz
TC28B1123	1.320	33,5	1.125	28,6	1.320	33,5	.543	13,8	2.000	50,8	.195	5,0		220 @ 100MHz
TC28B0984	1.127	28,6	.500	12,7	1.127	28,6	.591	15,0	1.677	42,6	.195	5,0		62 @ 100MHz
TC28B1251	1.375	34,9	.875	22,2	1.375	34,9	.750	19,1	1.884	47,9	.195	5,0		138 @ 100MHz
TC28B1501	1.628	41,4	1.000	25,4	1.628	41,4	.750	19,1	2.150	55,5	.195	5,0		177 @ 100MHz
TC28B1500	1.628	41,4	1.000	25,4	1.628	41,4	1.000	25,4	2.150	55,5	.195	5,0		133 @ 100MHz
TC28B2000	2.125	54,0	1.500	38,1	2.125	54,0	1.000	25,4	2.860	72,6	.281	7,1		380 @ 100MHz

sleeve snap

Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .500" (12.7 mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position. Options include foam adhesive pad on bottom.

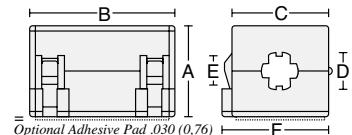

Available in standard colors gray (i.e., SS28B2031) and black (i.e., SS28B2031K)


Patent No. 5,764,125

PART No.	w/ Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS28B2027 AS28B2027		.420	10.7	.468	11.9	.468	11.9	105 @ 100MHz
SS28B2031 AS28B2031		.700	17.8	1.255	31.9	.675	17.1	200 @ 100MHz
SS28B2030 AS28B2030		.790	20.1	1.265	32.1	.770	19.6	200 @ 100MHz
SS28B2033 AS28B2033		.790	20.1	1.265	32.1	.770	19.6	200 @ 100MHz
SS28B2036 AS28B2036		1.155	29.3	1.250	31.8	1.125	28.6	230 @ 100MHz
SS28B2041 AS28B2041		.965	24.5	1.285	32.6	.930	23.6	238 @ 100MHz
SS28B2040 AS28B2040		1.155	29.3	1.250	31.8	1.125	28.6	230 @ 100MHz



sleeve snap for cable bundles

Box-shaped ferrite assembly for cable bundle diameters up to .730" (18.5mm) diameter. Allows single location for RFI suppression for multiple cables. Each circuit reacts separately with the suppression material without saturation. Alternatively, multiple turns of a single cable greatly increases impedance depending on frequency - see page 6, figures 3 and 4. Optional adhesive mount base.

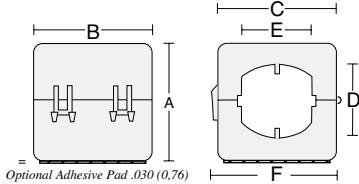

For optional variable diameter end port version with flexible spring flutes, see part numbers SS28B2044 and AS28B2044 in the photo below.


SS28B2035 available in standard colors gray (SS28B2035) and black (SS28B2035K)

PART No.	w/ Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS28B2035 AS28B2035		1.155	29.3	1.250	31.8	1.125	28.6	129 @ 100MHz
SS28B2043 AS28B2043		1.700	43.2	1.780	45.2	1.800	45.7	260 @ 100MHz



sleeve snap

WITH VARIABLE DIAMETER END PORTS. Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .730" (3.2 to 18.5 mm). Special mounting options include foam adhesive pad on bottom.

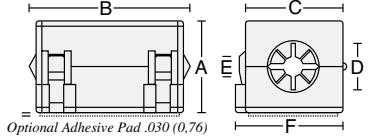

Available in standard colors gray (i.e., SS28B2034) and black (i.e., SS28B2034K)


Patent No. 5,003,278 and Patent No. 5,764,125

PART No.	w/ Adhesive	A	B (ref.)	C	D	E	F	IMPEDANCE IN OHMS
SS28B2034 AS28B2034		.585	14.9	1.250	31.8	.585	14.9	220 @ 100MHz
SS28B2037 AS28B2037		.790	20.1	1.450	36.8	.770	19.6	200 @ 100MHz
SS28B2042 AS28B2042		.965	24.5	1.480	37.6	.930	23.6	238 @ 100MHz
SS28B2032 AS28B2032		1.155	29.3	1.450	36.8	1.125	28.6	230 @ 100MHz
SS28B2044 AS28B2044		1.700	43.2	1.800	45.7	.790	20.1	260 @ 100MHz



internal locking snap

WITH SECURE INTERNAL LOCKING SYSTEM. Cannot be reopened after snapping closed into position. Ensures that suppressor cannot be removed. Grip-lock tabs at entry/exit ports prevent longitudinal slippage on a range of cable diameters from .275" to .300" (7.0 to 7.6mm). Standard colors are computer gray (PMS#413), computer beige (PMS#468), black and natural white. A cost-effective alternative to over-molding.

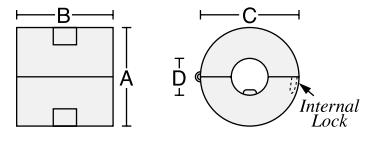


Patent Nos. 5,003,278 , 5,162,772 and 5,764,125

PART No.	A	B (ref.)	C	D	COLOR	IMPEDANCE IN OHMS
IL28B0642W	.780	19.8	.780	19.8	NATURAL WHITE	100 @ 100MHz
IL28B0642G	.780	19.8	.780	19.8	COMPUTER GRAY	100 @ 100MHz
IL28B0642B	.780	19.8	.780	19.8	COMPUTER BEIGE	100 @ 100MHz
IL28B0642K	.780	19.8	.780	19.8	BLACK	100 @ 100MHz



jelly bean snap

MINIATURE SIZE WITH INTERNAL LOCKING SYSTEM. Cannot be reopened after snapping closed into position. Ensures that suppressor cannot be removed. Grip-lock tabs at entry/exit ports prevent longitudinal slippage on a range of cable diameters from .060" to .120" (1.5 to 3.0mm).

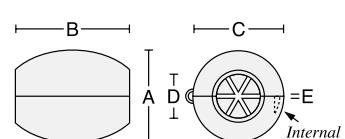

Excellent for tight spaces and low profile applications. A cost-effective alternative to "molded-in" suppressors, shrink tubing, tie wraps, taping and other secondary installation operations.

Available in standard color gray

Patent Nos. 5,003,278 , 5,162,772 and 5,764,125

PART No.	A	B	C	D	E	IMPEDANCE IN OHMS	
JB28B0010	.670	17.0	.820	20.8	.670	17.0	160 @ 100MHz





high impedance sleeve snap

WITH OPTIONAL MOUNTING BASES.


High impedance ferrite assembly for large scale applications containing high data rates and microprocessor harmonics/spurious signals well beyond the operating frequency. Excellent for telecommunications switching applications, local area networks (LANs) and distribution system integration. The basic version simply clamps into position around cables and wiring. May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

Other mounting options include a foam adhesive base, a button mount base sized for a .150" (3.8 mm) diameter hole, and a hardware mounting plate for screw or rivet attachment. The adhesive mount base and button mount base options are preassembled. The hardware mounting base may be press-fitted into the receptacle on the bottom of the case during installation in one of four positions at 90° increments for alternative assembly configurations.

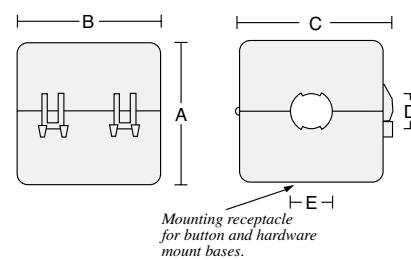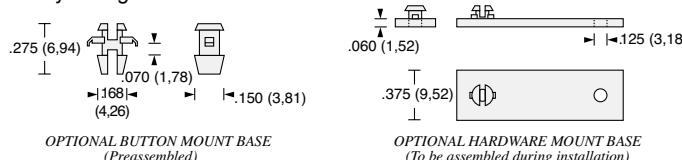

Mounting receptacle
for button and hardware
mount bases.

PART No.	Description	A	B	C	D	E	F	IMPEDANCE IN OHMS
HI28B2038	Basic	1.700	43,2	1.780	45,2	1.800	45,7	.428 10,9 .468 11,9 410 @ 100MHz
HF28B2038	Button Mount	1.700	43,2	1.780	45,2	1.800	45,7	.428 10,9 .468 11,9 410 @ 100MHz
HW28B2038	Hardware Mount	1.700	43,2	1.780	45,2	1.800	45,7	.428 10,9 .468 11,9 410 @ 100MHz
HA28B2038	Adhesive Mount	1.700	43,2	1.780	45,2	1.800	45,7	.428 10,9 .468 11,9 410 @ 100MHz





high impedance sleeve snap

WITH VARIABLE DIAMETER END PORTS AND OPTIONAL MOUNTING BASES.

High impedance ferrite assembly with exactly the same characteristics as the high impedance sleeve snaps above, except that the entry/exit end ports are surrounded with flexible spring flutes to grip a range of cable diameters from .250" to .435" (6,4 to 11,0mm). Excellent for telecommunications switching applications, local area networks (LANs) and distribution system integration. The basic version simply clamps into position around cables and wiring. May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

Other mounting options include a foam adhesive base, a button mount base sized for a .150" (3.8mm) diameter hole, and a hardware mounting plate for screw or rivet attachment. The adhesive mount base and button mount base options are preassembled. The hardware mounting base may be press-fitted into the receptacle on the bottom of the case during installation in one of four positions at 90° increments for alternative assembly configurations.

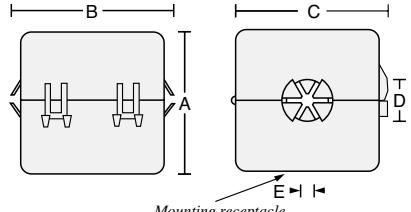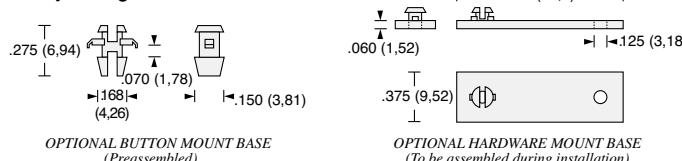

Mounting receptacle
for button and hardware
mount bases.

PART No.	Description	A	B (ref.)	C	D	E	F	IMPEDANCE IN OHMS
HI28B2039	Basic	1.700	43,2	2.000	50,8	1.800	45,7	.500 12,7 .140 3,55 410 @ 100MHz
HF28B2039	Button Mount	1.700	43,2	2.000	50,8	1.800	45,7	.500 12,7 .140 3,55 410 @ 100MHz
HW28B2039	Hardware Mount	1.700	43,2	2.000	50,8	1.800	45,7	.500 12,7 .140 3,55 410 @ 100MHz
HA28B2039	Adhesive Mount	1.700	43,2	2.000	50,8	1.800	45,7	.500 12,7 .140 3,55 410 @ 100MHz

Patent No. 5,003,278



USB cable sleeve snap


WITH VARIABLE DIAMETER END PORTS. Specifically sized to fit the range of common USB I/O cable diameters; variable diameter end ports allow for different types of cable insulation covers measuring .125" to .179" (3,0 - 4,5mm).

Simple snap-on installation. Available with optional adhesive pad on bottom, and in standard gray (PMS #413) and black colors.


For use with USB I/O USB 2.0 Electrical Test Specification, sections 7.0 and 8.0

Patent Nos. 5,003,278 and 5,764,125

PART No.	w/Adhesive	A	B	C	D	E	F	COLOR	IMPEDANCE IN OHMS
USB28B2034	USB28B2034A	.585	14,9	1.250	31,8	.585	14,9	.250	6,4 .120 3,0 .680 17,3 gray 220 @ 100MHz
USB28B2034K	USB28B2034KA	.585	14,9	1.250	31,8	.585	14,9	.250	6,4 .120 3,0 .680 17,3 black 220 @ 100MHz

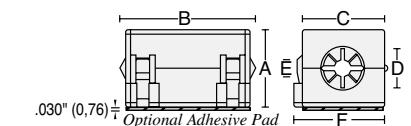

.030" (0,76)
Optional Adhesive Pad

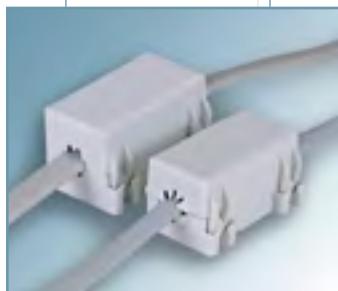

telecom cable snaps

WITH END PORTS FOR FLAT-OVAL CABLES. Box-shaped ferrite assembly in fully enclosed nylon case. Two sizes: one for 4-conductor and one for 6-conductor standard telecom flat-oval cable. Clamps around cable with appropriate pressure to maintain desired position.

Available in standard colors gray (i.e., SS28B2034) and black (i.e., SS28B2034K)
Patent Nos. 5,003,278 and 5,764,125

PART No.	Cable Size	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS28B2034	4 conductor	.585	14.9	1.250	31.8	.585	14.9	.250 6.4 .120 3.0 .680 17.3 220 @ 100MHz
SS28B2031	6 conductor	.700	17.8	1.255	31.9	.675	17.1	.230 5.8 .187 4.7 .768 19.5 200 @ 100MHz

very high impedance multi-turn sleeve snap

WITH SERPENTINE CABLE THREADING CAPABILITY.

By increasing the number of times the circuit passes through the ferrite core, the effective magnetic path is lengthened yielding a significant increase in impedance. See page 6, figures 3 and 4. The gain is equal to N^2 , the square of the number of turns, and depending on the circuit cable load and frequencies involved, much of the increase can be realized.

Cables may be "looped back through" as shown at left; or, "looped over the top" as shown at left (insert).

In an alternate configuration, separate cable circuits can be accommodated without saturation. Three styles permit different approaches:

The 1-hole allows two passes of a cable with a diameter up to .365" (9.3mm) or three passes of a cable with a diameter up to .243" (6.2mm).

The 2-hole allows two passes of a cable with a diameter up to .335" (8.5mm).


The 3-hole allows three passes of cable with a diameter up to .203" (5.8mm).

Each is available with an optional adhesive foam pad mounting base.

Available in standard colors gray (i.e., SS28B2035) and black (i.e., SS28B2035K)
Patent No. 5,003,278


PART No.	w/Adhesive	Description	A	B	C	D	E	IMPEDANCE IN OHMS ref.
SS28B2035	AS28B2035	1-hole	1.155	29.3	1.250	31.8	1.125	28.6 .780 19.8 1.230 31.2 1N=129* 2N=2 ² =4NΩ ref.
SS28B2035-2	AS28B2035-2	2-hole	1.155	29.3	1.250	31.8	1.125	28.6 .335 8.5 1.230 31.2 1N=270* 3N=3 ² =9NΩ ref.
SS28B2035-3	AS28B2035-3	3-hole	1.155	29.3	1.250	31.8	1.125	28.6 .203 5.2 1.230 31.2 1N=340* depending on circuit load and frequency

* @ 100 MHz

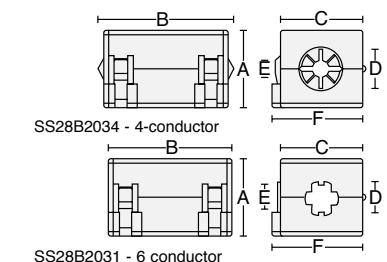

cable bundle clamp

WITH UNIVERSAL MOUNTING STRAP. For cable bundle diameters up to 1.00" (25.4mm). Allows single location for RFI suppression for multiple cables and wiring runs. Each circuit reacts independently with the suppression material without saturation. Adhesive mount base also provides a centered .203" (5.1mm) diameter hole for optional hardware attachment. Quick-release closure clip allows easy addition or removal of wires.

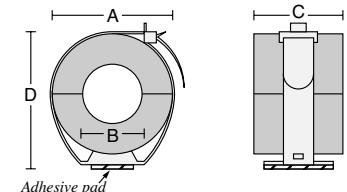

PART No.	w/ adhesive	A	B	C	D	IMPEDANCE IN OHMS
BC28B1251	BA28B1251	1.38	35.1	.75	19.1 .875 22.2	1.71 41.7 138 @ 100MHz
BC28B1501	BA28B1501	1.63	41.4	.75	19.1 1.000 25.4	1.96 48.0 177 @ 100MHz
BC28B1500	BA28B1500	1.63	41.4	1.00	25.4 1.000 25.4	1.96 48.0 133 @ 100MHz




pre-molded sleeve

WITH INTERNAL FRICTION GRIP Exterior PVC sheath pre-molded over ferrite suppressor. Assembles to cable prior to termination by threading in one end and out the other. Neutral gray standard color. Five sizes accommodate cable diameters from .200" to .430" (5.1 to 10.9mm). The preferred alternative to cable over-molding, shrink tubing, taping, tie wraps and other costly secondary installation operations. A drop of water in the I.D. during assembly will facilitate sliding into position.

Patent No. 5,200,730


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
PM28B3375	.192	4.8	.290	7.4	.465	11.8	2.01	51.1 .250 6.4 .960 24.4 .800 20.3 140 @ 100MHz
PM28B0625	.310	7.9	.400	10.2	.715	18.2	1.82	46.2 .250 6.4 .772 19.6 .800 20.3 120 @ 100MHz
PM28B1625	.310	7.9	.400	10.2	.715	18.2	2.38	60.5 .250 6.4 1.335 33.9 .800 20.3 225 @ 100MHz
PM28B0686	.375	9.5	.465	11.8	.776	19.7	2.38	60.5 .250 6.4 1.335 33.9 .800 20.3 196 @ 100MHz
PM28B0736	.430	10.9	.520	13.2	.776	19.7	2.38	60.5 .250 6.4 1.335 33.9 .800 20.3 176 @ 100MHz

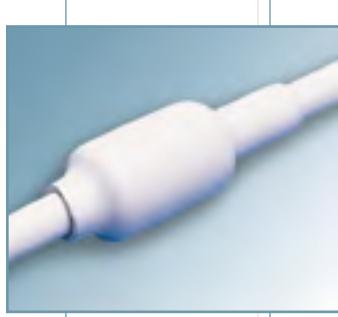

special purpose shielding bar

For situations where extremely high amounts of attenuation are needed and/or multiple passes through a traditional ferrite I.D. are not practical or sufficient. Simply wrap cable in a spiral around bar for optimum absorption.


- One individual size fits most applications
- For round or flat cables wound axially or attached longitudinally
- Attachment with cable ties or optional adhesive pad
- Sandwiching cable between two bars provides up to three times the impedance of a single bar depending on frequency



PART No.	w/ adhesive	A	B	C	IMPEDANCE IN OHMS
SB28B5630	SB28B5630A	.365	9.3	5.630	143.0 1.00 25.4 one pass: 500 @ 100MHz

miniature beads



Very small cylindrical suppressors for wire diameters below .25" (6.4mm). Handy for tight spaces, on-board suppression and general applications.



PART No.	A	B	C	IMPEDANCE IN OHMS		
28B0137-3	.500	12,7	.138	.3,5	.051 1,3	153 @ 100MHz
28B0138-7	.550	14,0	.138	.3,5	.034 0,9	234 @ 100MHz
28B0200-4	.900	22,9	.200	5,1	.062 1,6	318 @ 100MHz
28B0250-1	.625	15,9	.250	6,4	.125 3,2	133 @ 100MHz
28B0300-0	.200	5,1	.300	7,6	.069 1,8	93 @ 100MHz
28B0385-2	.650	16,5	.385	9,8	.038 0,9	452 @ 100MHz
28B0350-0	.625	15,9	.343	8,7	.170 4,3	102 @ 100MHz
28B0355-0	.354	9,0	.787	20,0	.187 4,7	138 @ 100MHz
28B0375-3	.750	19,1	.375	9,5	.192 4,8	140 @ 100MHz
28B0562-2	1.125	28,6	.562	14,2	.250 6,4	257 @ 100MHz

large beads


Sizes up to 1.0" I.D. (25.4 mm) for applications where there are large cable bundles or where great amounts of suppression are required.



PART No.	A	B	C	IMPEDANCE IN OHMS		
28B0563-0	.600	15,2	.562	14,2	.286 7,3	124 @ 100MHz
28B0625-0	.562	14,3	.625	15,9	.310 7,9	120 @ 100MHz
28B0625-1	1.125	28,6	.625	15,9	.310 7,9	225 @ 100MHz
28B0626-0	.625	15,9	.626	16,0	.133 3,4	300 @ 100MHz
28B0672-0	.672	17,1	1.000	25,4	.345 8,6	182 @ 100MHz
28B0672-1	1.000	25,4	.672	17,1	.345 8,6	182 @ 100MHz
28B0686-2	1.125	28,6	.686	17,4	.375 9,5	196 @ 100MHz
28B0735-0	1.125	28,6	.735	18,7	.400 10,2	188 @ 100MHz
28B0736-0	1.125	28,6	.736	18,7	.430 10,9	176 @ 100MHz
28B1020-1	1.125	28,6	1.020	25,9	.505 12,8	225 @ 100MHz
28B1102-1	1.000	25,4	1.102	27,9	.620 15,7	147 @ 100MHz
28B1250-2	1.000	25,4	1.250	31,8	.750 19,1	151 @ 100MHz
28B1387-1	1.000	25,4	1.387	35,2	.882 22,4	142 @ 100MHz
28B2000-3	2.000	50,8	2.000	50,8	1.000 25,4	381 @ 100MHz

toroids

Cables can many times be assembled through the larger center opening even with connectors and plugs installed beforehand. Multiple cable turns through the center yield greater suppression and the flexibility to fine-tune a circuit. Up to 1.400" (35,6mm) I.D.




PART No.	A	B	C	IMPEDANCE IN OHMS		
28B0870-0	.250	6,4	.870	22,1	.540 13,7	One Pass 25 @ 100MHz
28B0999-0	.500	12,7	1.000	25,4	.610 15,5	One Pass 83 @ 100MHz
28B1225-0	.612	15,5	1.225	31,1	.750 19,1	One Pass 97 @ 100MHz
28B1417-2	.500	12,7	1.417	36,0	.905 23,0	One Pass 89 @ 100MHz
28B2400-0	.500	12,7	2.400	61,0	1.400 35,6	One Pass 88 @ 100MHz

extra large toroids

WITH INSIDE DIAMETERS FROM 1.33" TO 6.66" (33.8 to 167 mm). Very large toroids for special purpose applications available in #28 material as shown below, and in #25 material.

Special order only: available by quotation. Please contact customer service with quantity information. Some items in stock.




PART No.	A	B	C	IMPEDANCE IN OHMS		
28B2275	.500	12,7	2.275	57,8	1.335 33,9	Per Application
28B2945	.500	12,7	2.945	74,8	1.775 45,1	Per Application
28B3170	.500	12,7	3.170	80,5	1.645 41,8	Per Application
28B4100	.500	12,7	4.100	104,1	2.650 67,3	Per Application
28B5945	.500	12,7	5.885	149,4	4.275 108,6	Per Application
28B5950	.500	12,7	5.885	149,4	3.675 93,3	Per Application
28B9210	1.000	25,4	9.210	233,9	6.665 169,3	Per Application

square tiles


For purpose-built electronic enclosures and architectural full room lining, these designs permit optimum absorption with minimum reflection. Very effective when used just in the corners of shielded rooms to dampen the effects of sharp corners.

Special order only: available by quotation. Please contact customer service with quantity information. Some items in stock.



PART No.	A	B	C	IMPEDANCE IN OHMS		
21T3350	.248	6,3	3.350	85,0	3.350 85,0	Per Application
21T3937	.248	6,3	3.937	100,0	3.937 100,0	Per Application
21T4335	.248	6,3	4.335	110,0	4.335 110,0	Per Application




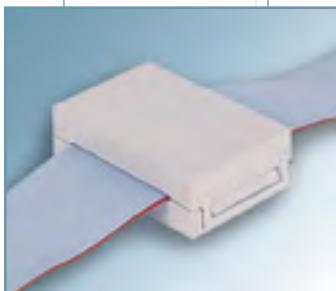


flat cable clamp

WITH FULL OUTER ENCLOSURE. Ferrite assembly in fully enclosed nylon case. Four sizes functional with flat cables up to 64-conductor widths. Internal grip-lock tabs apply pressure on cable to maintain mounting position.

May also be mounted with flat-head screws through the .120" (3,0mm) diameter holes on 1.25" (31,8mm) centers in the bottom by temporarily removing the lower ferrite half. Excellent for flex-circuits.

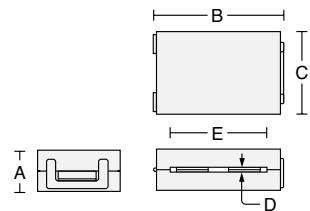


PART No.	A	B	C	D	E	IMPEDANCE IN OHMS	
RC28B1729	.670	17,0	2.03	51,6	1.312	33,3	.060 1,5 1.355 34,4
RC28B2480	.670	17,0	2.76	70,1	1.312	33,3	.060 1,5 2.047 52,0
RC28B3012	.670	17,0	3.26	82,8	1.312	33,3	.060 1,5 2.540 64,5
RC28B4340	.755	19,2	4.61	117,1	1.312	33,3	.104 2,6 3.240 82,3
							200 @ 100MHz 250 @ 100MHz 286 @ 100MHz 325 @ 100MHz

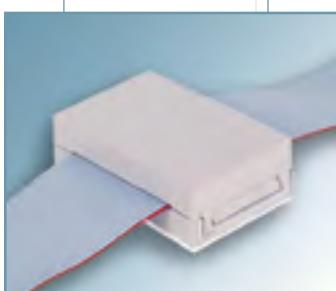

flat cable clamp

WITH FULL OUTER ENCLOSURE AND ADHESIVE MOUNT. Ferrite assembly in fully enclosed nylon case. Four sizes functional with flat cables up to 64-conductor widths. Internal grip-lock tabs apply pressure on cable to maintain mounting position.

Installs easily on any mounting surface by removing liner from foam adhesive base pad. Excellent for flex-circuits.

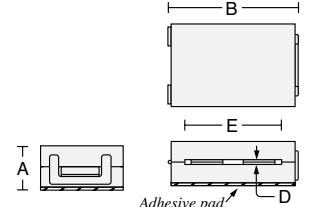

PART No.	A	B	C	D	E	IMPEDANCE IN OHMS	
RA28B1729	.700	17,8	2.03	51,6	1.312	33,3	.060 1,5 1.355 34,4
RA28B2480	.700	17,8	2.76	70,1	1.312	33,3	.060 1,5 2.047 52,0
RA28B3012	.700	17,8	3.26	82,8	1.312	33,3	.060 1,5 2.540 64,5
RA28B4340	.785	19,9	4.61	117,1	1.312	33,3	.104 2,6 3.240 82,3
							200 @ 100MHz 250 @ 100MHz 286 @ 100MHz 325 @ 100MHz




low profile flat cable clamp

SLIM-LINE FLAT CABLE CLAMP WITH CABLE GRIP OPENINGS. Ferrite pair snaps together into the lowest profile nylon enclosure available. Three sizes accommodate flat cables up to 40-conductors. Internal grip-lock tabs maintain mounting position. Mounts also with flat-head screws through the .120" (3,0mm) diameter holes in the bottom by temporarily removing the lower ferrite half.

Excellent for flex-circuits.

1. Place cable over lower half.
2. Align tabs and pockets on one end.
3. Rotate top half onto bottom clipping both sides in one smooth motion.

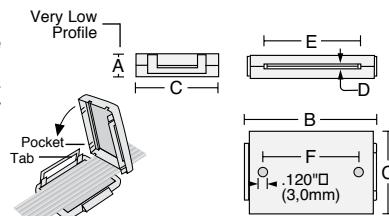

PART No.	A	B	C	D	E	F	IMPEDANCE IN OHMS
RC28B0765	.370	9,4	1.065	27,1	1.312	33,3	.038 0,97 .547 13,9 .250 6,4
RC28B1265	.370	9,4	1.560	39,6	1.312	33,3	.038 0,97 1.047 26,6 .750 19,1
RC28B2265	.370	9,4	2.560	65,0	1.312	33,3	.038 0,97 2.047 52,0 1.750 44,5
							142 @ 100MHz 148 @ 100MHz 154 @ 100MHz




low profile flat cable clamp

SLIM-LINE FLAT CABLE CLAMP WITH CABLE GRIP OPENINGS AND ADHESIVE MOUNT. Ferrite pair snaps together into the lowest profile nylon enclosure available. Three sizes accommodate flat cables up to 40-conductors. Internal grip-lock tabs apply pressure on cable to maintain mounting position. Installs easily on any mounting surface by removing liner from foam adhesive base pad.

Excellent for flex-circuits.

1. Place cable over lower half.
2. Align tabs and pockets on one end.
3. Rotate top half onto bottom clipping both sides in one smooth motion.

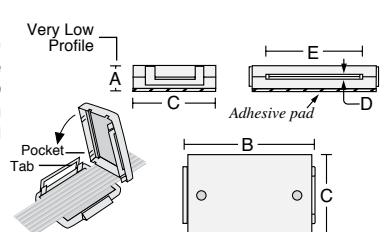


PART No.	A	B	C	D	E	IMPEDANCE IN OHMS	
RA28B0765	.400	10,2	1.065	27,1	1.312	33,3	.038 0,97 .547 13,9
RA28B1265	.400	10,2	1.560	39,6	1.312	33,3	.038 0,97 1.047 26,6
RA28B2265	.400	10,2	2.560	65,0	1.312	33,3	.038 0,97 2.047 52,0
							142 @ 100MHz 148 @ 100MHz 154 @ 100MHz



flat cable clamp


WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Nine sizes accommodate all flat cables up to 50-conductor width.

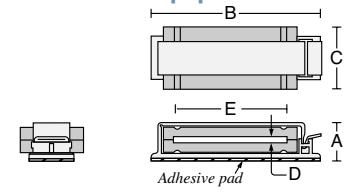

PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS					
FA28B0071	FC28B0071	.520	13,2	1.244	31,6	.750	19,1	.060	1,5	.510	13,0	49 @ 100 MHz
FA28B0121	FC28B0121	.520	13,2	1.790	45,5	.750	19,1	.060	1,5	1.010	25,7	97 @ 100 MHz
FA28B1240	FC28B1240	.520	13,2	1.790	45,5	1.125	28,6	.040	1,0	1.020	25,9	250 @ 100MHz
FA28B1265		.520	13,2	1.790	45,5	1.125	28,6	.038	1,0	1.047	26,6	148 @ 100MHz
FA28B1729	FC28B1729	.800	20,3	2.430	61,7	1.125	28,6	.060	1,5	1.355	34,4	200 @ 100 MHz
FA28B2265		.520	13,2	3.000	80,8	1.125	28,6	.038	1,0	2.047	52,0	154 @ 100 MHz
FA28B2375	FC28B2375	.800	20,3	3.180	80,8	1.050	26,7	.060	1,5	1.720	43,7	195 @ 100 MHz
FA28B2480	FC28B2480	.800	20,3	3.180	80,8	1.125	28,6	.060	1,5	2.047	52,0	250 @ 100 MHz
FA28B3012	FC28B3012	.800	20,3	3.700	94,0	1.125	28,6	.060	1,5	2.540	64,5	286 @ 100 MHz

flat cable clamp


WITH SINGLE PRESS FIT MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Seven sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS				
FF28B0121	.475	12,7	1.790	45,5	.750	19,1	.325	.060	1,5	.1010	25,7	97 @ 100MHz
FF28B1240	.475	12,7	1.790	45,5	1.125	28,6	.325	.040	1,0	1.020	25,9	250 @ 100MHz
FF28B1265	.475	12,7	1.790	45,5	1.125	28,6	.325	.038	1,0	1.047	26,6	148 @ 100MHz
FF28B1729	.800	20,3	2.430	61,7	1.125	28,6	.280	.183	4,6	1.355	34,4	200 @ 100MHz
FF28B2375	.800	20,3	3.180	80,8	1.050	26,7	.280	.183	4,6	1.720	43,7	195 @ 100MHz
FF28B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	.183	4,6	2.047	52,0	250 @ 100MHz
FF28B3012	.800	20,3	3.700	94,0	1.125	28,6	.280	.183	4,6	2.540	64,5	286 @ 100MHz

flat cable clamp


WITH DUAL PRESS FIT MOUNTS. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. Three sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.

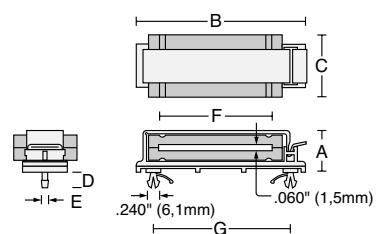

PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS						
FD28B2375	.800	20,3	3.180	80,8	1.050	26,7	.280	.183	4,6	1.720	43,7	2,550	64,8	195 @ 100MHz
FD28B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	.183	4,6	2.047	52,0	2,550	64,8	250 @ 100MHz
FD28B3012	.800	20,3	3.700	94,0	1.125	28,6	.280	.183	4,6	2.540	64,5	2,550	64,8	286 @ 100MHz

flat cable clamp


WITH SPLIT END CAPS, HARDWARE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps. Mounts using screws, push-rivets, or other hardware. Ten sizes accommodate flat cables up to 64-conductor width.

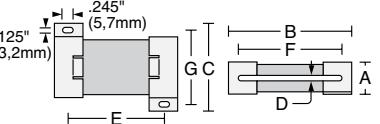

PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
SE28B0071	.375	9,5	.815	20,7	1.190	30,2	.060	1,5	.470	11,9	.510	13,0	.900	22,9	49 @ 100MHz
SE28B0121	.375	9,5	1.315	33,4	1.190	30,2	.060	1,5	1.000	25,4	1.000	25,7	.900	22,9	97 @ 100MHz
SE28B0146	.375	9,5	1.565	39,8	1.190	30,2	.060	1,5	1.250	31,8	1.260	32,0	.900	22,9	120 @ 100MHz
SE28B0221	.375	9,5	2.315	58,8	1.190	30,2	.060	1,5	2.000	50,8	2.010	51,1	.900	22,9	176 @ 100MHz
SE28B1240	.625	15,9	1.365	34,7	1.829	46,5	.040	1,0	.725	18,4	1.020	25,9	1.500	38,1	250 @ 100MHz
SE28B1729	.625	15,9	1.849	47,0	1.829	46,5	.060	1,5	1.300	33,0	1.355	34,4	1.500	38,1	200 @ 100MHz
SE28B2480	.625	15,9	2.570	65,3	1.829	46,5	.060	1,5	2.000	50,8	2.047	52,0	1.500	38,1	250 @ 100MHz
SE28B3012	.625	15,9	3.125	79,4	1.829	46,5	.060	1,5	2.550	64,8	2.540	64,5	1.500	38,1	286 @ 100MHz
SE28B3500	.625	15,9	3.620	91,9	1.829	46,5	.060	1,5	3.020	76,7	3.000	76,2	1.500	38,1	290 @ 100MHz
SE28B4340	.625	15,9	4.460	113,3	1.829	46,5	.104	2,6	3.875	98,4	3.240	82,3	1.500	38,1	325 @ 100MHz

flat cable clamp

WITH SPLIT END CAPS, ADHESIVE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. Ten sizes accommodate flat cables up to 64-conductor width.

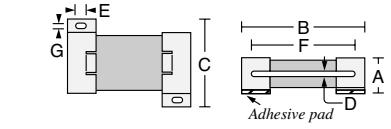


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
SA28B0071	.405	10,3	.815	20,7	1.190	30,2	.060	1,5	.245	5,7	.510	13,0	.125	3,2	49 @ 100MHz
SA28B0121	.405	10,3	1.315	33,4	1.190	30,2	.060	1,5	.245	5,7	1.010	25,7	.125	3,2	97 @ 100MHz
SA28B0146	.405	10,3	1.565	39,8	1.190	30,2	.060	1,5	.245	5,7	1.260	32,0	.125	3,2	120 @ 100MHz
SA28B0221	.405	10,3	2.315	58,8	1.190	30,2	.060	1,5	.245	5,7	2.010	51,1	.125	3,2	176 @ 100MHz
SA28B1240	.655	16,6	1.365	34,7	1.829	46,5	.040	1,0	.245	5,7	1.020	25,9	.125	3,2	250 @ 100MHz
SA28B1729	.655	16,6	1.849	47,0	1.829	46,5	.060	1,5	.245	5,7	1.355	34,4	.125	3,2	200 @ 100MHz
SA28B2480	.655	16,6	2.570	65,3	1.829	46,5	.060	1,5	.245	5,7	2.047	52,0	.125	3,2	250 @ 100MHz
SA28B3012	.655	16,6	3.125	79,4	1.829	46,5	.060	1,5	.245	5,7	2.540	64,5	.125	3,2	286 @ 100MHz
SA28B3500	.655	16,6	3.620	91,9	1.829	46,5	.060	1,5	.245	5,7	3.000	76,2	.125	3,2	290 @ 100MHz
SA28B4340	.655	16,6	4.460	113,3	1.829	46,5	.104	2,6	.245	5,7	3.240	82,3	.125	3,2	325 @ 100MHz



high impedance flat cable clamp

WITH ADHESIVE MOUNT. Extra wide ferrite assembly greatly increases effective magnetic path. Bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Three sizes accommodate all flat cables up to 50-conductor width.




PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS					
FA28B1785	FC28B1785	.800	20,3	2.430	61,7	1.500	38,1	.060	1,5	1.355	34,4	260 @ 100MHz
FA28B2500	FC28B2500	.800	20,3	3.180	80,8	1.500	38,1	.060	1,5	2.047	52,0	325 @ 100MHz
FA28B3000	FC28B3000	.800	20,3	3.700	94,0	1.500	38,1	.060	1,5	2.540	64,5	370 @ 100MHz



high impedance flat cable clamp

WITH SINGLE PRESS FIT MOUNT. Extra wide ferrite assembly greatly increases effective magnetic path. Bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Three sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.

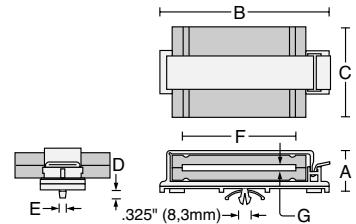


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS				
FF28B1785	.800	20,3	2.430	61,7	1.500	38,1	.280	.060	1,5	1.355	34,4	260 @ 100MHz
FF28B2500	.800	20,3	3.180	80,8	1.500	38,1	.280	.060	1,5	2.047	52,0	325 @ 100MHz
FF28B3000	.800	20,3	3.700	94,0	1.500	38,1	.280	.060	1,5	2.540	64,5	370 @ 100MHz



high impedance flat cable clamp

WITH DUAL PRESS FIT MOUNTS. Extra wide ferrite assembly greatly increases effective magnetic path. Bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. Two sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.

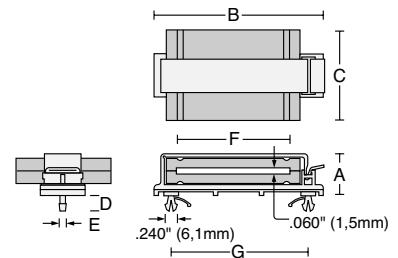


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS						
FD28B2500	.800	20,3	3.180	80,8	1.500	38,1	.280	.060	1,5	2.047	52,0	2.550	64,8	325 @ 100MHz
FD28B3000	.800	20,3	3.700	94,0	1.500	38,1	.280	.060	1,5	1.355	34,4	2.540	64,5	370 @ 100MHz



high impedance flat cable sleeve clamp

WITH 15-CONDUCTOR FLAT CABLE OPENING. Uniquely accommodates flat cables up to 15-conductors through the horizontal opening with substantially more impedance than standard flat clamps used typically for this type of application.

Available with optional adhesive foam mounting pad base.

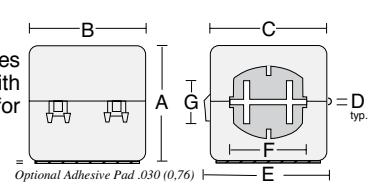

Available in standard colors gray (SS28B2035-15) and black (SS28B2035-15K)


PART No.	w/ Adhesive Pad	A	B	C	D	E	F	IMPEDANCE IN OHMS						
SS28B2035-15	AS28B2035-15	1.16	29,4	1.25	31,8	1.125	28,6	.038	1,1	1.230	35,1	.755	21,6	270 @ 100MHz

Patent No. 5,003,278




low profile solids

ULTRA-THIN. Excellent for thin flex circuits and SCSI 2 flat cables on .025" (0,64mm) centers. Six sizes accommodate cable widths up to 2.00" (50,8 mm).

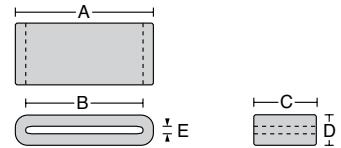


PART No.	A	B	C	D	E	IMPEDANCE IN OHMS					
28R0760	.760	19,3	.510	13,0	1.125	28,6	.300	7,6	.051	1,3	150 @ 100MHz
28R1127	1.125	28,6	.925	23,5	1.220	31,0	.303	7,7	.066	1,7	188 @ 100MHz
28R1127-2	1.125	28,6	.925	23,5	.980	24,9	.303	7,7	.066	1,7	151 @ 100MHz
28R1260	1.260	32,0	1.010	25,7	1.125	28,6	.300	7,6	.051	1,3	237 @ 100MHz
28R1575	1.575	40,0	1.325	33,7	1.125	28,6	.300	7,6	.051	1,3	160 @ 100MHz
28R1953	1.953	49,6	1.732	44,0	.472	12,0	.288	7,3	.059	1,5	109 @ 100MHz
28R2300	2.300	58,4	2.050	52,1	1.125	28,6	.300	7,6	.051	1,3	245 @ 100MHz

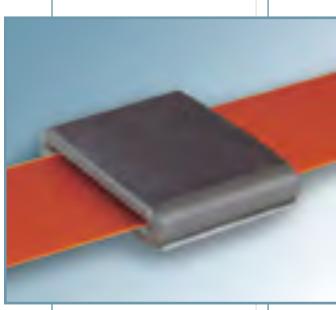

low profile solids

ULTRA-THIN WITH SHOCK MOUNT ADHESIVE FOAM BASE. Excellent for thin flex circuits and SCSI 2 flat cables on .025" (0,64mm) centers. Six sizes accommodate cable widths up to 2.00" (50,8mm). High tack adhesive mounting pad secures to almost any surface. Can be stacked one on top of another.

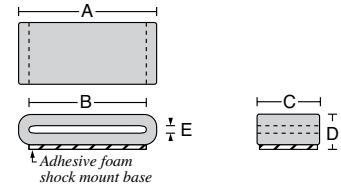


PART No.	A	B	C	D	E	IMPEDANCE IN OHMS					
SM28R0760	.760	19,3	.510	13,0	1.125	28,6	.330	8,4	.051	1,3	150 @ 100MHz
SM28R1127	1.125	28,6	.925	23,5	1.220	31,0	.333	8,5	.066	1,7	188 @ 100MHz
SM28R1127-2	1.125	28,6	.925	23,5	.980	24,9	.303	8,5	.066	1,7	151 @ 100MHz
SM28R1260	1.260	32,0	1.010	25,7	1.125	28,6	.330	8,4	.051	1,3	237 @ 100MHz
SM28R1575	1.575	40,0	1.325	33,7	1.125	28,6	.330	8,4	.051	1,3	160 @ 100MHz
SM28R1953	1.953	49,6	1.732	44,0	.472	12,0	.318	8,1	.059	1,5	109 @ 100MHz
SM28R2300	2.300	58,4	2.050	52,1	1.125	28,6	.330	8,4	.051	1,3	245 @ 100MHz



flex-circuit low profile solids


ULTRA-THIN WITH OPTIONAL ADHESIVE FOAM BASE. Solid thin profile ferrite suppressors. Excellent for flex-circuits and tight spaces. Various sizes can accommodate circuits up to 1.25" (31,8mm).

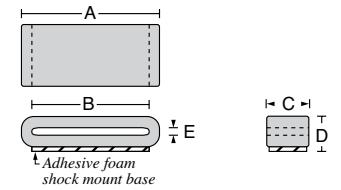


PART No.	w/Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS					
FX28R0984-0	FX28R0984-0A	.984	25,0	.709	18,0	.945	24,0	.303	7,7	.035	0,9	220 @ 100MHz
FX28R0984-2	FX28R0984-2A	.984	25,0	.709	18,0	.630	16,0	.303	7,7	.035	0,9	170 @ 100MHz
FX28R1261-2	FX28R1261-2A	1.260	32,0	.988	25,1	.382	9,7	.303	7,7	.035	0,9	135 @ 100MHz
FX28R1450-1	FX28R1450-1A	1.450	36,8	1.165	29,6	.394	10,0	.303	7,7	.035	0,9	130 @ 100MHz
FX28R1457-4	FX28R1457-4A	1.457	37,0	1.299	33,0	.530	13,5	.177	4,5	.020	0,5	140 @ 100MHz


rectangular solids

WITH OPTIONAL SHOCK-MOUNT ADHESIVE FOAM BASE. Solid ferrite suppressors configured to accept flat ribbon cables. Must be installed prior to termination of the cable. High tack adhesive mounting pad secures the cable routing to a fixed point on almost any surface. Can be stacked one on top of another. A variety of designs accommodate special installation and insertion loss requirements.

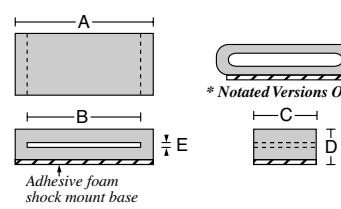

PART No.	w/Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS					
28B0785	SM28B0785	.785	19,9	.515	13,1	1.100	27,9	.445	11,3	.145	3,7	170 @ 100MHz
28R1531*	SM28R1531*	1.530	38,9	1.045	26,5	1.125	28,6	1.055	26,8	.510	13,0	196 @ 100MHz
28B1775	SM28B1775	1.775	45,1	1.355	34,4	1.125	28,6	.520	13,2	.060	1,52	293 @ 100MHz
28B1779	SM28B1779	2.500	63,5	2.050	52,1	1.125	28,6	.530	13,5	.066	1,68	295 @ 100MHz
28B1101	SM28B1101	1.101	28,0	.902	22,9	.577	14,7	.450	8,5	.059	1,5	133 @ 100MHz
28B1775-1	SM28B1775-1	1.775	45,1	1.355	34,4	.500	12,7	.520	13,2	.060	1,5	151 @ 100MHz
28B2170-1	SM28B2170-1	2.170	55,1	1.720	43,7	.500	12,7	.530	13,5	.050	1,3	176 @ 100MHz
28B2002	SM28B2002	2.394	60,8	2.000	50,8	.610	15,5	.724	18,4	.300	7,6	109 @ 100MHz
28B3149	SM28B3149	3.149	80,0	2.700	68,6	.500	12,7	.502	12,8	.075	1,9	93 @ 100MHz

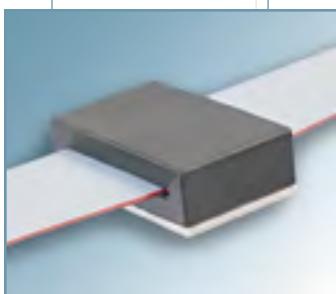

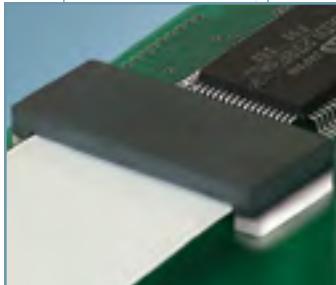


saddle beads®

HALF-TOROIDS AND HALF-BEADS WITH OR WITHOUT ADHESIVE MOUNT BASE.

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.


U-shaped with central opening extending directly to the outside radius for easy mounting. By simply straddling a cable or PCB component, a significant amount of magnetic coupling occurs, between 30%-40% of the impedance of our fully circumferential styles, depending on configuration.

Excellent for quick, economical applications, tight spaces, electronic enclosure cable routing, and especially direct mounting over leaded or surface mount printed circuit board components. Attaches to any surface with optional adhesive foam base or common electronic adhesives.

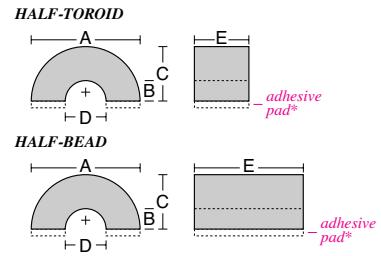

* Optional adhesive mount base .030" (0.7mm) thick
+ Point of measured impedance (see impedance below)

PART No. without Adhesive Mount	PART No. with Adhesive Mount	A	B	C	D	E	TYPE	IMPEDANCE IN OHMS (ref.)			
SB28B0550	SB28B0550AB	.550	14,0	.107	2,7	.275	7,0	.214	5,4	1.105	28,0
SB28B0617	SB28B0617AB	.617	15,7	.138	3,5	.308	7,8	.276	7,0	1.125	28,6
SB28B0642	SB28B0642AB	.642	16,3	.150	3,8	.341	8,7	.320	8,1	.630	16,0
SB28B0805	SB28B0805AB	.805	20,4	.172	4,3	.402	10,2	.404	10,3	.394	10,0
SB28B0937	SB28B0937AB	.937	23,8	.224	5,7	.468	11,9	.449	11,4	.551	14,0
SB28B1123	SB28B1123AB	1.123	28,5	.271	6,9	.561	14,2	.543	13,8	1.125	28,6
SB28B0984	SB28B0984AB	.984	25,0	.295	7,5	.492	12,5	.591	15,0	.472	12,0
SB28B1251	SB28B1251AB	1.251	31,8	.375	9,5	.625	15,9	.750	19,1	.875	22,2
SB28B1501	SB28B1501AB	1.500	38,1	.375	9,5	.750	19,1	.750	19,1	1.000	25,4
SB28B1500	SB28B1500AB	1.500	38,1	.500	12,7	.750	19,1	1.000	25,4	1.000	25,4
SB28B2000	SB28B2000AB	2.000	50,0	.500	12,7	1.000	25,4	1.000	25,4	1.500	38,1

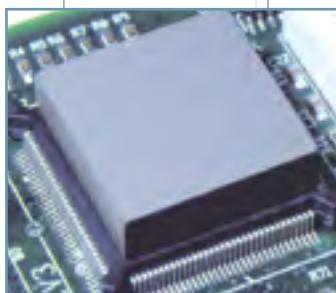



saddle beads®

HALF-SLEEVES AND RECTANGULAR PLATES WITH OR WITHOUT ADHESIVE MOUNT BASE.

Absorbs RFI right at the source before resonance and harmonics effects are transferred to neighboring components.

Rectangular sleeves or plate shapes with central opening extending outward to easily straddle a cable or PCB component, introducing a significant amount of magnetic coupling and impedance. Between 30% to 40% of the impedance of our fully enclosed styles, depending on configuration.

When affixed with thermally conductive adhesive to flat components, such as semiconductors, heat sink thermal dissipation occurs, increasing component efficiency. Attaches to any surface with optional adhesive foam base or common electronic adhesives.



* Optional adhesive bottom mount base .030" (0.7mm)
** Optional adhesive top mount base .030" (0.7mm)
+ Point of measured impedance (see impedance below)

PART No. without Adhesive Mount	PART No. with top* Adhesive Mount	PART No. with bottom* Adhesive Mount	A	B	C	D	E	TYPE	IMPEDANCE IN OHMS (ref.)			
SB28B2027	SB28B2027AT	SB28B2027AB	.296	7,5	.048	1,2	.148	3,8	.096	2,4	.297	7,5
SB28B2034	SB28B2034AT	SB28B2034AB	.445	11,3	.110	2,8	.200	5,1	.220	5,6	1.000	25,4
SB28B2031	SB28B2031AT	SB28B2031AB	.536	13,6	.125	3,2	.270	6,9	.250	6,4	1.100	27,9
SB28B2030	SB28B2030AT	SB28B2030AB	.638	16,2	.176	4,5	.319	8,1	.352	9,0	1.100	27,9
SB28B2041	SB28B2041AT	SB28B2041AB	.800	20,3	.200	5,1	.400	10,2	.400	10,2	1.100	27,9
SB28B2032	SB28B2032AT	SB28B2032AB	.965	24,5	.256	6,5	.492	12,5	.512	13,0	1.050	26,7
SB28B2035	SB28B2035AT	SB28B2035AB	.965	24,5	.365	9,3	.492	12,5	.730	18,5	1.050	26,7
SB28B2039	SB28B2039AT	SB28B2039AB	1.400	35,5	.255	6,5	.700	17,8	.510	13,0	1.500	38,1
SB28B2043	SB28B2043AT	SB28B2043AB	1.400	35,5	.375	9,5	.700	17,8	.750	17,8	1.500	38,1
SB28B0010	SB28B0010AT	SB28B0010AB	.325	8,3	.062	1,6	.163	4,1	.125	3,2	.600	15,2
SB28B0071	SB28B0071AT	SB28B0071AB	.710	18,0	.030	0,7	.130	3,3	.510	13,0	.500	12,7
SB28B0121	SB28B0121AT	SB28B0121AB	1.210	30,7	.030	0,7	.130	3,3	1.010	25,7	.500	12,7
SB28B0146	SB28B0146AT	SB28B0146AB	1.460	37,1	.030	0,7	.130	3,3	1.260	32,0	.500	12,7
SB28B0221	SB28B0221AT	SB28B0221AB	2.210	56,1	.030	0,7	.130	3,3	2.010	51,1	.500	12,7
SB28B1729	SB28B1729AT	SB28B1729AB	1.729	43,9	.030	0,7	.250	6,4	1.355	34,4	1.125	28,6
SB28B2375	SB28B2375AT	SB28B2375AB	2.350	59,7	.030	0,7	.250	6,4	1.720	43,7	1.000	25,4
SB28B2480	SB28B2480AT	SB28B2480AB	2.500	63,5	.030	0,7	.250	6,4	2.047	52,0	1.125	28,6
SB28B3012	SB28B3012AT	SB28B3012AB	3.000	76,2	.030	0,7	.250	6,4	2.540	64,5	1.125	28,6
SB28B3500	SB28B3500AT	SB28B3500AB	3.500	86,5	.030	0,7	.250	6,4	3.000	76,2	1.125	28,6
SB28B4340	SB28B4340AT	SB28B4340AB	4.340	110,2	.052	1,3	.250	6,4	3.240	82,3	1.125	28,6
SB28B0500	N/A	SB28B0500AB	.500	12,7	N/A		.250	6,4*	N/A	.500	12,7	
SB28B0500-1	N/A	SB28B0500-1AB	.500	12,7	N/A		.100	2,5	N/A	.500	12,7	
SB28B0875	N/A	SB28B0875AB	.875	22,2	N/A		.250	6,4*	N/A	.875	22,2	
SB28B0875-1	N/A	SB28B0875-1AB	.875	22,2	N/A		.100	2,5	N/A	.875	22,2	
SB28B1055	N/A	SB28B1055AB	1.055	26,8	N/A		.250	6,4*	N/A	1.055	26,8	
SB28B1055-1	N/A	SB28B1055-1AB	1.055	26,8	N/A		.100	2,5	N/A	1.055	26,8	
SB28B2100	N/A	SB28B2100AB	2.100	53,3	N/A		.250	6,4*	N/A	2.100	53,3	
SB28B2100-1	N/A	SB28B2100-1AB	2.100	53,3	N/A		.100	2,5	N/A	2.100	53,3	


bus bar ferrites – universal wideband up to 1GHz



rectangular solid bus bar ferrite

EXTRA WIDE OPENING WITH OPTIONAL ADHESIVE MOUNTING.

Excellent for bus bar thicknesses up to .500" (12,7mm). Three sizes accommodate bus bar widths up to 2.000" (50,8mm). Optional high tack adhesive mounting secures to almost any surface. Can be stacked one upon the other.

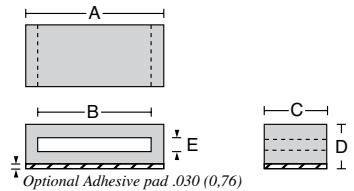


PART No.	w/ adhesive	A	B	C	D	E	IMPEDANCE IN OHMS					
28B0785	SM28B0785	.785	19,9	.515	13,1	1.100	27,9	.415	10,5	.145	3,7	170 @ 100MHz
28R1531	SM28R1531	1.530	38,9	1.045	26,5	1.125	28,6	1.025	26,0	.510	13,0	196 @ 100MHz
28B2002	SM28B2002	2.394	60,8	2.000	50,8	.610	15,5	.694	17,6	.300	7,6	109 @ 100MHz



rectangular split ferrite bus bar clamp

EXTRA WIDE OPENING WITH ADHESIVE FOAM MOUNTING BASE.

All-purpose series of two sizes accommodate all bus bar widths up to 2.45" (62,2mm) and thicknesses up to .285" (6,5mm). Installs easily by peeling protective paper liner from base.




PART No.	A	B	C	D	E	IMPEDANCE IN OHMS					
FA28B2940	1.040	26,4	3.700	94,0	1.125	28,6	.290	7,3	2.500	63,5	160 @ 100MHz



rectangular split ferrite bus bar clamp

EXTRA WIDE OPENING WITH PRESS-FIT MOUNTING BASE.

For bus bar widths up to 2.45" (62,2mm) and thicknesses up to .285" (6,5mm). Installs easily by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Accommodates panel thicknesses up to .150" (3,81mm).

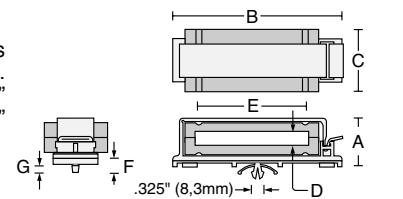


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS							
FF28B2440	1.040	26,4	3.180	80,8	1.125	28,6	.290	7,3	2.000	50,8	.390	9,9	.200	5,1	180 @ 100MHz
FF28B2940	1.040	26,4	3.700	94,0	1.125	28,6	.290	7,3	2.500	63,5	.390	9,9	.200	5,1	160 @ 100MHz



special purpose shielding bar

For situations where extremely high amounts of attenuation are needed. Can be strapped longitudinally onto bus bars with common cable tie-wraps; or, potting compounds can be used. Sandwiching the bus bar between two shielding bars will dramatically increase impedance up to three times the effect of a single bar depending on frequencies involved. Optional adhesive pad facilitates mounting.



* Optional Adhesive pad .030 (0,76)

PART No.	w/ adhesive	A	B	C	IMPEDANCE IN OHMS			
SB28B5630	SB28B5630A	.365	9,3	5.630	143,0	1.00	25,4	one pass: 500 @ 100MHz



universal-fit clamps and sleeves


STANDARD CATALOG CABLE FERRITE ASSEMBLIES. Any of the round or flat cable clamps shown elsewhere in this catalog make a perfectly good solution for many bus bar geometries and their mounting requirements. A properly placed suppressor will attenuate unwanted high frequency signals, thus negating the conductor and/or antenna-like radiating effects at specific frequencies while not disturbing the power distribution characteristics.

cable snap

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 2.0" (50,8mm) diameter. Snap closed around wire by clasping shut to position assembly.

May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 32 and 33 for impedance curve characteristics.

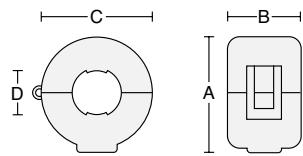


PART No.	A	B	C	D	IMPEDANCE IN OHMS
CS33B1805	1.040	26,4	.667	16,9	1.025 26,4 .340 8,6
CS33B1984	1.218	30,9	.705	17,9	1.220 31,0 .525 13,3
CS33B2000	2.350	59,7	1.851	47,0	2.309 58,6 .960 24,4
CS33B4000	4.500	114,2	1.851	47,0	4.687 110,0 1.960 49,8
					see page 31 for more details
					22 @ 30MHz
					20 @ 30MHz
					210 @ 30MHz
					140 @ 30MHz

sleeve snap

Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .500" (12,7mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position. Options include foam adhesive pad on bottom.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 32 and 33 for impedance curve characteristics.

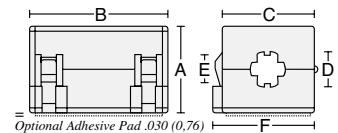


Patent No. 5,764,125

PART No.	w/ Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS33B2030 AS33B2030		.790	20,1	1.265	32,1	.770	19,6	.270 6,9 .220 5,6 .885 22,5
SS33B2033 AS33B2033		.790	20,1	1.265	32,1	.770	19,6	.350 8,8 .290 7,4 .885 22,5
SS33B2036 AS33B2036		1.155	29,3	1.250	31,8	1.125	28,6	.415 10,5 .350 8,9 1.230 31,2
SS33B2040 AS33B2040		1.155	29,3	1.250	31,8	1.125	28,6	.550 14,0 .480 12,2 1.230 31,2
								23 @ 30MHz
								23 @ 30MHz
								27 @ 30MHz
								27 @ 30MHz

sleeve snap

WITH VARIABLE DIAMETER END PORTS. Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .500" (3,2 to 12,7 mm). Special mounting options include foam adhesive pad on bottom.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 32 and 33 for impedance curve characteristics.

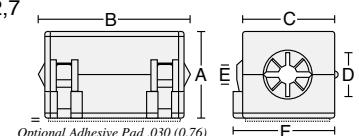


Patent No. 5,003,278 and Patent No. 5,764,125

PART No.	w/ Adhesive	A	B (ref.)	C	D	E	F	IMPEDANCE IN OHMS
SS33B2037 AS33B2037		.790	20,1	1.450	36,8	.770	19,6	.350 8,8 .200 5,1 .885 22,5
SS33B2032 AS33B2032		1.155	29,3	1.450	36,8	1.125	28,6	.500 12,7 .200 5,1 1.230 31,2
								23 @ 30 MHz
								27 @ 30 MHz

sleeve snap for cable bundles

Box-shaped ferrite assembly for cable bundle diameters up to .730" (18,5mm) diameter. Allows single location for RFI suppression for multiple cables. Each circuit reacts separately with the suppression material without saturation. Alternatively, multiple turns of a single cable greatly increases impedance depending on frequency - see page 6, figures 3 and 4. Optional adhesive mount base.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 32 and 33 for impedance curve characteristics.




Available in standard colors gray (i.e., SS33B2035) and black (i.e., SS33B2035K)

PART No.	w/ Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS33B2035 AS33B2035		1.155	29,3	1.250	31,8	1.125	28,6	.790 20,1 .720 18,3 1.230 31,2
								23 @ 30MHz

cable clamp

Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25,4 mm) diameter. Holes are provided for screw mounting.

Very effective from 1 MHz to 60 MHz; peak attenuation at 30 MHz. See pages 32 and 33 for impedance curve characteristics.




PART No.	A	B	C	D	E	F	IMPEDANCE IN OHMS
TC33B0805	.948	24,1	.500	12,7	.948	24,1	.404 10,3 1.498 38,0 .195 5,0
TC33B0984	1.127	28,6	.500	12,7	1.127	28,6	.591 15,0 1.677 42,6 .195 5,0
TC33B2000	2.125	54,0	1.500	38,1	2.125	54,0	1.000 25,4 2.860 72,6 .281 7,1
							22 @ 30MHz
							20 @ 30MHz
							210 @ 30MHz

low frequency ferrites- up to 60MHz applications

flat cable clamp

WITH FULL OUTER ENCLOSURE AND ADHESIVE MOUNT. Ferrite assembly in fully enclosed nylon case for flat cables up to 64-conductor width. Internal grip-lock tabs apply pressure on cable to maintain mounting position. Very effective from 1 MHz to 60 MHz with a peak attenuation at 30 MHz. For typical impedance curve comparisons to other material formulations, see page 33; and for specific impedance curves see page 32, bottom.

Installs easily on any mounting surface by removing liner from foam adhesive base pad. Also available without the adhesive mounting pad for assembly with two flat head screws through the .120" (3,0 mm) diameter holes on 1.25" (31,8 mm) centers in the bottom by temporarily removing the lower ferrite half.



PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
RA33B2480	RC33B2480	.700	17,8	2.76	70,1	1.312	33,3
RA33B4340	RC33B4340	.785	19,9	4.61	117,1	1.312	33,3


31 @ 30 MHz
79 @ 30 MHz

flat cable clamp

WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. One size accommodates all flat cables up to 40-conductor width.

Very effective from 1 MHz to 60 MHz with a peak attenuation at 30 MHz.

For typical impedance curve comparisons to other material formulations, see page 33; and for specific impedance curves see page 32, bottom



PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
FA33B2480	FC33B2480	.800	20,3	3.180	80,8	1.125	28,6


31 @ 30 MHz

flat cable clamp

WITH SINGLE PRESS FIT MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. One size accommodates all flat cables up to 40-conductor width. Fits substrates up to .070" (1,8mm) thickness.

Very effective from 1 MHz to 60 MHz with a peak attenuation at 30 MHz.

For typical impedance curve comparisons to other material formulations, see page 33; and for specific impedance curves see page 32, bottom



PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
FF33B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	7,1


31 @ 30MHz

flat cable clamp

WITH DUAL PRESS FIT MOUNTS. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. One size accommodates all flat cables up to 40-conductor width. Fits substrates up to .070" (1,8mm) thickness.

Very effective from 1 MHz to 60 MHz with a peak attenuation at 30 MHz.

For typical impedance curve comparisons to other material formulations, see page 33; and for specific impedance curves see page 32, bottom

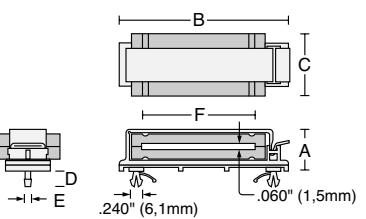

PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
FD33B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	7,1


31 @ 30MHz

flat cable clamp



WITH SPLIT END CAPS, ADHESIVE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. Two sizes accommodate flat cables up to 64-conductor width.

Very effective from 1 MHz to 60 MHz with a peak attenuation at 30 MHz.

For typical impedance curve comparisons to other material formulations, see page 33; and for specific impedance curves see page 32, bottom



PART No.	w/o Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS						
SA33B2480	SE33B2480	.655	16,6	2.570	65,3	1.829	46,5	.060	1,5	.245	5,7	2.047	52,0	31 @ 30 MHz
SA33B4340	SE33B4340	.655	16,6	4.460	113,3	1.829	46,5	.104	2,6	.245	5,7	3.240	82,3	79 @ 30 MHz




high frequency ferrites- 100MHz to 1 GHz applications

cable snap

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 2.0" (50.8mm) diameter. Snap closed around wire by clasping shut to position assembly.

May also be mounted with a flat-head screw through the .120" (3.0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

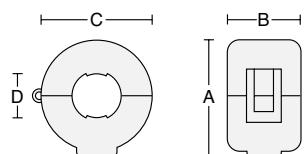


PART No.	A	B	C	D	IMPEDANCE IN OHMS
CS25B1642	.852	21.6	.885	22.5	.840 21.3 .282 7.2
CS25B1937	1.182	30.0	.780	19.8	1.188 30.2 .425 10.8
CS25B1500	1.725	43.8	1.232	31.3	1.720 43.7 .960 24.4
CS25B2000	2.350	59.7	1.851	47.0	2.309 58.6 .960 24.4
CS25B4000	4.500	114.2	1.851	47.0	4.687 110.0 1.960 49.8
					see page 31 for more details
					see page 31 for more details
					590 @ 700MHz



sleeve snap

Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .500" (12.7 mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position. Options include foam adhesive pad on bottom.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.



Patent No. 5,764,125


PART No. w/ Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SS25B2030 AS25B2030	.790	20.1	1.265	32.1	.770	19.6	.270 6.9 .220 5.6 .885 22.5
SS25B2033 AS25B2033	.790	20.1	1.265	32.1	.770	19.6	.350 8.8 .290 7.4 .885 22.5
SS25B2036 AS25B2036	1.155	29.3	1.250	31.8	1.125	28.6	.415 10.5 .350 8.9 1.230 31.2
SS25B2040 AS25B2040	1.155	29.3	1.250	31.8	1.125	28.6	.550 14.0 .480 12.2 1.230 31.2
							390 @ 700MHz
							390 @ 700MHz
							510 @ 700MHz
							510 @ 700MHz



sleeve snap


WITH VARIABLE DIAMETER END PORTS. Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .500" (3.2 to 12.7 mm). Special mounting options include foam adhesive pad on bottom.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.



Patent No. 5,003,278 and Patent No. 5,764,125


PART No. w/ Adhesive	A	B (ref.)	C	D	E	F	IMPEDANCE IN OHMS
SS25B2037 AS25B2037	.790	20.1	1.450	36.8	.770	19.6	.350 8.8 .200 5.1 .885 22.5
SS25B2032 AS25B2032	1.155	29.3	1.450	36.8	1.125	28.6	.500 12.7 .200 5.1 1.230 31.2
							390 @ 700 MHz
							510 @ 700 MHz



internal locking snap

WITH SECURE INTERNAL LOCKING SYSTEM. Cannot be reopened after snapping closed into position. Ensures that suppressor cannot be removed. Grip-lock tabs at entry/exit ports prevent longitudinal slippage on a range of cable diameters from .275" to .300" (7.0 to 7.6mm). Standard colors are computer gray (PMS#413), computer beige (PMS#468), black and natural white. A cost-effective alternative to over-molding.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

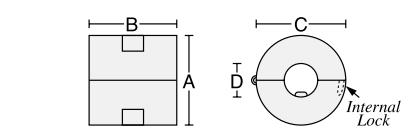

Patent Nos. 5,003,278 , 5,162,772 and 5,764,125


PART No.	A	B (ref.)	C	D	COLOR	IMPEDANCE IN OHMS
IL25B0642W	.780	19.8	.780	19.8	NATURAL WHITE	290 @ 700MHz
IL25B0642G	.780	19.8	.780	19.8	COMPUTER GRAY	290 @ 700MHz
IL25B0642B	.780	19.8	.780	19.8	COMPUTER BEIGE	290 @ 700MHz
IL25B0642K	.780	19.8	.780	19.8	BLACK	290 @ 700MHz



cable clamp

Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25.4 mm) diameter. Holes are provided for screw mounting.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.




PART No.	A	B	C	D	E	F	IMPEDANCE IN OHMS
TC25B0642	.785	19.9	.630	16.0	.785	19.9	.320 8.1 1.335 33.9 .195 5.0
TC25B0937	1.127	28.6	.551	14.0	1.127	28.6	.449 11.4 1.677 42.6 .195 5.0
TC25B1500	1.628	41.4	1.000	25.4	1.628	41.4	1.000 25.4 2.150 55.5 .195 5.0
TC25B2000	2.125	54.0	1.500	38.1	2.125	54.0	1.000 25.4 2.860 72.6 .281 7.1
							290 @ 700MHz
							305 @ 700MHz
							510 @ 700MHz
							890 @ 700MHz

specific high frequency 700MHz peak for flat cables

flat cable clamp

WITH FULL OUTER ENCLOSURE AND ADHESIVE MOUNT. Ferrite assembly in fully enclosed nylon case for flat cables up to 40-conductor width. Internal grip-lock tabs apply pressure on cable to maintain mounting position. Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

Installs easily on any mounting surface by removing liner from foam adhesive base pad. Also available without the adhesive mounting pad for assembly with two flat head screws through the .120" (3,0 mm) diameter holes on 1.25" (31,8 mm) centers in the bottom by temporarily removing the lower ferrite half. Excellent for flex-circuits.

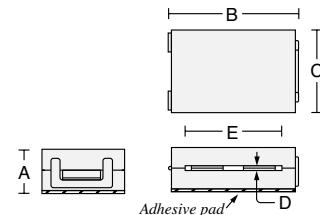


PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS	
RA25B2480	RC25B2480	.700	17,8	2.76	70,1	1.312	33,3	.060 1,5 2.047 52,0 790 @ 700 MHz
RA25B4340	RC25B4340	.785	19,9	4.61	117,1	1.312	33,3	.104 2,6 3.240 82,3 930 @ 700 MHz

flat cable clamp

WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Two sizes accommodate all flat cables up to 40-conductor width.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

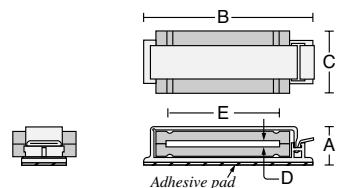


PART No.	w/o Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS	
FA25B0121	FC25B0121	.520	13,2	1.790	45,5	.750	19,1	.060 1,5 1.010 25,7 245 @ 700 MHz
FA25B2480	FC25B2480	.800	20,3	3.180	80,8	1.125	28,6	.060 1,5 2.047 52,0 790 @ 700 MHz

flat cable clamp

WITH SINGLE PRESS FIT MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Two sizes accommodate all flat cables up to 40-conductor width. Fits substrates up to .070" (1,8mm) thickness.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

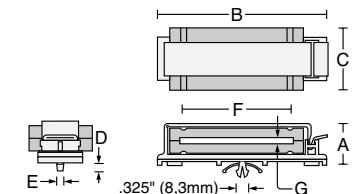


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
FF25B0121	.475	12,7	1.790	45,5	.750	19,1	.325	.240 6,1 1.010 25,7 .060 1,5 245 @ 700MHz
FF25B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	.183 4,6 2.047 52,0 .060 1,5 790 @ 700MHz

flat cable clamp

WITH DUAL PRESS FIT MOUNTS. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. One size accommodates all flat cables up to 40-conductor width. Fits substrates up to .070" (1,8mm) thickness.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

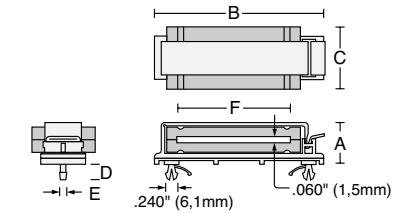


PART No.	A	B	C	D	E	F	G	IMPEDANCE IN OHMS
FD25B2480	.800	20,3	3.180	80,8	1.125	28,6	.280	.183 4,6 2.047 52,0 2.550 64,8 790 @ 700MHz

flat cable clamp

WITH SPLIT END CAPS, ADHESIVE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. Two sizes accommodate flat cables up to 40-conductor width.

Very effective from 100 MHz to 1 GHz; peak attenuation at 700 MHz. See pages 32 and 33 for impedance curve characteristics.

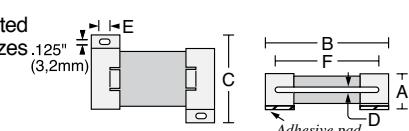


PART No.	w/o Adhesive	A	B	C	D	E	F	IMPEDANCE IN OHMS
SA25B0121	SE25B0121	.405	10,3	1.315	33,4	1.190	30,2	.060 1,5 .245 5,7 1.010 25,7 245 @ 700 MHz
SA25B2480	SE25B2480	.655	16,6	2.570	65,3	1.829	46,5	.060 1,5 .245 5,7 2.047 52,0 790 @ 700 MHz
SA25B4340	SE25B4340	.655	16,6	4.460	113,3	1.829	46,5	.104 2,6 .245 5,7 3.240 82,3 930 @ 700 MHz



sleeve snap


Box-shaped ferrite assembly in enclosed nylon case. Various sizes are functional with wires up to .400" (10,2 mm) diameter. Simply clamp around cable or wire; plastic tabs at entry/exit ports apply pressure to cable surface to maintain mounting position. Options include foam adhesive pad on bottom.



Patent No. 5,764,125


Available in standard colors gray (i.e., SS20B2030) and black (i.e., SS20B2030K)

PART No.	w/ Adhesive	A	B	C	D	E	F
SS20B2030 AS20B2030		.790	20,1	1.265	32,1	.770	19,6
SS20B2033 AS20B2033		.790	20,1	1.265	32,1	.770	19,6
SS20B2041 AS20B2041		.965	24,5	1.285	32,6	.930	23,6

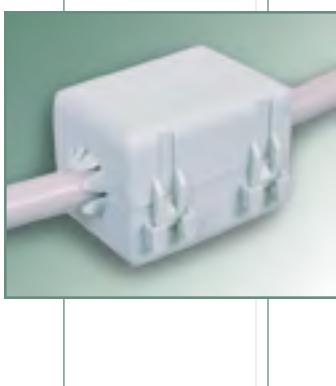

sleeve snap

WITH VARIABLE DIAMETER END PORTS. Box-shaped ferrite assembly in fully enclosed nylon case. End ports are surrounded with flexible spring flutes to grip a range of cable diameters from .125" to .400" (3,2 to 10,2 mm). Special mounting options include foam adhesive pad on bottom.




Patent No. 5,003,278 and Patent No. 5,764,125

PART No.	w/ Adhesive	A	B (ref.)	C	D	E	F
SS20B2034 AS20B2034		.585	14,9	1.250	31,8	.585	14,9
SS20B2037 AS20B2037		.790	20,1	1.450	36,8	.770	19,6
SS20B2042 AS20B2042		.965	24,5	1.480	37,6	.930	23,6



cable snap for cable bundles

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 2.0" (50,8mm) diameter. Snap closed around wire by clasping shut to position assembly.

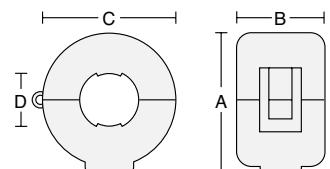


May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.

PART No.	A	B	C	D
CS20B1500	1.725	43,8	1.232	31,3
CS20B2000	2.350	59,7	1.851	47,0
CS20B4000	4.500	114,2	1.851	47,0



cable clamp for cable bundles

Ferrite assembly bonded to nylon strap; functional with wires and cables up to a 1.00" (25,4 mm) diameter. Holes are provided for screw mounting.

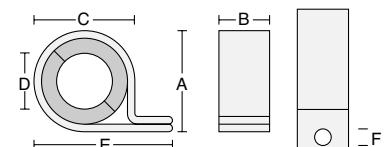


PART No.	A	B	C	D	E	F
TC20B1500	1.628	41,4	1.000	25,4	1.628	41,4
TC20B2000	2.125	54,0	1.500	38,1	2.125	54,0




solid beads

Sizes up to .430" I.D. (10,9 mm) for applications where it is possible to assemble the ferrite suppressor before the cable ends are terminated.




PART No.	A	B	C
20B0562-2	1.125	28,6	.562
20B0736-0	1.125	28,6	.736

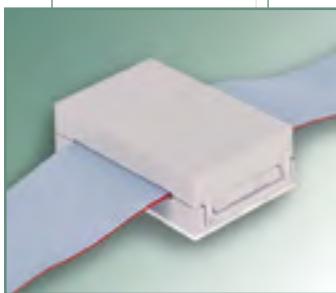


flat cable clamp

WITH FULL OUTER ENCLOSURE AND ADHESIVE MOUNT. Ferrite assembly in fully enclosed nylon case. Two sizes functional with flat cables up to 40-conductor widths. Internal grip-lock tabs apply pressure on cable to maintain mounting position.

Installs easily on any mounting surface by removing liner from foam adhesive base pad. Excellent for flex-circuits.




PART No.	w/o Adhesive	A	B	C	D	E
RA20B1729	RC20B1729	.700	17,8	2.03	51,6	1.312 33,3
RA20B2480	RC20B2480	.700	17,8	2.76	70,1	1.312 33,3

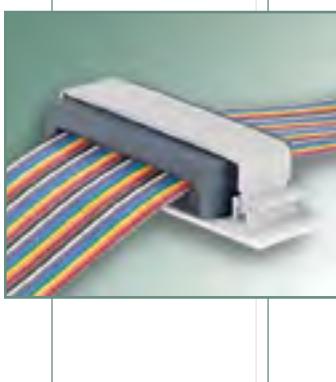


flat cable clamp

WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. For flat cables up to 40-conductor width 2.00" (50,8 mm).




PART No.	w/o Adhesive	A	B	C	D	E
FA20B1729	FC20B1729	.800	20,3	2.430	61,7	1.125 28,6
FA20B2480	FC20B2480	.800	20,3	3.180	80,8	1.125 28,6

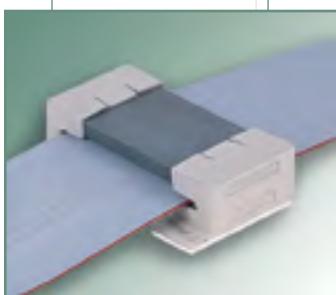

flat cable clamp

WITH SPLIT END CAPS, ADHESIVE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. For flat cables up to 40-conductor width 2.00" (50,8 mm).

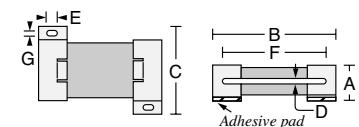


PART No.	w/o Adhesive	A	B	C	D	E	F	G
SA20B1729	SE20B1729	.655	16,6	1.849	47,0	1.829 46,5	.060 1,5	.245 5,7 1.355 34,4 .125 3,2
SA20B2480	SE20B2480	.655	16,6	2.570	65,3	1.829 46,5	.060 1,5	.245 5,7 2.047 52,0 .125 3,2



low profile solids

ULTRA-THIN. Excellent for thin flex circuits and flat cables. Two sizes accommodate cable widths up to 1.325" (33,7 mm).




PART No.	A	B	C	D	E
20R1260	1.260	32,0	1.010	25,7	1.125 28,6 .300 7,6 .051 1,3
20R1575	1.575	40,0	1.325	33,7	1.125 28,6 .300 7,6 .051 1,3



low profile solids

ULTRA-THIN WITH SHOCK MOUNT ADHESIVE FOAM BASE. Excellent for thin flex circuits and flat cables. Two sizes accommodate cable widths up to 1.325" (33,7mm). High tack adhesive mounting pad secures to almost any surface. Can be stacked one on top of another.



PART No.	A	B	C	D	E
SM20R1260	1.260	32,0	1.010	25,7	1.125 28,6 .330 8,4 .051 1,3
SM20R1575	1.575	40,0	1.325	33,7	1.125 28,6 .330 8,4 .051 1,3

3-Steps to Reducing RFID Interference

Radio Frequency Identification (RFID) is a rapidly expanding technology with new applications emerging at a remarkable rate. From management of warehouse inventory to identification of patients in a medical setting, proper deployment and unimpeded communication between RFID readers and tags is paramount to successful operation.

One of the major considerations when implementing an RFID system is the effect of unwanted RF interference between Readers and Tags. Most workplaces have hundreds if not thousands of electronic devices that create unwanted interference, including computers, Bluetooth networks, wireless networks, motors, conveyors and robots. Actually, any device with a microchip and power cord or cable will emit RF energy which can interfere with the ability of the reader to receive a clean signal.



Leader Tech offers a simple “first-step” approach to reducing unwanted RF interference. We recommend the following:

Identify Sources of RFID Interferences

The FerriShield CTK031 hand-held probe (see below) is one of the easiest ways to identify unwanted electro-magnetic interference. All you need to do is pass the probe over suspect sources. If the device detects RF emissions it alerts with an audible tone that intensifies as interference increases.

Attach a Frequency-Specific RFID Ferrite to the Suspect Device

Samplings of our most popular RFID ferrites are shown on the following page. In addition, a free 32-piece engineering kit is provided with the purchase of any CTK031 Probe.

Check If Interference Has Been Eliminated

After you have attached the cable-mounted ferrite, simply use the hand-held RF probe to confirm that the ferrite has eliminated the unwanted interference.

CTK031 – SCAN EM-C PROBE SET WITH DEMO FIXTURE

Contains both CTM030 electric and CTM032 magnetic near-field probes along with a step-by-step guide, an EMC Demo Fixture, and cables with adapters for spectrum analyzer, oscilloscope or multimeter. Free ferrite engineering kit included. See information at lower right.



FREE #EK28B0032 FERRITE ENGINEERING KIT WITH EITHER SCANEM PROBE KIT PURCHASE

Our popular, wideband assortment of 32 unique configurations for RFID EMI cable suppression.



CTK031 W/ BOTH PROBES	PROBE	PROBE
Parameters	CTM030	CTM032
Fields	Electric	Magnetic
Frequency Response	2MHz - 2GHz	1MHz - 1GHz
RF Output	Yes	Yes
DC Output to a multimeter	Yes	Yes
Sensitivity (typical)	-10dBm/(V/m)	-20dBm/mA
Connector	SMB/BNC	SMB/BNC
Dimensions (approx.)	6.18" x 1.21" x 0.76" (157 x 31 x 20mm)	6.18" x 1.21" x 0.76" (157 x 31 x 20mm)
Weight (approx.)	2.25oz (65g)	2.25oz (65g)
Battery (included)	2 x AAA	2 x AAA
LED Bar Graph	5 LED color bar	5 LED color bar
Audio Indication	Speaker (tone pitch proportional to the field strength)	



sleeve snap for round cables

Three common sizes in three frequency-specific formulations. Box-shaped assembly snaps over cables up to .400" (10,1mm) diameter. Optional foam adhesive mounting pad on bottom.


PART No.	w/adhesive	A	B	C	D	E	F	Target Frequency/Range	Impedance in Ohms				
SS28B2030	AS28B2030	.790	20,1	1.265	32,1	.770	19,6	.270	6,9	.220 5,6	885 22,5	13.56MHz	200 @ 100MHz
SS28B2033	AS28B2033	.790	20,1	1.265	32,1	.770	19,6	.350	8,8	.290 7,4	.885 22,5	13.56MHz	200 @ 100MHz
SS28B2041	AS28B2041	.965	24,5	1.285	32,6	.930	23,6	.450	11,4	.380 9,7	1.035 26,3	13.50MHz	238 @ 100MHz
SS25B2030	AS25B2030	.790	20,1	1.265	32,1	.770	19,6	.270	6,9	.220 5,6	.885 22,5	433.92MHz & 860-930MHz	340 @ 700MHz
SS25B2033	AS25B2033	.790	20,1	1.265	32,1	.770	19,6	.350	8,8	.290 7,4	.885 22,5	433.92MHz & 860-930MHz	290 @ 700MHz
SS20B2030	AS20B2030	.790	20,1	1.265	32,1	.770	19,6	.270	6,9	.220 5,6	.885 22,5	2.45GHz	per application
SS20B2033	AS20B2033	.790	20,1	1.265	32,1	.770	19,6	.350	8,8	.290 7,4	.885 22,5	2.45GHz	per application
SS20B2041	AS20B2041	.965	24,5	1.285	32,6	.930	23,6	.450	11,4	.380 9,7	1.035 26,3	2.45GHz	per application

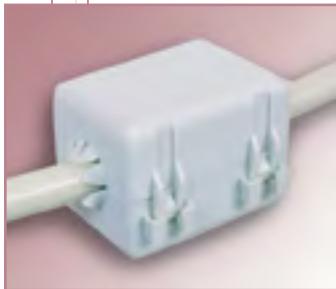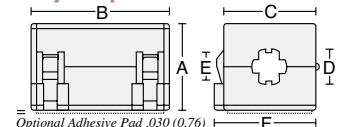

sleeve snap for round cables

WITH VARIABLE DIAMETER END PORTS. Four sizes fit cable diameters from .125" to .500" (3,2 to 12,7mm); end ports are surrounded by flexible spring flutes to grip a range of diameters. Three choices of frequency-specific material formulations. Optional foam adhesive mounting pad on bottom.


PART No.	w/adhesive	A	B (ref.)	C	D	E	F	Target Frequency/Range	Impedance in Ohms				
SS28B2034	AS28B2034	.585	14,9	1.250	31,8	.585	14,9	.250	6,4	.120 3,0	.680 17,3	13.56MHz	220 @ 100MHz
SS28B2037	AS28B2037	.790	20,1	1.450	36,8	.770	19,6	.350	8,8	.200 5,1	.885 22,5	13.56MHz	200 @ 100MHz
SS28B2042	AS28B2042	.965	24,5	1.480	37,6	.930	23,6	.425	10,8	.170 4,3	1.035 26,3	13.56MHz	238 @ 100MHz
SS28B2032	AS28B2032	1.155	29,3	1.450	36,8	1.125	28,6	.500	12,7	.200 5,1	.1230 31,2	13.56MHz	238 @ 100MHz
SS25B2037	AS25B2037	.790	20,1	1.450	36,8	.770	19,6	.350	8,8	.200 5,1	.885 22,5	433.92MHz & 860-930MHz	390 @ 700MHz
SS25B2032	AS25B2032	1.155	29,3	1.450	36,8	1.125	28,6	.500	12,7	.200 5,1	.1230 31,2	433.92MHz & 860-930MHz	510 @ 700MHz
SS20B2034	AS20B2034	.585	14,9	1.250	31,8	.585	14,9	.250	6,4	.120 3,0	.680 17,3	2.45GHz	per application
SS20B2037	AS20B2037	.790	20,1	1.450	36,8	.770	19,6	.350	8,8	.200 5,1	.885 22,5	2.45GHz	per application
SS20B2042	AS20B2042	.965	24,5	1.480	37,6	.930	23,6	.425	10,8	.170 4,3	1.035 26,3	2.45GHz	per application

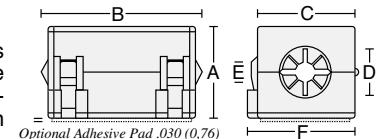


cable snap for round cables

Ferrite assembly in fully enclosed nylon case; functional with cables and bundles up to a 2.0" (50,8mm) diameter. Three choices of frequency-specific material formulations. Optional foam adhesive mounting pad on bottom.

PART No.	w/adhesive	A	B	C	D		Target Frequency/Range	Impedance in Ohms				
CS28B1642	CA28B1642	.852	21,6	.885	22,5	.840	21,3	.282	7,2		13.56MHz	100 @ 100MHz
CS28B1805	CA28B1805	1.040	26,4	.667	16,9	1.025	26,4	.340	8,6		13.56MHz	73 @ 100MHz
CS28B1937	CA28B1937	1.182	30,0	.780	19,6	1.188	30,2	.425	10,8		13.56MHz	117 @ 100MHz
CS28B1984	CA28B1984	1.218	30,9	.705	17,9	1.220	31,0	.525	13,3		13.56MHz	62 @ 100MHz
CS28B1501	CA28B1501	1.725	43,8	1.232	31,3	1.720	43,7	.710	18,0		13.56MHz	177 @ 100MHz
CS28B1500	CA28B1500	1.725	43,8	1.232	31,3	1.720	43,7	.960	24,4		13.56MHz	133 @ 100MHz
CS28B2000	CA28B2000	2.350	59,7	1.851	47,0	2.309	58,6	.960	24,4	details on page 31	13.56MHz	380 @ 100MHz
CS28B4000	CA28B4000	4.500	114,2	1.851	47,0	4.687	119,0	1.960	49,8	details on page 31	13.56MHz	290 @ 100MHz
CS25B1642	CA25B1642	.852	21,6	.885	22,5	.840	21,3	.282	7,2		433.92MHz & 860-930MHz	290 @ 700MHz
CS25B1937	CA25B1937	1.182	30,0	.780	19,6	1.188	30,2	.425	10,8		433.92MHz & 860-930MHz	305 @ 700MHz
CS25B1500	CA25B1500	1.725	43,8	1.232	31,3	1.720	43,7	.960	24,4		433.92MHz & 860-930MHz	570 @ 700MHz
CS25B2000	CA25B2000	2.350	59,7	1.851	47,0	2.309	58,6	.960	24,4	details on page 31	433.92MHz & 860-930MHz	890 @ 700MHz
CS25B4000	CA25B4000	4.500	114,2	1.851	47,0	4.687	119,0	1.960	49,8	details on page 31	433.92MHz & 860-930MHz	590 @ 700MHz
CS20B1500	CA20B1500	1.725	43,8	1.232	31,3	1.720	43,7	.960	24,4		2.45GHz	per application
CS20B2000	CA20B2000	2.350	59,7	1.851	47,0	2.309	58,6	.960	24,4	details on page 31	2.45GHz	per application
CS20B4000	CA20B4000	4.500	114,2	1.851	47,0	4.687	119,0	1.960	49,8	details on page 31	2.45GHz	per application




*Optional Adhesive .030" (0,76)



flat cable clamp for flat cables

WITH OPTIONAL ADHESIVE MOUNTING. Ferrite assembly clamps over flat cables up to 64-conductor widths 3.24" (82,3mm). Optional adhesive pad mounts on bottom; or, may be mounted with flat-head screws through the .120" (3,0mm) diameter holes on 1.25" (31,8mm) centers in the bottom by temporarily removing the lower ferrite half.

PART No.	w/adhesive	A	B	C	D	E	Target Frequency/Range	Impedance in Ohms					
RC28B1729	RA28B1729	.670	17,0	2.030	51,6	1.312	33,3	.060	1,5	1.355	34,4	13.56MHz	200 @ 100MHz
RC28B2480	RA28B2480	.670	17,0	2.760	70,1	1.312	33,3	.060	1,5	2.047	52,0	13.56MHz	250 @ 100MHz
RC28B3012	RA28B3012	.670	17,0	3.260	82,8	1.312	33,3	.060	1,5	2.540	64,5	13.56MHz	286 @ 100MHz
RC28B4340	RA28B4340	.755	19,2	4.610	117,1	1.312	33,3	.104	2,6	3.240	82,3	13.56MHz	325 @ 100MHz
RC25B2480	RA25B2480	.700	17,8	2.760	70,1	1.312	33,3	.060	1,5	2.047	52,0	433.92MHz & 860-930MHz	390 @ 700MHz
RC25B4340	RA25B4340	.785	19,9	4.610	117,1	1.312	33,3	.104	2,6	3.240	82,3	433.92MHz & 860-930MHz	510 @ 700MHz
RC20B1729	RA20B1729	.700	17,8	2.030	51,6	1.312	33,3	.060	1,5	1.355	34,4	2.45GHz	per application
RC20B2480	RA20B2480	.700	17,8	2.760	70,1	1.312	33,3	.060	1,5	2.047	52,0	2.45GHz	per application



*Optional Adhesive .030" (0,76)



engineering kit #EK28B0032

BISECTED FERRITES FOR APPLICATIONS UP TO 1 GHz WITH PEAK PROPERTIES AT 250MHz.

Our most popular engineering kit! Contains a large assortment of various sizes of ferrite assemblies from catalog pages 10 through 21. Manufactured in the most frequently used universal #28 wideband material formulation for all applications up to 1 GHz.

All catalog items are in stock at all times for immediate delivery.



engineering kit #EK28B0021

SOLID FERRITES FOR APPLICATIONS UP TO 1 GHz WITH PEAK PROPERTIES AT 250MHz.

Sample assortment of twenty cylindrical and flat solid ferrite suppressors in universal #28 wideband material formulation for applications up to 1 GHz. Contains many of the cylindrical and flat rectangular designs shown on pages 15 and 19, including the "SM" shock mount versions.

See catalog pages 15 and 19 for all items available from stock for immediate delivery.



saddle beads® engineering kit #EK28B27SB

FERRITES FOR APPLICATIONS UP TO 1 GHz WITH PEAK PROPERTIES AT 250MHz.

A wide variety of common sizes of our unique half-toroid, half-bead, half-sleeve and plate shapes for round wire, flat wire and PC board components. Manufactured in the most frequently used universal #28 wideband material formulation for all applications up to 1 GHz.

See catalog page 20 for all items available from stock for immediate delivery.



engineering kit #EK33B0011, low frequency 30MHz peak

BISECTED FERRITES FOR APPLICATIONS FROM 1 TO 30MHz WITH PEAK PROPERTIES AT 30MHz.

Sample assortment containing nine of the most common configurations of ferrite assemblies manufactured in #33 material formulation. Specifically applicable in the 1-30 MHz range.

Contains part numbers TC33B0805, TC33B0984, CS33B1805, CV33B1984, FA33B2480, SS33B2033, SS33B2037, SS33B2032, SS33B2036. Other sizes available on a special order basis.

See catalog pages 22 and 23 for all items available from stock for immediate delivery. Most other catalog items are also available in this material on special order basis.



engineering kit #EK25B0012, high frequency 700MHz peak

BISECTED FERRITES FOR APPLICATIONS UP TO 1 GHz WITH PEAK PROPERTIES AT 700MHz.

Sample assortment of ten popular stock items manufactured in our newest #25 high frequency material. Effective to 1.2 GHz with peak properties at 700 MHz.

Contains part numbers TC25B0642, TC25B0937, CS25B1642, SA25B0121, CV25B1937, FA25B2480, SS25B2033, SS25B2032, SS25B2037, SS25B2036. Other sizes available on a special order basis.

See catalog pages 24 and 25 for all items available from stock for immediate delivery. Most other catalog items are also available in this material on special order basis.




engineering kit #EK20B0009, Bluetooth™

BISECTED AND SOLID FERRITES FOR APPLICATIONS CONCERNED WITH 2.45GHZ OPERATIONS.

Sample assortment of nine popular stock items manufactured in #20 material formulation. Specifically applicable in the 2.45GHz frequency area.

Contains part numbers 20B0562-2, 20B0736-0, 20R1260, 20R1575, FA20B2480, SS20B2034, SS20B2037, SS20B2033, SS20B2042.

See catalog pages 26 and 27 for all items available from stock for immediate delivery. Most other catalog items are also available in this material on special order basis.

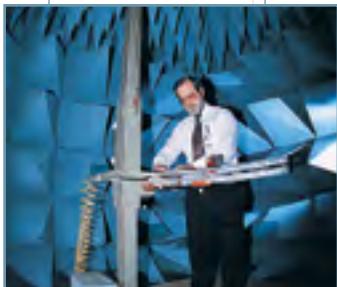

suppression prototyping

Your lab is not complete without a selection of ferrite RFI-EMI suppressors on hand. Helpful during engineering evaluations, prototyping, emergencies, and eventually for final product compliance testing and documentation.

The engineering kits shown on page 30 contain a wide assortment of sizes, configurations and suppression levels for any insertion loss requirements.


The test fixtures shown below are indispensable problem-solving aids, useful in any laboratory.

When extra samples are required for your project, just a phone call to our customer service department will have them immediately on the way to you.



empirical test fixtures – WITH QUICK-RELEASE STRAP

A handy R&D/test device for determining if a ferrite suppressor is feasible in a given situation. With this massive amount of insertion loss material applied to a circuit, a rough estimate of attenuation effect can be previewed. Afterwards, a properly configured ferrite assembly can be determined. Install on any cable data signal circuit by reassembling ferrite halves within the plastic strap. Even flat ribbon cables pass through the large opening. Available in our four standard material formulas.




PART No.	A	B	C	D	MATERIAL	IMPEDANCE IN OHMS
ET28B2000	2.53	64,3	1.50	38,1	#28 formulation	380 @ 100MHz
ET33B2000	2.53	64,3	1.50	38,1	#33 formulation	210 @ 30MHz
ET25B2000	2.53	64,3	1.50	38,1	#25 formulation	890 @ 700MHz
ET20B2000	2.53	64,3	1.50	38,1	#20 formulation	per application



empirical test fixtures – IN FULLY ENCLOSED PLASTIC CASE

Another variation of the test fixture shown above – the same ferrite core encased in a heavy-duty hinged nylon plastic enclosure. A handy R&D/test device for determining if a ferrite suppressor is feasible in a given situation. With this massive amount of insertion loss material applied to a circuit, a rough estimate of attenuation effect can be previewed. Afterwards, a properly configured ferrite assembly can be determined. Install on any cable data signal circuit by clamping around the cable. Even flat ribbon cables pass through the large opening. Available in our four standard material formulas.

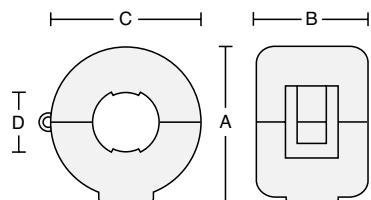


PART No.	A	B	C	D	MATERIAL	IMPEDANCE IN OHMS
CS28B2000	2.350	59,7	1.851	47,0	#28 formulation	380 @ 100MHz
CS33B2000	2.350	59,7	1.851	47,0	#33 formulation	210 @ 30MHz
CS25B2000	2.350	59,7	1.851	47,0	#25 formulation	890 @ 700MHz
CS20B2000	2.350	59,7	1.851	47,0	#20 formulation	per application



special purpose large toroid clamp

IN FULLY ENCLOSED PLASTIC CASE WITH 2.0" (50,8mm) I.D.

Similar to other "CS" Empirical Test Fixtures above, except with a 4.0" 101,6mm O.D. and a 2.0" 50,8mm I.D. ferrite core. Available in four standard material formulas.

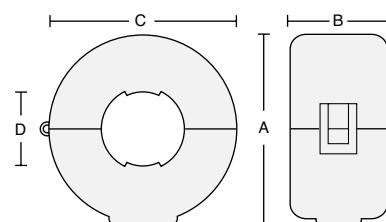


PART No.	A	B	C	D	MATERIAL	IMPEDANCE IN OHMS
CS28B4000	4.500	114,2	1.851	47,0	#28 formulation	290 @ 100MHz
CS33B4000	4.500	114,2	1.851	47,0	#33 formulation	140 @ 30MHz
CS25B4000	4.500	114,2	1.851	47,0	#25 formulation	590 @ 700MHz
CS20B4000	4.500	114,2	1.851	47,0	#20 formulation	per application



empirical test fixture – FOR FLAT CABLES AND FLEX-CIRCUITS

A high impedance R&D/test device for determining if a ferrite suppressor is feasible in a given situation. Specifically for flat cables and flex-circuits, with this massive amount of insertion loss material applied to a circuit the attenuation effect of the wideband ferrite core material can be previewed. Afterwards, a properly configured ferrite assembly can be determined. Installs on any cable data signal circuit up to 50-conductors by engaging the double clamps; quick-release design opens easily. Adhesive foam pads on bottom allow permanent mounting if desired. Available in our standard #28 wideband formula for frequencies from 10 MHz to 1 GHz.

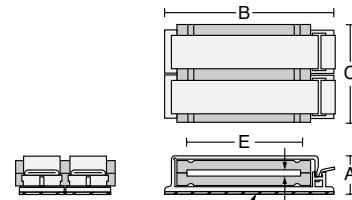


PART No.	A	B	C	D	E	IMPEDANCE IN OHMS	
ET28B3000	.800	20,3	3.700	94,0	1.500	38,1	370 @ 100MHz

Attenuation Properties by Part Number

IMPEDANCE VS. FREQUENCY-#28 MATERIAL

The #28 formulation of suppression material is our most common product. It is an excellent wideband general purpose insertion loss absorber for frequencies from 10 MHz up to 1 GHz.


All of the impedance data below applies to the FerriShield® series which are specified by "28B" or the following alpha prefixes: TC, CS, CA, CW, CF, CV, FA, FF, FD, FX, IL, BA, BC, ET, SE, SA, PM, JB, CG, UG, HF, HI, HW, HA, SM, WC, CC, AC, PC, HC, HD, RC, RA, SF, SD, SS and USB. For specific performance by part number, find the alpha-numeric designation on the charts below according to the last seven digits of each catalog part number; i.e., for part number "CS28B1937" see "28B1937" on the chart.

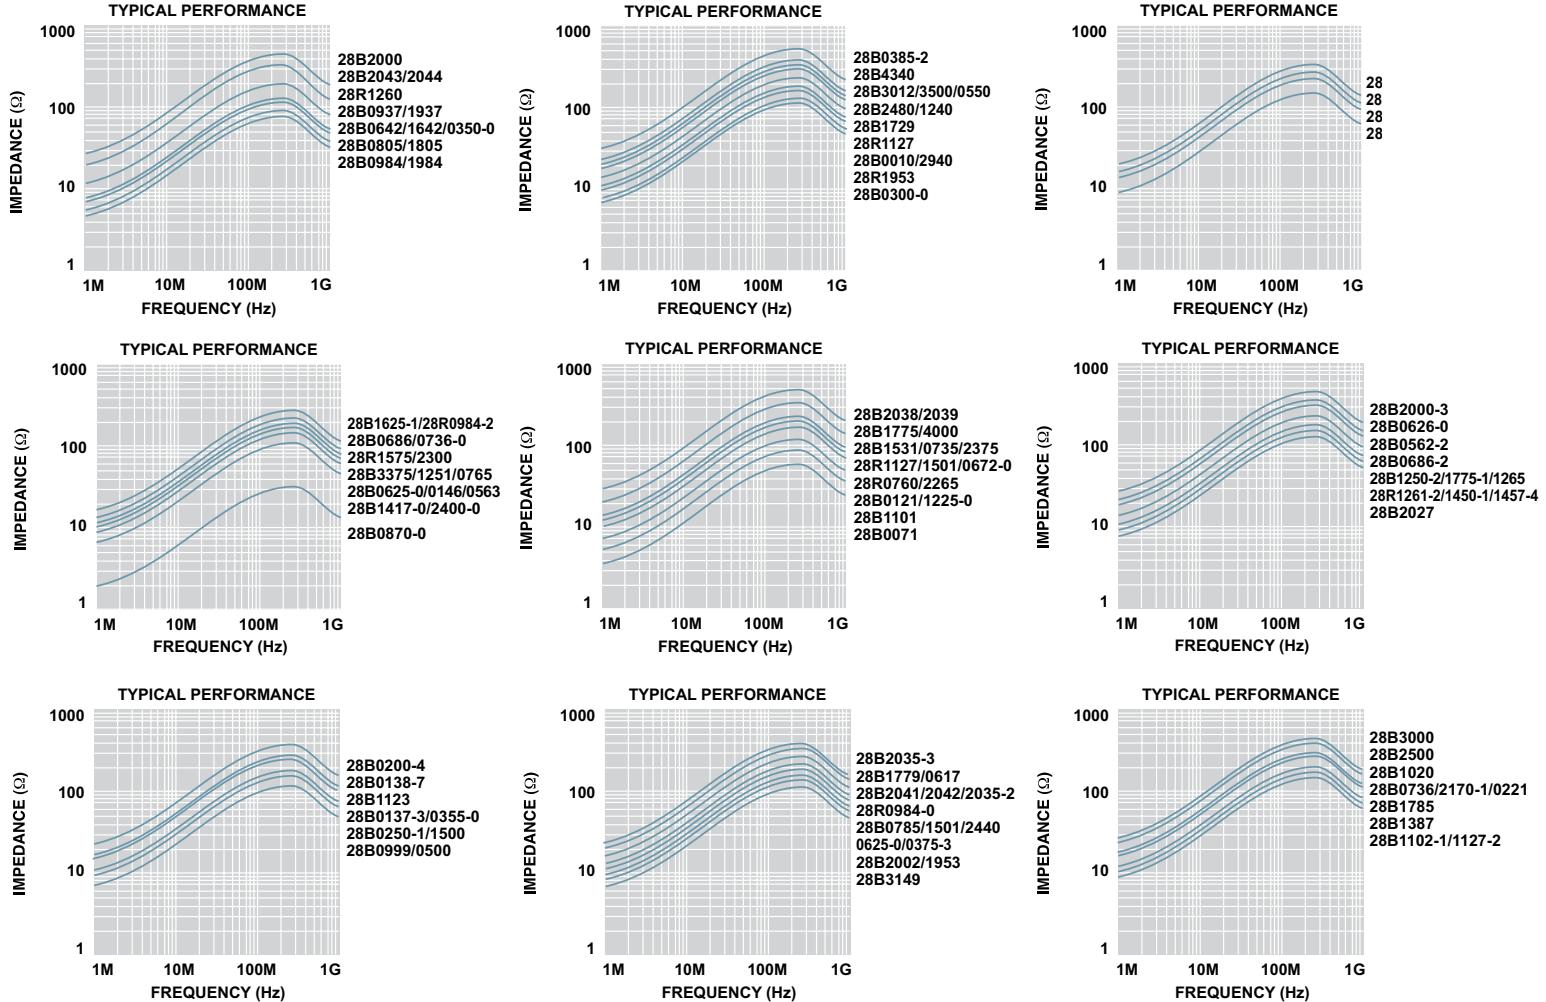

IMPEDANCE VS. FREQUENCY-#33 MATERIAL

The #33 formulation of suppression material is specifically applicable from 1 to 30 MHz with a decreasing effect beyond that range. The part numbers shown below are standard items available from stock and are the most commonly used configurations for those frequencies. Other sizes are available by special order.





All of the impedance data below applies to the FerriShield® series which are specified by "33B" or the following alpha prefixes: TC, CS, CA, CW, CF, CV, FA, FF, FD, ET, RC, RA, SE, SA and SS. For specific performance by part number, find the alpha-numeric designation on the charts below according to the last seven digits of each catalog part number, i.e. for part number "SS33B2032" see "33B2032" on the chart.

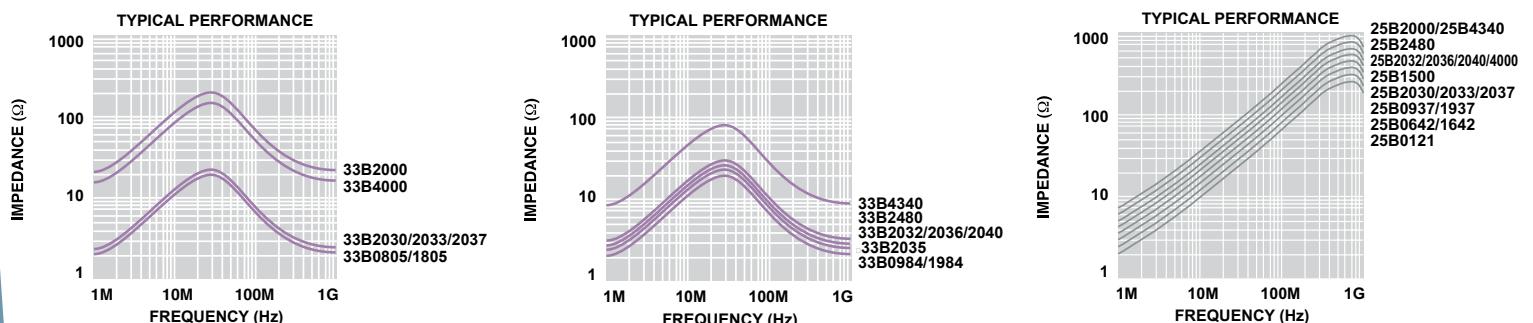

All attenuation data is derived from tests using an HP4191A attenuation analyzer with spring clip or binding post fixturing, and does not include the test wire resistance. All impedance readings are shown at nominal $\pm 10\%$ at 3 standard deviations from the mean.

Material Properties

Formula	Description	Application	Permeability μ_i	B_s @ 10 Oe Gauss	Loss Factor $(^1\mu_i^Q) \times 10^{-6}$	Curie Temp. °C	Vol. Res. ohm-cm	Temperature Factor (20°C to 100°C) ($\times 10^6$) per °C
28 Material	Most popular wideband	1MHz-1GHz, 250MHz peak	850	3350	120 @ 1.0MHz	≥ 175	$\times 10^5$	< 7
33 Material	Low frequency	1MHz-60MHz, 30MHz peak	2700	4800	7 @ .1MHz	≥ 200	$\times 10^2$	< 7
25 Material	High frequency	1MHz-1.2GHz, 700MHz peak	125	3650	32 @ 2.5MHz	≥ 225	$\times 10^8$	< 7
20 Material	Microwave	2.45GHz peak	20	2700	500 @ 100.0MHz	≥ 510	$\times 10^8$	< 7

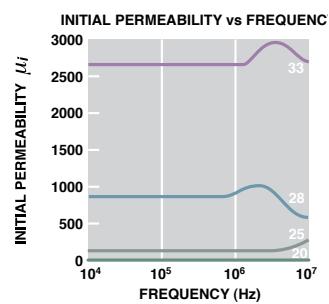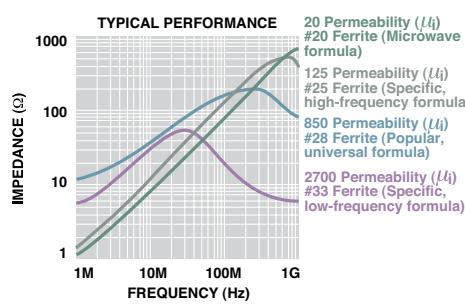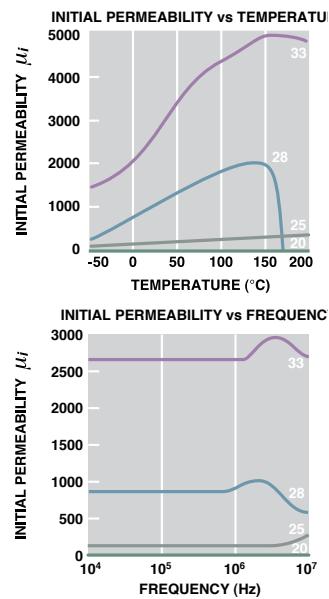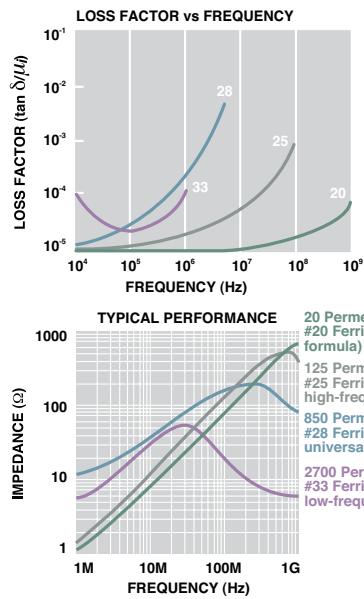

CABLE SIZE BY PART NUMBER The maximum recommended cable size or cable bundle diameter is shown below for each part number. A range of sizes indicates that the suppressor has a variable opening.

Series	Size	Maximum recommended cable size-in. mm
TC, ET	0550	.214 5.4 dia.
BA, BC	0617	.276 7.0 dia.
IL	0642	.320 8.1 dia.
	0805	.404 10.3 dia.
	0937	.449 11.4 dia.
	1123	.543 13.8 dia.
	0984	.591 15.0 dia.
	1251	.750 19.1 dia.
	1501	.750 19.1 dia.
	1500	1.000 25.4 dia.
	2000	1.000 25.4 dia.
Special Purpose	0138-7	.034 0.8 dia.
Solid Beads, PM	0137-3	.051 1.3 dia.
	0200-4	.062 1.6 dia.
	0300-0	.069 1.8 dia.
	0250-1	.125 3.2 dia.
	0350-1	.170 4.3 dia.
	0355-0	.187 4.8 dia.
	0385-2	.038 0.9 dia.
	0375-3	.200 5.0 dia.
	0500-3	.312 7.9 dia.
	0562-2	.250 6.3 dia.
	0563-0	.285 7.3 dia.
	0625-0 and 0625-1	.310 7.9 dia.
	0626-0	.133 3.4 dia.
	0672-0	.345 8.8 dia.
	0686-2	.375 9.5 dia.
	0735-0	.400 10.2 dia.
	0736-0	.410 10.4 dia.
	1020-1	.505 12.8 dia.
	1102-1	.630 16.0 dia.
	1250-2	.750 19.0 dia.
	1387-1	.880 22.4 dia.
JB PM	2000-3	1.000 25.4 dia.
	0010	.060 1.5 to .120 3.1 dia.
	3375	.192 4.8 dia.
	0625	.310 7.9 dia.
	1625	.310 7.9 dia.
	0686	.375 9.5 dia.
SS, AS	2027	.085 2.2 dia.
HI, HF	2034	.125 3.2 to .170 4.3 dia.
HW, HA,	2031	.200 5.1 dia.

Series	Size	Maximum recommended cable size- in. mm
USB	2035-3	3 holes ea. @ .203 5.2 dia.
	2030	.235 6.0 dia.
	2033	.300 7.6 dia.
	2037	.210 5.3 to .300 7.6 dia.
	2035-2	2 holes ea. @ .335 8.5 dia.
	2036	.380 9.7 dia.
	2041	.400 10.2 dia.
	2042	.250 6.3 to .400 10.2 dia.
	2032	.250 6.3 to .500 12.7 dia.
	2038	.440 11.3 dia.
	2039	.250 6.3 to .435 11.0 dia.
	2040	.500 12.7 dia.
	2035	.730 18.5 dia.
	2043	.730 18.5 dia.
	2044	.500 12.7 to .710 18.0 dia.
	2035-15	15 conductor, .038 x .75 1.0 x 19.1
ET, FA	0071	10 conductor, .060 x .500 1.5 x 12.7
FF, FD	0121	20 conductor, .060 x 1.00 1.5 x 25.4
FC, SE	0146	26 conductor, .060 x 1.25 1.5 x 31.8
SA, RC	0221	40 conductor, .060 x 2.00 1.5 x 50.8
RA	0765	10 conductor, .038 x .500 1.0 x 12.7
	1240	20 conductor, .040 x 1.00 1.0 x 25.4
	1265	20 conductor, .038 x 1.00 1.0 x 25.4
	1729	26 conductor, .060 x 1.25 1.5 x 31.8
	1785	26 conductor, .060 x 1.25 1.5 x 31.8
	2265	40 conductor, .038 x 2.00 1.0 x 50.8
	2375	34 conductor, .060 x 1.70 1.5 x 43.2
	2440	40 conductor, .280 x 2.00 7.1 x 50.8
	2480	40 conductor, .060 x 2.00 1.5 x 50.8
	2500	40 conductor, .060 x 2.00 1.5 x 50.8
	2940	50 conductor, .280 x 2.50 7.1 x 63.5
	3000	50 conductor, .060 x 2.50 1.5 x 63.5
	3012	50 conductor, .060 x 2.50 1.5 x 63.5
	3500	60 conductor, .060 x 3.00 1.5 x 76.2
	4340	64 conductor, .100 x 3.20 2.5 x 8.2
FX	0984-0	.030 x .700 0.76 x 17.8
	0984-2	.030 x .700 0.76 x 17.8
	1261-2	.030 x .980 0.76 x 24.9
	1450-1	.030 x 1.155 0.76 x 29.3
	0984-0	.018 x 1.29 95.0 x 32.8

Series	Size	Maximum recommended cable size- in. mm
SM	0760	10 conductor, .051 x .510 1.3 x 13.0
	0785	10 conductor, .145 x .500 3.7 x 12.7
and	1101	18 conductor, .059 x .900 1.5 x 22.8
	1127-218	2 conductor, .060 x .900 1.5 x 22.8
Rectangular Solids	1260	20 conductor, .051 x 1.01 1.3 x 25.7
	1531	20 conductor, .210 x 1.00 12.9 x 25.4
	1575	26 conductor, .051 x 1.30 1.3 x 33.0
	1775	26 conductor, .060 x 1.30 1.5 x 33.0
	1953	34 conductor, .059 x 1.70 1.5 x 43.1
	2170	35 conductor, .050 x 1.72 1.2 x 43.7
	2002	40 conductor, .300 x 2.00 7.6 x 50.8
	1779	40 conductor, .066 x 2.00 1.6 x 50.8
	2300	40 conductor, .051 x 2.05 1.3 x 52.1
CS, CA	3149	50 conductor, .075 x 2.70 1.9 x 68.5
CW, CF	1642 and 0642	.300 7.6 dia.
	1805 and 0805	.345 8.7 dia.
	1937 and 0937	.400 10.2 dia.
	1984 and 0984	.520 13.2 dia.
	1501	.750 19.1 dia.
	1500	1.000 25.4 dia.
	2000	1.000 25.4 dia.
	4000	2.000 50.8 dia..
CV	1642	.120 3.0 to .300 7.6 dia.
	1805	.120 3.0 to .345 8.7 dia.
	1937	.200 5.1 to .400 10.2 dia.
	1984	.200 5.1 to .500 12.7 dia.
Toroids	0870-0	.540 13.7 dia.
	0999-0	.610 15.5 dia.
	1225-0	.750 19.1 dia.
	1417-0	.905 23.0 dia.
	2400-0	1.400 35.6 dia.
Extra Large Toroids	2275	1.335 33.9 dia.
	3170	1.645 41.8 dia.
	2945	1.775 45.1 dia.
	4100	2.650 67.3 dia.
	5950	3.675 93.3 dia.
	5945	4.330 110.0 dia.
	9210	6.665 169.3 dia.
SB	all	per application - see page 14



ScanEM probes

NEAR-FIELD DETECTORS FOR EASY MEASUREMENT OF ELECTROMAGNETIC EMISSIONS

Shorten your development schedule and eliminate the need for product redesign by using proper EMC tools from the beginning of the project. ScanEM probes are diagnostic instruments for detecting, locating and measuring electromagnetic emissions. They are professional tools that don't require you to be an EMC expert to completely address emission compliance. They can reliably predict electromagnetic behavior of your products and locate emission sources in a matter of seconds. They detect the presence of an electromagnetic field and provide audio and visual indication of its relative strength either working by themselves, or as broadband active probes with any spectrum analyzer, oscilloscope or multimeter.

- Pinpoint exact sources of EMI
- Detect electric and magnetic fields separately
- Self-contained: palm-sized, no cords, no power supply or amplifier
- Audio output: tone changes indicate field strength
- LED color bar verifies relative field strength
- Squelch feature nullifies ambient to locate problem areas
- Output to spectrum analyzer or oscilloscope if desired
- DC output to multimeter for DC voltage as a function of field strength
- No disturbance of circuit under test - does not touch the circuit

WHY NEAR-FIELD TESTING?

The standard radiated EMC test is done in the far field at 10'-0" (3M) from the product. This shows if there is a failure, but does not pinpoint the source of the problem. A near-field probe is a close-up inspection which permits quick product scanning for problem areas.

- PC board traces
- Troubleshooting
- Production quality control
- Prequalification
- Cables, connectors – to a single circuit or pin
- Production quality control
- Service and repair
- Non-contact diagnostics – no circuit loading

A day spent at the beginning of a project preventing EMC problems saves days, even weeks, fixing these problems at the end.



CTK015 – SCANEM-C PROBE SET

Complete kit contains electric and magnetic near-field probes. See specifications in chart below. Includes batteries, user guide, storage case and 6'-0" (1.8M) cable with adapters for connecting to spectrum analyzer, oscilloscope or multimeter. Free ferrite engineering kit included. See information at lower right.

CTK015 W/ BOTH PROBES	PROBE	PROBE
Parameters	CTM030	CTM032
Fields	Electric	Magnetic
Frequency Response	2MHz - 2GHz	1MHz - 1GHz
RF Output	Yes	Yes
DC Output to a multimeter	Yes	Yes
Sensitivity (typical)	-10dBm/(V/m)	-20dBm/mA
Connector	SMB/BNC	SMB/BNC
Dimensions (approx.)	6.18" x 1.21" x 0.76" (157 x 31 x 20mm)	6.18" x 1.21" x 0.76" (157 x 31 x 20mm)
Weight (approx.)	2.25oz (65g)	2.25oz (65g)
Battery (included)	2 x AAA	2 x AAA
LED Bar Graph	5 LED color bar	5 LED color bar
Audio Indication	Speaker (tone pitch proportional to the field strength)	



CTK031 – EMC COMPLIANCE ENGINEERING KIT WITH DEMO FIXTURE

Contains both CTM030 electric and CTM032 magnetic near-field probes shown above along with a step-by-step guide, an EMC Demo Fixture, and cables with adapters for spectrum analyzer, oscilloscope or multimeter. Free ferrite engineering kit included. See information at lower right.



DEMO FIXTURE



Observe how a ferrite reduces emission



Verify the effectiveness of shielding



FREE #EK28B0032 FERRITE ENGINEERING KIT WITH EITHER ScanEM PROBE KIT PURCHASE

Our popular, wideband assortment of 32 unique configurations for EMI cable suppression.

Installation Guidelines

FerriShield® suppressors offer the finest performance alternatives by way of universal packaging, specific-purpose and general-purpose formulations. There are a few simple guidelines to assure expected results.

1. Cable Size

Refer to the chart on the page 33 for maximum recommended cable (or cable bundle) diameter. More than one cable may be inserted through the core opening since each circuit reacts with the ferrite material independently.

Consider the double loop knot shown in Attachment section below for snug attachment while greatly increasing the attenuation effect due to the increased magnetic path length. See also page 6, figures 3 and 4 for related technical information.



2. Closure


A tight fit between the cable outside dimensions; i.e. O.D., and the ferrite inside dimensions, i.e. I.D., will create the most effective magnetic path and a correspondingly higher attenuation ratio. Conversely, a loose fit is acceptable for many reasons, principally if a larger ferrite is desired, or a purpose-fit slack cable for tension control, flexing, etc.

3. Position

The suppressor should normally be located close to the cable termination where it exits the electronic enclosure.

Where a cable connects two enclosures containing RF sources, a suppressor on each end may be required.

For circuits within an enclosure, a position close to the RF source is best; however, other locations along the circuit may work just as well. This provides the opportunity to allow the suppressor, when affixed to the enclosure, to function also as a cable routing guide. See "Attachment" below for alternatives.

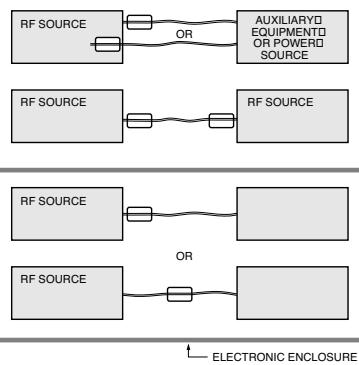

4. Attachment

Consider the various attachment alternatives shown below.



Tight grip on cable



Double loop knot



Hardware: screw, rivet



Press-fit tabs



Pressure sensitive adhesive



Cable tie wrap



Side-by-side double loop for flat cables

Each part number is a standard stock item and is carried in our inventories at all times for immediate delivery.

Part Number	Page #	Part Number	Page #	Part Number	Page #	Part Number	Page #
20B0562-2	26	AS20B2037	26,29	CF28B0937	11	FA20B1729	27
20B0736-0	26	AS20B2041	26,29	CF28B0984	11	FA20B2480	27
20R1260	27	AS20B2042	26,29	CF28B1500	10	FA25B0121	25
20R1575	27	AS25B2030	24,29	CF28B1501	10	FA25B2480	25
21T3350	15	AS25B2032	24,29	CF28B1642	10	FA28B0071	17
21T3937	15	AS25B2033	24,29	CF28B1805	10	FA28B0121	17
21T4335	15	AS25B2036	24	CF28B1937	10	FA28B1240	17
28B0137-3	15	AS25B2037	24,29	CF28B1984	10	FA28B1265	17
28B0138-7	15	AS25B2040	24	CF28B2000	10	FA28B1729	17
28B0200-4	15	AS28B2027	12	CS20B1500	26,29	FA28B1785	18
28B0250-1	15	AS28B2030	12,29	CS20B2000	26,29,31	FA28B2265	17
28B0300-0	15	AS28B2031	12	CS20B4000	26,29,31	FA28B2375	17
28B0350-0	15	AS28B2032	12,29	CS25B1500	24,29	FA28B2480	17
28B0355-0	15	AS28B2033	12,29	CS25B1642	24,29	FA28B2500	18
28B0375-3	15	AS28B2034	12,29	CS25B1937	24,29	FA28B2940	21
28B0385-2	15	AS28B2035	12,14	CS25B2000	24,29,31	FA28B3000	18
28B0562-2	15	AS28B2035-15	18	CS25B4000	24,29,31	FA28B3012	17
28B0563-0	15	AS28B2035-2	14	CS28B0642	11	FA33B2480	23
28B0625-0	15	AS28B2035-3	14	CS28B0805	11	FC20B1729	27
28B0625-1	15	AS28B2036	12	CS28B0937	11	FC20B2480	27
28B0626-0	15	AS28B2037	12,29	CS28B0984	11	FC25B0121	25
28B0672-0	15	AS28B2040	12	CS28B1500	10,29	FC25B2480	25
28B0686-2	15	AS28B2041	12,29	CS28B1501	10,29	FC28B0071	17
28B0735-0	15	AS28B2042	12,29	CS28B1642	10,29	FC28B0121	17
28B0736-0	15	AS28B2043	12	CS28B1805	10,29	FC28B1240	17
28B0785	19,21	AS28B2044	12	CS28B1937	10,29	FC28B1729	17
28B0870-0	15	AS33B2030	22	CS28B1984	10,29	FC28B1785	18
28B0999-0	15	AS33B2032	22	CS28B2000	10,29,31	FC28B2375	17
28B1020-1	15	AS33B2033	22	CS28B4000	10,29,31	FC28B2480	17
28B1101	19	AS33B2035	22	CS33B1805	22	FC28B2500	18
28B1102-1	15	AS33B2036	22	CS33B1984	22	FC28B3000	18
28B1225-0	15	AS33B2037	22	CS33B2000	22,31	FC28B3012	17
28B1250-2	15	AS33B2040	22	CS33B4000	22,31	FC33B2480	23
28B1387-1	15	BA28B1251	14	CTK015	34	FD25B2480	25
28B1417-2	15	BA28B1500	14	CTK031	28,34	FD28B2375	17
28B1775	19	BA28B1501	14	CV28B1642	10	FD28B2480	17
28B1775-1	19	BC28B1251	14	CV28B1805	10	FD28B2500	18
28B1779	19	BC28B1500	14	CV28B1937	10	FD28B3000	18
28B2000-3	15	BC28B1501	14	CV28B1984	10	FD28B3012	17
28B2002	19,21	CA20B1500	29	CW28B0642	11	FD33B2480	23
28B2170-1	19	CA20B2000	29	CW28B0805	11	FF25B0121	25
28B2275	15	CA20B4000	29	CW28B0937	11	FF25B2480	25
28B2400-0	15	CA25B1500	29	CW28B0984	11	FF28B0121	17
28B2945	15	CA25B1642	29	CW28B1500	10	FF28B1240	17
28B3149	19	CA25B1937	29	CW28B1501	10	FF28B1265	17
28B3170	15	CA25B2000	29	CW28B1642	10	FF28B1729	17
28B4100	15	CA25B4000	29	CW28B1805	10	FF28B1785	18
28B5945	15	CA28B0642	11	CW28B1937	10	FF28B2375	17
28B5950	15	CA28B0805	11	CW28B1984	10	FF28B2440	21
28B9210	15	CA28B0937	11	CW28B2000	10	FF28B2480	17
28R0760	19	CA28B0984	11	EK20B0009	30	FF28B2500	18
28R1127	19	CA28B1500	10,29	EK25B0012	30	FF28B2940	21
28R1127-2	19	CA28B1501	10,29	EK28B0021	30	FF28B3000	18
28R1260	19	CA28B1642	10,29	EK28B0032	30	FF28B3012	17
28R1531	19,21	CA28B1805	10,29	EK28B27SB	30	FF33B2480	23
28R1575	19	CA28B1937	10,29	EK33B0011	30	FX28R0984-0/A	19
28R1953	19	CA28B1984	10,29	ET20B2000	31	FX28R0984-2/A	19
28R2300	19	CA28B2000	10,29	ET25B2000	31	FX28R1450-1/A	19
AS20B2030	26,29	CA28B4000	29	ET28B2000	31	FX28R1450-2/A	19
AS20B2033	26,29	CF28B0642	11	ET28B3000	31	FX28R1457-4/A	19
AS20B2034	26,29	CF28B0805	11	ET33B2000	31		

Each part number is a standard stock item and is carried in our inventories at all times for immediate delivery.

Part Number	Page #	Part Number	Page #	Part Number	Page #	Part Number	Page #
HA28B2038	13	SB28B0071	20	SB28B2043AT/AB	20	SS25B2036	24
HA28B2039	13	SB28B0071AB/AT	20	SB28B2100	20	SS25B2037	24,29
HF28B2038	13	SB28B0121	20	SB28B2100-1	20	SS25B2040	24
HF28B2039	13	SB28B0121AB/AT	20	SB28B2100-1AB	20	SS28B2027	12
HI28B2038	13	SB28B0146	20	SB28B2100AB	20	SS28B2030	12,29
HI28B2039	13	SB28B0146AB/AT	20	SB28B2375	20	SS28B2031	12,14
HW28B2038	13	SB28B0221	20	SB28B2375AT/AB	20	SS28B2032	12,29
HW28B2039	13	SB28B0221AT/AB	20	SB28B2480	20	SS28B2033	12,29
IL25B0642W/G/B/K	24	SB28B0500	20	SB28B2480AT/AB	20	SS28B2034	12,14,29
IL28B0642W/G/B/K	12	SB28B0500-1	20	SB28B3012	20	SS28B2035	12,14
JB28B0010	12	SB28B0500-1AB	20	SB28B3012AT/AB	20	SS28B2035-15	18
PM28B0625	14	SB28B0500AB	20	SB28B3500	20	SS28B2035-2	14
PM28B0686	14	SB28B0550	20	SB28B3500AT/AB	20	SS28B2035-3	14
PM28B0736	14	SB28B0550AB	20	SB28B4340	20	SS28B2036	12
PM28B1625	14	SB28B0617	20	SB28B4340AT/AB	20	SS28B2037	12,29
PM28B3375	14	SB28B0617AB	20	SB28B5630	14,21	SS28B2040	12
RA20B1729	27,29	SB28B0642	20	SB28B5630A	14,21	SS28B2041	12,29
RA20B2480	27,29	SB28B0642AB	20	SE20B1729	27	SS28B2042	12,29
RA25B2480	25,29	SB28B0805	20	SE20B2480	27	SS28B2043	12
RA25B4340	25,29	SB28B0805AB	20	SE25B0121	25	SS28B2044	12
RA28B0765	16	SB28B0875	20	SE25B2480	25	SS33B2030	22
RA28B1265	16	SB28B0875-1	20	SE25B4340	25	SS33B2032	22
RA28B1729	16,29	SB28B0875-1AB	20	SE28B0071	17	SS33B2033	22
RA28B2265	16	SB28B0875AB	20	SE28B0121	17	SS33B2035	22
RA28B2480	16,29	SB28B0937	20	SE28B0146	17	SS33B2036	22
RA28B3012	16,29	SB28B0937AB	20	SE28B0221	17	SS33B2037	22
RA28B4340	16,29	SB28B0984	20	SE28B1240	17	SS33B2040	22
RA33B2480	23	SB28B0984AB	20	SE28B1729	17	TC20B1500	26
RA33B4340	23	SB28B1055	20	SE28B2480	17	TC20B2000	26
RC20B1729	27,29	SB28B1055-1	20	SE28B3012	17	TC25B0642	24
RC20B2480	27,29	SB28B1055-1AB	20	SE28B3500	17	TC25B0937	24
RC25B2480	25,29	SB28B1055AB	20	SE28B4340	17	TC25B1500	24
RC25B4340	25,29	SB28B1123	20	SE33B2480	23	TC25B2000	24
RC28B0765	16	SB28B1123AB	20	SE33B4340	23	TC28B0550	11
RC28B1265	16	SB28B1251	20	SM20R1260	27	TC28B0617	11
RC28B1729	16,29	SB28B1251AB	20	SM20R1575	27	TC28B0642	11
RC28B2265	16	SB28B1500	20	SM28B0785	19,21	TC28B0805	11
RC28B2480	16,29	SB28B1500AB	20	SM28B1101	19	TC28B0937	11
RC28B3012	16,29	SB28B1501	20	SM28B1775	19	TC28B0984	11
RC28B4340	16,29	SB28B1501AB	20	SM28B1775-1	19	TC28B1123	11
RC33B2480	23	SB28B1729	20	SM28B1779	19	TC28B1251	11
RC33B4340	23	SB28B1729AT/AB	20	SM28B2002	19,21	TC28B1500	11
SA20B1729	27	SB28B2000	20	SM28B2170-1	19	TC28B1501	11
SA20B2480	27	SB28B2000AB	20	SM28B3149	19	TC28B2000	11
SA25B0121	25	SB28B2027	20	SM28R0760	19	TC33B0805	22
SA25B2480	25	SB28B2027AT/AB	20	SM28R1127	19	TC33B0984	22
SA25B4340	25	SB28B2030	20	SM28R1127-2	19	TC33B2000	22
SA28B0071	17	SB28B2030AT/AB	20	SM28R1260	19	USB28B2034	13
SA28B0121	17	SB28B2031	20	SM28R1531	19,21	USB28B2034A	13
SA28B0146	17	SB28B2031AT/AB	20	SM28R1575	19	USB28B2034K	13
SA28B0221	17	SB28B2032	20	SM28R1953	19	USB28B2034KA	13
SA28B1240	17	SB28B2032AT/AB	20	SM28R2300	19		
SA28B1729	17	SB28B2034	20	SS20B2030	26,29		
SA28B2480	17	SB28B2034AT/AB	20	SS20B2033	26,29		
SA28B3012	17	SB28B2035	20	SS20B2034	26,29		
SA28B3500	17	SB28B2035AT/AB	20	SS20B2037	26,29		
SA28B4340	17	SB28B2039	20	SS20B2041	26,29		
SA33B2480	23	SB28B2039AT/AB	20	SS20B2042	26,29		
SA33B4340	23	SB28B2041	20	SS25B2030	24,29		
SB28B0010	20	SB28B2041AT/AB	20	SS25B2032	24,29		
SB28B0010AB/AT	20	SB28B2043	20	SS25B2033	24,29		

WE'VE GOT YOU COVERED

Reliable Board, Enclosure and Cable Shielding Solutions


Leader Tech is a world-leading innovator and US-based manufacturer of EMI shielding products for circuit boards, enclosures and cables. In addition to our best selling standard, modified standard and custom CBS shields, Leader Tech offers an expansive line of beryllium copper fingerstock gaskets, conductive elastomers, advanced RF absorber materials and EMI/RFI ferrites.



EMI Enclosure Solutions Catalog



CBS Circuit Board Shielding Catalog



LEADERTECH SHIELDING PRODUCTS

Board Level Shielding

- Standard and Multi-Cavity CBS
- Modified Standard Options
- Custom Circuit Board Shields

FerriShield Ferrites

- Snap-On Bisected & Solid Bead Ferrites
- Round & Flat Styles for Cables, Wires and Flex Circuits
- Low, High, Microwave and Wideband Frequency-Specific Material

Enclosure Shielding

- BeCu Fingerstock Gaskets
- TechSIL 5000 Conductive Elastomers
- Conductive Fabric Shielding Gaskets
- TechSIL 8000 Oriented Wire Gaskets
- TechMESH Knitted Wire Gaskets
- TechMESH Combo Strip & Gaskets
- TechVent Honeycomb Shielding Panels

EMI PROBLEM?

Our sales engineers are waiting for your call: 866-TECH-EMI (866-832-4364)

Visit our web site today to browse our complete product line, download literature and find your local sales engineer or sales representative! www.leadertechinc.com

STANDARD PRODUCTS

Part Number Explanation



Part Style	Material Type	Ferrite Shape	Ferrite Size	Special Option
SS	28	B	2031	K

Color

All plastic components are supplied in PMS #413 computer gray unless shown in photos as natural white or black. Black is optional where indicated.

Custom Products

Engineering support is always available for special designs and evaluations.

Samples

Most items on catalog pages 10 through 27 are available from stock on a complimentary basis.

Commercial and Government Entity Code (CAGE CODE): 4J674

Quality System

ISO 9001:2008 certified.

Delivery

All items are normally available from stock at all times for immediate delivery.

RoHS Directive

All FerriShield products are in compliance with the European Commission RoHS Directive, Restriction of use of certain Hazardous Substances, dated July, 1 2006. FerriShield products do not contain any of the six restricted substances; namely, lead, cadmium, mercury, hexavalent chromium, PBB or PBDE flame retardant.

Customer Service

For quotes, technical information or personal assistance, contact:



12420 Race Track Road, Tampa, Florida 33626
www.leadertechinc.com • sales@leadertechinc.com
 866.TECH.EMI (866.832.4364) • Local: 813.855.6921
 Fax: 813.855.3291



ISO 9001: 2008 CERTIFIED



STATEMENT OF LIEU OF WARRANTY: All technical information and data in this document is based on tests and is believed to be accurate and reliable. Nevertheless, since the products described herein are not provided to conform with mutually accepted specifications and the use thereof is unknown, the manufacturer and seller of the products do not guarantee results, freedom from patent infringement, or suitability of the products for any application thereof. The manufacturer and seller of the products described in this document will provide all possible technical assistance and will replace any products proven defective. No statement or recommendations made by the manufacturer or seller not contained herein shall have any force of effect unless in conformity with an agreement signed by an officer of the seller and manufacturer. Product testing by the purchaser is recommended in order to confirm expected results.

copyright® Leader Tech, Inc. 2009

www.LEADERTECHINC.com

A passion in all we do



**LEADER
TECH** 
a HEICO company

12420 Race Track Rd.
Tampa, Florida 33626

866.TECH.EMI (866.832.4364)
Tel: 813.855.6921
Fax: 813.855.3291

ISO 9001: 2008



www.leadertechinc.com

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9