


## 3-INPUT / 2-INPUT VIDEO SWITCH


### ■ GENERAL DESCRIPTION

The NJM2508 is video switch for video and audio signal. It contains 3 input-1 output and 2 input-1 output video switch. One input terminal has clamp function and so is applied to fixed DC level of video signal. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 75dB (at f = 4.43MHz)


### ■ PACKAGE OUTLINE



NJM2508D



NJM2508M



NJM2508V

### ■ FEATURES

- Operating Voltage (+4.75V to +13V)
- 3 Input-1 Output and 2 Input-1 Output
- Crosstalk 75dB (at 4.43MHz)
- Wide Frequency Range 10MHz (2V<sub>P-P</sub> Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology


### ■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V<sup>+</sup> 4.75V to 13.0V

### ■ APPLICATION

- VCR, Video Camera, AV-TV, Video Disk Player.

### ■ BLOCK DIAGRAM

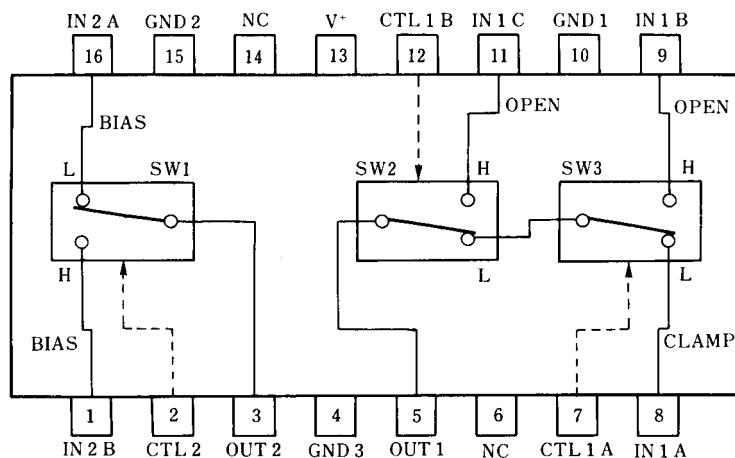

NJM2508D

NJM2508M

NJM2508V

# NJM2508

## ■ ABSOLUTE MAXIMUM RATINGS

( $T_a = 25^\circ\text{C}$ )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+$	14	V
Power Dissipation	$P_D$	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW
Operating Temperature Range	$T_{opr}$	-40 to +85	°C
Storage Temperature Range	$T_{stg}$	-40 to +125	°C

## ■ ELECTRICAL CHARACTERISTICS


( $V^+ = 5\text{V}$ ,  $T_a = 25^\circ\text{C}$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current 1	$I_{CC1}$	$V^+ = 5\text{V}$ (Note1)	6.6	9.4	12.3	mA
Operating Current 2	$I_{CC2}$	$V^+ = 9\text{V}$ (Note1)	8.0	11.5	15.0	mA
Voltage Gain	$G_V$	$V_I = 2V_{P.P}$ / 100kHz, $V_O / V_I$	-0.6	-0.1	+0.4	dB
Frequency Response	$G_f$	$V_I = 2V_{P.P}$ , $V_O$ (10MHz / 100kHz)	-1.0	0	+1.0	dB
Differential Gain	$DG$	$V_I = 2V_{P.P}$ , Staircase Signal	-	0.3	-	%
Differential Phasa	$DP$	$V_I = 2V_{P.P}$ , Staircase Signal	-	0.3	-	deg
Output offset Voltage	$V_{OS}$	(Note2)	-10	0	+10	mV
Crosstalk	$CT$	$V_I = 2V_{P.P}$ , 4.43MHz, $V_O / V_I$	-	-75	-	dB
Switch Change Voltage	$V_{CH}$	All inside SW : ON	2.5	-	-	V
Switch Change Voltage	$V_{CL}$	All inside SW : OFF	-	-	1.0	V

(Note1)  $S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1$

(Note2) Output DC Voltage Difference is tested on  $S6 = 1 \rightarrow 2$ ,  $S1 = S2 = S3 = S4 = S5 = 1$ ,  $S8 = 2$  and  $S7 = 1$

## ■ TEST CIRCUIT

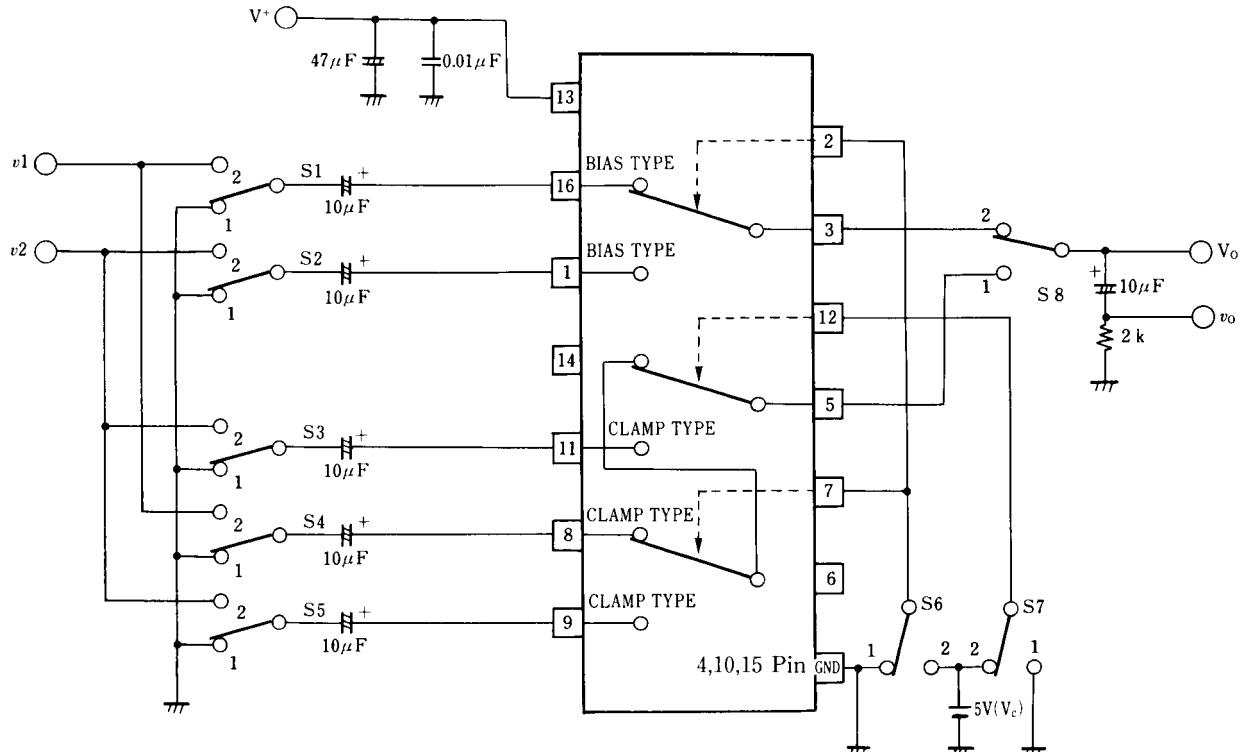


## ■ PIN FUNCTION

PIN No.	PIN NAME	DC VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1	IN 2A IN 2B [Input]	2.5V	
8	IN 1A [Input]	1.5V	
9 11	IN 1B IN 1C [Input]		
7 12 2	CTL 1A CTL 1B CTL 2 [Control]		
5	OUT1 [Output]	1.8V	
3	OUT2 [Output]	0.8V	
13	V <sup>+</sup>	5V	
15 4 10	GND 1 GND 2 GND 3		


# NJM2508

## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )


Operating Current vs. Operating Voltage

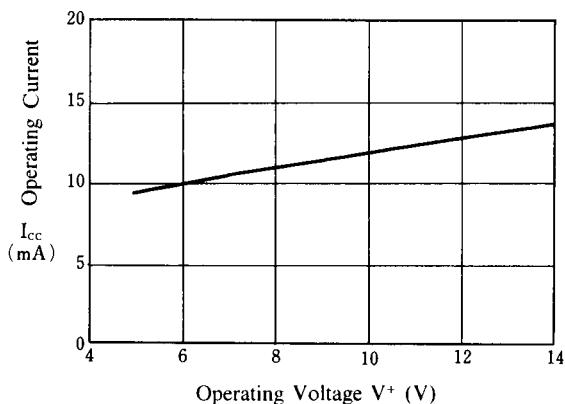


Operating Current vs. Ambient Temperature

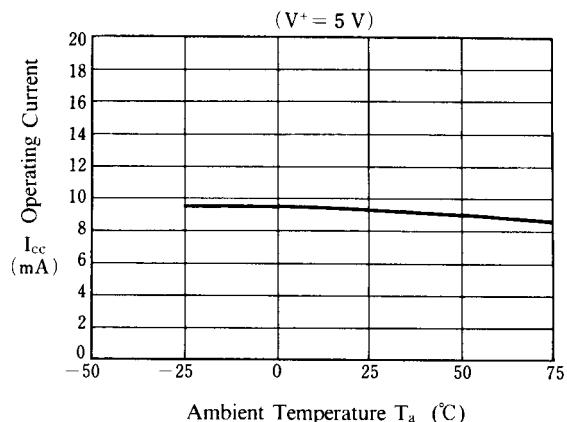


Operating Current vs. Ambient Temperature

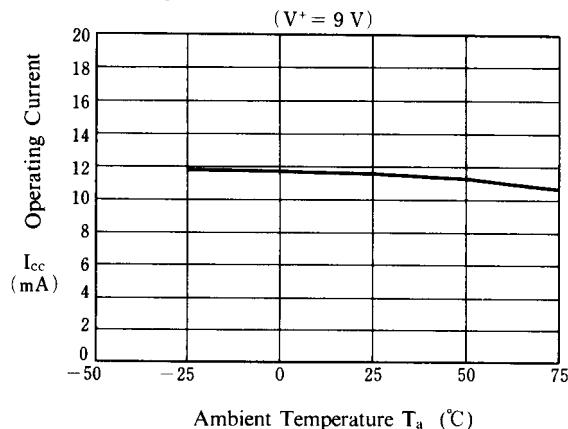


Voltage Gain vs. Operating Voltage

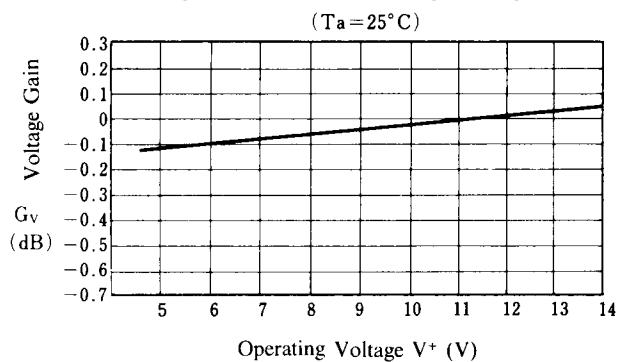







Voltage Gain vs. Frequency

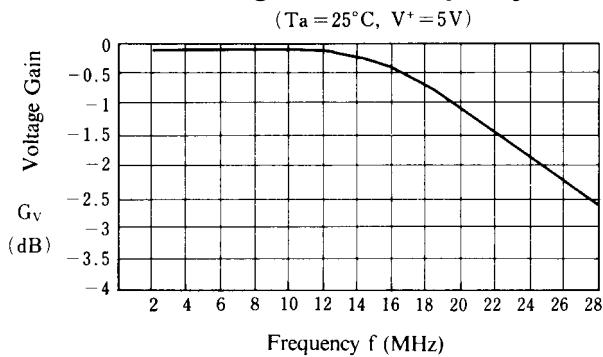

Voltage Gain vs. Ambient Temperature






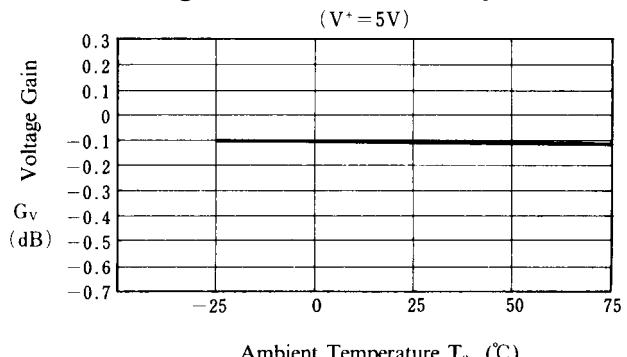


## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

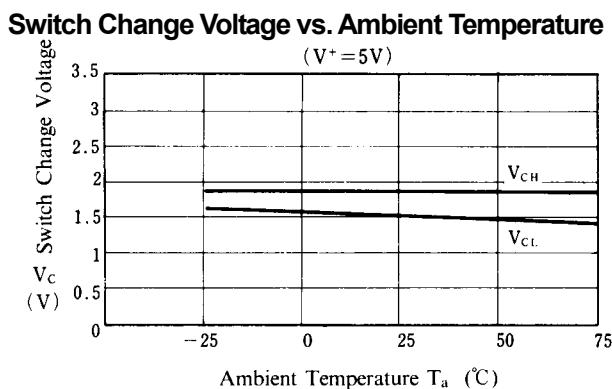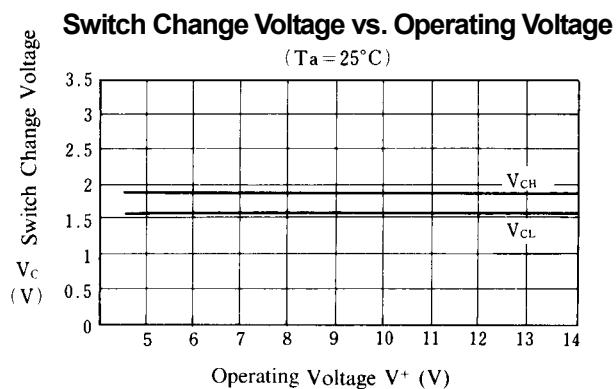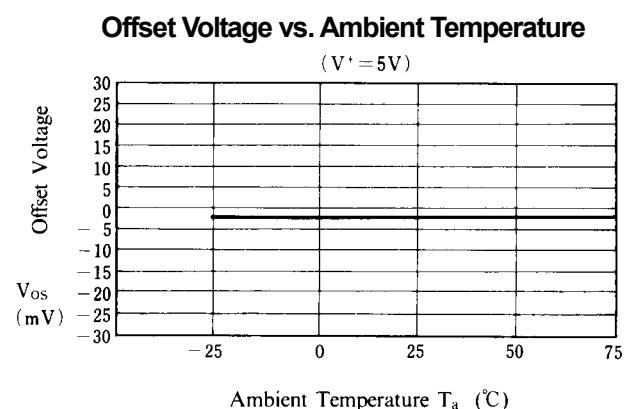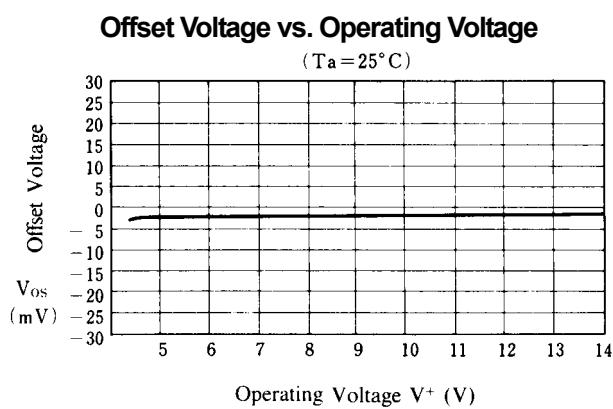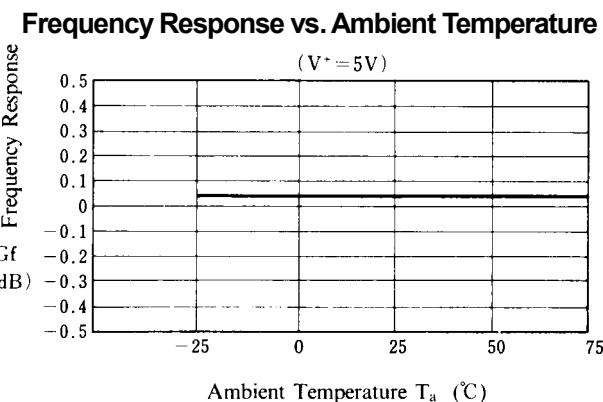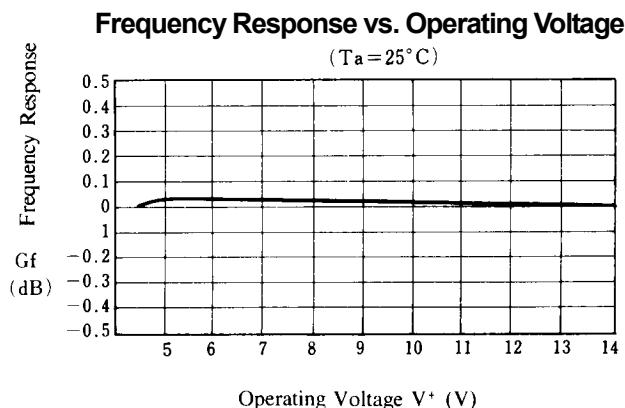


# NJM2508

## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ C$ )

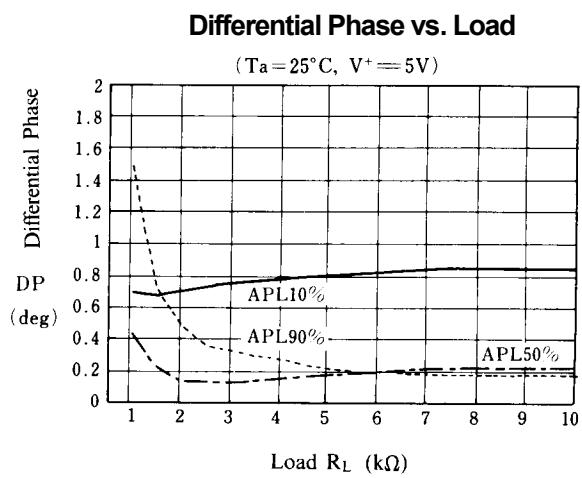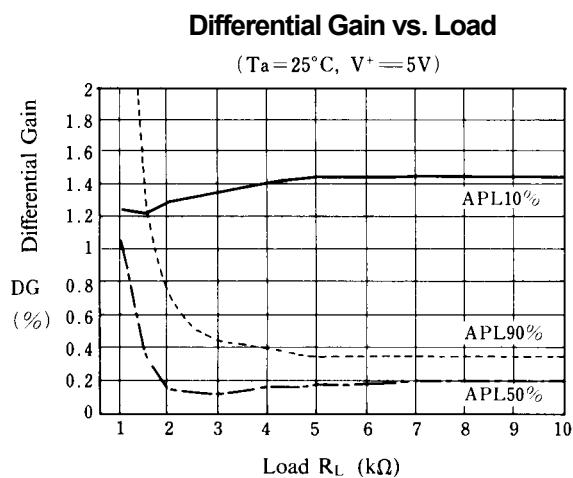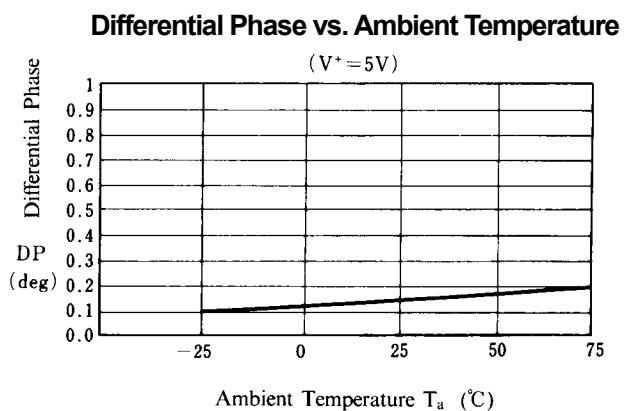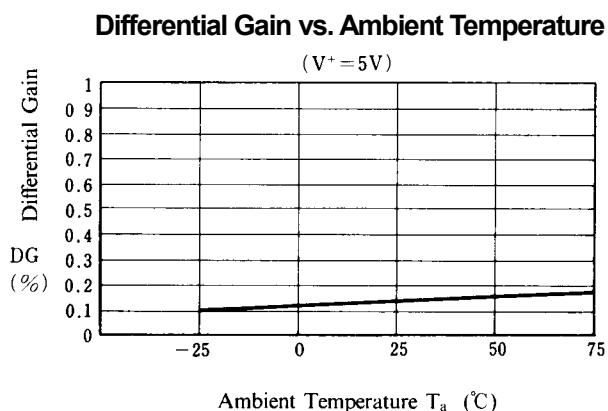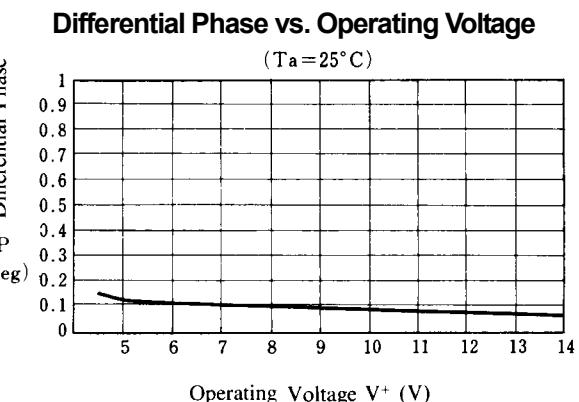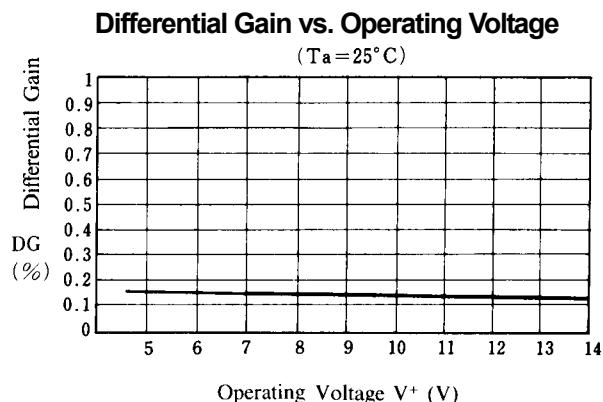


■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )


Differential Gain vs. APL

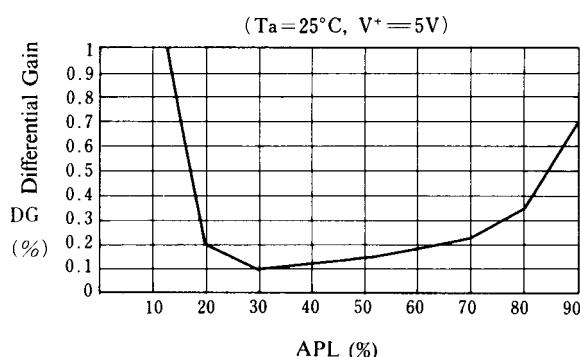


Differential Phase vs. APL

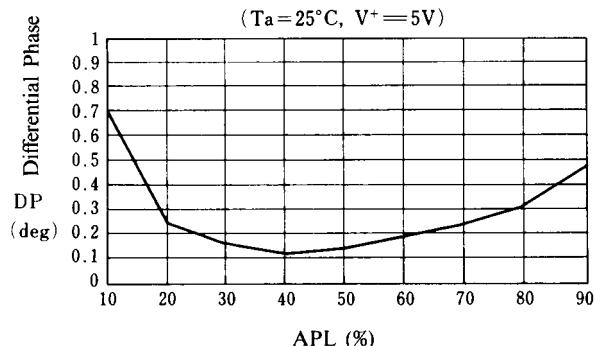


Differential Gain vs. Load

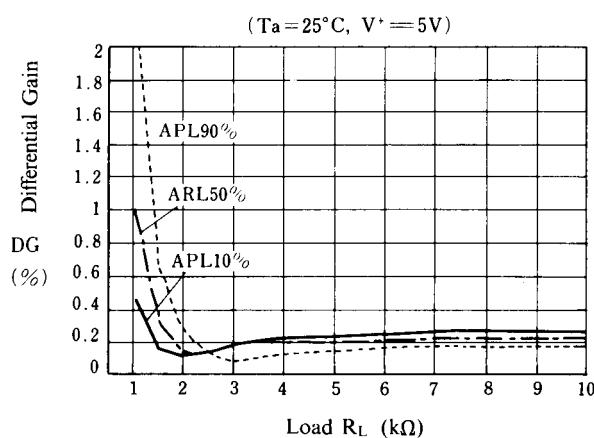


Differential Phase vs. Load

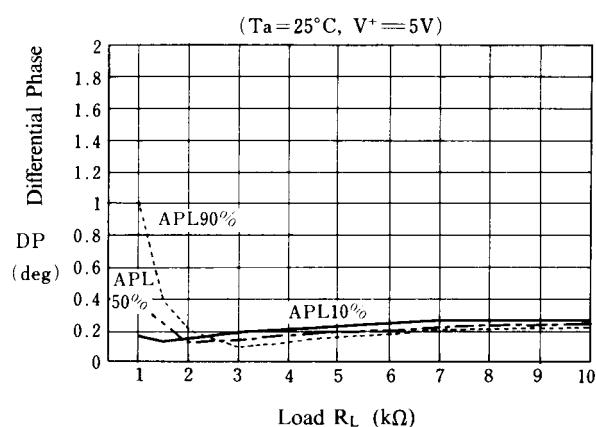

Differential Gain vs. APL






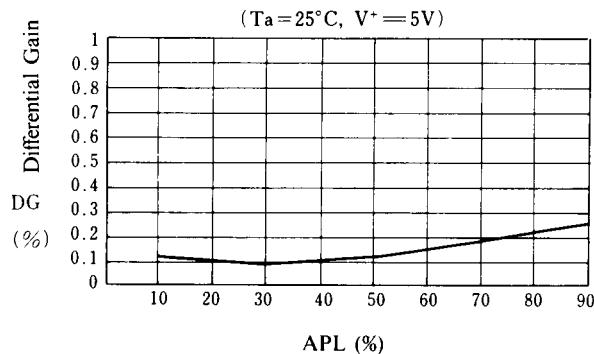


Differential Phase vs. APL

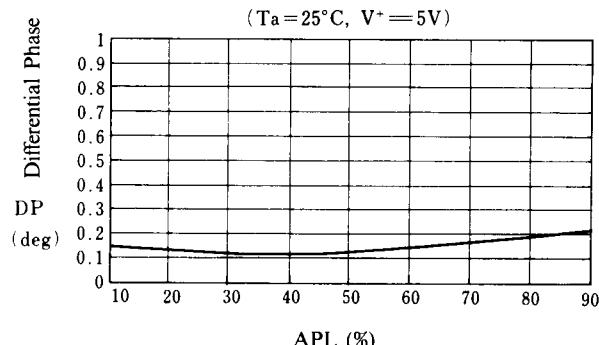


# NJM2508

## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

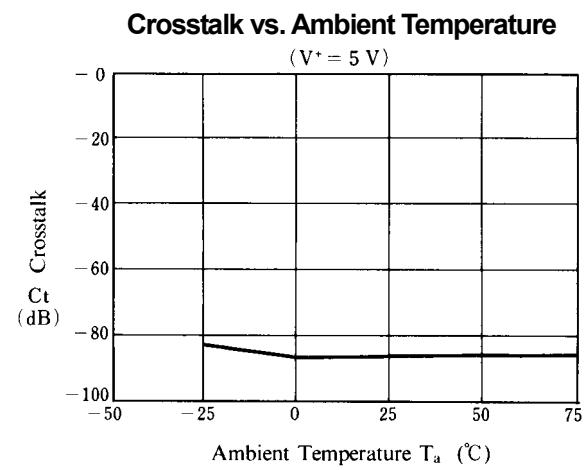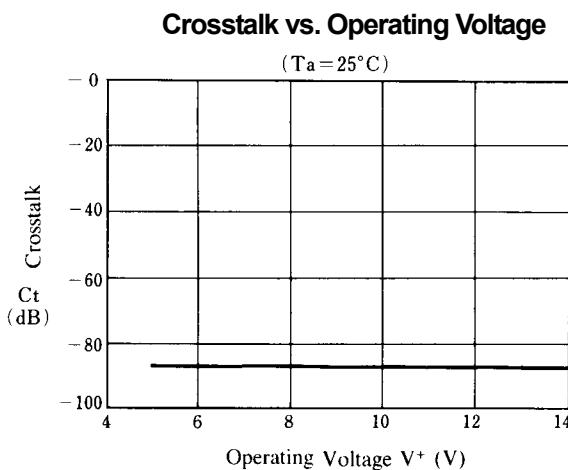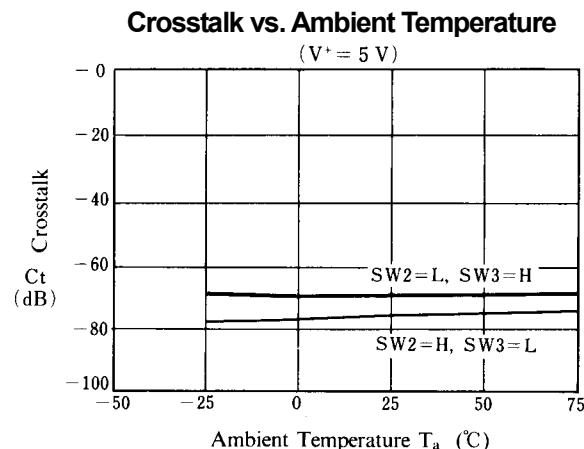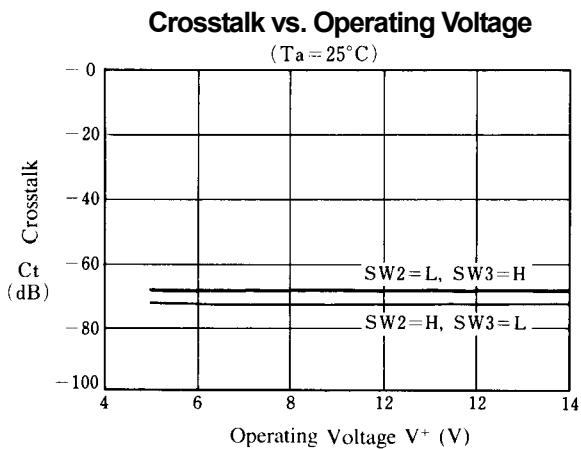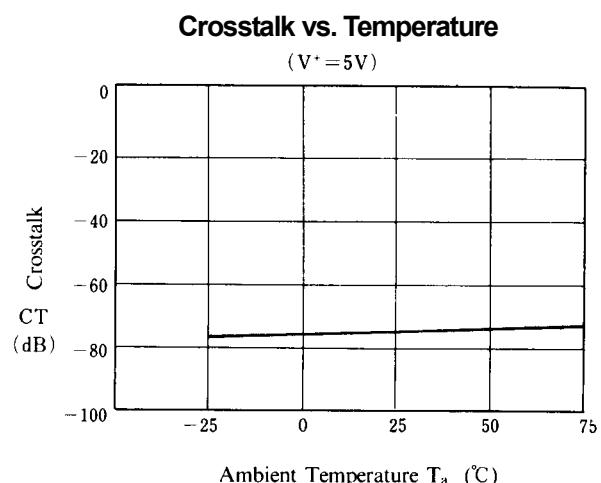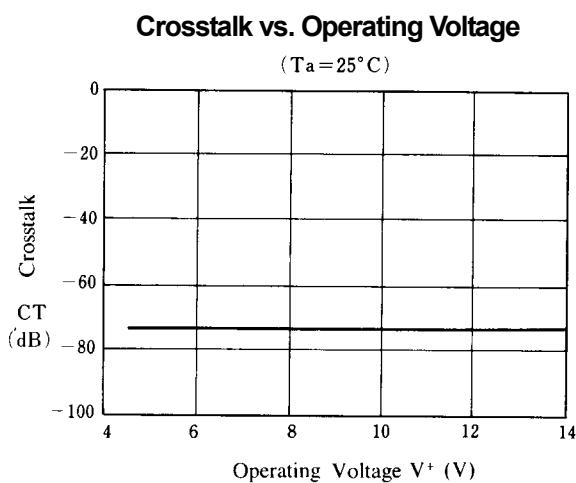


## ■ TYPICAL CHARACTERISTICS ( $T_a = +25^\circ\text{C}$ )

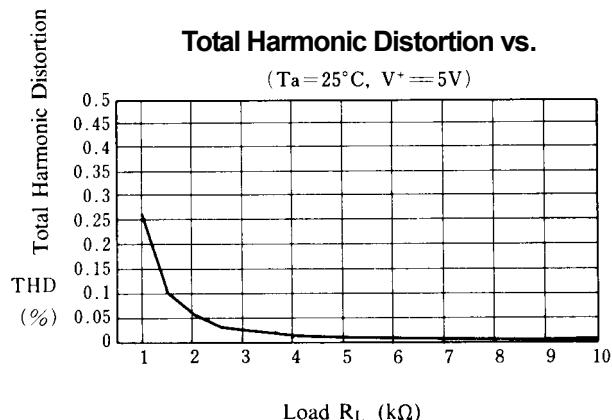


# NJM2508

## ■ APPLICATION


This IC requires  $1M\Omega$  resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

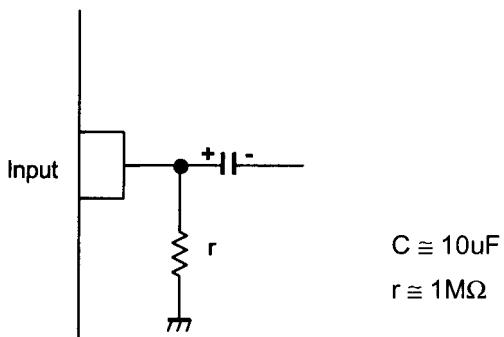

This IC requires  $0.1\mu F$  capacitor between INPUT and GND,  $1M\Omega$  resistance between INPUT and GND for clamp type input at mute mode.

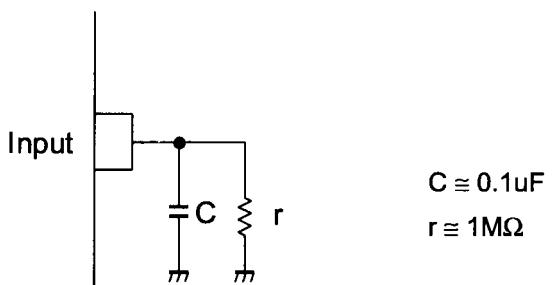

This IC requires  $0.1\mu F$  capacitor between INPUT and GND for bias type input at mute mode.

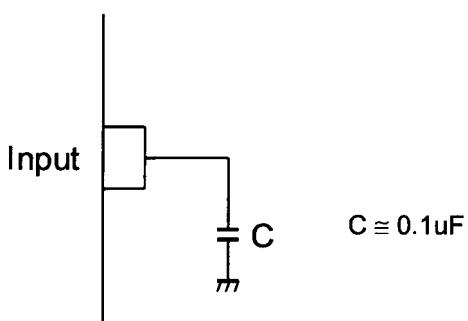

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9