

DESCRIPTION

Demonstration circuit 886 is an ultra-low input voltage and dropout voltage supply using the LTC3035 linear regulator, which comes in a very small 8-pin DFN package. The DC886 has an input voltage range from 1.7V to 5.5V, an output voltage range between 0.4V and 3.6V, and is capable of delivering 300mA of output current. Due to the 0.4V reference of the LTC3035, the DC886 is capable of supplying power to very low voltage applications, such as a (relatively) high current voltage refer-

ences. The DC886 comes assembled with small ceramic capacitors – 1 μ F – to demonstrate the LTC3035 maintaining stability with ceramic output capacitors.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1.

Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		1.7V
Maximum Input Voltage		5.5V
Output Voltage V_{OUT}	$V_{IN} = 1.7\text{V to } 5.5\text{V}$, $I_{OUT} = 0\text{A to } 300\text{mA}$	$1.8\text{V} \pm 3\%$
Typical Dropout Voltage	$V_{IN} = 1.7\text{V}$, $I_{OUT} = 300\text{mA}$	45mV
Output Regulation	Line	$\pm 0.5\%$
	Load	$\pm 0.5\%$

QUICK START PROCEDURE

The DC886 demonstration board is easy to set up to evaluate the performance of the LTC3035. For proper measurement equipment configuration, set up the circuit according to the diagram in **Figure 1**. Before proceeding to test, insert jumper JP5 shunt into the off (lower) position, connecting the RUN pin to ground (GND), which shuts down the circuit.

NOTE: When measuring the input or output ripple or noise voltage, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the

voltages by touching the probe tip directly across the VIN or VOUT and GND terminals. See Figure 2 for proper scope probe technique.

1. Connect the input power supply and the load to the board. Do not hot-plug VIN or increase VIN over the rated maximum supply voltage of 5.5V, or the part may be damaged. Refer to Figure 1 for the proper measurement equipment setup.
2. Select any of the output voltages by inserting a shunt into that output voltage jumper position.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 886

300mA VERY LOW DROPOUT LINEAR REGULATOR

3. Apply 5V at VIN. Measure VOUT; it should read 0V. If desired, one can measure the shutdown supply current at this point. The supply current will be approximately 1uA in shutdown.
 4. Turn on the circuit by inserting the shunt on jumper JP5 into the ON (upper) position. The output voltage should be regulating to +/-2% of its selected value (see the table below).
 5. Vary the input voltage from VOUT plus the dropout voltage (45mV typically at 300mA of output current) to 5.5V and adjust the load current from 0 to 300mA. VOUT should read +/-3% of its selected value (see the table below).
- When finished, turn off the circuit by inserting the shunt on jumper JP5 into the OFF (lower) position.

	No Load	Max Load or Line Variation	Max Load and Line Variation
	2%	2.5%	3%
VOUT = 1.8V	1.764V – 1.836V	1.755V – 1.845V	1.746V – 1.854V
VOUT = 2.5V	2.45V – 2.55V	2.437V – 2.563V	2.425V – 2.575V
VOUT = 3.3V	3.234V – 3.366V	3.217V – 3.383V	3.201V – 3.399V

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 886

300mA VERY LOW DROPOUT LINEAR REGULATOR

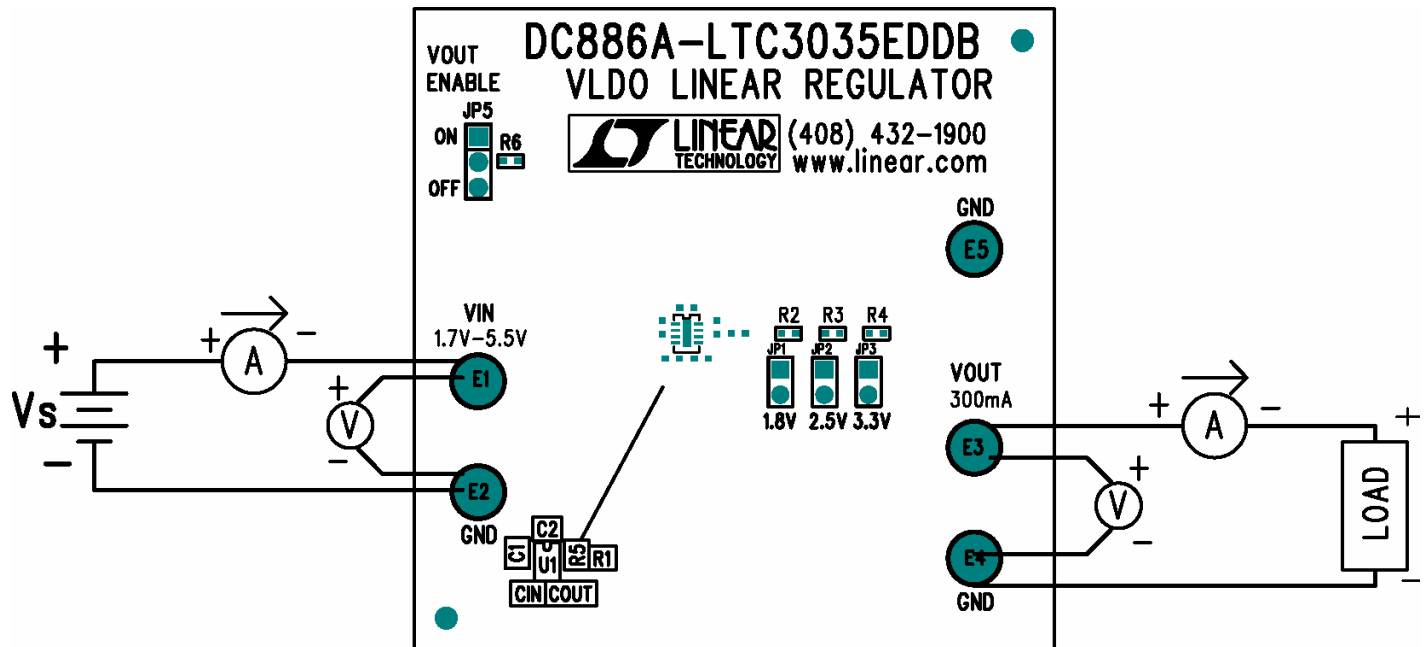


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9