

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC930A

1 CELL LI-ION BATTERY CHARGER BOARD WITH BUILT IN CHARGE TERMINATION

LTC4001

DESCRIPTION

Demonstration circuit DC930 is a single Li-ion cell/battery stand-alone battery charge controller with built in charge termination featuring the LTC4001. The input voltage is 4.3 to 5.5V. The charger output voltage is fixed for a 1cell 4.2V Li-ion battery. The maximum charge current is 2A. The board will automatically charge a battery to termination as soon as input power is applied with a battery connected prior to power up. Status LEDs are provided for CHARGE, FAULT and C/10. An onboard NTC thermistor is provided. Jumpers are provided to reduce both charge cur-

rent and charge detection threshold down to 1A and 0.1A respectively. An on-off and an external-onboard thermistor jumper are also provided. The board is laid out to support remote voltage sensing at both input and output terminals. Test-points are provided for various signal-monitoring points.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1. Performance Summary


PARAMETER	CONDITION	VALUE
Maximum Input Voltage	Limited by IC Volt Ratings.	5.5V
Recommended Minimum Input Voltage	$V_{in} > V_{bat}$ Termination voltage + 100mV.	4.3V (4.5V recommended)
Charge Time	$C3 = 0.1\mu F$, where $C3 = \text{Time} * 0.0733\mu F/Hr$ Time can be increased by adding parallel cap between timer test point and ground.	1.3 Hours +/- 10%
Automatic Recharge Threshold		$V_{bat} < 4.1V$
Efficiency	$V_{in} = 5V$, $V_{bat} = 4V$ and $I_{bat} = 2Amps$	>85%
Maximum Charge Current	Default is set up for 2A. 1A jumper provided.	2A +/- 5%


QUICK START PROCEDURE

- 1) Connect the input power source to PVIN and GND terminals (TP1 and TP2) using a power supply capable of handling a minimum of 2.5A of current within a 4.5 to 5.5V range. The input supply MUST be greater than the full voltage value of the battery to allow a full charge to take place.
- 2) Connect the load to BAT+ and BAT- terminals (TP8 and TP5).
- 3) Connect a 4.2V Li-ion battery to the terminals.
- 4) Turn on the input power supply.
- 5) NOTE: If the board is allowed to get to warm, the onboard NTC thermistor may trip and momentarily suspend the charge process. The Fault LED being activated can confirm this. When the board cools down, charging will automatically resume.
- 6) NOTE: Resistive based current monitoring meters placed in series with the chargers output will lengthen the charge time. Any increase in series resistance will force the CC to CV transition point to occur prematurely such that the CV phase will become longer than normal relative to a direct battery connection. Total charge time will also increase.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC930A

1 CELL LI-ION BATTERY CHARGER BOARD WITH BUILT IN CHARGE TERMINATION

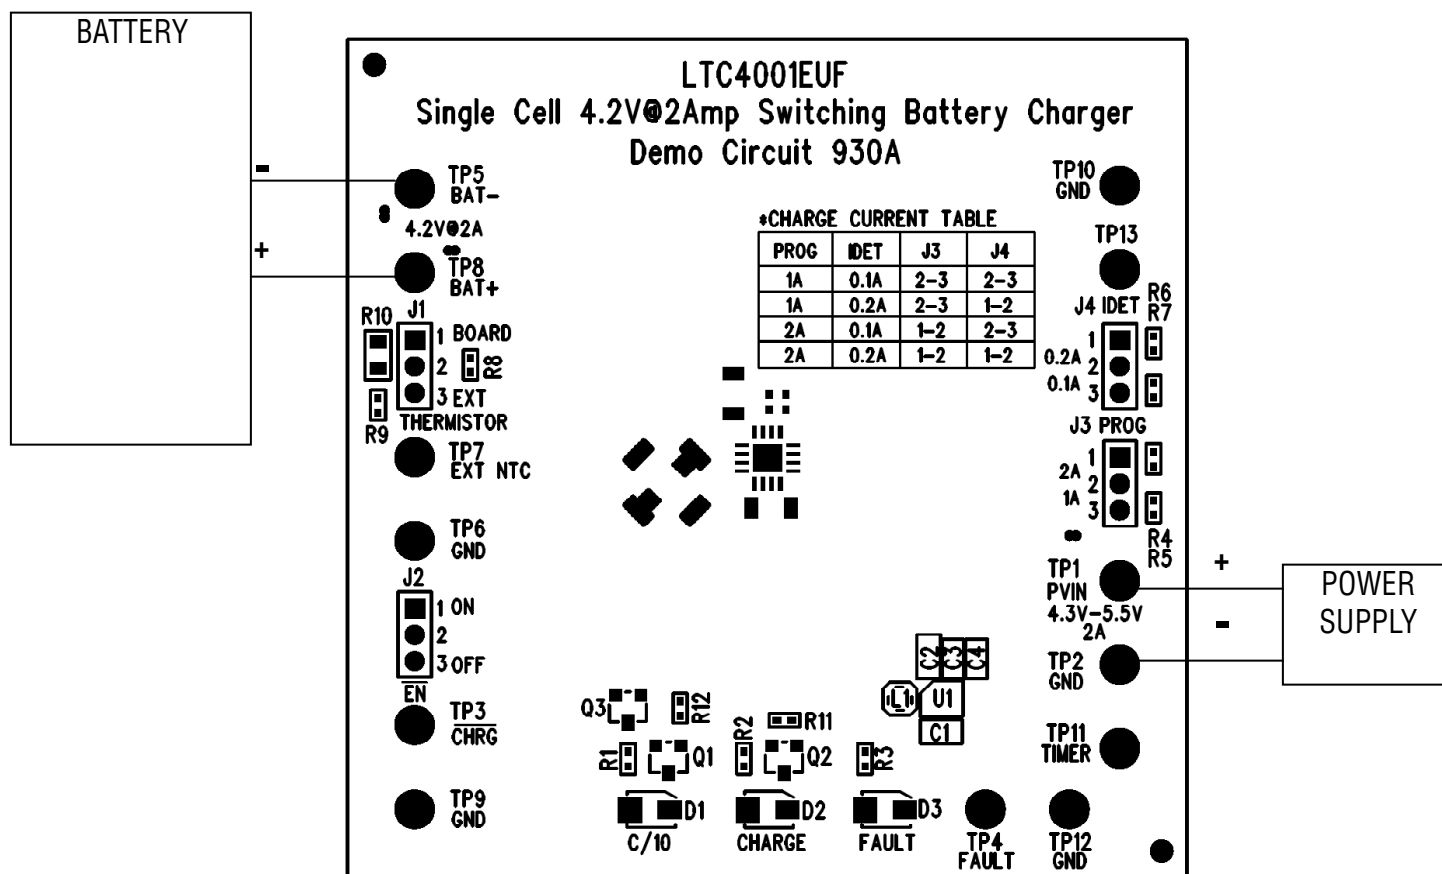

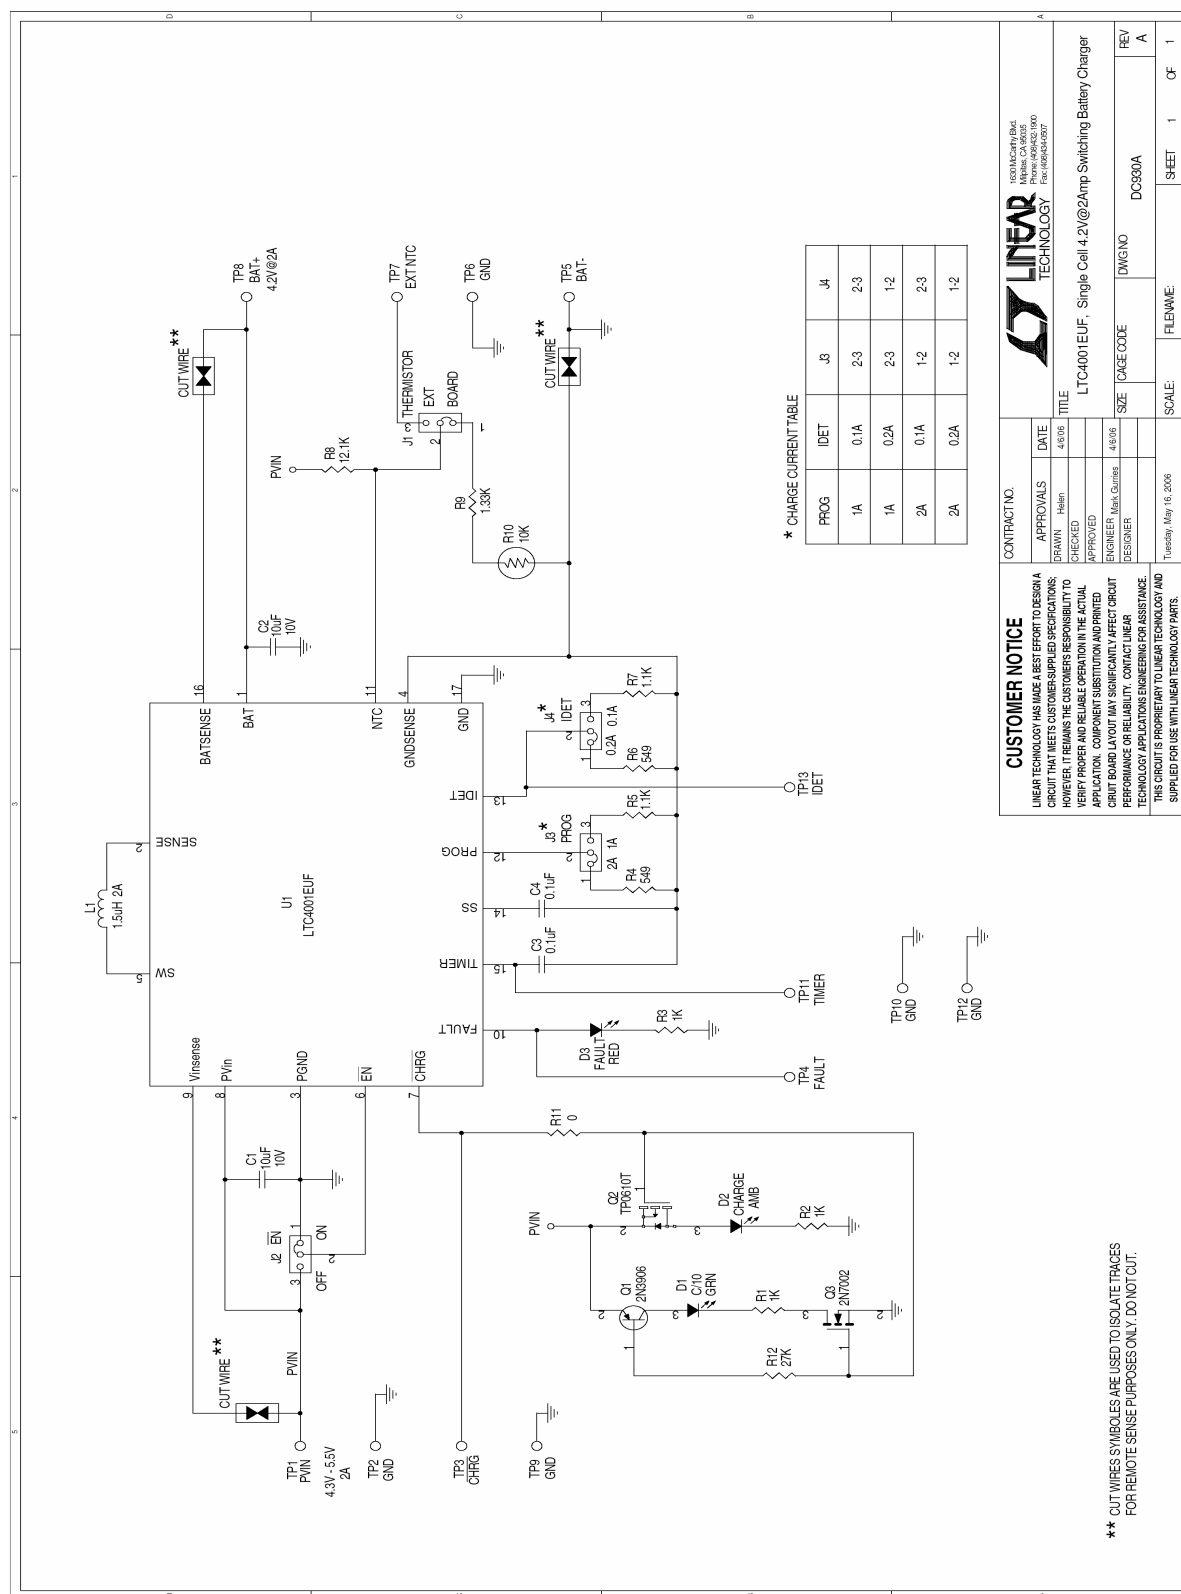

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9