


# GT11 Series

— Connectors for coaxial cables —

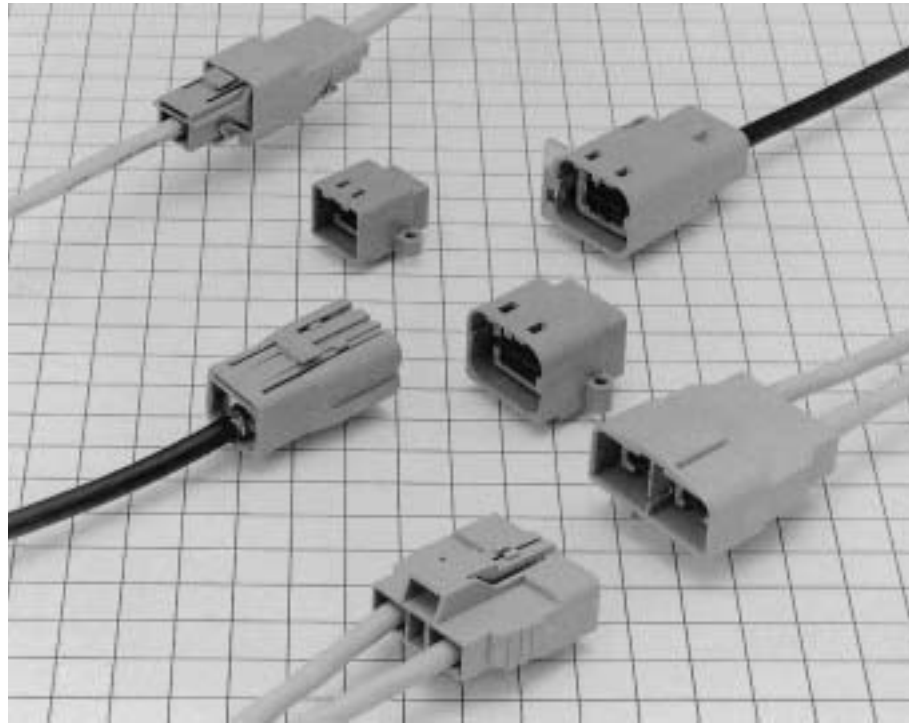


## ■ Features

- **Cost efficient termination**  
Highly efficient and reliable single motion crimp termination allows high volume production with semi-automatic equipment.
- **Lock-release latching system**
- **Shock / vibration resistant electrical connections**
- **Verification of the full contact insertion**

## For Double-Conductor coaxial shielded cable

### F Connectors

#### ● Outer terminals

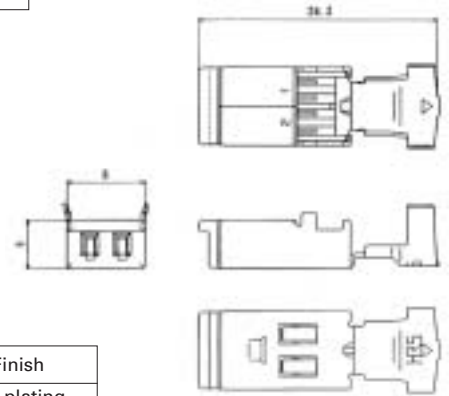


Part Number	CL No.	Applicable Cable
GT11-2S-5.2C	761-0002-3	4.5 to 5.2mm
GT11-2S-6.0C	761-0028-7	5.8 to 6.2mm

Item	Material	Finish
Outer terminal	Brass	Tin plating
Insulator	PT	Color: Dark gray

\* The suitable terminals might differ depending on the internal structure of the cable.


#### ● Inner Terminals

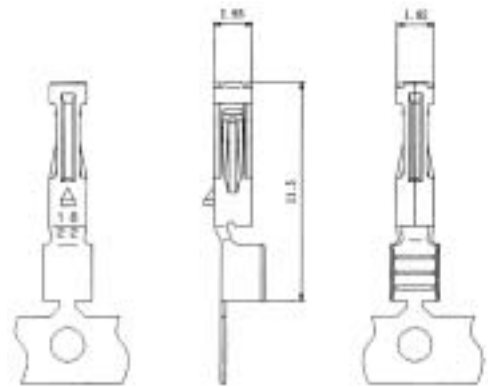

Part Number	CL No.	Conductor Size (AWG)	Material	Finish	Packaging
GT11-1822SCF	761-0004-9	#18 to 22	Brass	Tin plating	8,000 pcs. per reel
GT11-2428SCF	761-0020-5	#24 to 28			

### M Connectors

#### ● Outer terminals

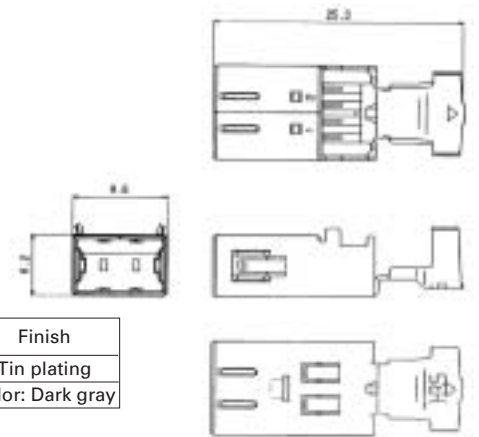


Part Number	CL No.	Applicable Cable
GT11-2P-5.2C	761-0001-0	4.5 to 5.2mm
GT11-2P-6.0C	761-0027-4	5.8 to 6.2mm

Item	Material	Finish
Outer terminal	Brass	Tin plating
Insulator	PT	Color: Dark gray

\* The suitable terminals might differ depending on the internal structure of the cable.

#### ● Inner Terminals

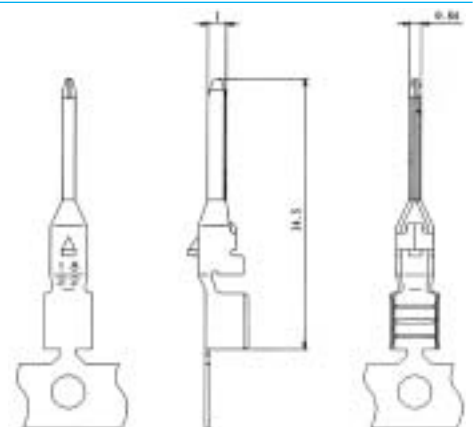


Part Number	CL No.	Conductor Size (AWG)	Material	Finish	Packaging
GT11-1822PCF	761-0003-6	#18 to 22	Brass	Tin plating	8,000 pcs. per reel
GT11-2428PCF	761-0019-6	#24 to 28			

## For Double-Conductor coaxial cable

### F Connectors

#### ● Housing

◆ Shown with inserted retainer

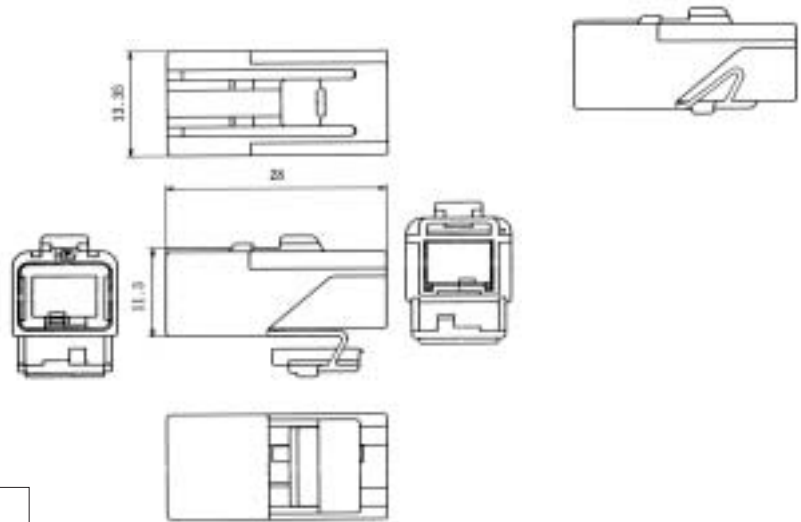


Part Number	CL No.	Material	Color
GT11-2S-HU	761-0005-1	PBT	Light gray

### M Connectors

#### ● Housing


◆ Shown with inserted retainer

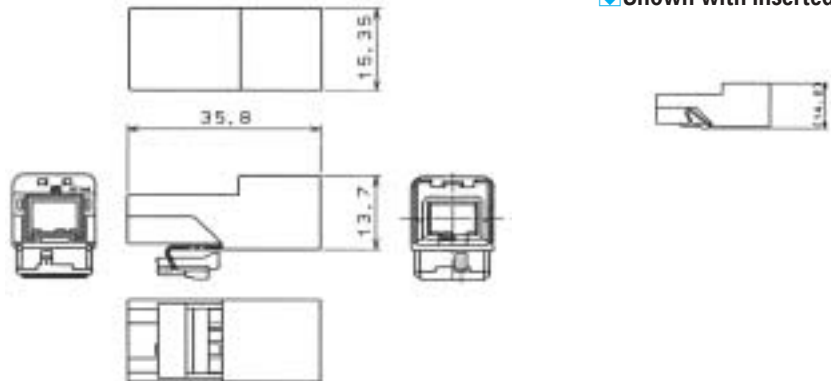

Part Number	CL No.	Material	Color
GT11-2P-HU	761-0006-4	PBT	Light gray



◆ Shown with inserted retainer

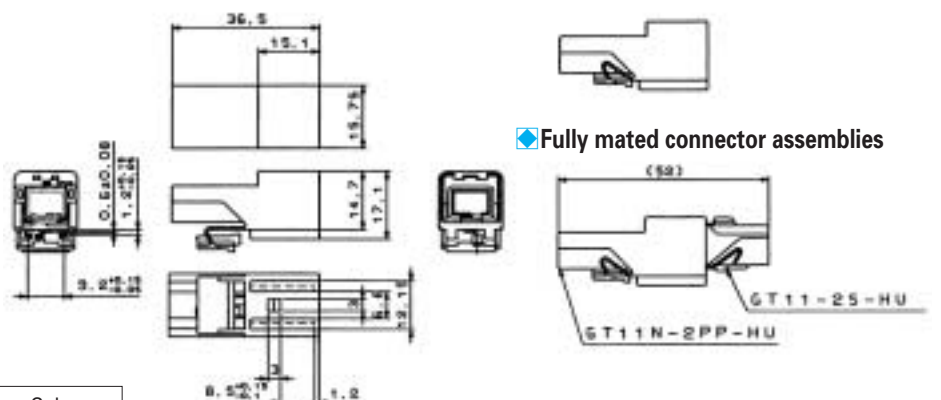

◆ Fully mated connector assemblies


Part Number	CL No.	Material	Color
GT11N-2PP-HU	761-0008-0	PBT	Light gray




# Waterproof type For Double-Conductor coaxial cable

## F Connectors

### ● Housing

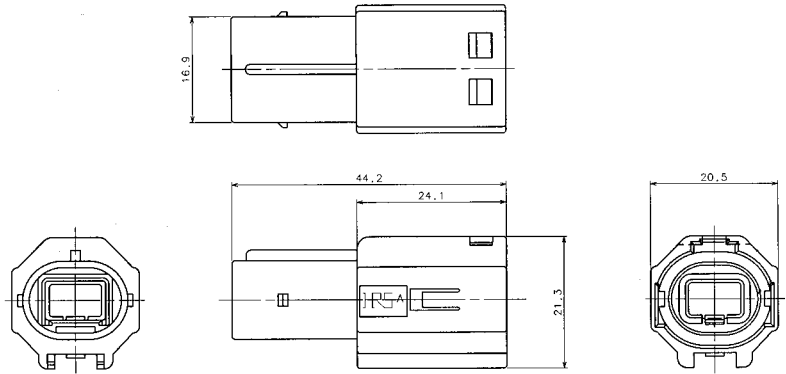


### ◆ Fully mated connector assemblies

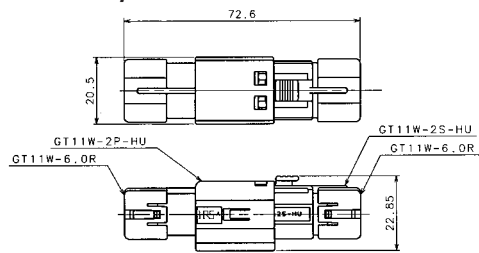

Part Number	CL No.	Material
GT11W-2P-HU	761-0023-3	PBT


## M Connectors

### ● Housing

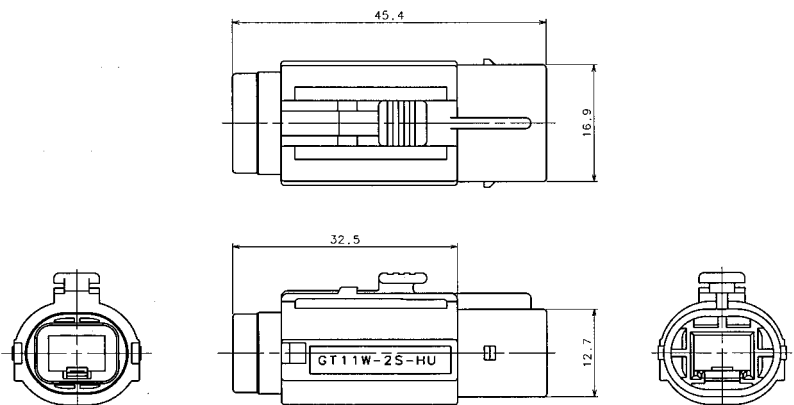

Part Number	CL No.	Material
GT11W-2S-HU	761-0024-6	PBT

### ● Retainer (used with GT11W-2S-HU and GT11W-2P-HU)



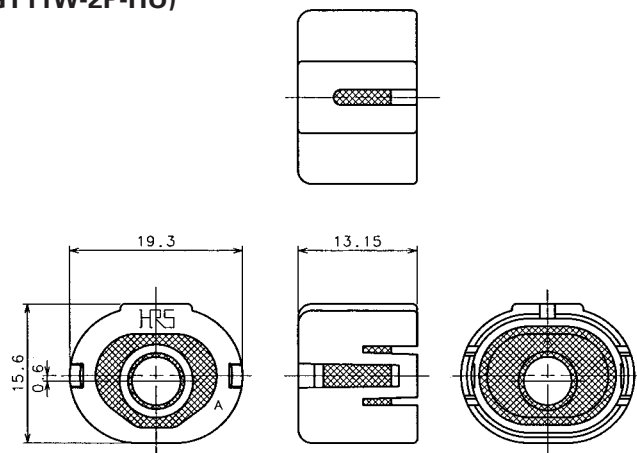


Part Number	CL No.	Applicable Cable
GT11W-6.0R	761-0025-9	PBT Silicon rubber compound

## Waterproof type For Double-Conductor coaxial cable

### F Connectors

#### ● Housing

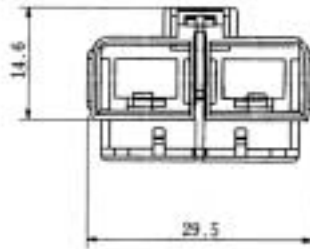

◆ Shown with inserted retainer






Part Number	CL No.	Material	Color
GT11K-2/2S-HU	761-0039-3	PBT	Light gray


\* Mates only with GT11KN-2/2PP-HU.

### M Connectors

#### ● Housing

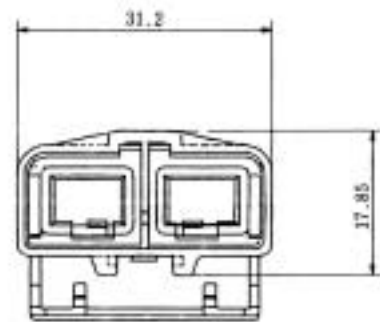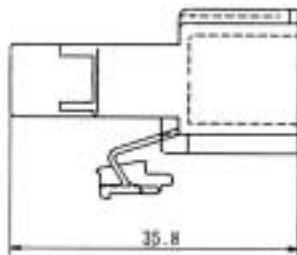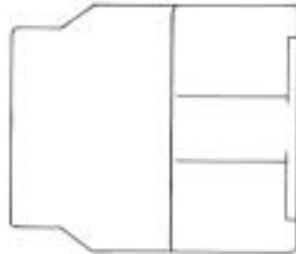


◆ Shown with inserted retainer

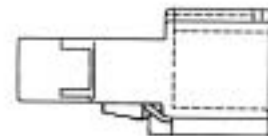


Part Number	CL No.	Material	Color
GT11KN-2/2PP-HU	761-0040-2	PBT	Light gray

## ◆ Termination sequence


### ① Strip the cable.

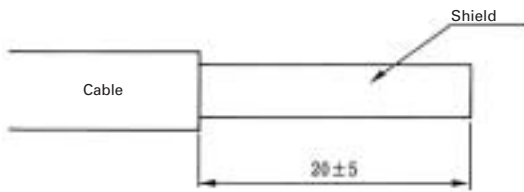


### ② Cut the shield and expose the wire.

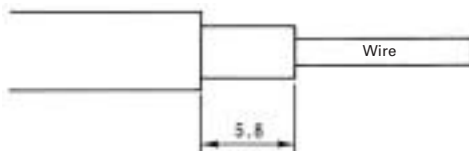

### ③ Cut back the shield above the sheath and wrap with conductive tape.

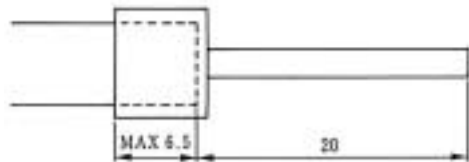


### ④ Strip the wire and form it.

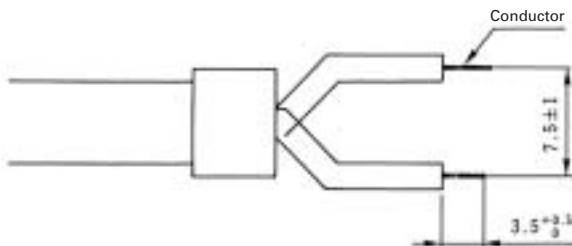


Jig used: Cable-forming strip jig  
(Refer to Page 85 for detail.)

### ⑤ Crimp the wire to the internal terminal.

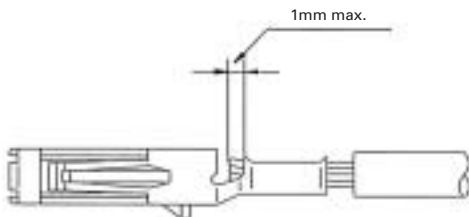


Jig used: Automatic crimping machine.  
(Refer to Page 85 for detail.)

### ⑥ Insert the internal terminals into the Outer terminals.

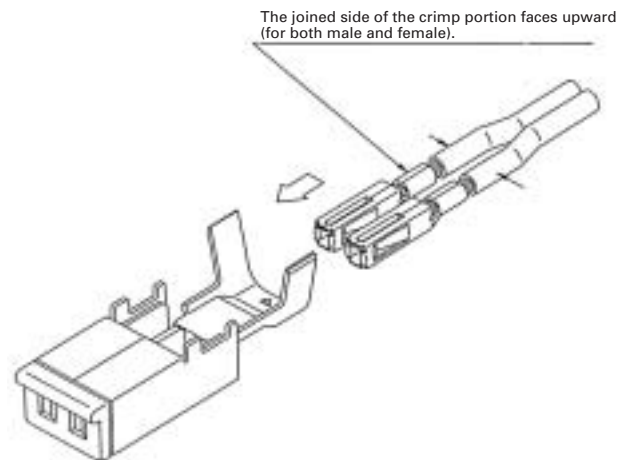


### ⑦ Crimp the Outer terminal.

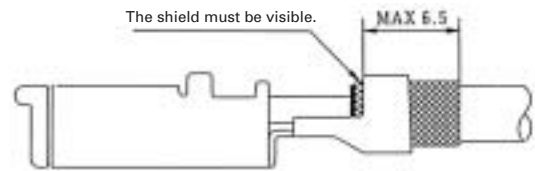


Jig used: Outside tube caulking jig.  
(Refer to Page 91 for detail.)

### ⑧ Insert the terminal into the housing. (Please insert until the terminal is stopped by the lance.)

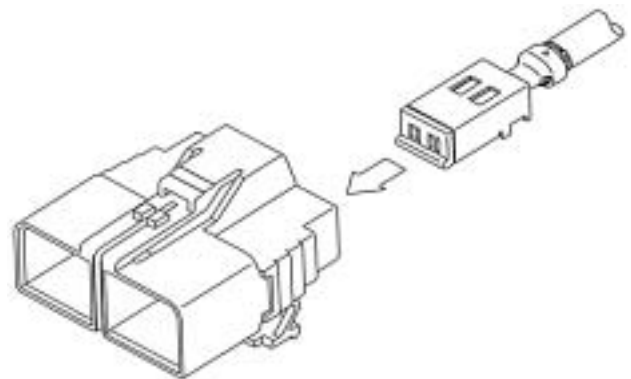





### ⑨ Mount the retainer to complete the task.

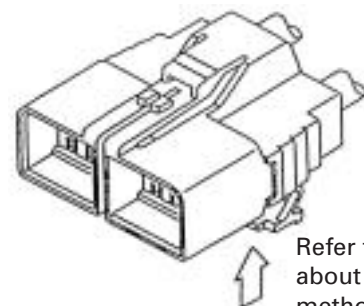

Refer to Page 84 for information  
about the retainer mounting  
method.



## ◆ Retainer Mounting Method
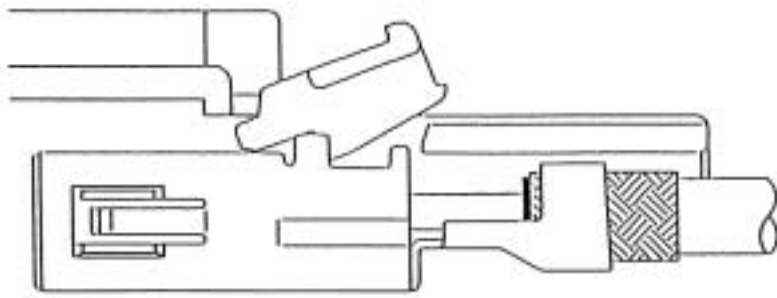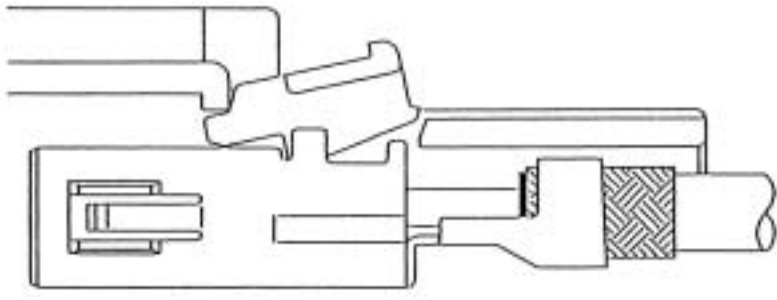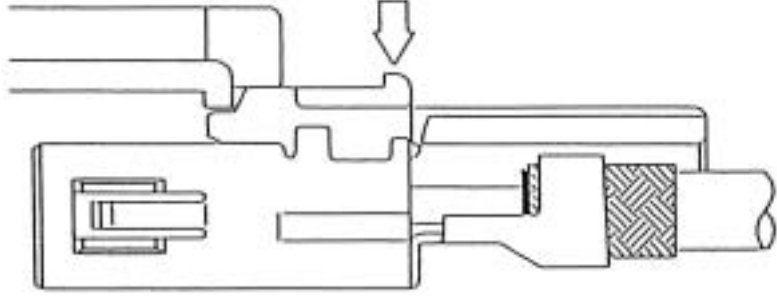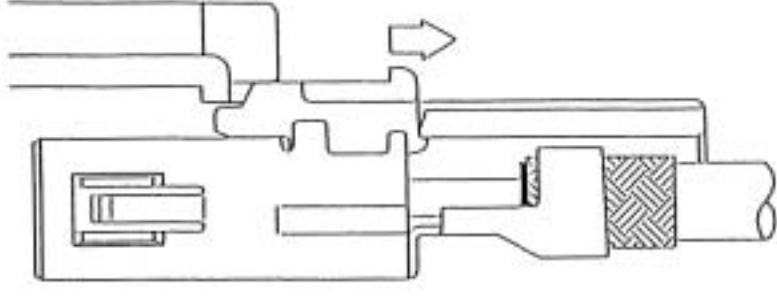
<p><b>a. Insert so that the terminal locking tab is inserted between the top surface of the terminal and the housing.</b></p>	 A cross-sectional diagram of a terminal assembly. A locking tab is being inserted from the top into a slot between the terminal and the housing. The terminal has a textured cylindrical section on its right side.
<p><b>b. Push in while changing the angle of the retainer until the front surface comes to a stop.</b></p>	 A cross-sectional diagram similar to the first one, but the locking tab is now pushed further into the housing. The tab is angled downwards, and its front surface is in contact with the housing's internal structure.
<p><b>c. Press the rear portion of the retainer and snap it into the locked position.</b></p>	 A cross-sectional diagram showing the locking tab fully seated. A downward-pointing arrow indicates the rear portion of the retainer being pressed down into the housing to lock it.
<p><b>d. If locking is not complete, press the rear portion of the retainer again while pulling it backward.</b></p>	 A cross-sectional diagram showing the locking tab fully seated. A downward-pointing arrow indicates the rear portion of the retainer being pressed down, and a rightward-pointing arrow indicates it being pulled back to complete the locking process.

\* Check that all locations are locked.

\* Check that the bands are housed in all of the receiving areas.



## ◆ Termination Tools

User's manuals are available. Please ask your Hirose Electric account representative.

### ● Cable-Forming Strip Jig (for 2-conductor cable)

Main Unit

Accessory (Electrical Box)



Part Number CT11-ST/AD

#### Specifications

	Capacity	Remarks
Mounting Dimensions	Approximately 400 W x 500 D x 300 H	Approximately 300 W x 250 D x 200 H
Weight	Approximately 40 kg	Approximately 5 kg
Power supply	AC100V (50/60Hz)	
Air pressure	5-6Kgf/cm	
Task time	Approximately 14 seconds	

### ● Automatic Crimping Machine (for 2-conductor and 8-conductor cable)



Part Number CM-105


#### Specifications

Item	Specification	Remarks
Capacity	1.5tons	
Stroke	30mm	
Number of strokes	200spm (50Hz)	200spm (60Hz)
Weight	75kg	
Motor	0.2kW	AC100V
Crimping speed	2000 to 4000 pcs. per day	

### ● Cable-Forming Strip Jig (for 2-conductor cable)

Main Unit

Accessory (Electrical Box)

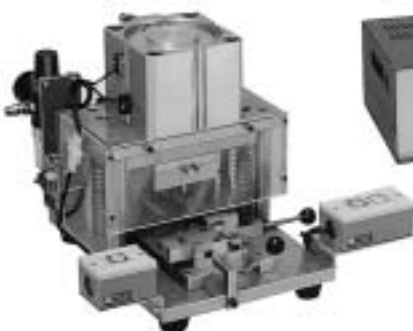

Part Number CT11-CT/AD

#### Specifications


	Specification	Remarks
Mounting Dimensions	Approximately 300 W x 400 D x 300 H	Approximately 300 W x 250 D x 200 H
Weight	Approximately 25 kg	Approximately 5 kg
Power supply	AC100V (50/60Hz)	
Air pressure	5-6Kgf/cm	

\* Crimp height setting tables are available for each cable type. Please contact your nearest Hirose Electric account representative.  
Different cables will require different crimp height settings.

## For 8-Conductor coaxial shielded cable


### F Connectors

#### ● Inner Terminal

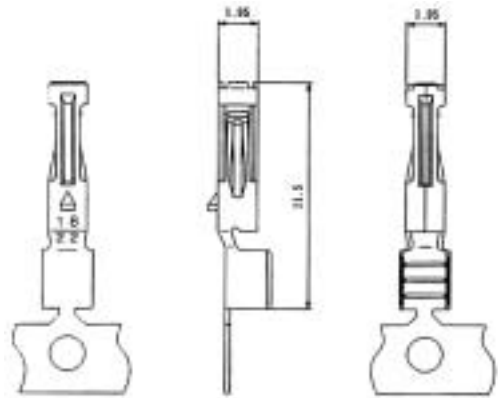


Part Number	CL No.	Conductor Size (AWG)	Material	Finish
GT11-1822SCF	761-0004-9	#24 to 28	Phosphor bronze	Tin plating
GT11-2428SCF	761-0020-5	#24 to 28	Phosphor bronze	Tin plating

#### ● Insulator

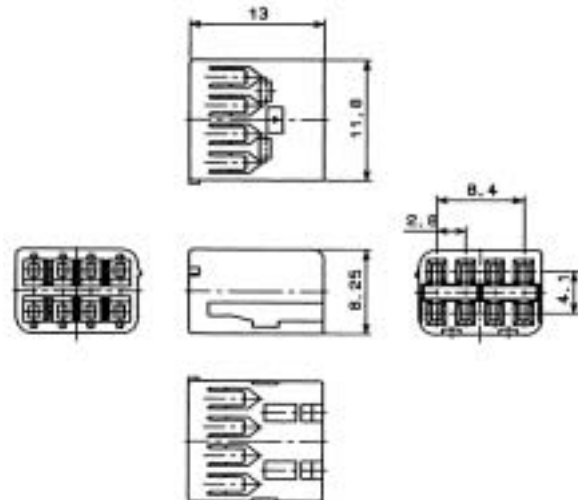


Part Number	CL No.	Material
GT11-8DS-2.8C	761-0014-2	PBT

#### ● Outer terminals

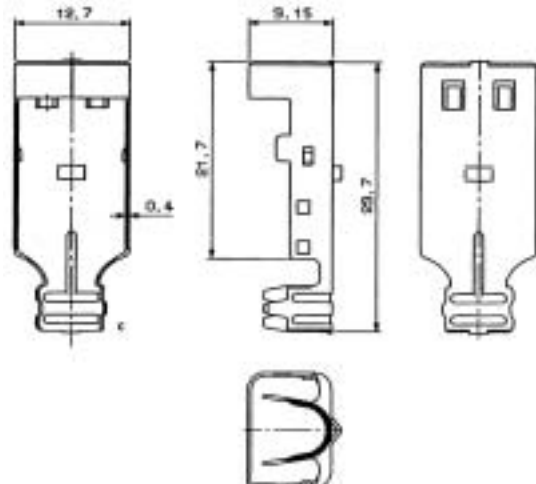


Part Number	CL No.	Material	Finish
GT11-8DS-5C	761-0015-5	Brass	Phosphor bronze

● Shield Plate

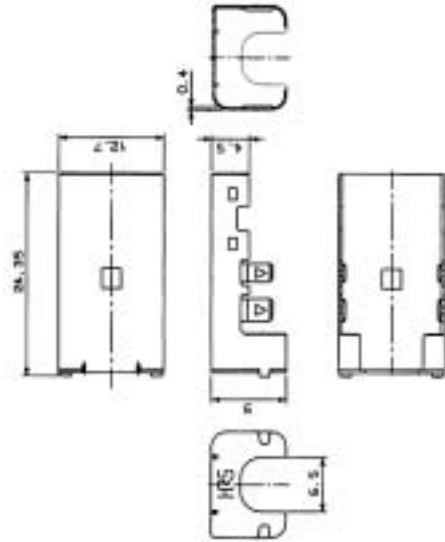


Part Number	CL No.	Material	Finish
GT11-8DS-SB	761-0016-8	Brass	Tin plating

● Housing

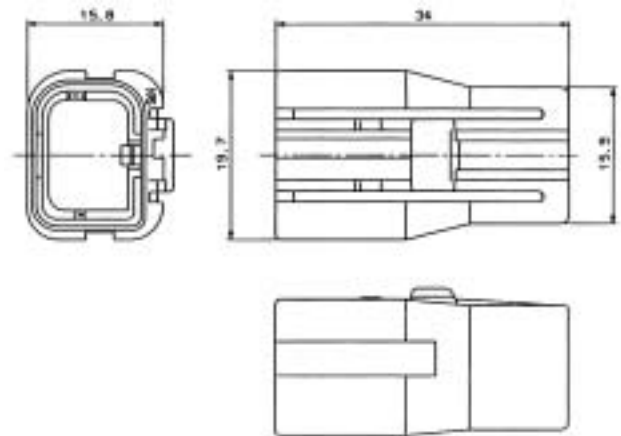

Part Number	CL No.	Material
GT11-8DS-HU	761-0017-0	PBT


● Retainer (used with GT11-8DS-HU)

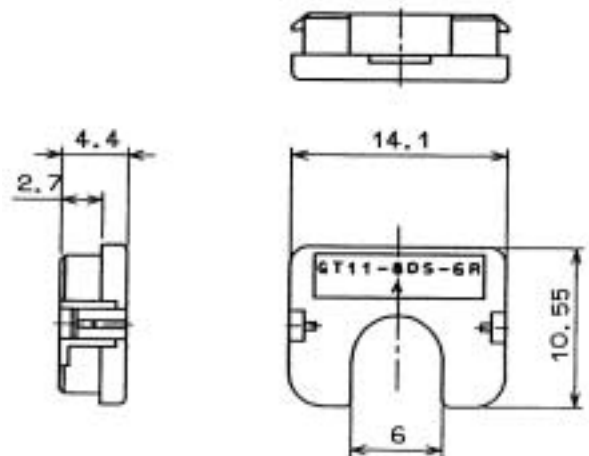

Part Number	CL No.	Material
GT11-8DS-6R	761-0018-3	PBT


## M Connectors

### ● Inner Terminals

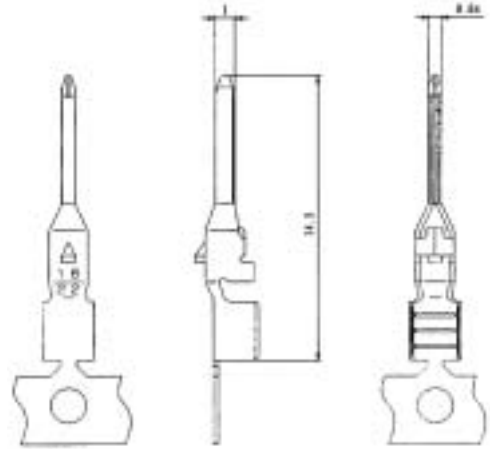


Part Number	CL No.	Conductor Size (AWG)	Material	Finish
GT11-1822PCF	761-0003-6	#18 to 22	Phosphor bronze	Tin plating
GT11-2428PCF	761-0019-6	#24 to 28	Phosphor bronze	Tin plating

### ● Insulator

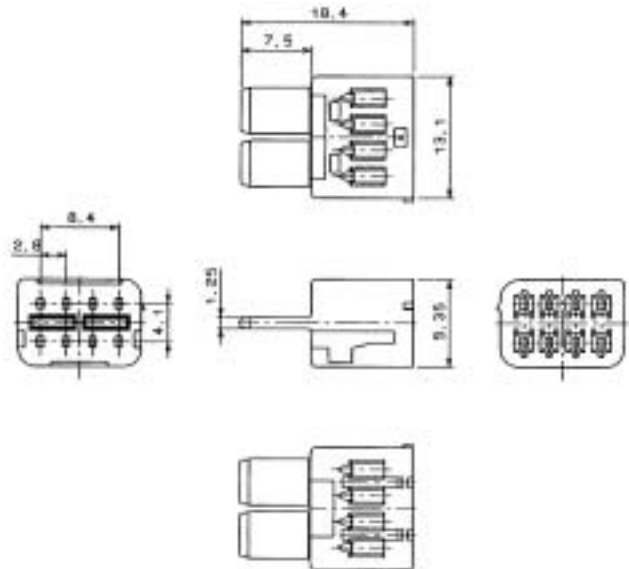


Part Number	CL No.	Material
GT11-8DP-2.8C	761-0009-2	PBT

### ● Outer terminals

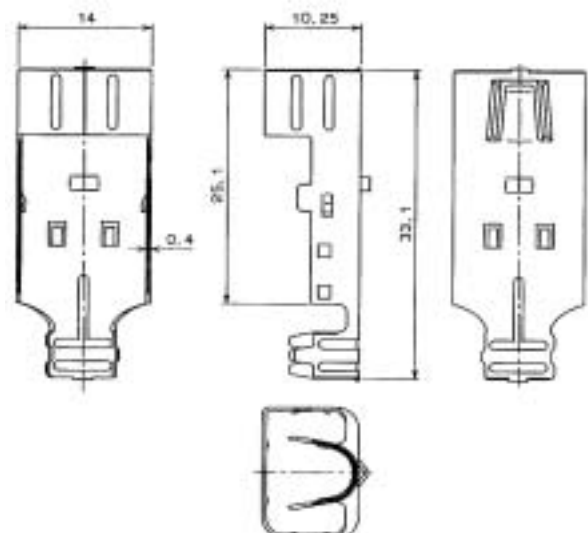


Part Number	CL No.	Material	Finish
GT11-8DP-5C	761-0010-1	Brass	Phosphor bronze

● Shield Plate

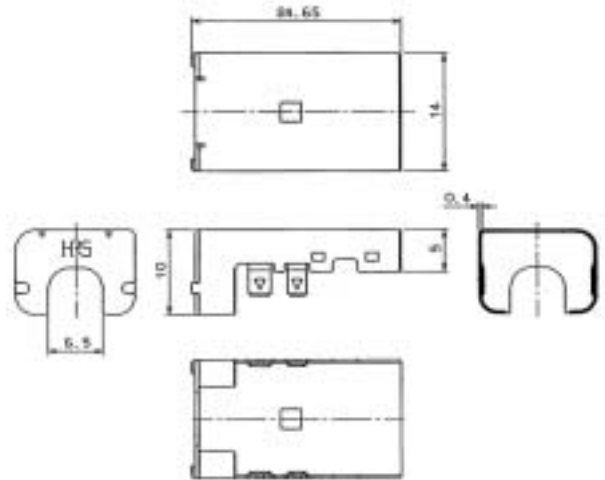


Part Number	CL No.	Material	Finish
GT11-8DP-SB	761-0011-4	Brass	Phosphor bronze

● Housing

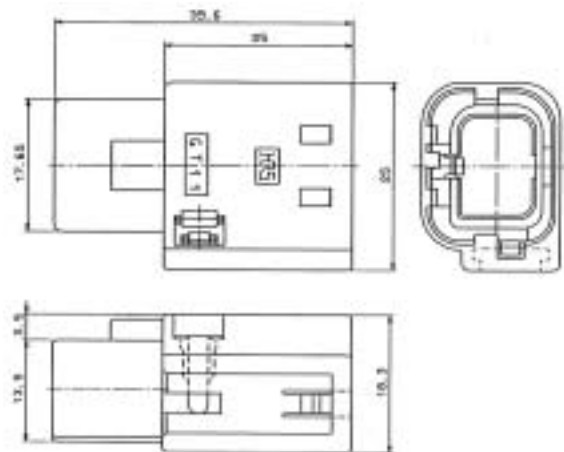

Part Number	CL No.	Material
GT11-8DP-HU	761-0012-7	PBT


● Retainer (Used with GT11-8DS-HU)

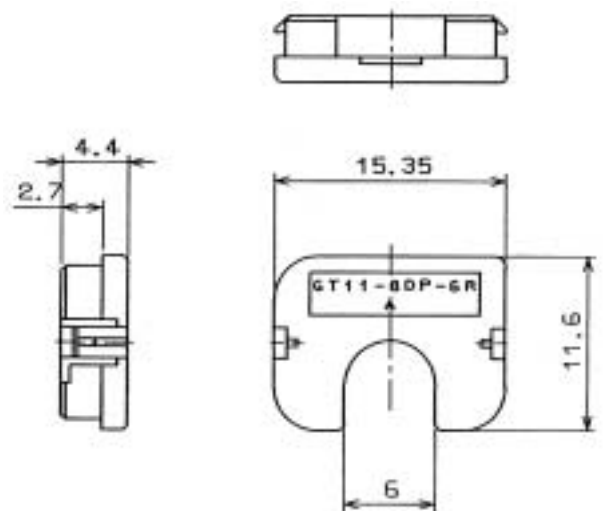


Part Number	CL No.	Material
GT11-8DP-6R	761-0013-0	PBT

\* Reserved for product expansion


● Printed Circuit Board Type

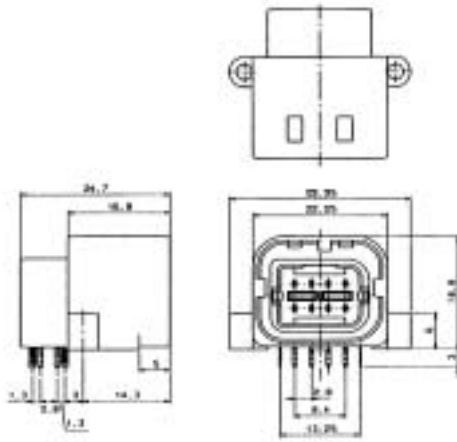

◆ Recommended Board Mounting Pattern













◆ Fully mated connector assemblies

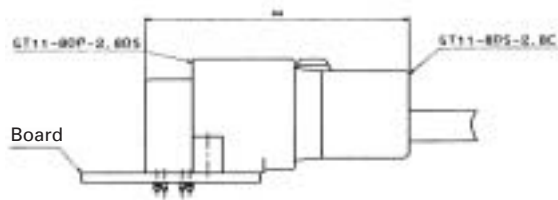

Part Number	CL No.	Item	Material	Finish
GT11-8DP-2.8DS	761-0021-8	Housing	PBT	
		Outer Terminal	Phosphor bronze	Tin plating
		Insulator	PBT	
		Terminal	Brass	Tin plating

## ◆ Termination sequence
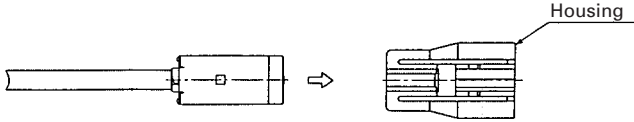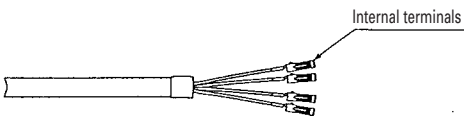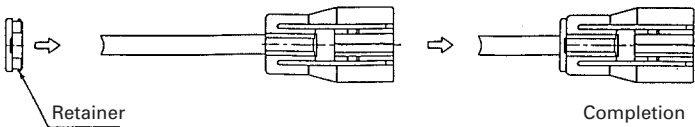
<p>① Strip the Cable.</p>  <p>The diagram shows a cross-section of a cable. A section of length 25 is marked, showing the outer jacket and the shield being stripped back. Labels include 'Cable' and 'Shield'.</p>	<p>⑥ Insert the inner terminals into the insulated case.</p>  <p>The diagram shows a bundle of wires with terminals being inserted into a rectangular insulated case. A label 'Inner terminal' points to the terminals inside the case.</p>
<p>② Cut the shield and expose the wire.</p>  <p>The diagram shows the shield being cut back, exposing the individual wires. A label 'Wire' points to the exposed wires. A dimension of 6 is shown for the length of the exposed wires.</p>	<p>⑦ Insert what was made in Step ⑥ into the Outer terminals.</p>  <p>The diagram shows the assembly from Step 6 being inserted into a component labeled 'Outer terminals'.</p>
<p>③ Cut back the shield above the sheath and wrap with conductive tape.</p>  <p>The diagram shows the shield being wrapped with a piece of 'Conductive tape'.</p>	<p>⑧ Insert the caulking shield cover onto the Outer terminals.</p>  <p>The diagram shows a 'Shield cover' being inserted onto the assembly from Step 7.</p>
<p>④ Strip the wire.</p>  <p>The diagram shows the individual wires being stripped back.</p>	<p>⑨ Insert what was made in Step ⑧ into the housing.</p>  <p>The diagram shows the assembly from Step 8 being inserted into a component labeled 'Housing'.</p>
<p>⑤ Crimp the internal terminals.</p>  <p>The diagram shows 'Internal terminals' being crimped onto the individual wires.</p>	<p>⑩ Insert the retainer.</p>  <p>The diagram shows a 'Retainer' being inserted into the assembly, leading to the final 'Completion' state.</p>



## ◆ Termination Tools

User's manuals are available. Please ask your Hirose Electric account representative.

### ● Cable-Forming Strip Jig (for 2-conductor cable)

Main Unit    Accessory (Electrical Box)



Part Number CT11-ST/AD

#### Specifications

	Capacity	Remarks
Mounting Dimensions	Approximately 400 W x 500 D x 300 H	Approximately 300 W x 250 D x 200 H
Weight	Approximately 40 kg	Approximately 5 kg
Power supply	AC100V (50/60Hz)	
Air pressure	5-6Kgf/cm	
Task time	Approximately 14 seconds	

### ● Automatic Crimping Machine (for 2-conductor and 8-conductor cable)



Part Number CM-105

#### Specifications

Item	Specification	Remarks
Capacity	1.5Ton	
Stroke	30mm	
Number of strokes	200spm (50Hz)	240spm (60Hz)
Weight	75kg	
Motor	0.2kW	AC100V
Crimping speed	2000 to 4000 pcs. per day	

### ● Cable-Forming Strip Jig (for 2-conductor cable)

Main Unit    Accessory (Electrical Box)    Specifications



Part Number CT11-CT/AD

	Specification	Remarks
Mounting Dimensions	Approximately 300 W x 400 D x 300 H	Approximately 300 W x 250 D x 200 H
Weight	Approximately 25 kg	Approximately 5 kg
Power supply	AC100V (50/60Hz)	
Air pressure	5-6Kgf/cm	

\* Crimp height setting tables are available for each cable type. Please contact your nearest Hirose Electric account representative.  
Different cables will require different crimp height settings.

### ● Outer terminal Caulking Jig (for 8-conductor cable)

Hand Press



Part Number GT11-8S/P-HP

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9