


# Xinger®



## Ultra Low Profile 0805 5 dB Directional Coupler

### Description


The DC4859J5005AHF is a low cost, low profile sub-miniature high performance 5 dB directional coupler in an easy to use RoHS compliant, Halogen Free surface mount package. It is designed for 4700 – 5900MHz applications including: WiFi and P2P / P2MP applications. The DC4859J5005AHF is ideal for power detection, signal injection and other applications where low insertion loss signal monitoring is required. The DC4859J5005AHF is available on tape and reel for pick and place high volume manufacturing. All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All parts have been subjected to rigorous qualification testing and units are 100% RF tested.

**Detailed Electrical Specifications:** Specifications subject to change without notice.


| Features: | ROOM (25°C)     |                    |      |     |                     |     |                  |      |                  |      |                     |     |                            |     |                        |
|-----------|-----------------|--------------------|------|-----|---------------------|-----|------------------|------|------------------|------|---------------------|-----|----------------------------|-----|------------------------|
|           | Frequency (MHz) | Mean Coupling (dB) |      |     | Insertion loss (dB) |     | Return Loss (dB) |      | Directivity (dB) |      | Phase Balance (deg) |     | Frequency Sensitivity (dB) |     | Power Handling (watts) |
|           |                 | Min                | Typ. | Max | Typ.                | Max | Typ.             | Min  | Typ.             | Min  | Typ.                | Max | Typ.                       | Max |                        |
|           | 4700 - 5900     | 4.4                | 4.9  | 5.6 | 0.3                 | 0.5 | 19.5             | 15.7 | 19.0             | 14.0 | 1.8                 | 5.0 | 0.07                       | 0.2 | 5                      |
|           | 4900 - 5500     | 4.4                | 4.9  | 5.6 | 0.3                 | 0.5 | 19.5             | 15.7 | 19.4             | 15.5 | 1.2                 | 4.0 | 0.03                       | 0.2 | 5                      |

\*\*Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance.


### Outline Drawing

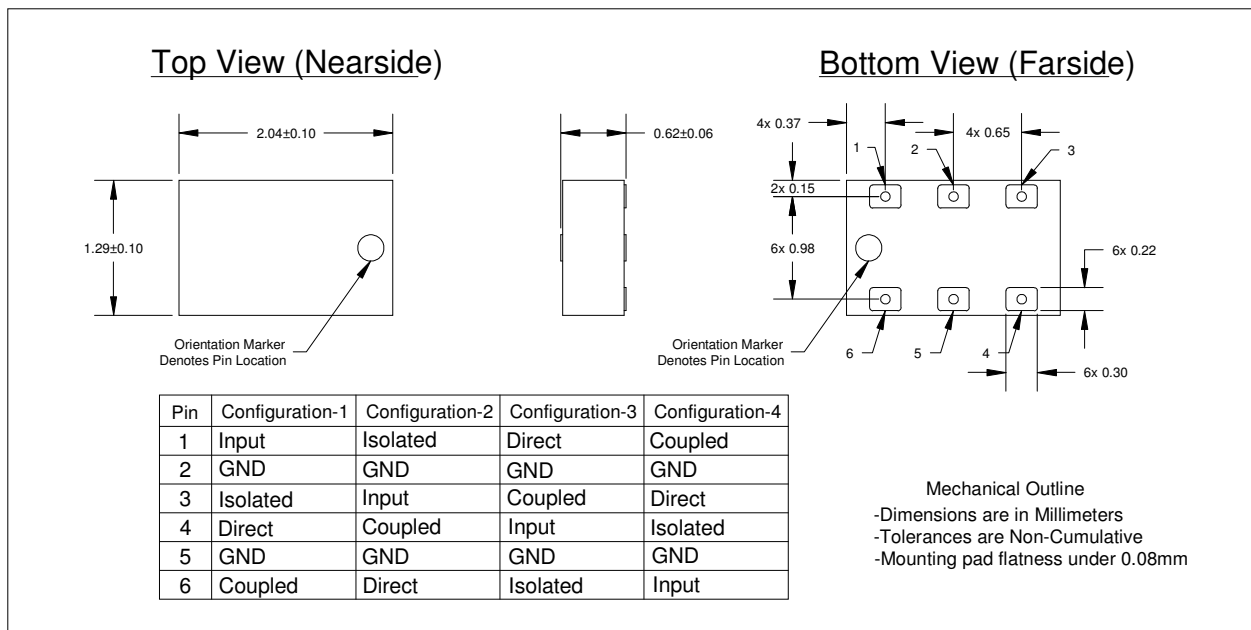

## Typical Performance: 4600 MHz. to 6000 MHz (Configuration 1)

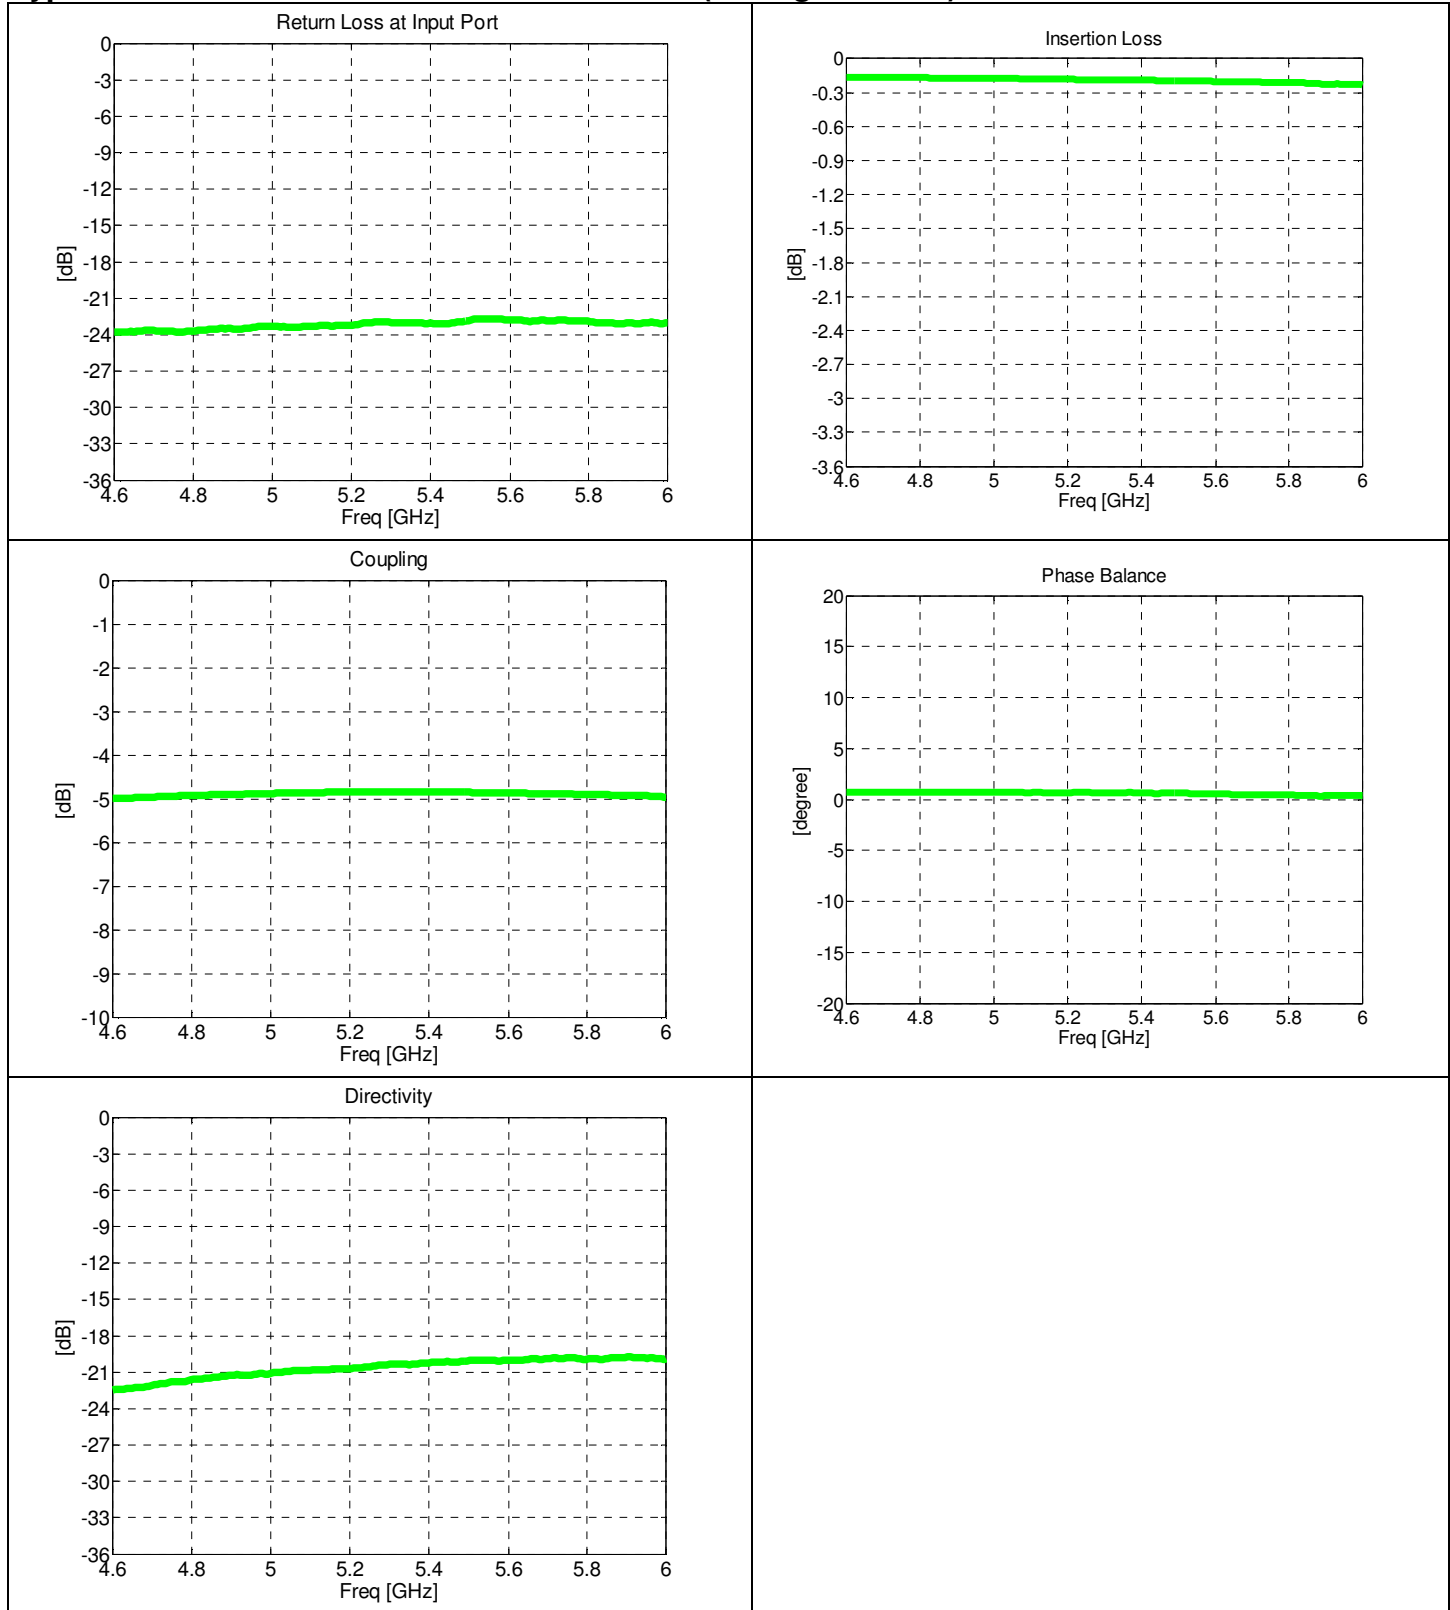

### Wideband Performance: 10 to 8010MHz (Configuration 1)

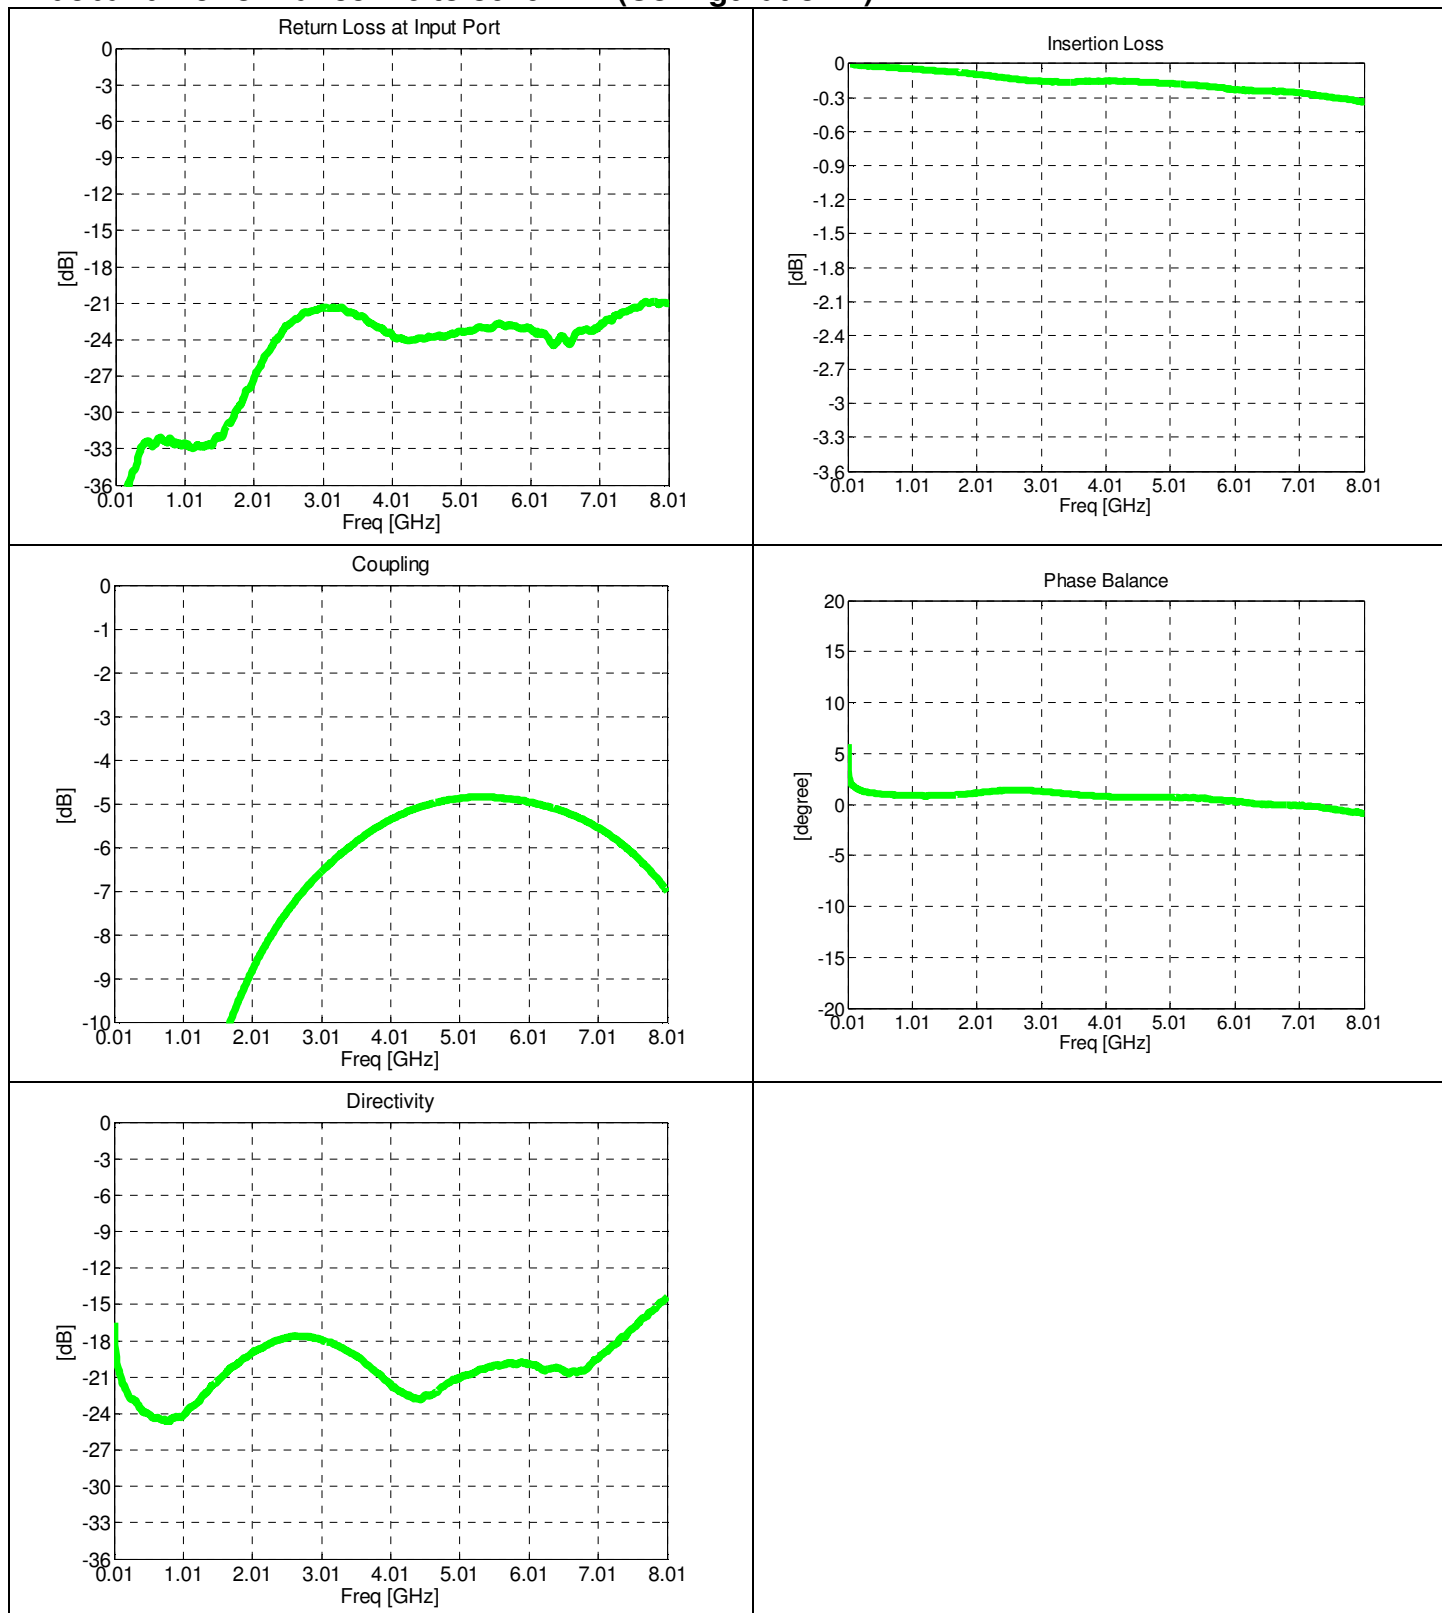

## Definition of Measured Specifications


| Parameter             | Definition                                                                                                                                                                                                                    | Mathematical Representation<br><i>i, j, k, m</i> is denoted as the port index of input, isolated, direct and coupled port for specific pin configuration shown in the table above |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Return Loss           | The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR.                                                                                                                        | $20\log_{10}( S_{ii} )$                                                                                                                                                           |
| Directivity           | The power at the isolated port divided by the power at the coupled port                                                                                                                                                       | $20\log_{10}\frac{ S_{ji} }{ S_{mi} }$                                                                                                                                            |
| Insertion Loss        | The input power divided by the sum of the power at the two output ports.                                                                                                                                                      | $10\log_{10}( S_{mi} ^2 +  S_{ki} ^2)$                                                                                                                                            |
| Mean Coupling         | At a given frequency ( $\omega_n$ ), coupling is the input power divided by the power at the coupled port. Mean coupling is the average value of the coupling values in the band. N is the number of frequencies in the band. | $\text{Coupling (dB)} = 20\log_{10} S_{mi} $ $\text{Mean Coupling (dB)} = \frac{\sum_{m=1}^N 20\log_{10} S_{mi} }{N}$                                                             |
| Phase Balance         | The difference in phase angle between the two output ports.                                                                                                                                                                   | $\angle S_{ki} - \angle S_{mi} + 90^\circ$                                                                                                                                        |
| Frequency sensitivity | The decibel difference between the maximum in band coupling value and the minimum in band coupling value.                                                                                                                     | $(\text{Max Coupling (dB)} - \text{Min Coupling (dB)})/2$                                                                                                                         |

### Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.


An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

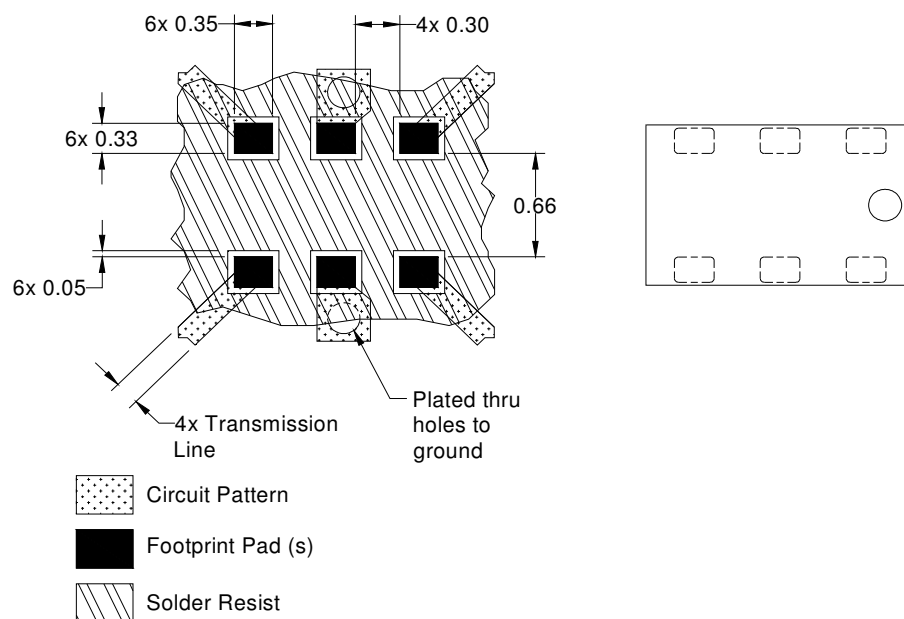


Dimensions are in Millimeters  
Mounting Footprint

## Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

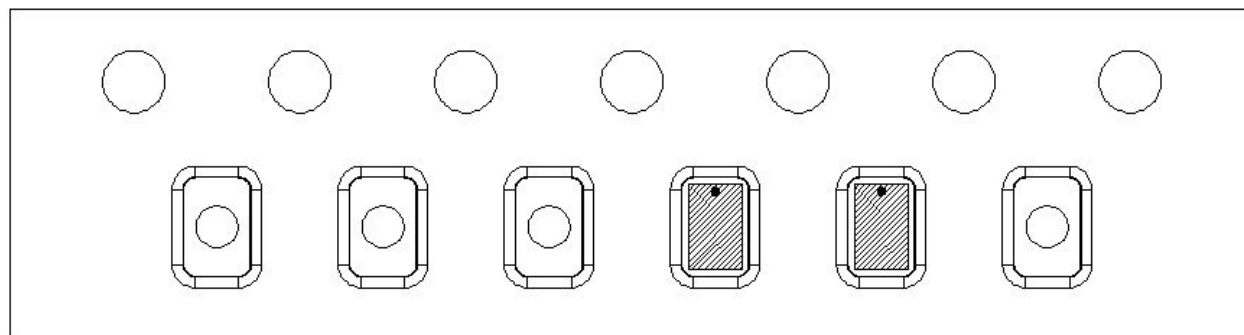

Direction of  
Part Feed  
(Unloading) →

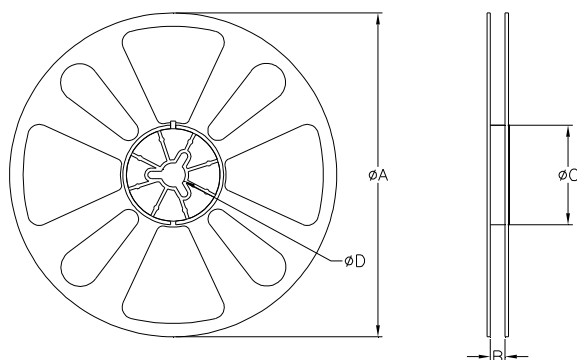

| TABLE 1       |                    |        |
|---------------|--------------------|--------|
| QUANTITY/REEL | REEL DIMENSIONS mm |        |
| 4000          | $\phi A$           | 177.80 |
|               | B                  | 8.00   |
|               | $\phi C$           | 50.80  |
|               | $\phi D$           | 13.00  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9