

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

LTM4601EV

DESCRIPTION

Demonstration circuit DC1043A-A features the LTM[®]4601EV and LTM4601-1EV, the high efficiency, high density switch mode step-down power modules. The input voltage range is from 5.0V to 20V. The output voltage is programmable from 0.6V to 3.3V; refer to step down ratio curve in the LTM4601 datasheet. The rated load current is 20A, while de-rating is necessary for certain V_{IN} , V_{OUT} , and thermal conditions. 24A load current can be achieved by applying forced airflow convection or attaching heatsinks. Master module U1 provides differential remote sensing to accurately regulate output voltage independent of load current. Integrated input and output filters enable a simple PCB layout. Only bulk input and output capacitors are needed externally. The DC1043A-A has onboard 180 degree interleaving clock generator. The

default clock frequency is 750 KHz. The LTM4601 allows the user to program output ramp-up and ramp-down through the TRACK/SS pin. The output can be set to coincidentally or ratiometrically track with another supply's output. Margining function is provided for the user who wants to stress their system by varying supply voltages during testing; refer to data-sheet for functional diagram.

If desired, slave unit U2 could be substituted by LTM4601-1EV.

Design files for this circuit board are available. Call the LTC Factory.


 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		5V
Maximum Input Voltage		20V
Output Voltage V_{OUT}	Jumper selectable (open for 0.6V)	1.2V, 1.5V, 1.8V, 2.5V, 3.3V
Maximum Continuous Output Current	De-rating is necessary for certain V_{IN} , V_{OUT} , and thermal conditions	$20A_{DC}$
Default Operating Frequency		750kHz
Efficiency	$V_{IN}=12V$, $V_{OUT}=1.5V$, $I_{OUT}=20A$	83.2%, See Figure 3
Load Transient	$V_{IN}=12V$, $V_{OUT}=1.5V$	See Figure 4

QUICK START PROCEDURE

Demonstration circuit DC1043A-A is easy to set up to evaluate the performance of the LTM4601EV. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

- Place jumpers in the following positions for a typical $1.5V_{OUT}$ application:

Vout Select	RUN	MARGO	MARG1
1.5V	ON	LO	LO

- With power off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and V_{IN} supply to be less than 20V.
- Turn on the power at the input. The output voltage should be $1.5V \pm 2\%$.
- Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other pa-

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

rameters. Output ripple should be measured across the output capacitors.

- For optional load transient test, apply adjustable pulse signal between IOSTEP CLK and GND pins. Pulse amplitude sets the current step. The pulse signal should have very small duty cycle (<15%) to limit the thermal stress on the transient load circuit. The output transient current can be monitored at BNC connector J5 (25mV/10A).

- For Margining function test, place jumper MARG0 and MARG1 in the configurations shown in the following table, measure the output voltage at Vo+ and Vo-.

MARG1	MARG0	Vout
LO	LO	0
LO	HI	+5%
HI	LO	-5%
HI	HI	0

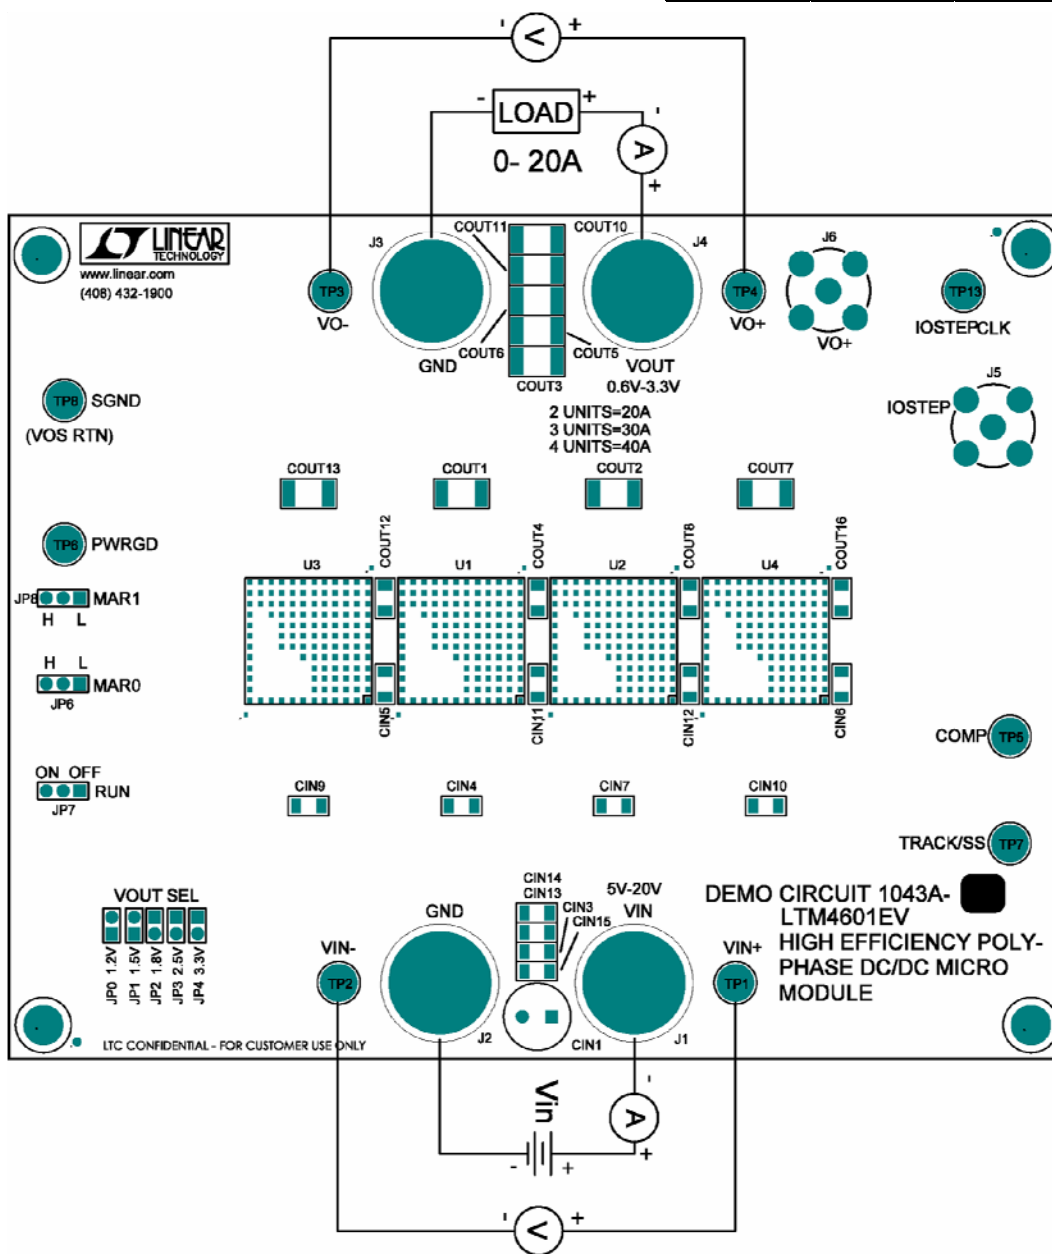


Figure 1. Test Setup of DC1043A-A

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

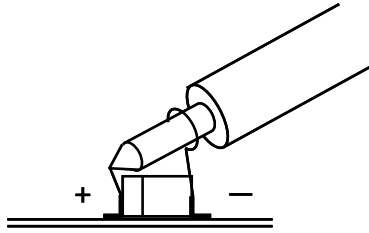


Figure 2. Scope Probe Placements for Measuring Input or Output Ripple.


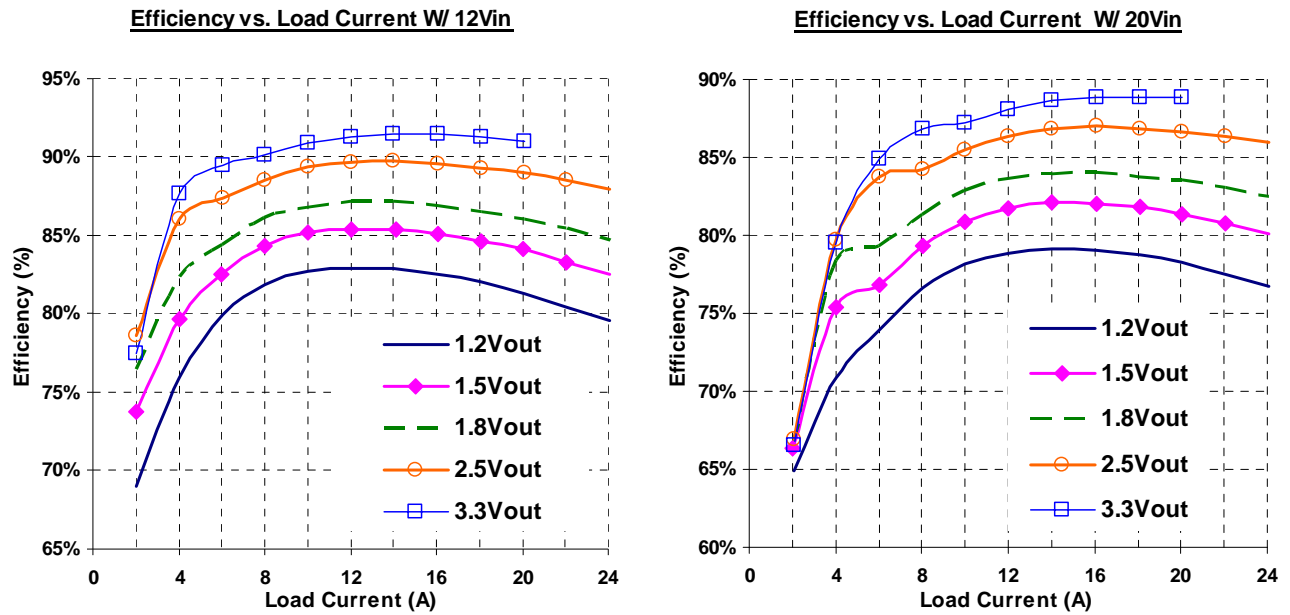


Figure 3. Measured Supply Efficiency with Different V_{IN} and V_{OUT}

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

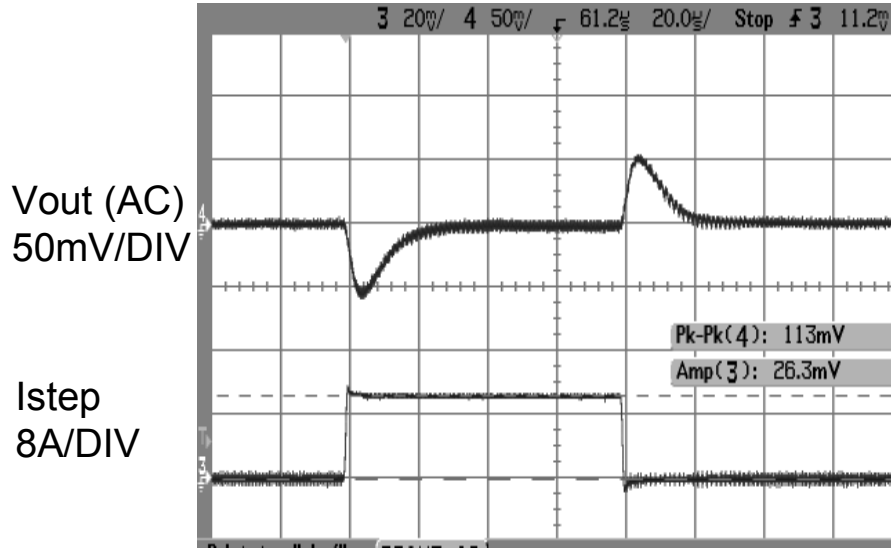


Vin = 12V

Vout = 1.5V

5A to 15A LOAD STEP (50%)

Cout = 2 X 22uF ceramic, 4X100uF ceramic; C12 = 47pF

Figure 4. Measured Load Transient Response (5-15A Step)

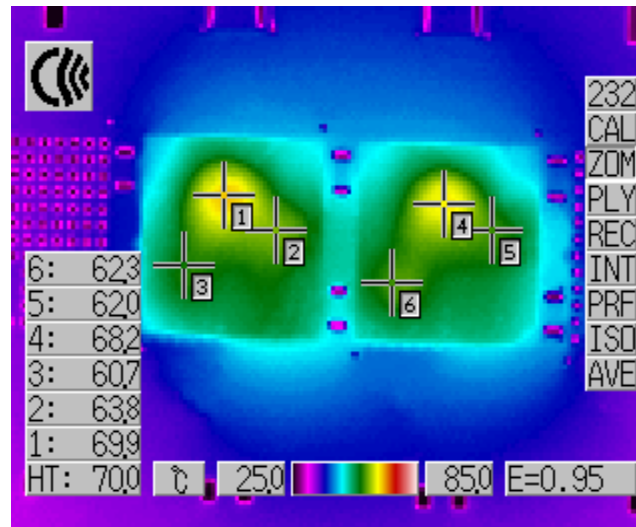

Vo = 1.5V@20A


Vin = 20V

Figure 5. Measured Thermal Performance

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY

ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/23/05	
	2	Change, Correction, Modifications 05/09/06 more chgs	04/04/06	
	3	Change 01, R7, R29, 10/06/06; More Changes 11/09/06; More Changes	10/06/06	

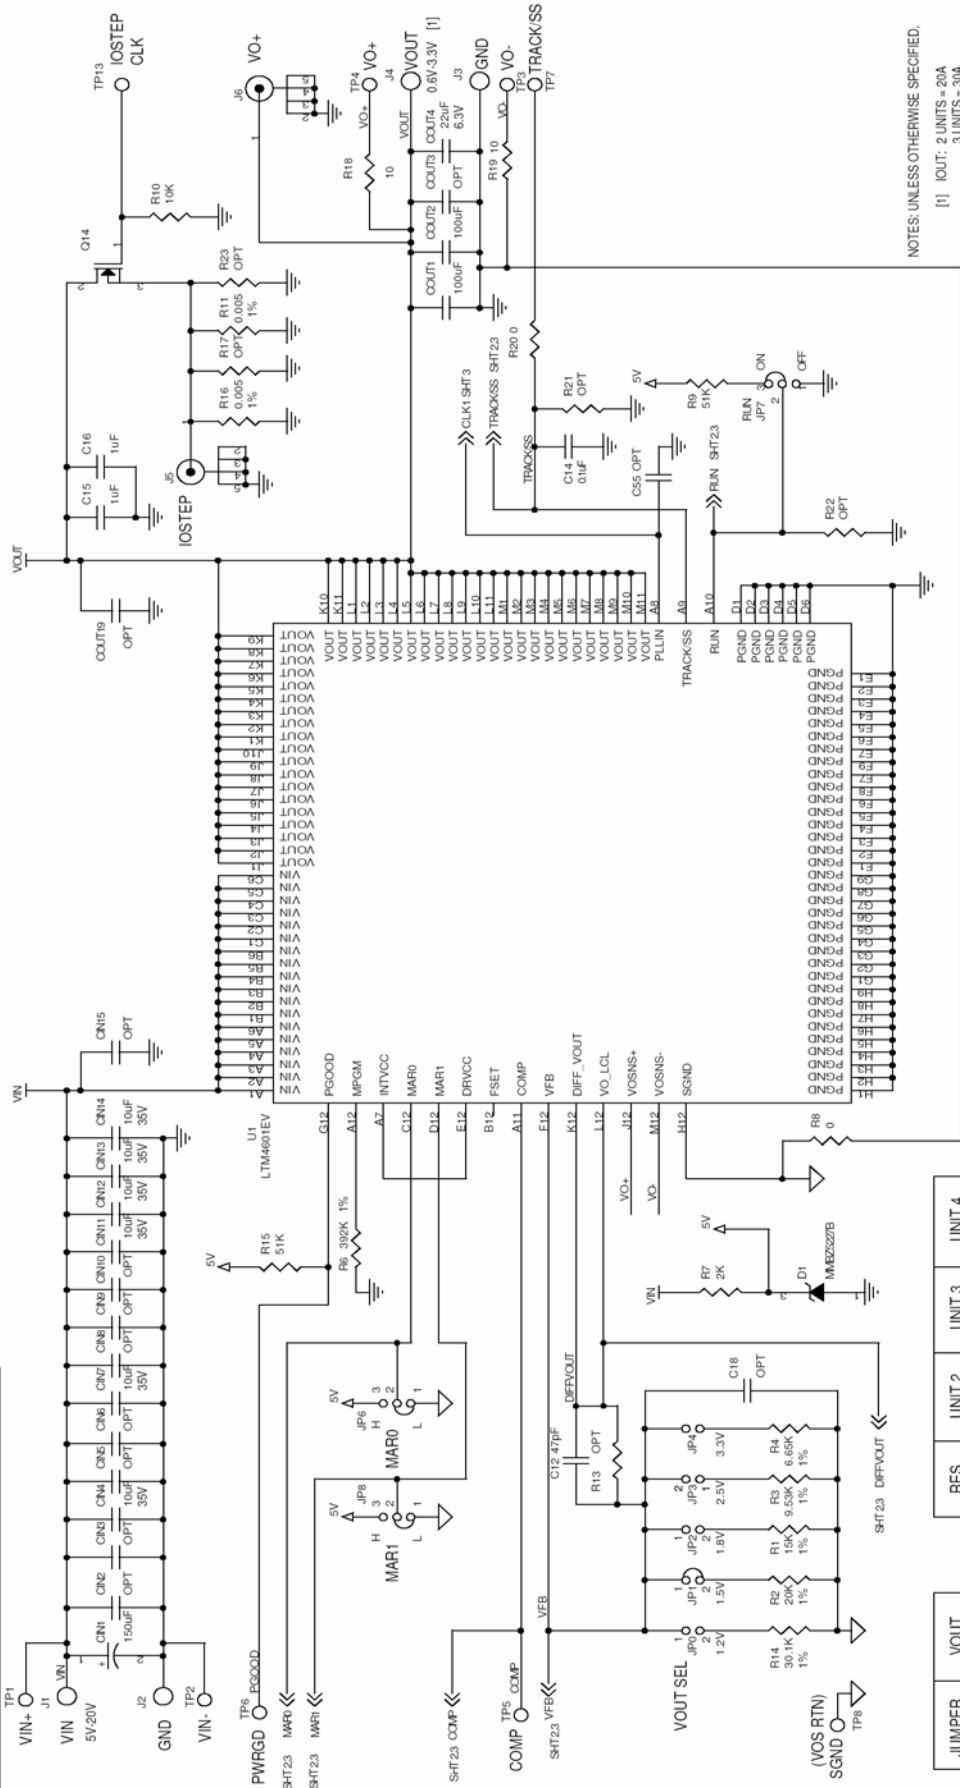

NOTES: UNLESS OTHERWISE SPECIFIED,
 [1] IOUT: 2 UNITS = 20A
 3 UNITS = 30A
 4 UNITS = 40A

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

JUMPER	VOUT	RES	UNIT 2	UNIT 3	UNIT 4
JP0	1.2V	R14	30.1K	20K	15K
JP1	1.5V	R2	20K	13.3K	10K
JP2	1.8V	R1	15K	10K	7.5K
JP3	2.5V	R3	9.53K	6.34K	4.75K
JP4	3.3V	R4	6.65K	4.42K	3.32K



1600 McCarthy Blvd.
 Milpitas, CA 95035
 Phone: 408/853-1900
 Fax: 408/853-0077

CONTRACT NO. _____
 DATE 12/23/05
 DRAWN BY: JET
 CHECKED: _____
 APPROVED: _____
 ENGINEER: _____
 DESIGNER: _____
 SIZE: Custom
 CAGE CODE: _____
 DWG NO: DC1043A-A
 REV: 3


TITLE: SCH. LTM4601EV HIGH EFFICIENCY POLYPHASE DC/DC MICRO MODULE
 FILENAME: 1043A-3.DSN
 SHEET: 1 OF 3

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCE ON ANGLE
 2 PLACES ... 3 PLACES ...
 INTERPRET DIM AND TOL
 PER ASME Y14.5M-1994
 THIRD ANGLE PROJECTION
 DO NOT SCALE DRAWING



QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY				
ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/29/05	
	2	Change Connection Modifications 05/09/06 more chgs.	04/04/06	
	3	Change D1, R7, R26, 10/05/06, New Change	10/05/06	

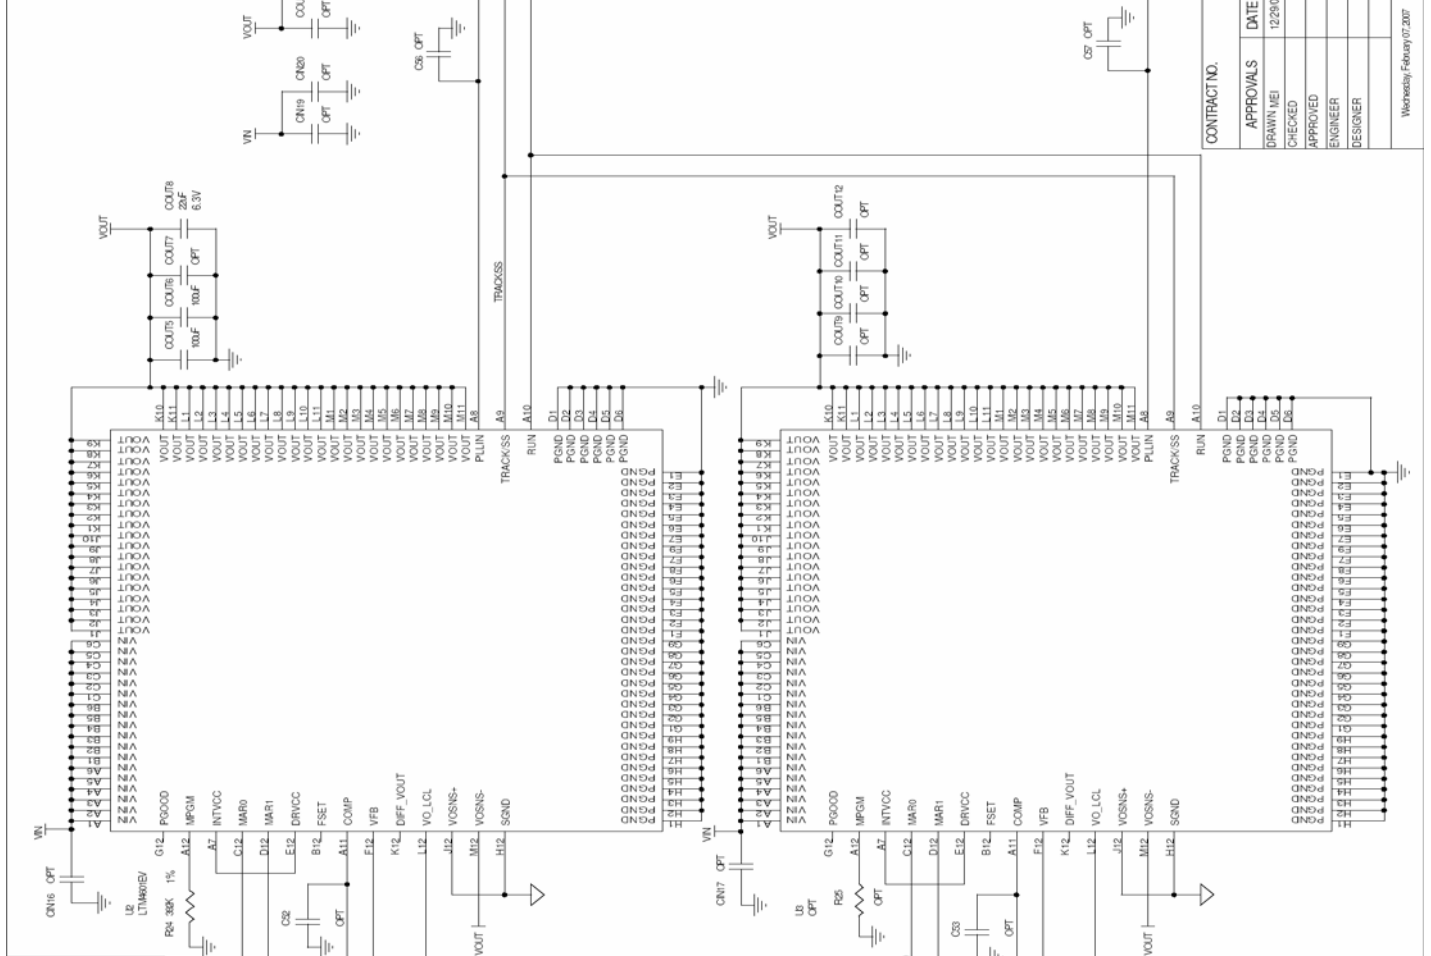

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.

Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

CONTRACT NO.	DATE	12/29/05
APPROVALS	DRAWN	MEI
CHECKED	APPROVED	
ENGINEER	DESIGNER	


		1000 McCarty Blvd Newark, CA 94560 Phone: 415-862-3900 Fax: 415-862-4507
TITLE SCH, LTM601EV HIGH EFFICIENCY POLYPHASE DC/DC MICRO MODULE		
SIZE	CAGE CODE	DWG NO
B		DC1043A-A
SCALE: NONE	FILENAME: 1043A-3.DSN	SHEET 2 OF 3
Wednesday, February 07, 2007		

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY

ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/29/05	
	2	Change, Correction, Modifications, 05/08/06 More chgs.	04/04/06	
	3	Change D1, R7, R20, 1005068 New Changes	10/05/06	

PHASE No.	R26	R27	R29
2	0	OPT	267K
3	OPT	OPT	88.7K
4	OPT	OPT	66.5K

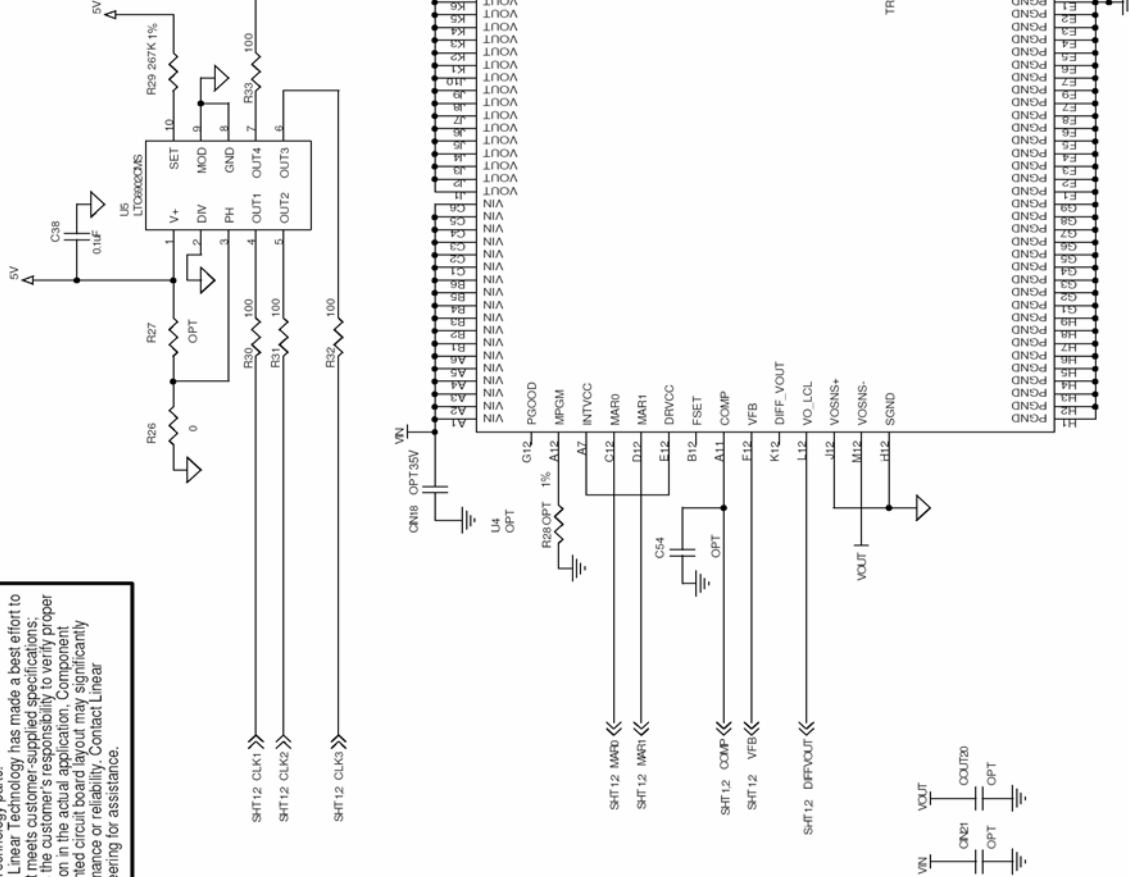

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

1600 McCarthy Blvd.
Folsom, CA 95605
Phone: (916)451-1900
Fax: (916)451-0077

CONTRACT NO.

APPROVALS	DATE
DRAWN: MEI	12/29/05
CHECKED	
APPROVED	
ENGINEER	
DESIGNER	


TITLE SCH, LTM4601EV HIGH EFFICIENCY POLYPHASE
DC/DC MICRO MODULE

SIZE	CAGE CODE	DWG NO	REV
Custom		DC1043A-A	3

Wednesday, February 07, 2007

SCALE: NONE FILENAME: 1043A-3.DSN SHEET 3 OF 3

USED IN PCB MANUFACTURING

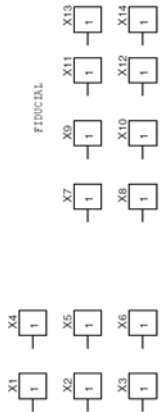

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9