

LTC3533

3.3V, 1.5A Synchronous Buck-Boost Converter

DESCRIPTION

Demonstration circuit 999A is a wide input range, 3.3V, 1.5A Synchronous Buck-Boost Converter featuring the LTC3533.

This circuit was designed to demonstrate the high levels of performance, efficiency, and small solution size attainable using this part in a buck-boost power supply. It operates at 1.0MHz and produces a regulated 3.3V, 1.5A output from an input voltage range of 2.4 to 5.5V, and operates down to 1.8V with de-rated output current. It is suitable for portable applications, and has a footprint area that is 0.25 square inches.

Synchronous rectification helps to attain efficiency up to 94%, depending on line and load. The LTC3533 provides current limit and shutdown disconnect. It offers Burst Mode operation for high efficiency at light loads.

Design files for this circuit board are available. Call the LTC factory.

Δ, LTC, LTM, LT, Burst Mode, OPTI-LOOP, Over-The-Top and PolyPhase are registered trademarks of Linear Technology Corporation. Adaptive Power, C-Load, DirectSense, Easy Drive, FilterCAD, Hot Swap, LinearView, μModule, Micropower SwitcherCAD, Multimode Dimming, No Latency ΔΣ, No Latency Delta-Sigma, No R_{SENSE}, Operational Filter, PanelProtect, PowerPath, PowerSOT, SmartStart, SoftSpan, Stage Shedding, SwitcherCAD, ThinSOT, UltraFast and VLDO are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

PERFORMANCE SUMMARY

Specifications are at TA = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		1.8		5.5	V
V _{OUT}	Output Voltage			3.3		V
I _{OUT}	Output Current Range	V _{IN} = 2.4 – 5.5V	0		1.5	A
I _{OUT}	Maximum Output Current	V _{IN} = 0.8V (linear interpolation from 0.8 – 2.4V)			0.8	A
F _{SW}	Switching (Clock) Frequency			1.0		MHz
V _{OUT P-P}	Output Ripple	V _{IN} = 4.2V, I _{OUT} = 1.5A (20MHz BW)		20		mV _{p-p}
I _{REG}	Output Regulation	Line and Load (1.8-5.5V, 0-1.5A)		±0.4		%
P _{OUT} /P _{IN}	Efficiency (see Figure 2)	V _{IN} = 4.2V, I _{OUT} = 1.5A		89		%

OPERATING PRINCIPLES

The LTC3533 Synchronous Buck-Boost Converter is employed to produce a 3.3V output from an input ranging from 1.8V to 5.5V.

The converter utilizes a proprietary 4-switch topology to provide an output that is within the input voltage

range. It seamlessly transitions from buck, to buck-boost, to boost modes of operation to maintain the output as the input voltage goes from maximum to minimum values.

QUICK START PROCEDURE

Demonstration circuit 999 is easy to set up to evaluate the performance of the LTC3533. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip and ground ring directly across the last output capacitor (COUT) as shown in Figure 1.

1. Set an input power supply that is capable of 1.8V to 5.5V to 4.2V. Turn off the supply.
2. With power off, connect the supply to the input terminals +Vin and –Vin.
 - a. Input voltages lower than 1.8V can keep the converter from turning on due to the undervoltage lockout feature of the LTC3533.
 - b. If efficiency measurements are desired, an ammeter capable of measuring 3Adc or a resistor shunt can be put in series with the input supply in order to measure the DC999A's input current.
 - c. A voltmeter with a capability of measuring at least 5.5V can be placed across the input terminals in order to get an accurate input voltage measurement.
3. Turn on the power at the input.

NOTE. Make sure that the input voltage never exceeds 5.5V.

4. Check for the proper output voltage of 3.3V. Turn off the power at the input.
5. Once the proper output voltages are established, connect a variable load capable of sinking 1.5A at 3.3V to the output terminals +Vout and –Vout. Set the current for 0A.
 - a. If efficiency measurements are desired, an ammeter or a resistor shunt that is capable of handling 1.5Adc can be put in series with the output load in order to measure the DC999A's output current.
 - b. A voltmeter with a capability of measuring at least 3.3V can be placed across the output terminals in order to get an accurate output voltage measurement.
6. Turn on the power at the input.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
7. Once the proper output voltage is again established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other desired parameters.

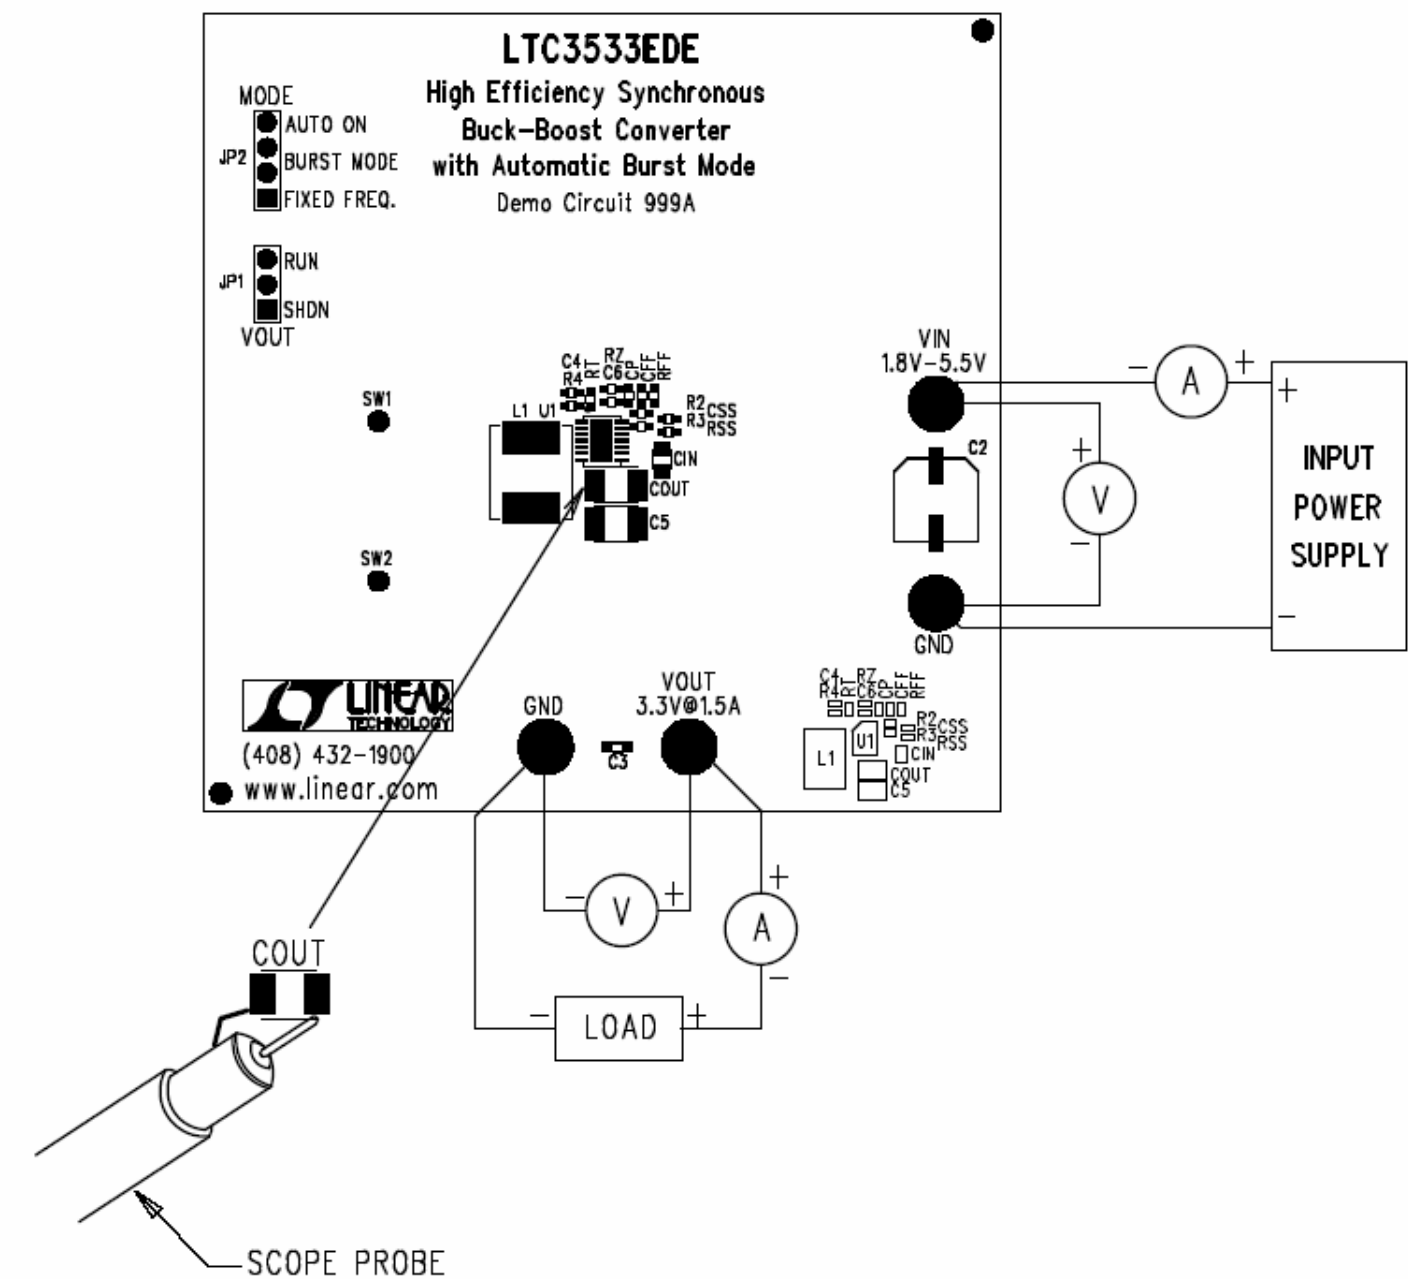


Figure 1. Proper Measurement Equipment Setup

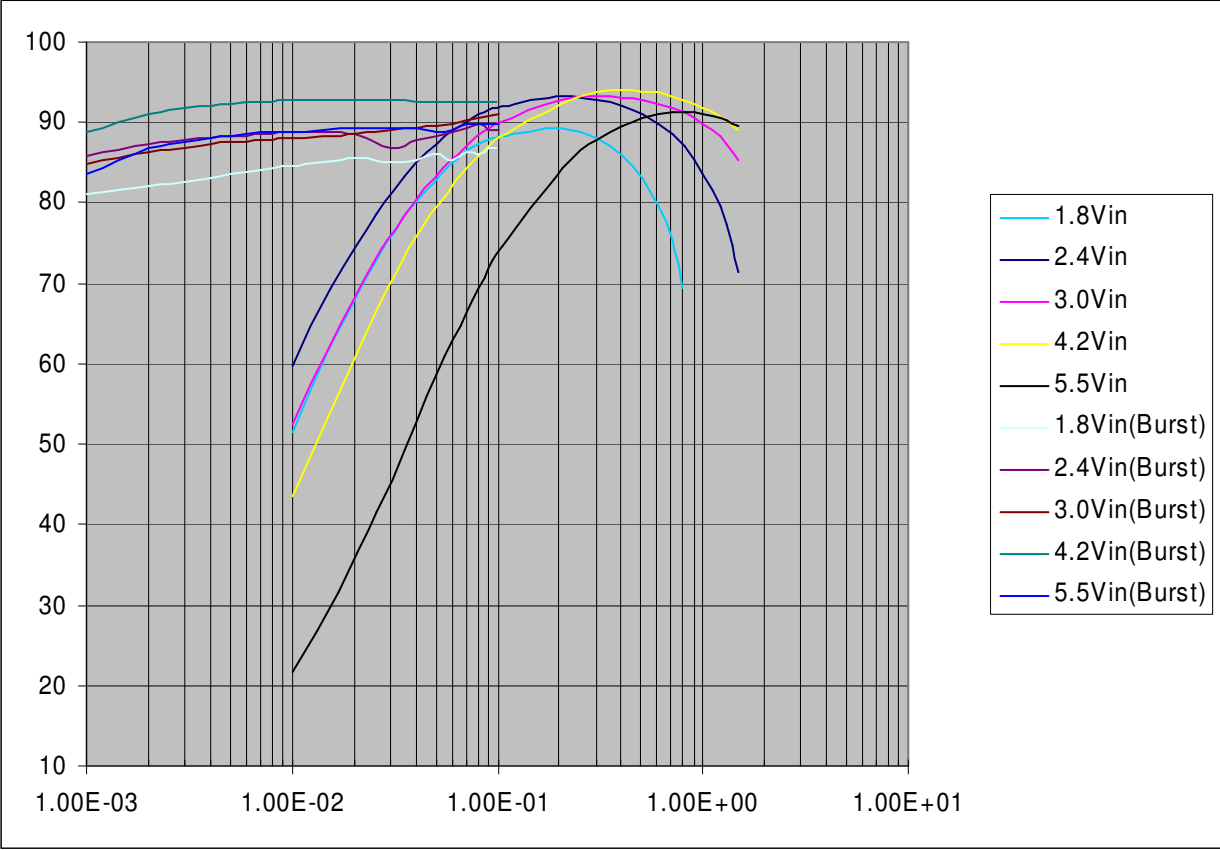


Figure 2. Efficiency – Note 90%+ efficiency over a wide current range.

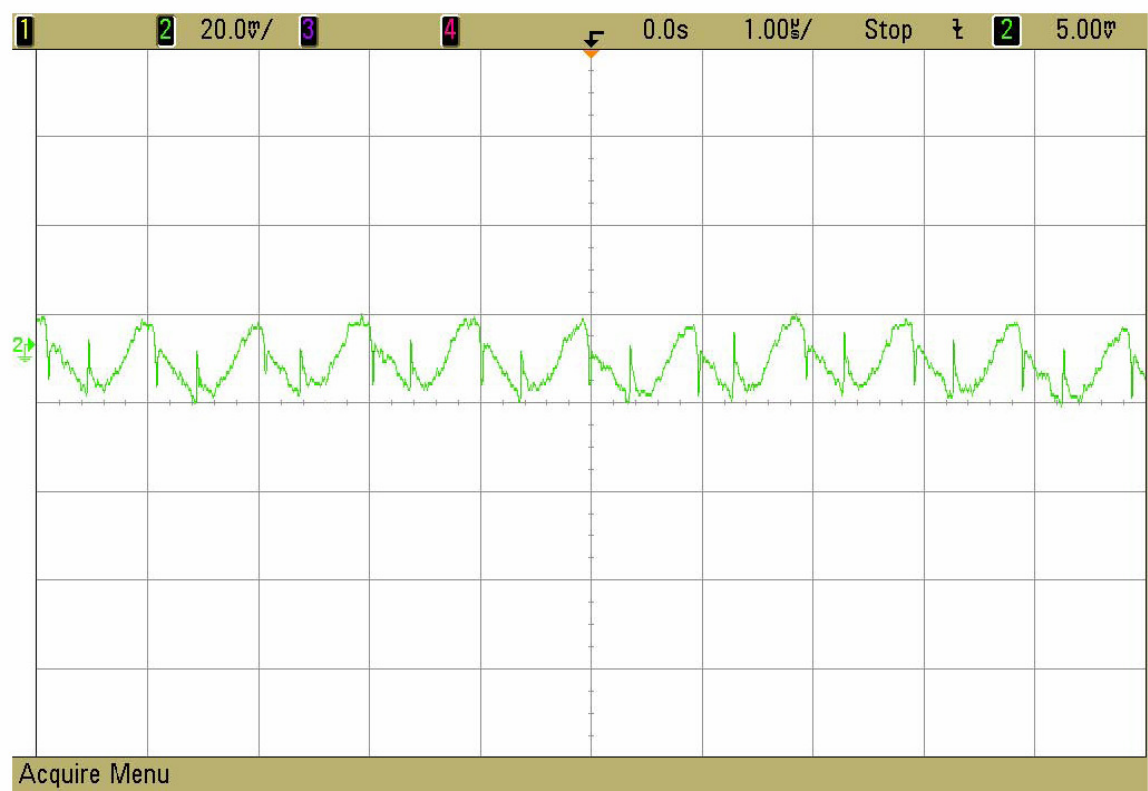


Figure 3. Output Ripple at 2.6V_{in} and 1.5A_{out} (20MHz) - 1µs and 20mV / div


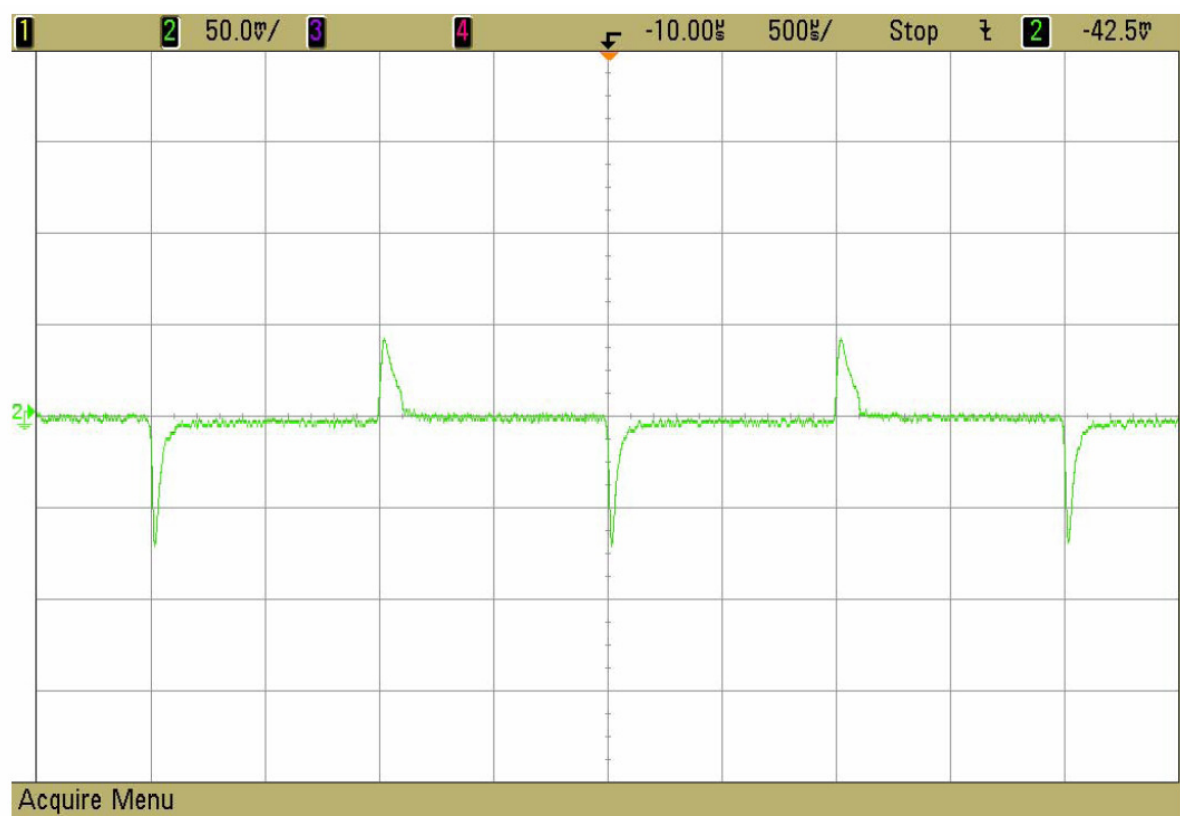


Figure 4. Transient Response Waveform at 4.2Vin and 0.75 - 1.5Aout – 500uS and 50mV / div

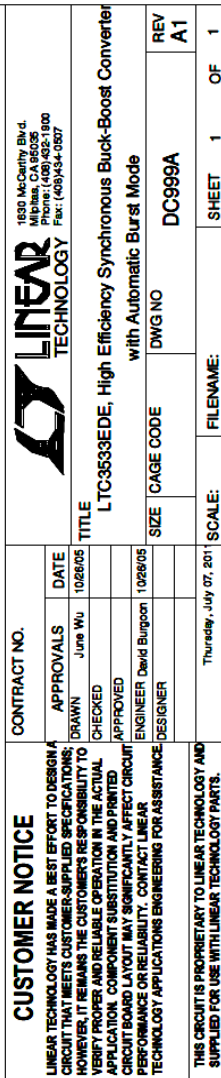

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9