

## Ferrule fuses



### Table of Contents

| Basic Catalog Number | Volts          | Amp Range | Page    |
|----------------------|----------------|-----------|---------|
| FWA                  | 150            | 5-60      | 197-198 |
| FWX                  | 250            | 1-50      | 199-200 |
| FWH                  | 500            | 0.25-30   | 201-204 |
| FWC                  | 600            | 6-32      | 205-206 |
| FWP                  | 690V/700       | 1-100     | 207-210 |
| FWK                  | 750            | 5-60      | 211-212 |
| FWJ                  | 1000           | 20-30     | 213-214 |
| FWL/FWS              | 1250/1500/2000 | 2-30      | 215     |

### Accessories

Fuse Holders 216

### Ferrule Fuse Ranges

| Volts           | Amps    | AC | DC          |
|-----------------|---------|----|-------------|
| 150             | 5-60    | X  | X           |
| 250             | 1-50    | X  | X           |
| 500             | 0.25-30 | X  | X           |
| 600             | 6-32    | X  | X           |
| 700 (22 x 58mm) | 20-100  | X  | —           |
| 700 (14 x 51mm) | 1-50    | X  | X           |
| 750             | 5-60    | X  | X           |
| 1000            | 20-30   | X  | X (800Vdc)  |
| 1250            | 20-30   | X  | X (1000Vdc) |
| 1500            | 8-15    | X  | X (1000Vdc) |
| 2000            | 2-6     | X  | X (1000Vdc) |

### General Information

Cooper Bussmann offers a full line of ferrule style (cylindrical clip-mounted) fuses, designed and tested to meet standards and requirements in various locations around the world.

Their unique design and construction provide:

- Superior cycling capability
- Low energy let-through (I<sup>2</sup>t)

Ferrule fuses provide an excellent solution for small UPS, small ac drives and other low power applications where space is at a premium.

### Voltage Rating

All Cooper Bussmann ferrule fuses — except 690V — have been tested at their rated voltage. The 690V ferrule fuse has been tested to the IEC 60269 standard, which requires clearing at the rated voltage +5%.

### Accessories

Ferrule fuses may be mounted in fuseclips, fuse holders, fuse blocks or fused switches. A variety of products are available. Please consult Cooper Bussmann Application Engineering to discuss your requirement.

## Ferrule — FWA 150V: 5-60A

**FWA 5-30A (10 x 38mm)  
35-60A (21 X 51mm)**

### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustration.

### Ratings:

Volts: — 150Vac/dc

Amps: — 5-60A


IR: — 100kA Sym.

**Agency Information:** CE, UL Recognition

### Electrical Characteristics


#### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (rms).

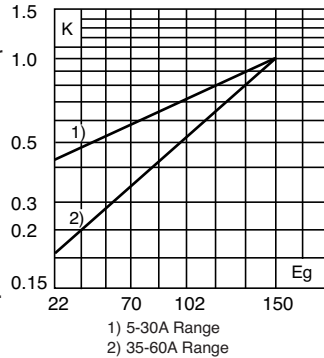


#### Dimensions - in (mm)

| Amp Range | Dimensions |              |              |
|-----------|------------|--------------|--------------|
|           | A          | B            | C            |
| 5-30      | 1.5 (38.1) | 0.375 (9.5)  | 0.406 (10.3) |
| 35-60     | 2.0 (50.8) | 0.625 (15.9) | 0.811 (20.6) |

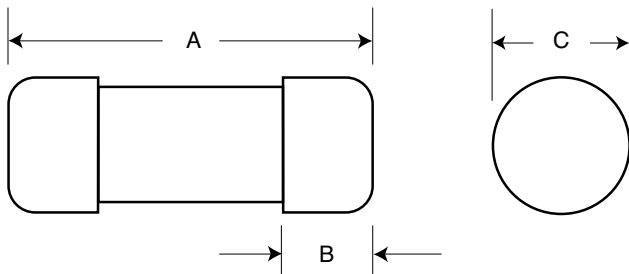


### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (rms) at a power factor of 15%.

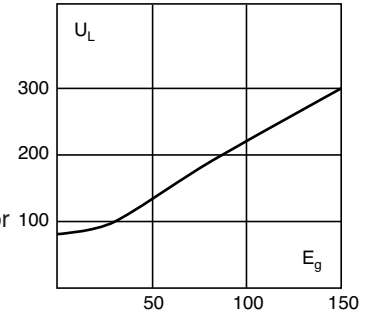

### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

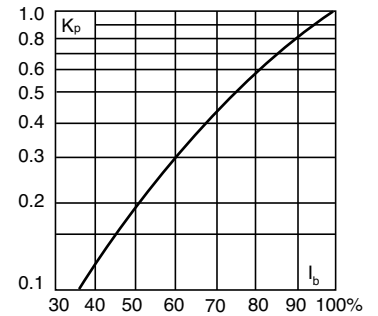

### Catalog Numbers

| Catalog Numbers | Size   | Electrical Characteristics |                                       |                  |            |
|-----------------|--|----------------------------|---------------------------------------|------------------|------------|
|                 |  | Rated Current RMS-Amps     | I <sup>2</sup> t (A <sup>2</sup> Sec) |                  | Watts Loss |
|                 |  |                            | Pre-arc                               | Clearing at 150V |            |
| FWA-5A10F       | 10 x 38mm<br>( <sup>3</sup> / <sub>16</sub> " x 1 <sup>1</sup> / <sub>2</sub> ") | 5                          | 1.6                                   | 8                | 1          |
| FWA-10A10F      |  | 10                         | 3.6                                   | 16               | 2.7        |
| FWA-15A10F      |  | 15                         | 14                                    | 55               | 3.3        |
| FWA-20A10F      |  | 20                         | 33                                    | 130              | 3.8        |
| FWA-25A10F      |  | 25                         | 58                                    | 220              | 4.9        |
| FWA-30A10F      | 30   | 100                        | 400                                   | 4.9              |            |
| FWA-35A21F      | 21 x 51mm<br>( <sup>13</sup> / <sub>16</sub> " x 2")                             | 35                         | 75                                    | 800              | 4.5        |
| FWA-40A21F      |  | 40                         | 100                                   | 1000             | 5.1        |
| FWA-45A21F      |  | 45                         | 130                                   | 1300             | 6          |
| FWA-50A21F      |  | 50                         | 170                                   | 1600             | 7.3        |
| FWA-60A21F      |  | 60                         | 250                                   | 2400             | 8.0        |

• Watts loss provided at rated current.  
• See accessories on page 216.

### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

## Ferrule — FWA 150V: 5-60A


### FWA 5-30A: 150V (10 x 38mm)

Time-Current Curve

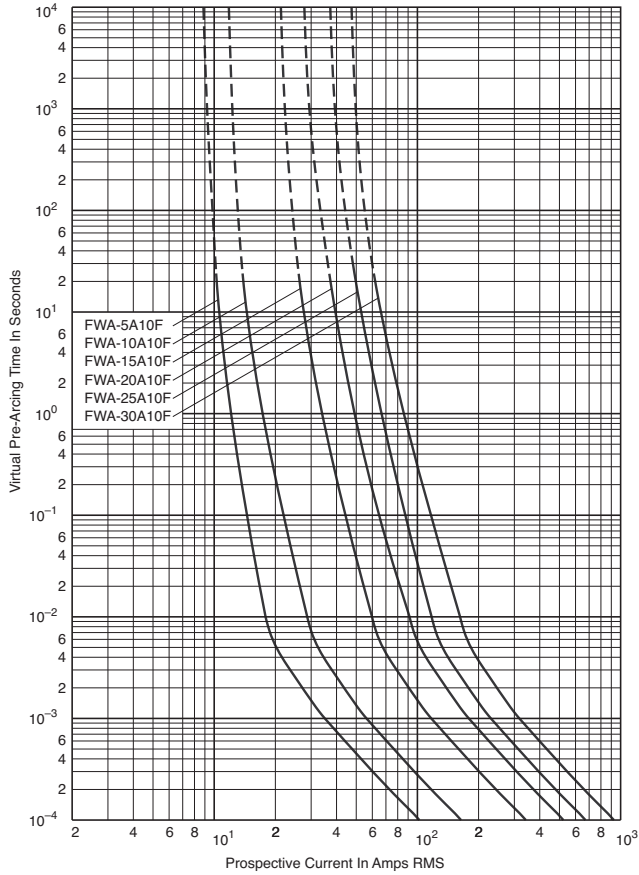


### FWA 35-60A: 150V (21 x 51mm)


Time-Current Curve

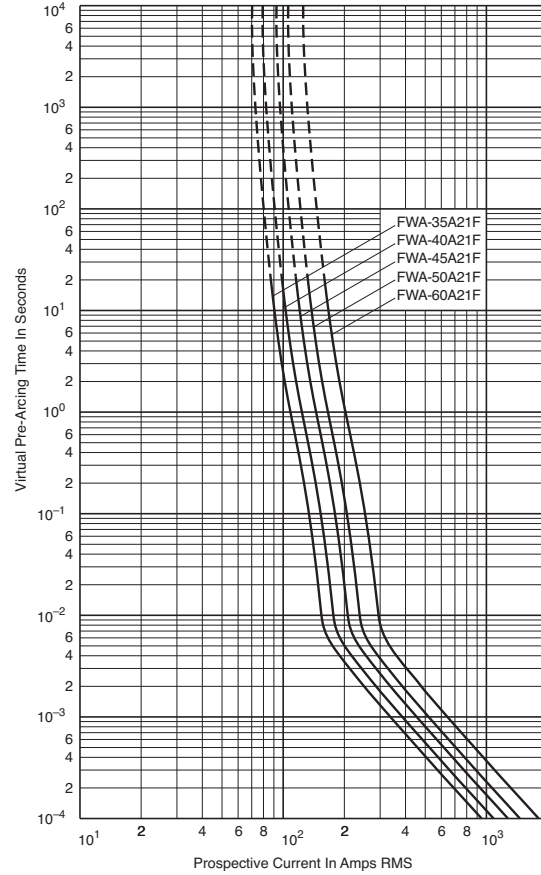

Peak Let-Through Curve

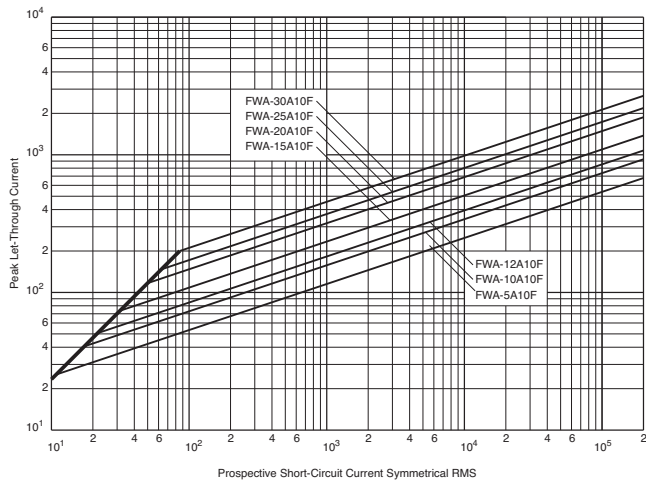

Peak Let-Through Curve

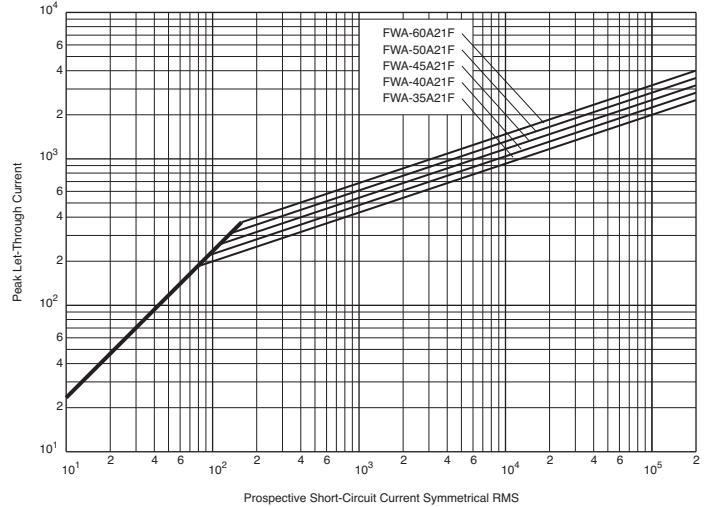

Data Sheet: 35785317

Data Sheet: 35785305

## Ferrule — FWX 250V (UL): 1-50A

### FWX (14 x 51mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustration.

#### Ratings:

Volts: — 250Vac/dc

Amps: — 1-50A

IR: — 200kA RMS Sym.

— 50kA @ 250Vdc


**Agency Information:** CE, UL Recognition 1-50A & CSA Component Acceptance: 5-30A

#### Electrical


#### Characteristics

#### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (rms).




#### Dimensions - mm (inches)

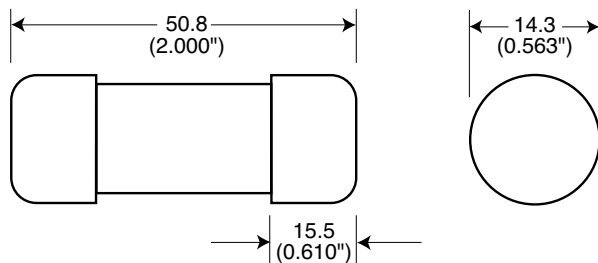


#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (rms) at a power factor of 15%.

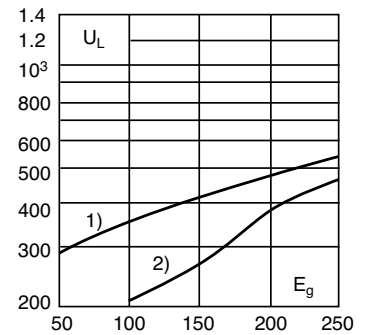

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

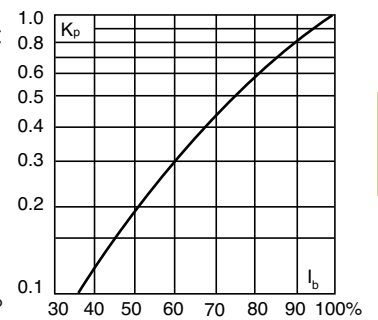

#### Catalog Numbers

| Catalog Number | Size                                 | Electrical Characteristics |                             |                  |            |
|----------------|--------------------------------------|----------------------------|-----------------------------|------------------|------------|
|                |                                      | Rated Current RMS-Amps     | $I^2t$ (A <sup>2</sup> Sec) |                  | Watts Loss |
|                |                                      |                            | Pre-arc                     | Clearing at 250V |            |
| FWX-1A14F      | 14 x 51mm<br>( $\frac{1}{2}$ " x 2") | 1                          | —                           | —                | —          |
| FWX-2A14F      |                                      | 2                          | —                           | —                | —          |
| FWX-3A14F      |                                      | 3                          | —                           | —                | —          |
| FWX-4A14F      |                                      | 4                          | —                           | —                | —          |
| FWX-5A14F      |                                      | 5                          | 1.6                         | 13               | 1.3        |
| FWX-10A14F     |                                      | 10                         | 3.6                         | 24               | 3.4        |
| FWX-15A14F     |                                      | 15                         | 14                          | 83               | 3.8        |
| FWX-20A14F     |                                      | 20                         | 33                          | 200              | 4.6        |
| FWX-25A14F     |                                      | 25                         | 58                          | 300              | 5.3        |
| FWX-30A14F     |                                      | 30                         | 100                         | 500              | 5.9        |
| FWX-50A14F     | 50                                   | 200                        | 1800                        | 5.7              |            |

• Watts loss provided at rated current.  
 • (250Vdc/Interrupting rating 50kA) UL Recognition & CSA Component Acceptance on 5 through 30A only. Consult Cooper Bussmann for additional ratings.  
 • See accessories on page 216.

#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through ( $I^2t$ )
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


#### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters


## Ferrule — FWX 250V (UL): 1-50A

### FWX 1-30A: 250V (14 x 51mm)

Time-Current Curve

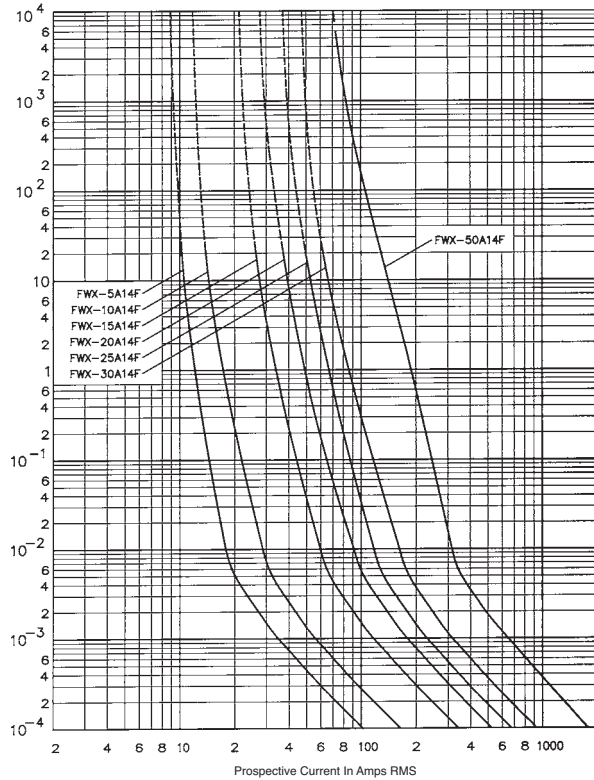

Peak Let-Through Curve

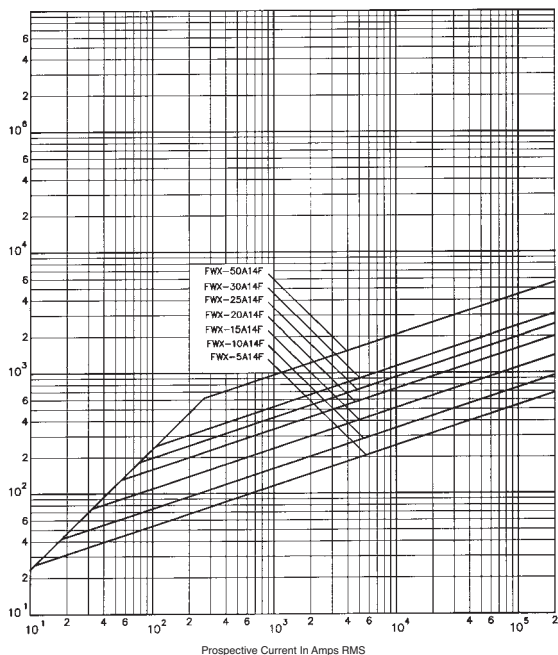

## Ferrule — FWH 500V: 0.25-30A

### FWH (6 x 32mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustrations.

#### Ratings:

Volts: — 500Vac

Amps: — 0.25-30A

IR: — 50kA at  $\geq 20\%$  pf (0.25-20A)

— 20kA at  $\geq 20\%$  pf (25-30A)

**Agency Information:** CE, UL Recognition 0.25-30A, CSA

Component Acceptance: 0.25-7A

#### Opening Times

| Amp Ratings | 150%     | 200%     | 300%          |
|-------------|----------|----------|---------------|
| 0.25-7      | > 30 min | < 30 min | $\leq 10$ sec |
| 10-30       | < 30 min | < 30 min | $\leq 10$ sec |



### Catalog Numbers

| Catalog Numbers | Size                                   | Electrical Characteristics |                             |                  |            |
|-----------------|--|----------------------------|-----------------------------|------------------|------------|
|                 |  | Rated Current RMS-Amps     | $I^2t$ (A <sup>2</sup> Sec) |                  | Watts Loss |
|                 |  |                            | Pre-arc                     | Clearing at 500V |            |
| FWH-.250A6F     |  | 0.25*                      | 0.01                        | 0.05             | 2.7        |
| FWH-.500A6F     |  | 0.5*                       | 0.05                        | 0.25             | 1.2        |
| FWH-001A6F      |  | 1*                         | 0.4                         | 2                | 1.7        |
| FWH-002A6F      |  | 2*                         | 1.3                         | 3.5              | 3.2        |
| FWH-3.15A6F     |  | 3.15*                      | 3.1                         | 7.7              | 2.9        |
| FWH-005A6F      |  | 5*                         | 15                          | 40               | 2.1        |
| FWH-6.30A6F     | 6 x 32mm                               | 6.3*                       | 36                          | 90               | 2.3        |
| FWH-007A6F      | ( $\frac{1}{4}$ " x $1\frac{1}{4}$ " ) | 7*                         | 50                          | 125              | 2.5        |
| FWH-010A6F      |  | 10**                       | 9.9                         | 139              | 2.86       |
| FWH-12.5A6F     |  | 12.5**                     | 20                          | 60               | 3.53       |
| FWH-015A6F      |  | 15**                       | 44                          | 146              | 3.08       |
| FWH-016A6F      |  | 16**                       | 48                          | 177              | 4.48       |
| FWH-020A6F      |  | 20**                       | 75                          | 259              | 4.26       |
| FWH-025A6F      |  | 25**                       | 126                         | 345              | —          |
| FWH-030A6F      |  | 30**                       | 145                         | 430              | —          |

\*300% minimum opening current at rated voltage.


\*\*200% minimum opening current at rated voltage.

• Consult Cooper Bussmann for DC ratings.

• See accessories on page 216.

High Speed Fuses

### Dimensions - mm (inches)

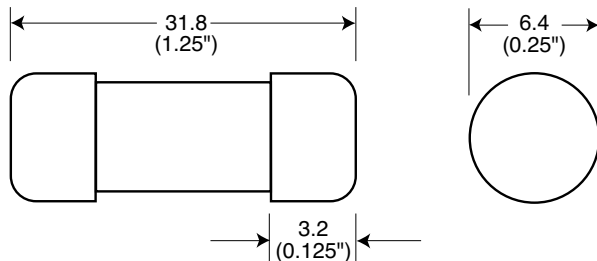

### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through ( $I^2t$ )
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

## Ferrule — FWH 500V: 0.25-30A


### FWH 0.25-7A: 500V (6 x 32mm)

Time-Current Curve

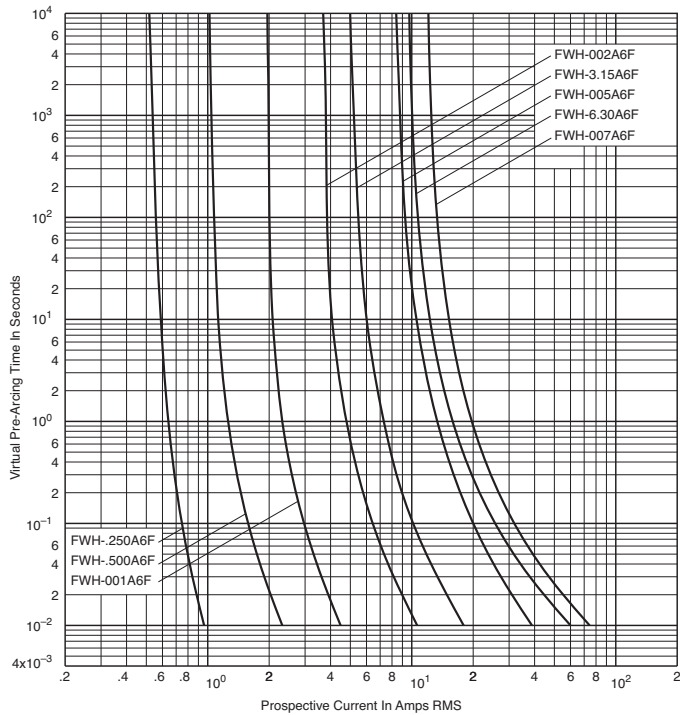

### FWH 10-30A: 500V (6 x 32mm)

Time-Current Curve

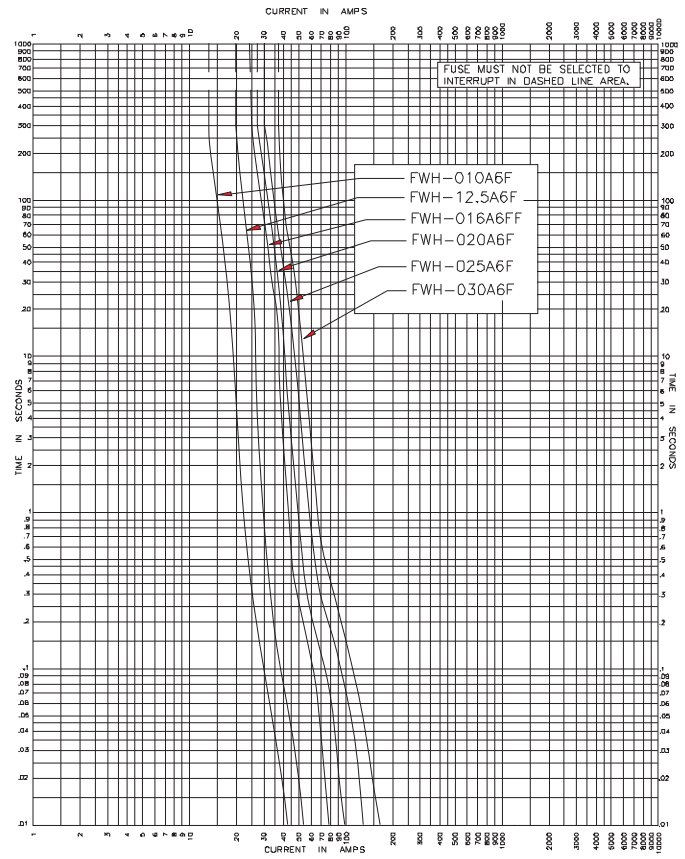



## Ferrule — FWH 500V: 1-30A

### FWH (14 x 51mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustration.

#### Ratings:

Volts: — 500Vac/dc

Amps: — 1-30A

IR: — 200kA RMS Sym.

— 50kA @500Vdc


**Agency Information:** CE, UL Recognition 1- 30A & CSA Component Acceptance: 5 - 30A.




#### Electrical Characteristics

##### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (rms).




#### Dimensions - mm (inches)

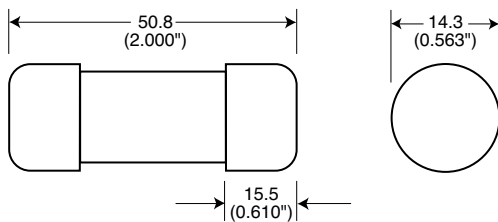


#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (rms) at a power factor of 15%.



#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

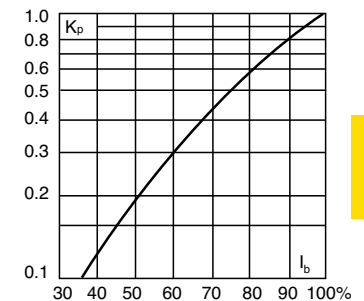

#### Catalog Numbers

| Catalog Numbers | Size                                | Electrical Characteristics |                                       |                  |            |
|-----------------|-------------------------------------|----------------------------|---------------------------------------|------------------|------------|
|                 |                                     | Rated Current RMS-Amps     | I <sup>2</sup> t (A <sup>2</sup> Sec) |                  | Watts Loss |
|                 |                                     |                            | Pre-arc                               | Clearing at 500V |            |
| FWH-1A14F       | 14 x 51mm<br>(% <sup>16</sup> x 2") | 1                          | —                                     | —                | —          |
| FWH-2A14F       |                                     | 2                          | —                                     | —                | —          |
| FWH-3A14F       |                                     | 3                          | —                                     | —                | 2.3        |
| FWH-4A14F       |                                     | 4                          | —                                     | —                | —          |
| FWH-5A14F       |                                     | 5                          | 1.6                                   | 6.4              | 1.5        |
| FWH-6A14F       |                                     | 6                          | 1.6                                   | 6.4              | 1.5        |
| FWH-10A14F      |                                     | 10                         | 3.6                                   | 13               | 4          |
| FWH-12A14F      |                                     | 12                         | —                                     | —                | —          |
| FWH-15A14F      |                                     | 15                         | 10                                    | 40               | 5.5        |
| FWH-20A14F      |                                     | 20                         | 26                                    | 96               | 6          |
| FWH-25A14F      |                                     | 25                         | 49                                    | 191              | 7          |
| FWH-30A14F      |                                     | 30                         | 58                                    | 232              | 9          |

• Watts loss provided at rated current.  
• See accessories on page 216.

#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

#### Typical Applications


- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters




## Ferrule — FWH 500V: 1-30A

FWH 1-30A: 500V (14 x 51mm)

Time-Current Curve

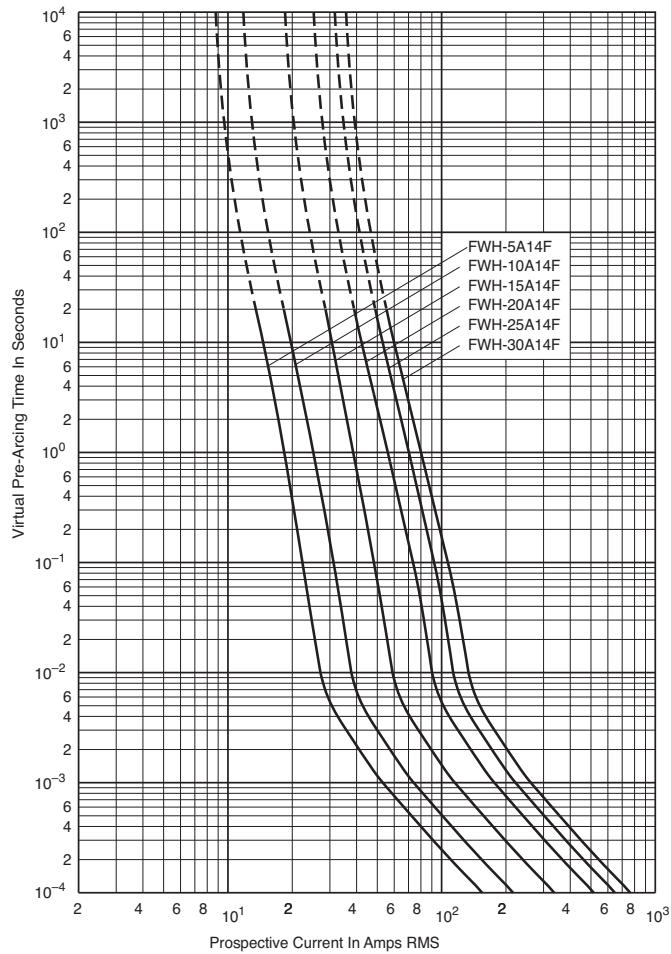

Peak Let-Through Curve

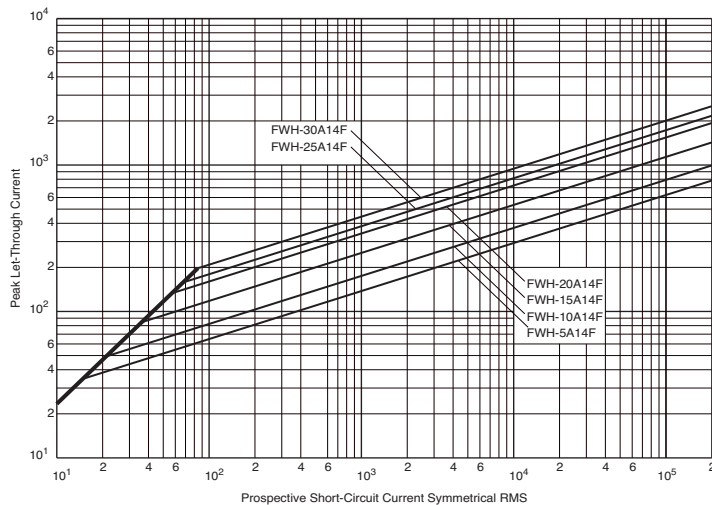

Data Sheet: 35785298

## Ferrule — FWC 600V: 6-32A

### FWC (10 x 38mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustration.

#### Ratings:

Volts: — 600Vac/dc

Amps: — 6-32A

IR: — 200kA RMS Sym.

— 50kA @ 700Vdc (6-25A)


**Agency Information:** CE, UL Recognition: 6-32A.

UL Recognition: 6-25A


#### Electrical Characteristics

##### Total Clearing $I^2t$

The total clearing  $I^2t$  at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing  $I^2t$  is found by multiplying by correction factor, K, given as a function of applied working voltage,  $E_g$ , (rms).




#### Dimensions - mm (inches)

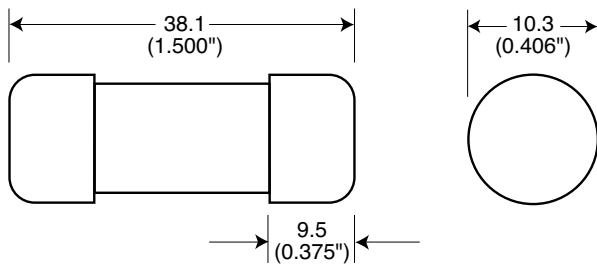


#### Arc Voltage

This curve gives the peak arc voltage,  $U_L$ , which may appear across the fuse during its operation as a function of the applied working voltage,  $E_g$ , (rms) at a power factor of 15%.

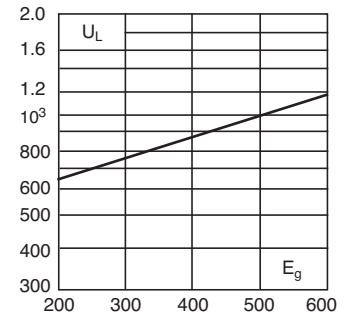

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor,  $K_p$ , is given as a function of the RMS load current,  $I_b$ , in % of the rated current.

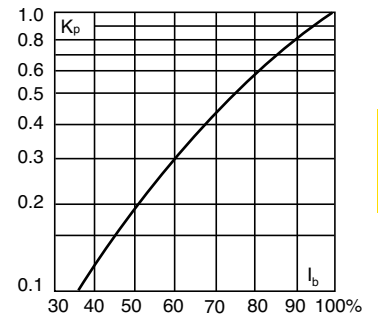

#### Catalog Numbers

| Catalog Numbers | Size   | Electrical Characteristics |                             |                  |            |
|-----------------|--|----------------------------|-----------------------------|------------------|------------|
|                 |  | Rated Current RMS-Amps     | $I^2t$ (A <sup>2</sup> Sec) |                  | Watts Loss |
|                 |  |                            | Pre-arc                     | Clearing at 600V |            |
| FWC-6A10F       | 10 x 38mm<br>( <sup>19</sup> / <sub>32</sub> " x 1 1/2") | 6                          | 4                           | 30               | 1.5        |
| FWC-8A10F       |  | 8                          | 6                           | 50               | 2.0        |
| FWC-10A10F      |  | 10                         | 9                           | 70               | 2.5        |
| FWC-12A10F      |  | 12                         | 15                          | 120              | 3.0        |
| FWC-16A10F      |  | 16                         | 25                          | 150              | 3.5        |
| FWC-20A10F      |  | 20                         | 34                          | 260              | 4.8        |
| FWC-25A10F      |  | 25                         | 60                          | 390              | 6.0        |
| FWC-30A10F      |  | 30                         | 95                          | 600              | 7.5        |
| FWC-32A10F      | 32   | 95                         | 600                         | 7.5              |            |

• Watts loss provided at rated current.  
• See accessories on page 216.

#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through ( $I^2t$ )
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


#### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters


## Ferrule — FWC 600V: 6-32A

### FWC 6-32A: 600V (10 x 38mm)

Time-Current Curve

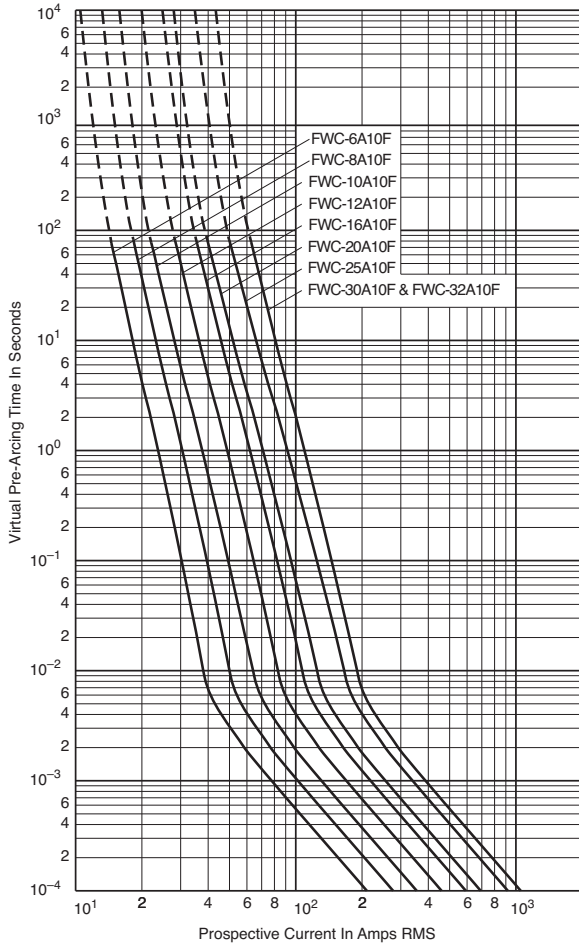

Peak Let-Through Curve

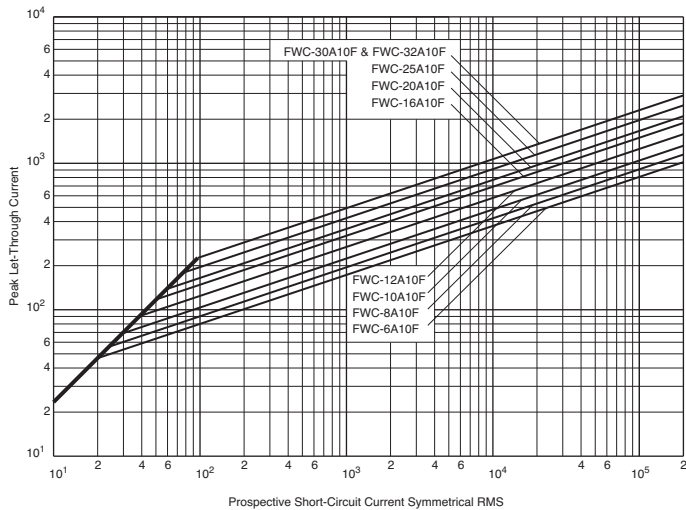

Data Sheet: 35785306

## Ferrule — FWP 690V/700V (IEC/UL): 1-50A, Striker Optional

### FWP (14 x 51mm)

#### Specifications

**Description:** Ferrule style high speed fuses with and without indicating striker.

**Dimensions:** See dimensions illustrations.

#### Ratings:


- Volts: — 690Vac (IEC)
- 700Vac (UL)
- 800Vdc (5-50A)
- Amps: — 1-50A
- IR: — 200kA RMS Sym.
- 50kA @800Vdc

**Agency Information:** CE, UL Recognition, CSA Component Acceptance for versions without indicator only.

#### Electrical Characteristics

##### Total Clearing I<sup>2</sup>t


The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (rms).

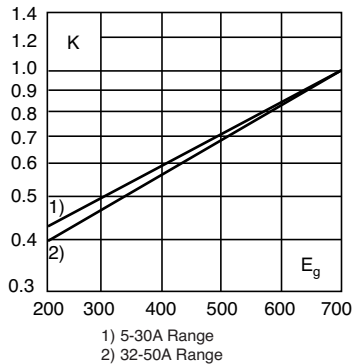


1) 5-30A Range  
2) 32-50A Range

#### Dimensions - mm (inches)

##### Without Striker

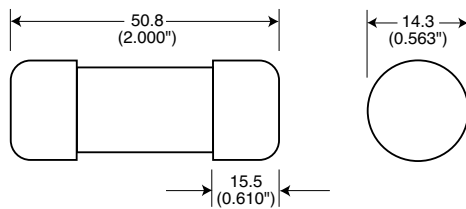


##### With Striker

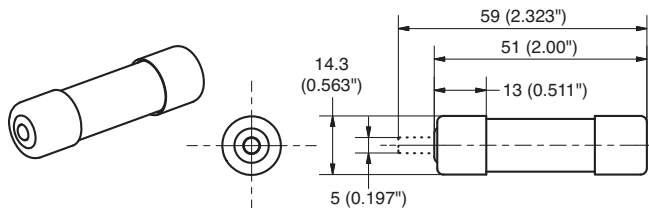

FWP with striker option.


#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (rms) at a power factor of 15%.

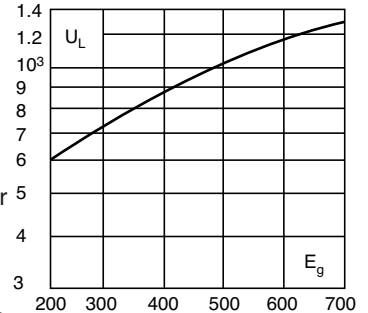

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

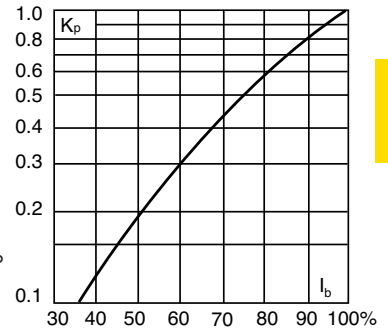

#### Catalog Numbers

| Catalog Numbers | Size   | Electrical Characteristics |                       |   |            |
|-----------------|--|----------------------------|-----------------------|---|------------|
|                 |  | Current RMS-Amps           | Rated Minimum Melting | I <sup>2</sup> t (A <sup>2</sup> Sec) Clearing At Rated Voltage | Watts Loss |
| Without Striker |  |                            |                       |   |            |
| FWP-1A14Fa      | 14 x 51mm<br>( <sup>11</sup> / <sub>16</sub> " x 2") | 1                          | —                     | —   | —          |
| FWP-2A14Fa      |  | 2                          | —                     | —   | —          |
| FWP-2.5A14Fa    |  | 2.5                        | —                     | —   | —          |
| FWP-3A14Fa      |  | 3                          | —                     | —   | —          |
| FWP-4A14Fa      |  | 4                          | —                     | —   | —          |
| FWP-5A14Fa      |  | 5                          | 1.6                   | 11.0  | 1.5        |
| FWP-10A14Fa     |  | 10                         | 3.6                   | 38.5  | 4          |
| FWP-15A14Fa     |  | 15                         | 8.6                   | 70  | 5.5        |
| FWP-20A14Fa     |  | 20                         | 26.0                  | 230   | 6          |
| FWP-25A14Fa     |  | 25                         | 46.5                  | 375   | 7          |
| FWP-30A14Fa     | 30   | 58                         | 485                   | 9   |            |
| FWP-32A14Fa     | 32   | 68                         | 600                   | 7.6   |            |
| FWP-40A14Fa     | 40   | 84                         | 750                   | 8   |            |
| FWP-50A14Fa     | 50   | 200                        | 1800                  | 9   |            |
| With Striker    |  |                            |                       |   |            |
| FWP-10A14FI     | 14 x 51mm<br>( <sup>11</sup> / <sub>16</sub> " x 2") | 10                         | 3.6                   | 38.5  | 4          |
| FWP-15A14FI     |  | 15                         | 8.6                   | 70  | 5.5        |
| FWP-20A14FI     |  | 20                         | 26.0                  | 230   | 6          |
| FWP-25A14FI     |  | 25                         | 46.5                  | 375   | 7          |
| FWP-30A14FI     |  | 30                         | 58                    | 485   | 9          |
| FWP-32A14FI     |  | 32                         | 68                    | 600   | 7.6        |
| FWP-40A14FI     |  | 40                         | 84                    | 750   | 8          |
| FWP-50A14FI     |  | 50                         | 200                   | 1800  | 9          |

\* Watts loss provided at rated current.  
\* See accessories on page 216.

#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks


Data Sheet: 720025

## Ferrule — FWP 690V/700V (IEC/UL): 1-50A, Striker Optional


Without Striker

FWP 5-50A: 660V/700V (14x 51mm)

Time-Current Curve

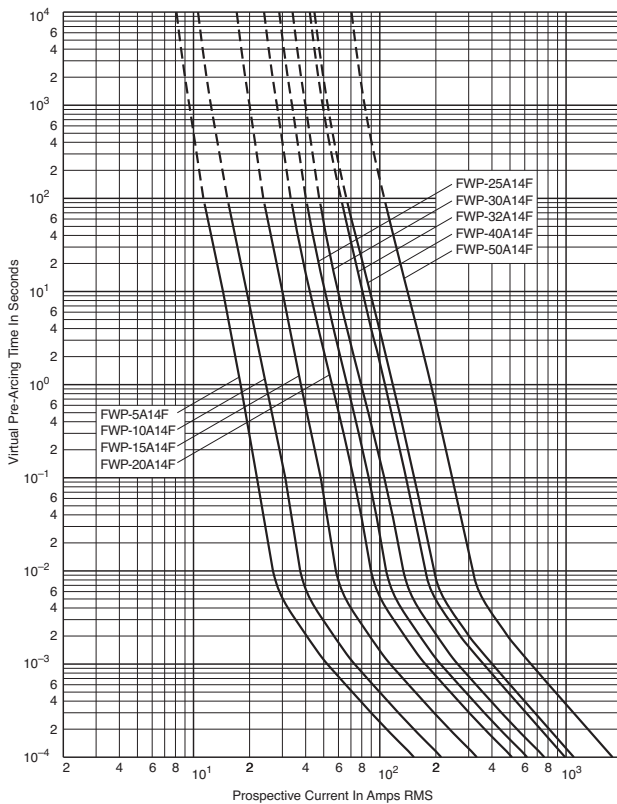

Peak Let-Through Curve

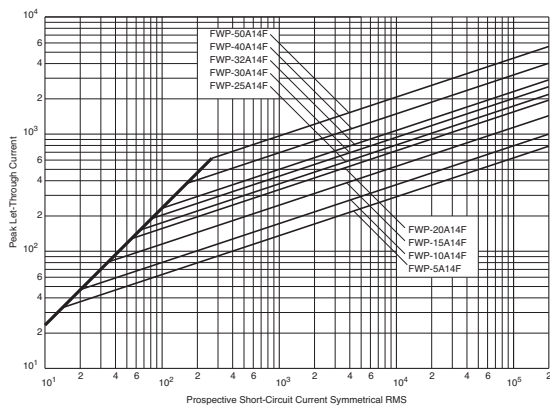

Data Sheet: 35785307

## Ferrule — FWP 690V/700V (IEC/UL): 20-100A, Striker Optional

### FWP (22 x 58mm)

#### Specifications

**Description:** Ferrule style high speed fuses with and without indicating striker.

**Dimensions:** See dimensions illustration.

#### Ratings:

- Volts: — 690Vac (IEC)
- 700Vac (UL)


- Amps: — 20-100A
- IR: — 200kA RMS Sym.
- 50kA @ 500Vdc

**Agency Information:** CE, UL Recognition

#### Electrical Characteristics


##### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (rms).

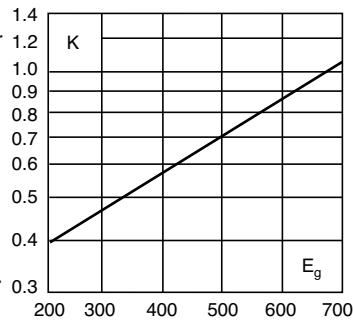


#### Dimensions - mm (inches)

##### Without Striker

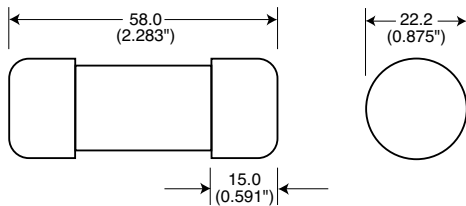


##### With Striker

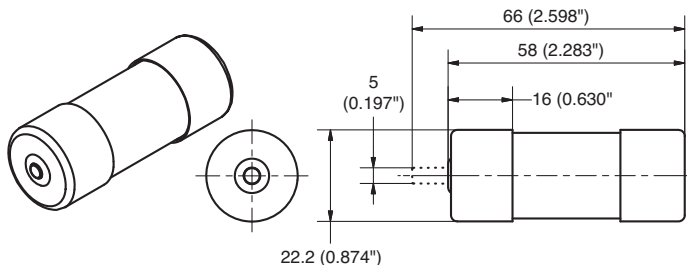


#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (rms) at a power factor of 15%.

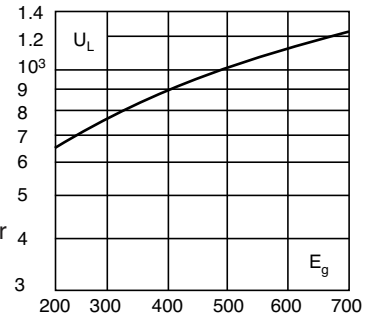

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

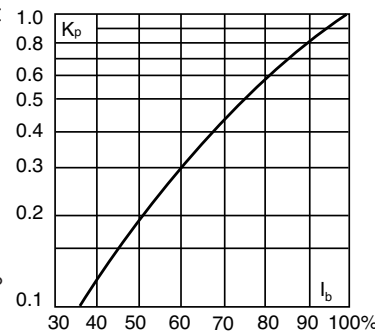

#### Catalog Numbers

| Catalog Numbers        | Size                         | Electrical Characteristics |                                       |                           |            |
|------------------------|------------------------------|----------------------------|---------------------------------------|---------------------------|------------|
|                        |                              | Rated Current RMS-Amps     | I <sup>2</sup> t (A <sup>2</sup> Sec) |                           | Watts Loss |
|                        |                              |                            | Minimum Melting                       | Clearing At Rated Voltage |            |
| <b>Without Striker</b> |                              |                            |                                       |                           |            |
| FWP-20A22Fa            | 22 x 58mm<br>(7/8" x 2 1/2") | 20                         | 19.0                                  | 260                       | 5          |
| FWP-25A22Fa            |                              | 25                         | 34.0                                  | 410                       | 6          |
| FWP-32A22Fa            |                              | 32                         | 53.5                                  | 605                       | 8          |
| FWP-40A22Fa            |                              | 40                         | 68                                    | 750                       | 9          |
| FWP-50A22Fa            |                              | 50                         | 135                                   | 1600                      | 9.5        |
| FWP-63A22Fa            |                              | 63                         | 280                                   | 3080                      | 11         |
| FWP-80A22Fa            |                              | 80                         | 600                                   | 6600                      | 13.5       |
| FWP-100A22Fa           | 100*                         | 1100                       | 12500                                 | 16                        |            |
| <b>With Striker</b>    |                              |                            |                                       |                           |            |
| FWP-20A22FI            | 22 x 58mm<br>(7/8" x 2 1/2") | 20                         | 19.0                                  | 260                       | 5          |
| FWP-25A22FI            |                              | 25                         | 34.0                                  | 410                       | 6          |
| FWP-32A22FI            |                              | 32                         | 53.5                                  | 605                       | 8          |
| FWP-40A22FI            |                              | 40                         | 68                                    | 750                       | 9          |
| FWP-50A22FI            |                              | 50                         | 135                                   | 1600                      | 9.5        |
| FWP-63A22FI            |                              | 63                         | 280                                   | 3080                      | 11         |
| FWP-80A22FI            |                              | 80                         | 600                                   | 6600                      | 13.5       |
| FWP-100A22FI           | 100*                         | 1100                       | 12500                                 | 16                        |            |

\*IEC/UL Voltage rating 690/700

#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

#### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

Data Sheet: 720026


High Speed Fuses

## Ferrule — FWP 690V/700V (IEC/UL): 20-100A, Striker Optional


Without Striker

FWP 20-100A: 660V/700V (22 x 58mm)

Time-Current Curve

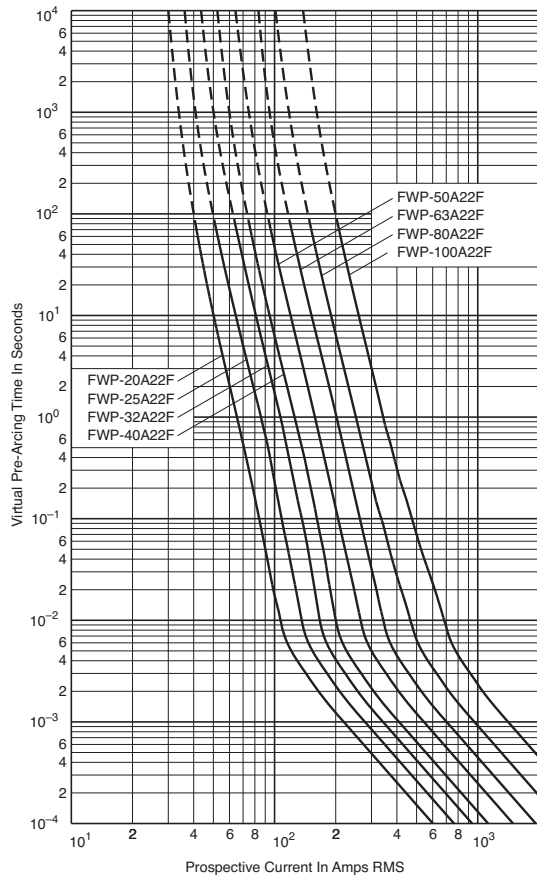

Peak Let-Through Curve

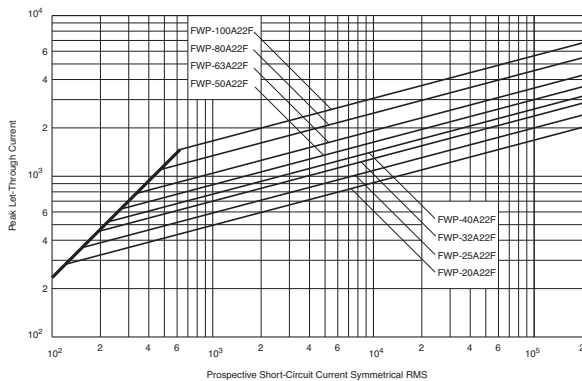



## Ferrule — FWK 750V: 5-60A

### FWK 5-30A (20 x 127mm) 35-60A (25 x 146mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See Dimensions illustrations.

#### Ratings:

Volts: — 750Vac

— 750Vdc (Time constant = 10-15mS)

Amps: — 5-60A

IR: — 45kA RMS Sym.

**Agency Information:** CE



#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through ( $I^2t$ )
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

#### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

#### Catalog Numbers

| Catalog Numbers | Size                           | Electrical Characteristics |                             |                    |
|-----------------|--------------------------------|----------------------------|-----------------------------|--------------------|
|                 |                                | Rated Current RMS-Amps     | $I^2t$ (A <sup>2</sup> Sec) |                    |
|                 |                                |                            | Pre-arc                     | Clearing at 750Vdc |
| FWK-5A20F       | 20 x 127mm<br>( $3/8"$ x 5")   | 5                          | 8.5                         | 16                 |
| FWK-8A20F       |                                | 8                          | 50                          | 100                |
| FWK-10A20F      |                                | 10                         | 95                          | 200                |
| FWK-15A20F      |                                | 15                         | 100                         | 240                |
| FWK-20A20F      |                                | 20                         | 125                         | 315                |
| FWK-30A20F      |                                | 30                         | 400                         | 1100               |
| FWK-35A25F      | 25 x 146mm<br>(1" x 5 $7/8"$ ) | 35                         | 1300                        | 4300               |
| FWK-40A25F      |                                | 40                         | 1600                        | 5300               |
| FWK-50A25F      |                                | 50                         | 3100                        | 12000              |
| FWK-60A25F      |                                | 60                         | 5900                        | 24000              |

Recommended fuseholders for 20x127, CH127-1, -2, -3

Recommended fuseclips for 20x127, 1A1837

Recommended fuseclips for 25x146, A3354705

#### Dimensions - mm (inches)

Fig. 1: 5-30A


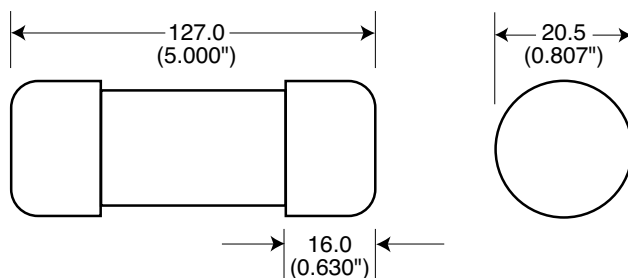


Fig. 2: 35-60A

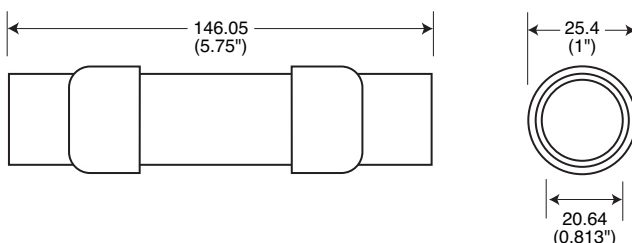


Data Sheet: 720039

## Ferrule — FWK 750V: 5-60A

FWK 750V: 5-30A (20 x 127mm)  
 35-60A (25 x 146mm)

Time-Current Curve

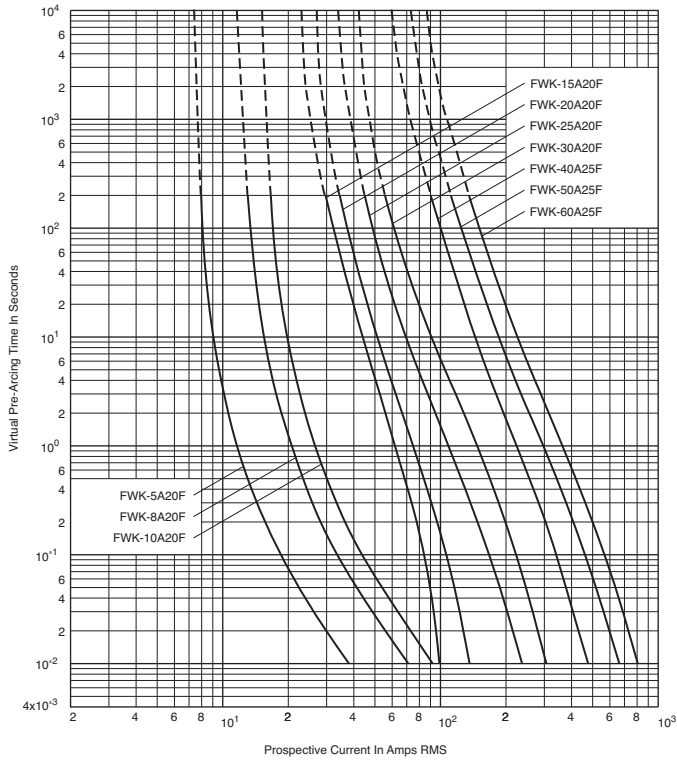

## Ferrule — FWJ 1000V: 20-30A

### FWJ (14 x 67mm)

#### Specifications

**Description:** Ferrule style high speed fuses.

**Dimensions:** See dimensions illustration.

#### Ratings:

Volts: — 1000Vac/800Vdc

Amps: — 20-30A

IR: — 25kA RMS Sym.


— 20kA @ 800Vdc

**Agency Information:** CE, UL Recognized

#### Electrical Characteristics


##### Total Clearing I<sup>2</sup>t

The total clearing I<sup>2</sup>t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltages, the clearing I<sup>2</sup>t is found by multiplying by correction factor, K, given as a function of applied working voltage, E<sub>g</sub>, (rms).




#### Arc Voltage

This curve gives the peak arc voltage, U<sub>L</sub>, which may appear across the fuse during its operation as a function of the applied working voltage, E<sub>g</sub>, (rms) at a power factor of 15%.

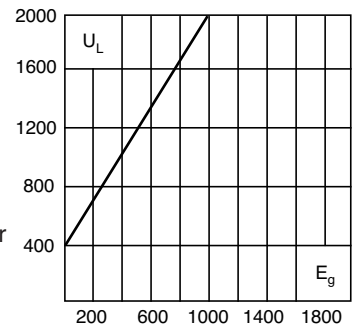

#### Power Losses

Watts loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, K<sub>p</sub>, is given as a function of the RMS load current, I<sub>b</sub>, in % of the rated current.

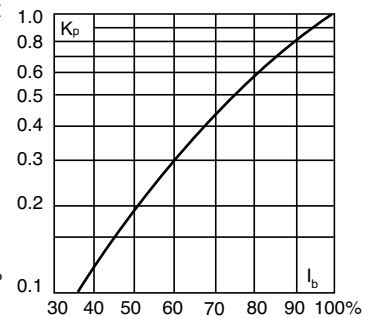

High Speed Fuses

#### Catalog Numbers

| Catalog Numbers | Size  | Electrical Characteristics |                                       |                   |            |
|-----------------|---|----------------------------|---------------------------------------|-------------------|------------|
|                 |   | Rated Current RMS-Amps     | I <sup>2</sup> t (A <sup>2</sup> Sec) |                   | Watts Loss |
|                 |   |                            | Pre-arc                               | Clearing at 1000V |            |
| FWJ-20A14F      | 14 x 67mm   | 20                         | 25                                    | 220               | 9          |
| FWJ-25A14F      | (% <sup>16</sup> x 2 <sup>1/2</sup> " <sup>16</sup> ) | 25                         | 33                                    | 350               | 11         |
| FWJ-30A14F      |   | 30                         | 52                                    | 450               | 14         |

• Watts loss provided at rated current.  
• See accessories on page 216.


#### Features and Benefits

- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

#### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters

#### Dimensions - mm (inches)

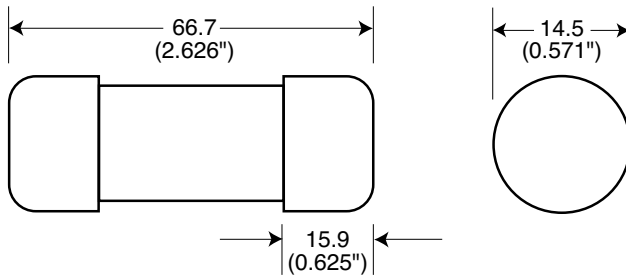


#### Fuseclips:

- Catalog Number: 5591 (see data sheet 2132)


## Ferrule — FWJ 1000V: 20-30A

FWJ 20-30A: 1000V (14 x 67mm)

Time-Current Curve

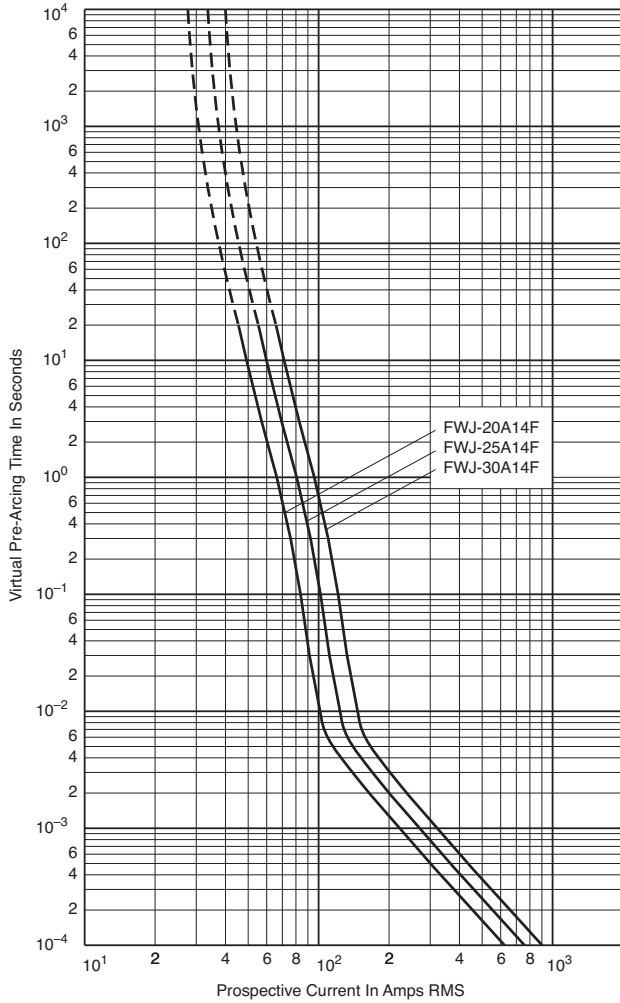

Peak Let-Through Curve

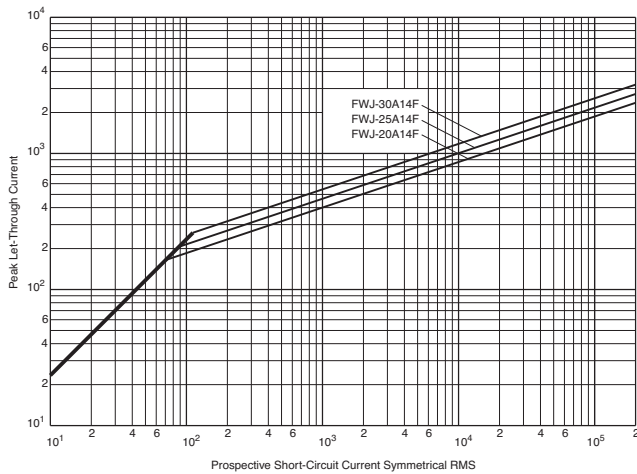

## Ferrule — FWS/FWL 1000Vdc: 2-30A

**FWS 2-15A (20 x 127mm)**  
**FWL 20-30A (20 x 127mm)**

### Specifications

**Description:** Ferrule style full range fuses.

**Dimensions:** See dimensions illustrations.

### Ratings:

- Volts: — 1200Vac (FWL 20-30A)
- 1400Vac (FWS 8-15A)
- 2100Vac (FWS 2-6A)
- 1000Vdc (FWL/FWS 2-30)

Amps: — 2-30A

- IR: — 45kA RMS Sym.
- 30kA @ 1000Vdc


**Agency Information:** CE, IEC 60077

### Catalog Numbers


| Catalog Numbers | Size  | Electrical Characteristics |                                       |                     |            |
|-----------------|---|----------------------------|---------------------------------------|---------------------|------------|
|                 |   | Rated Current RMS-Amps     | I <sup>2</sup> t (A <sup>2</sup> Sec) |                     | Watts Loss |
|                 |   |                            | Pre-arc                               | Clearing at 1000Vdc |            |
| FWS-2A20F       | 20 x 127mm<br>( <sup>13</sup> / <sub>16</sub> " x 5") | 2                          | 0.8                                   | 2.4                 | 4.4        |
| FWS-6A20F       |   | 6                          | 27                                    | 81                  | 6.7        |
| FWS-8A20F       |   | 8                          | 64                                    | 192                 | 7.6        |
| FWS-10A20F      |   | 10                         | 118                                   | 277                 | 3.0        |
| FWS-12A20F      |   | 12                         | 170                                   | 380                 | 3.4        |
| FWS-15A20F      |   | 15                         | 209                                   | 500                 | 5.0        |
| FWL-20A20F      | 20 x 127mm<br>( <sup>13</sup> / <sub>16</sub> " x 5") | 20                         | 675                                   | 1550                | 5.9        |
| FWL-25A20F      |   | 25                         | 1200                                  | 2760                | 6.5        |
| FWL-30A20F      |   | 30                         | 1850                                  | 4300                | 7.5        |

- ADD "I" to catalog number for indicating version.
- Enclosed finger-safe fuse holder – CH127
- Open style fuse block – 4530-OP
- See accessories on page 216.
- Watts loss provided at rated current.

### Dimensions - mm (inches)

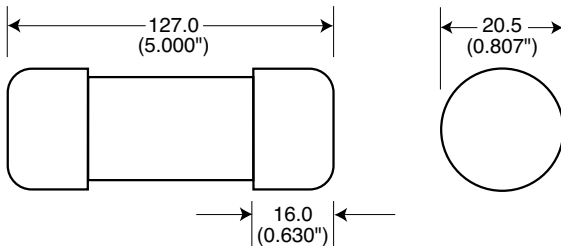

### Indicating Version - Dimensions - mm (inches)

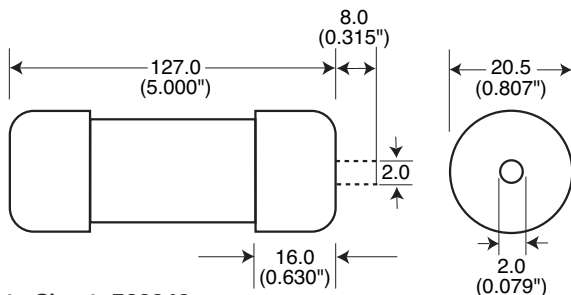

Data Sheet: 720040



### Features and Benefits


- Excellent cycling capability and DC performance
- Low arc voltage and low energy let-through (I<sup>2</sup>t)
- Low watts loss in a compact size
- Used with finger-safe holders/blocks

### Typical Applications

- DC common bus
- DC drives
- Power converters/rectifiers
- Reduced voltage starters
- Traction aux circuits
- Capacitor protection

## FWL/FWS 2-30A: 1000Vdc 2-30A (20 x 127mm)

### Time-Current Curve

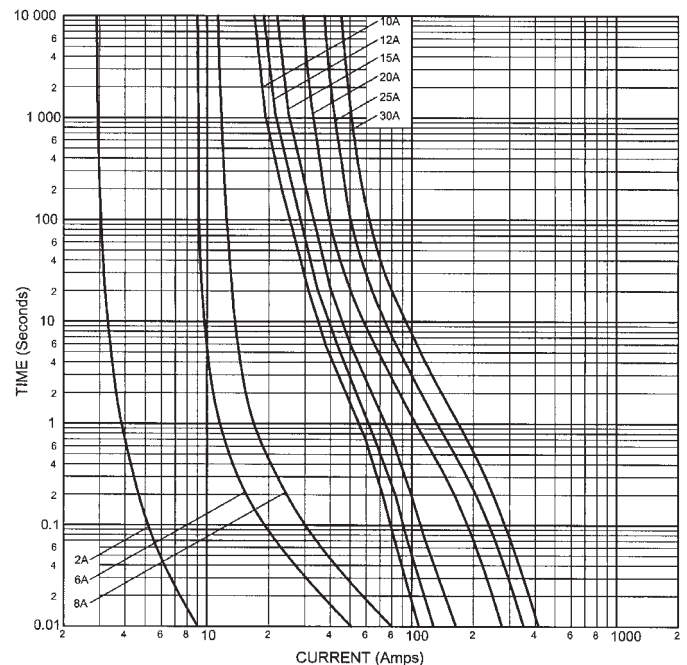

High Speed Fuses

## Ferrule Fuse Accessories

### Fuse Holders

#### Specifications

**Catalog Symbol:** CH Series

**Description:** DIN rail mount fuse holders

**Agency Information:**  
cULus/cURus/CE

**North American 10 x 38**

**Class CC:** Listed UL 4248, Guide IZLT, File E14853, Certified CSA Std. C22.2 No. 39, Class 6225 01, File 47235

**North American 10 x 38 Midget:** Recognized UL 4248, Guide IZLT2, File E14853, Certified CSA Std. C22.2 No. 39, Class 6225 01, File 47235

**European:** 10 x 38 IEC 269-2-1, 14 x 51 IEC 269-2-1, 22 x 58 IEC 269-2-1

#### Features and Benefits

- Finger-safe design - No exposed contacts
- DIN rail mount (35mm) - Fits standard mounting rails
- Optional open fuse indication lights tells fuse status at a glance
- Handle/fusepuller easily installs and removes fuses
- Available in single and multi-pole configurations
- Wire ready lugs and spade terminal connections save installation time
- CE marking
- Available up to 1000Vdc
- PLC device available for remote monitoring

#### Typical Applications

- Switchboard panel, control consoles, small motors, transformers, and similar applications

#### Recommended Cooper Bussmann Fuse Types

**Class CC** North American Class CC Fuses - LP-CC, FNQ-R, KTK-R

10 x 38 North American Midget Fuses - FNQ, KTK, AGU, BAF, BAN, FNM, FWA, FWC, PV & DCM

14 x 51 Fuses - FWX, FWH, FWP & NON

22 x 58 Fuses - FWP



### Fuse Blocks

#### Specifications

**Catalog Symbol:** J70100, J70032

**Description:** Fuse blocks for 22 x 58mm & 14 x 51mm fuses.

#### Ratings:

Volts: — 700Vac

Amps: — 32-100A

Withstand: — 200kA RMS Sym.

**Agency Information:** CE, UL Recognized, Guide IZLT2, File E14853

**Flammability Rating:** UL 94V0



#### Catalog Numbers

| Catalog Numbers | Fuse Size | Amps | Poles | Max Wire Size | Terminations                 |
|-----------------|-----------|------|-------|---------------|------------------------------|
| J70032-2CR      | 14x51     | 32   | 2     | #2            | Box Lug w/<br>Retaining Clip |
| J70032-3CR      |           | 32   | 3     | #2            |                              |
| J70100-1CR      | 22x58     | 100  | 1     | #2            |                              |
| J70100-2CR      |           | 100  | 2     | #2            |                              |
| J70100-3CR      |           | 100  | 3     | #2            |                              |

See pages 257 and 258 for CH Series fuse holder information.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9