

## 2-INPUT 3CHANNEL VIDEO SWITCH

### ■ GENERAL DESCRIPTION

**NJM2283** is a switching IC for switching over from one audio or video input signal to another. Internalizing 2 inputs and 1 output, and then each set of 3 can be operated independently. It is a higher efficiency video switch, featuring the supply voltage range 4.75 to 13.0V, the frequency feature 10MHz, and then Crosstalk 75dB (at 4.43MHz).


### ■ FEATURES

- 2 Input-1 Output 3 Circuits internalizing
- Wide Operating Voltage (4.75V to 13V)
- Crosstalk 75dB (at 4.43MHz)
- Wide Operating Supply Range 10MHz (2V<sub>P-P</sub> Input)
- Wide Bandwidth Frequency
- Package Outline DIP16, DMP16, SSOP16

### ■ APPLICATIONS


- VCR, Video Camera, AV-TV, Video Disk Player.

### ■ BLOCK DIAGRAM

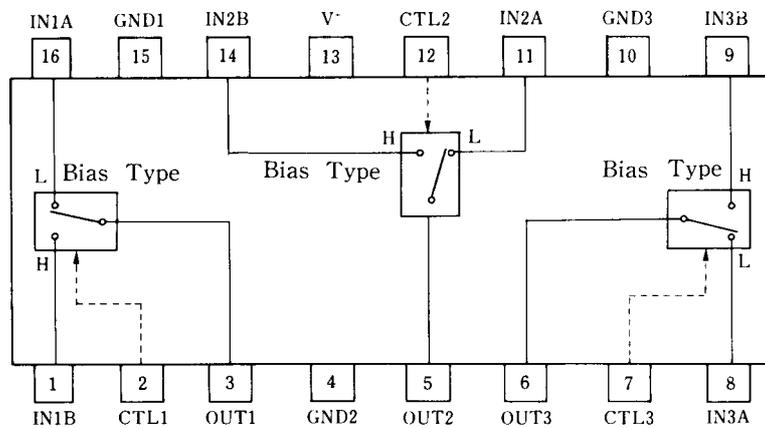


**NJM2283D**  
**NJM2283M**  
**NJM2283V**


### ■ PACKAGE OUTLINE



**NJM2283D**



**NJM2283M**



**NJM2283V**

# NJM2283

## ■ MAXIMUM RATINGS

(T<sub>a</sub> = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	14	V
Power Dissipation	P <sub>D</sub>	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW mW mW
Operating Temperature Range	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

## ■ ELECTRICAL CHARACTERISTICS

(V<sup>+</sup> = 5V, T<sub>a</sub> = 25°C)

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I <sub>CC1</sub>	V <sup>+</sup> = 5V (Note1)	8.3	11.8	15.3	mA
Operating Current (2)	I <sub>CC2</sub>	V <sup>+</sup> = 9V (Note1)	10.4	14.8	19.2	mA
Voltage Gain	G <sub>V</sub>	V <sub>I</sub> = 100kHz, 2V <sub>P-P</sub> , V <sub>O</sub> / V <sub>I</sub>	-0.6	-0.1	+0.4	dB
Frequency Gain	G <sub>F</sub>	V <sub>I</sub> = 2V <sub>P-P</sub> , V <sub>O</sub> (10MHz) / V <sub>O</sub> (100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V <sub>I</sub> = 2V <sub>P-P</sub> , Standard Staircase Signal	-	0.3	-	%
Differential Phase	DP	V <sub>I</sub> = 2V <sub>P-P</sub> , Standard Staircase Signal	-	0.3	-	deg
Output offset Voltage	V <sub>OS</sub>	(Note2)	-10	0	+10	mV
Crosstalk	CT	V <sub>I</sub> = 2V <sub>P-P</sub> , 4.43MHz, V <sub>O</sub> / V <sub>I</sub>	-	-75	-	dB
Switch Change Over Voltage	V <sub>CH</sub>	All inside Switch ON	2.5	-	-	V
Switch Change Over Voltage	V <sub>CL</sub>	All inside Switch OFF	-	-	1.0	V

(Note1) S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1


(Note2) S1 = S2 = S3 = S4 = S5 = S6 = 1, S7 = 1→2 Measure the output DC voltage difference

## ■ TERMINAL EXPLANATION

PIN No.	PIN NAME	VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1 11 14 8 9	IN 1 A IN 1 B IN 2 A IN 2 B IN 3 A IN 3 B [Input]	2.5V	
2 12 7	CTL 1 CTL 2 CTL 3 [Switching]		
3 5 6	OUT1 OUT2 OUT3 [Output]	1.8V	
13	V <sup>+</sup>	5V	
15 4 10	GND 1 GND 2 GND 3		







# NJM2283

## TEST CIRCUIT

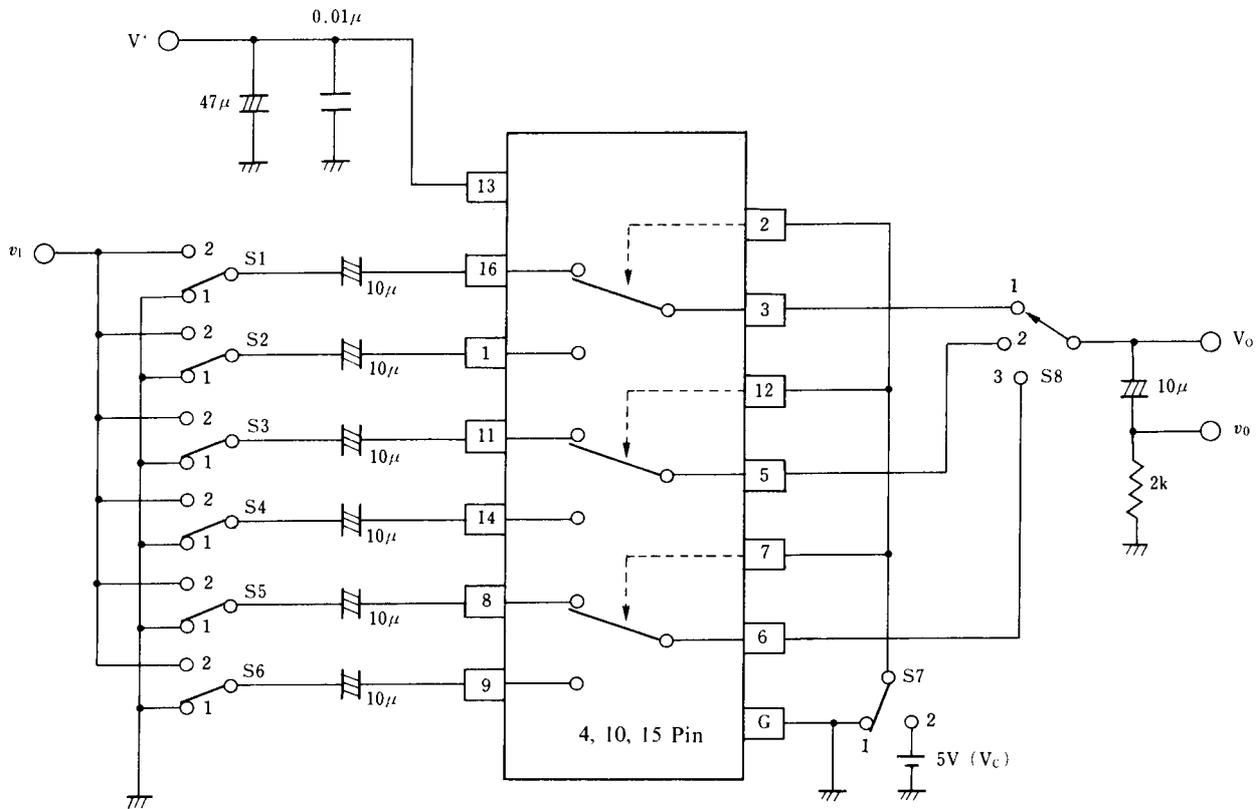


Parameter	S1	S2	S3	S4	S5	S6	S7	S8	Test Part
$I_{CC1}$	1	1	1	1	1	1	1	1	$V^+$
$I_{CC2}$	1	1	1	1	1	1	1	1	
$G_{V1}$	2	1	1	1	1	1	1	1	$v_o$
$G_{F1}$	2	1	1	1	1	1	1	1	
$DG_1$	2	1	1	1	1	1	1	1	
$DP_1$	2	1	1	1	1	1	1	1	
CT1	2	1	1	1	1	1	2	1	$v_o$
CT2	1	2	1	1	1	1	1	1	
CT3	1	1	2	1	1	1	2	2	
CT4	1	1	1	2	1	1	1	2	
CT5	1	1	1	1	2	1	2	3	
CT6	1	1	1	1	1	2	1	3	
$V_{OS1}$	1	1	1	1	1	1	1/2	1	$V_o$
$V_{C1}$	1/2	2/1	1	1	1	1	$V_C$	1	$V_C$
THD	2	1	1	1	1	1	1	1	$v_o$

## ■ TYPICAL CHARACTERISTICS

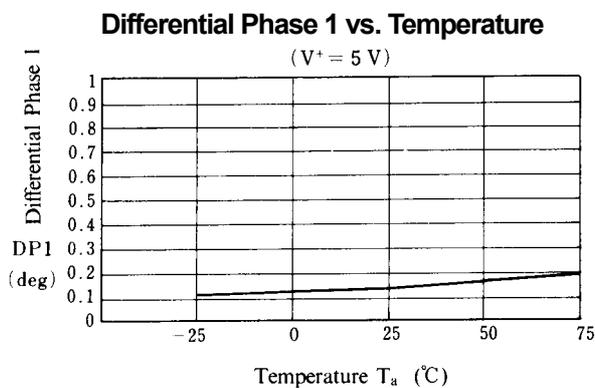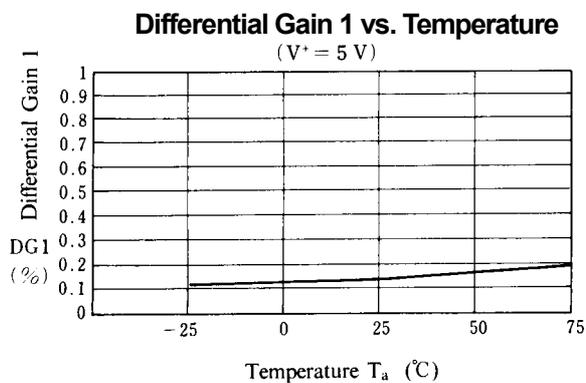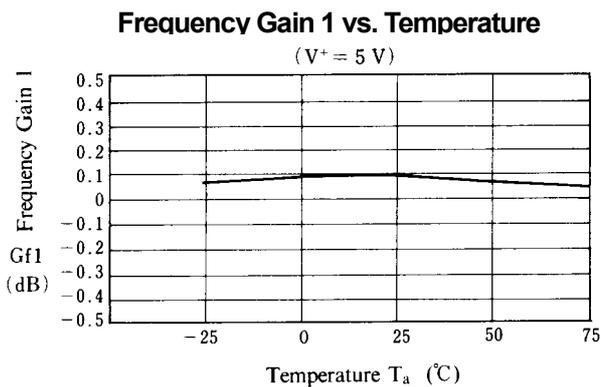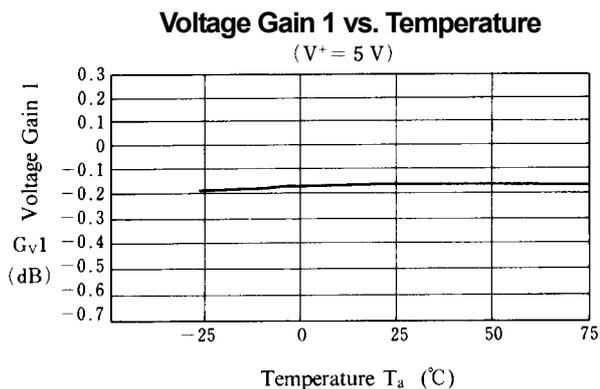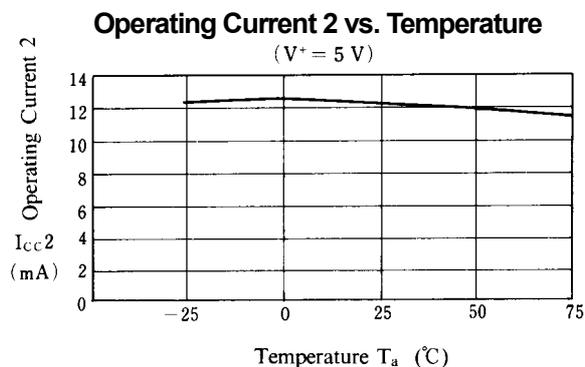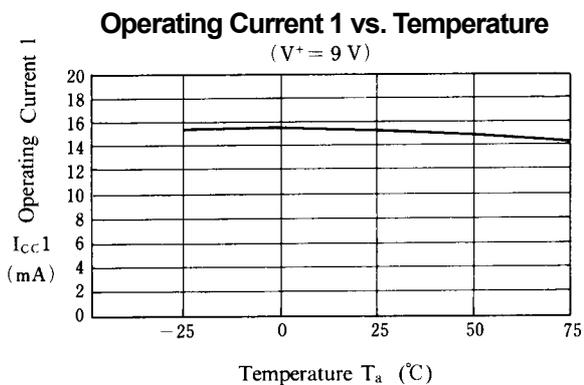


## ■ TYPICAL CHARACTERISTICS


**Offset Voltage 1 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

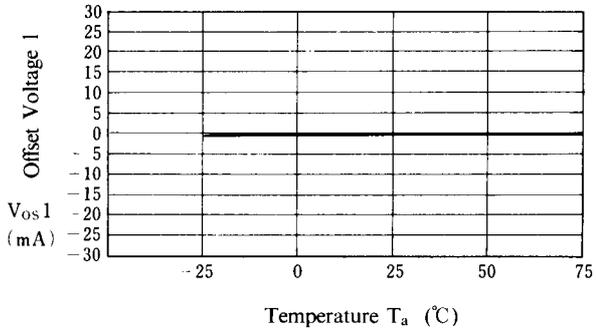


**Crosstalk 1 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

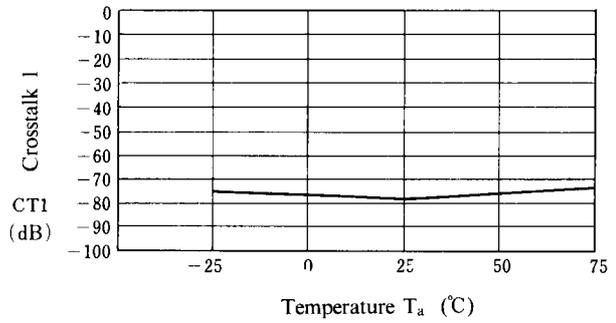


**Crosstalk 2 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

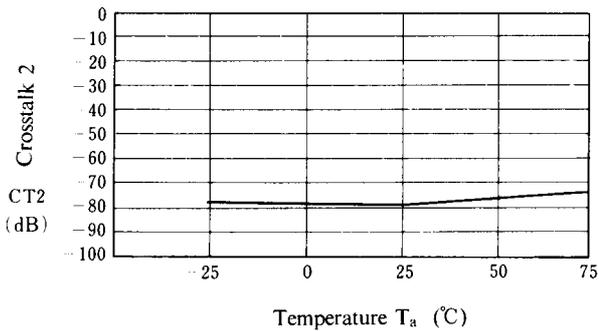


**Crosstalk 3 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

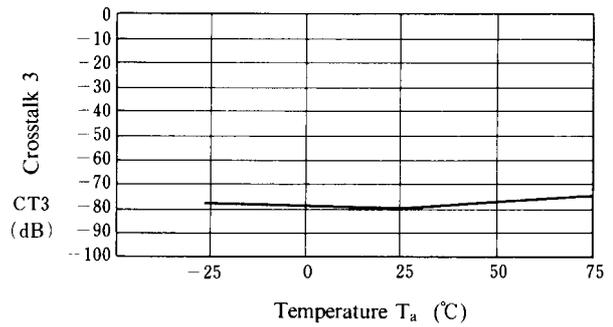

**Crosstalk 4 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

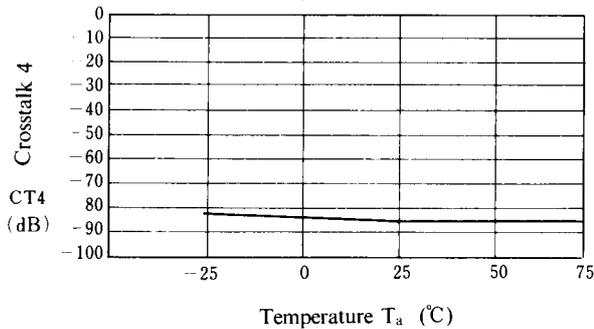


**Crosstalk 5 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

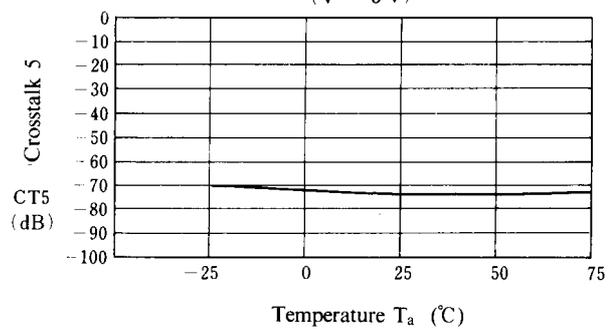


## ■ TYPICAL CHARACTERISTICS


**Crosstalk 6 vs. Temperature**  
( $V^+ = 5\text{ V}$ )

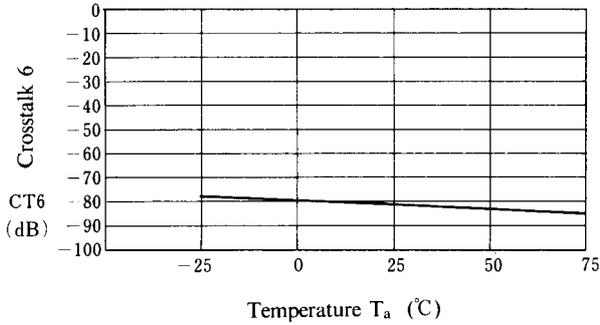


**Switch Change Over 1 vs. Operating Voltage**  
( $V^+ = 5\text{ V}$ )

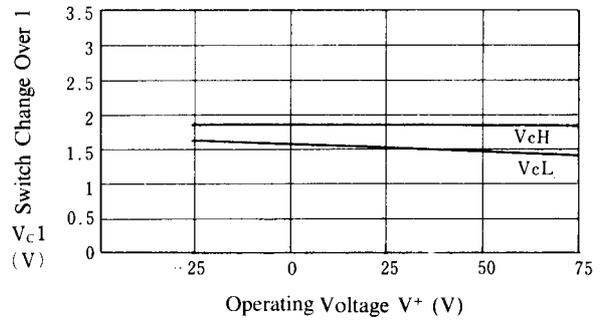


**Operating Current vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

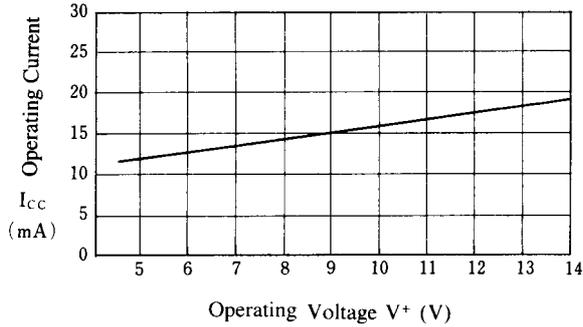


**Voltage Gain 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

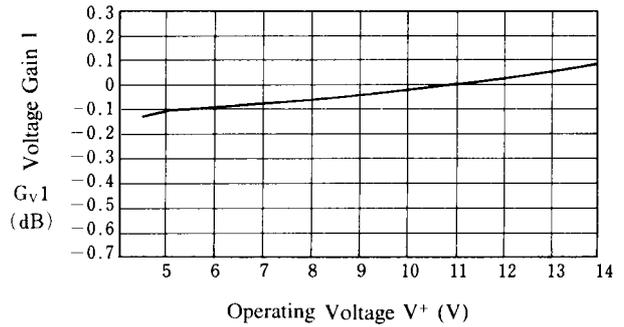

**Frequency Gain 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

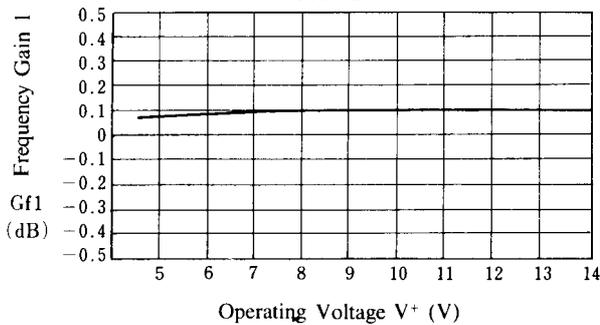


**Differential Gain 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

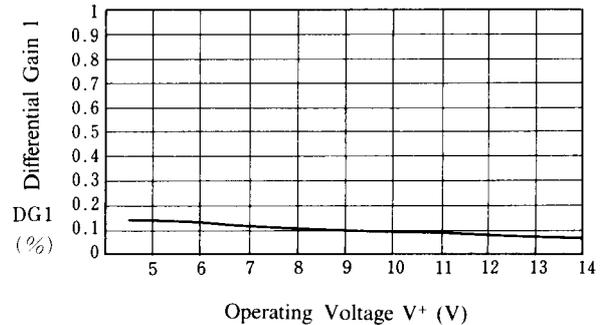


## ■ TYPICAL CHARACTERISTICS


**Differential Phase 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

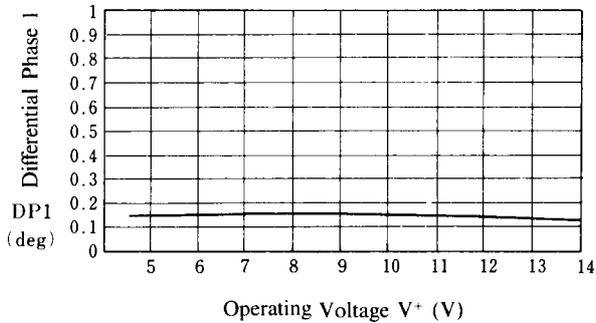


**Offset Voltage 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

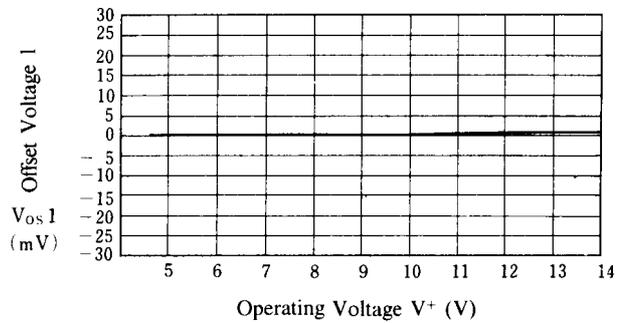


**Crosstalk 1 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

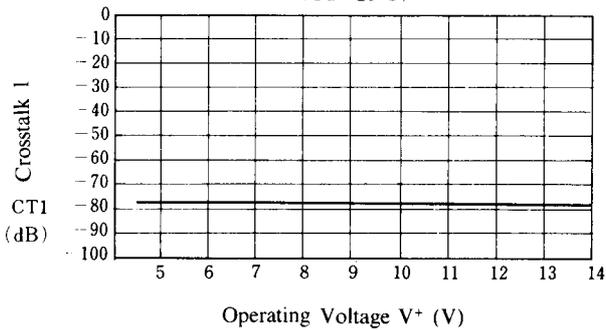


**Crosstalk 2 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

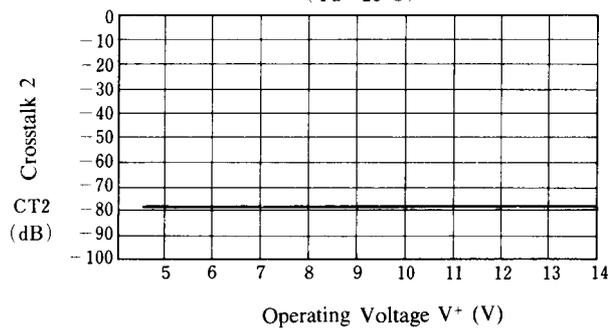

**Crosstalk 3 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

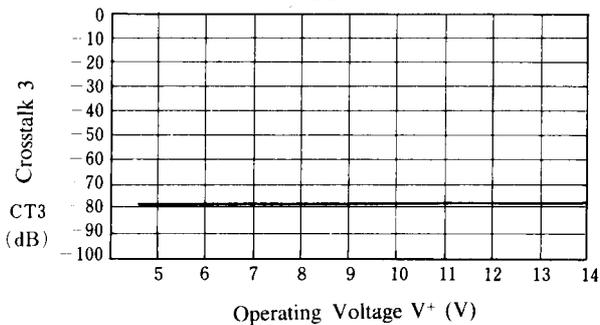


**Crosstalk 4 vs. Operating Voltage**  
( $T_a = 25^\circ\text{C}$ )

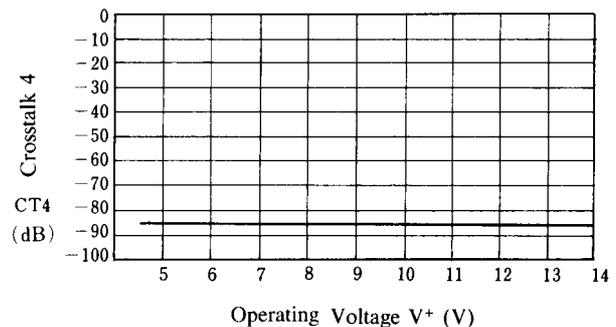

## ■ TYPICAL CHARACTERISTICS


### Crosstalk 5 vs. Operating Voltage

(Ta=25°C)

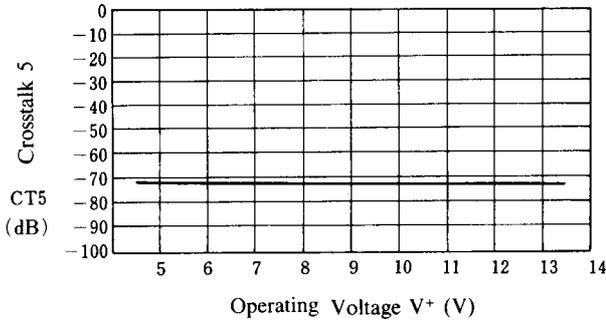


### Crosstalk 6 vs. Operating Voltage

(Ta=25°C)

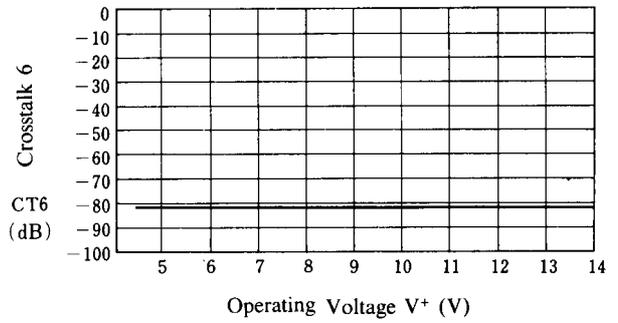


### Switch Change Over 1 vs. Operating Voltage

(Ta=25°C)

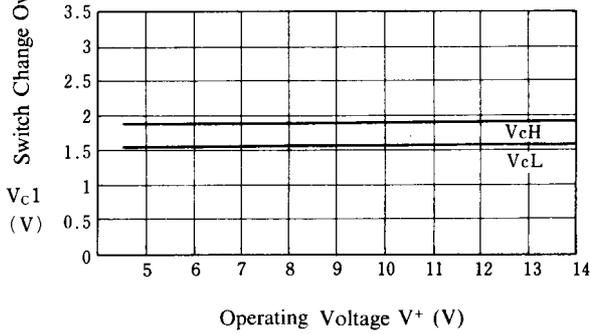


### Voltage Gain 1 vs. Frequency Feature

(Ta=25°C)

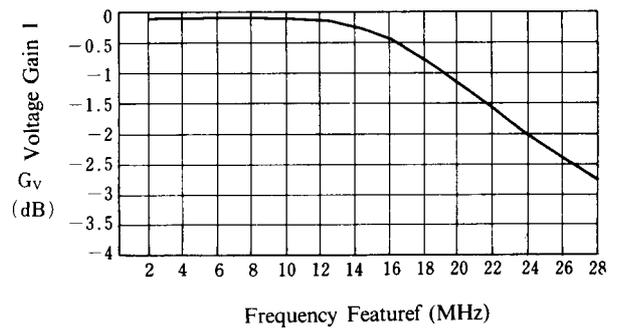


### Differential Gain 1 vs. Load Resistor

(Ta=25°C)

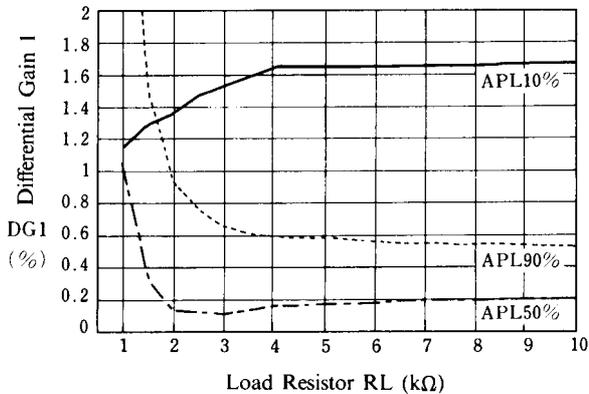


### Differential Phase 1 vs. Load Resistor

(Ta=25°C)

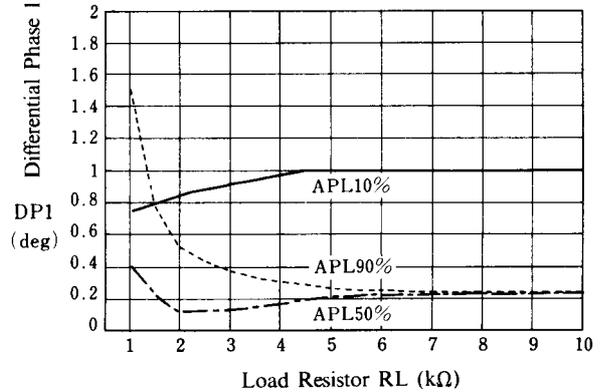


## ■ TYPICAL CHARACTERISTICS


**Differential Gain 1 vs. APL**  
( $T_a = 25^\circ\text{C}$ )

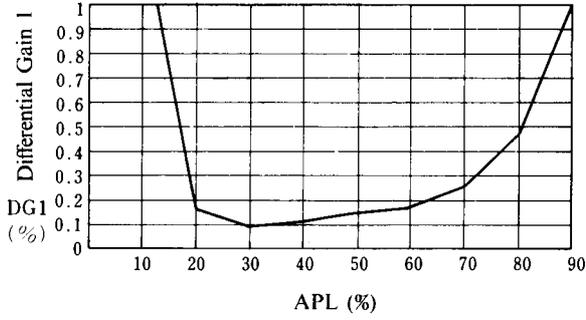

**Differential Phase 1 vs. APL**  
( $T_a = 25^\circ\text{C}$ )

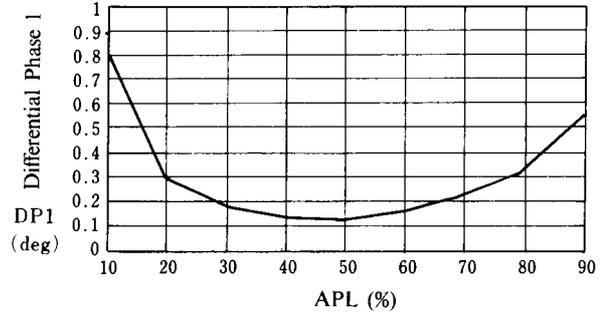


**Total Harmonic Distortion vs. Load Resistor**  
( $T_a = 25^\circ\text{C}$ )

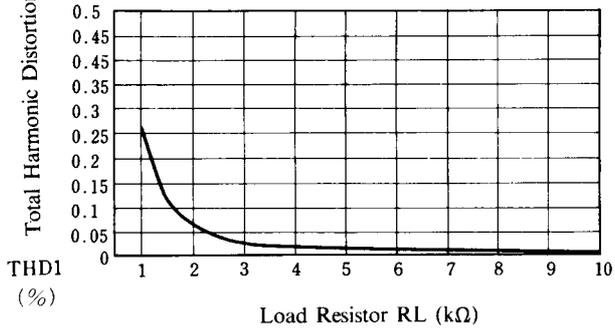

## ■ APPLICATION

This IC requires 0.1 $\mu$ F capacitor between INPUT and GND for bias type input at mute mode.

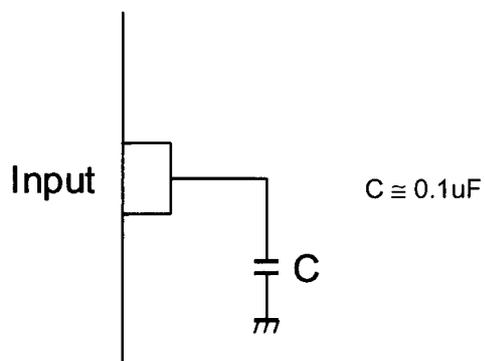

**[CAUTION]**  
 The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9